

# PF1835

## High Efficiency Urinal Siphon Jet, Rear Outlet



### Product Features

- Vitreous china
- High efficiency urinal (HEU)
- Siphon jet flushing (0.5 gpf - 1.0 gpf / 1.9 lpf - 3.8 lpf)
- 3/4" top inlet spud
- 2" NPT inside thread outlet
- Elongated 14" rim
- Hanging bracket included
- Flush valve not included



PF1835WH

### Codes and Standards

- ADA
  - IAPMO/UPC
  - ASME A112.19.2
  - CSA
  - EPA WaterSense
- \*WaterSense compliant when used with a 1.1 gpf or 1.28 gpf WaterSense-compliant flushometer

### Technical Information

| Fixture:          |                             |
|-------------------|-----------------------------|
| Configuration     | Siphon jet urinal           |
| Gallons per flush | 0.5gpf-1.0gpf/1.9lpf-3.8lpf |
| Spud size         | 3/4" top                    |
| Passageway        | 2" outlet                   |

### Included Components

- Mounting brackets
- Inlet spud
- Outlet spud

### Specified Model

| Model    | Model Description                            | Color Finishes |
|----------|--|----------------|
| PF1835WH | Siphon jet, 3/4" Top Spud, Rear Outlet White | ○ White (WH)   |




PF1835

# High Efficiency Urinal Siphon Jet, Rear Outlet



## Product Specifications

Siphon jet urinal shall be made of vitreous china with a 3/4" top spud. Urinal shall include inlet and spuds and brackets. Urinal shall use 0.5 gpf - 1.0 gpf (1.9 lpf - 3.8 lpf). Urinal shall be PROFLO model PF1835. Recommended working pressure between 25 and 80 psi. Provide suitable reinforcement for wall support.

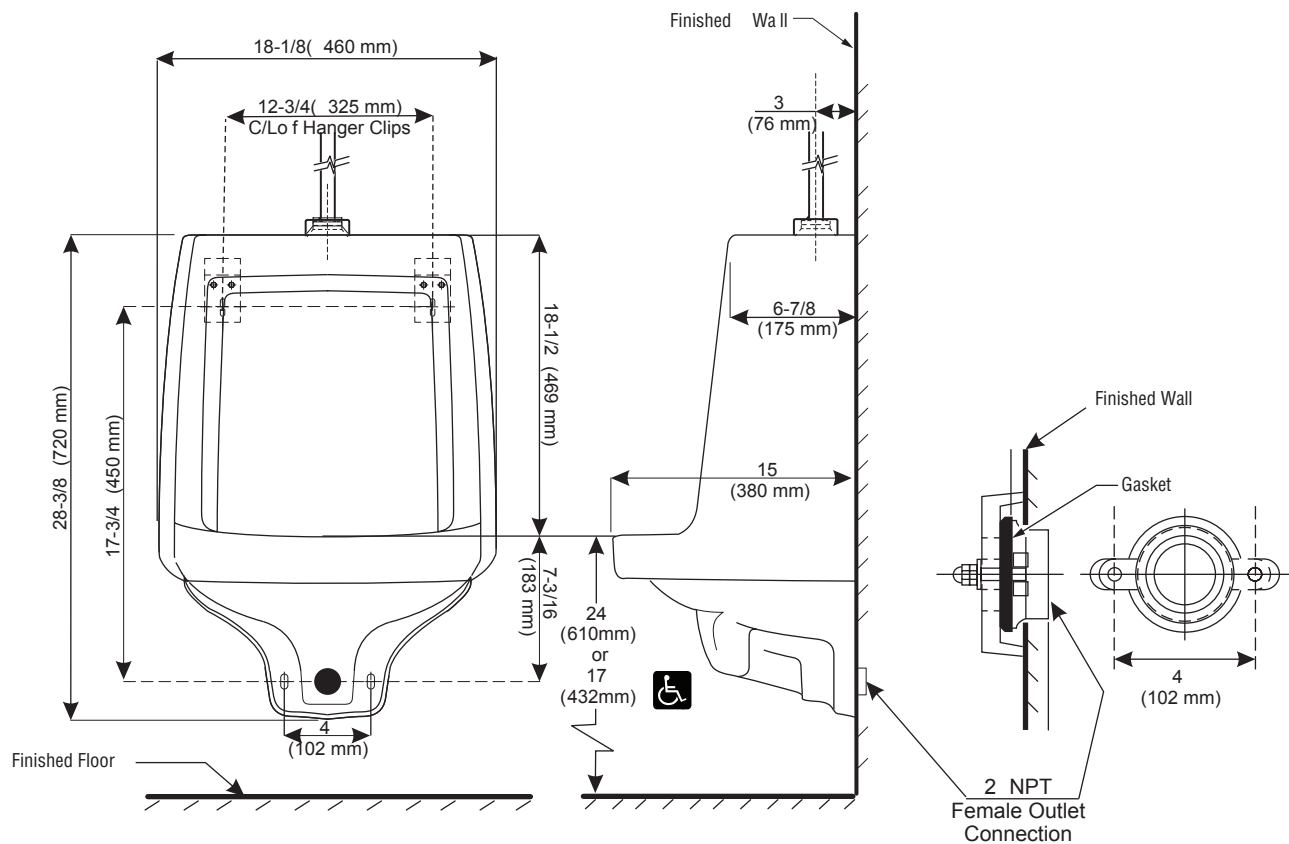

All dimensions and specifications are nominal and may vary: Dimensions of 8" and greater have a tolerances of +3%. Dimensions less than 8" have a tolerances of +5%.

## Warranty and Codes

This product comes complete with installation, operating, care and maintenance instructions. All PROFLO fixtures carry a 1- year limited warranty. This product meets or exceeds ASME/ANSI A112.19.2M. In an effort to continually improve our products, we will make design changes from time to time. We reserve the right to ship newly designed product to fill any order unless we agree in writing to do otherwise. Meets the Americans Disabilities Act guidelines and ANSI A11.17.1 when installed to 17" height from finished floor.

