

SPECIFICATIONS


FNW7862
STRUT ACCESSORIES



CUSHIONED PIPE WRAP

FEATURES

- Made in the USA
- Sold in 25-foot rolls
- Manufactured from a thermoplastic elastomer – Service range of -50°F to 275°F

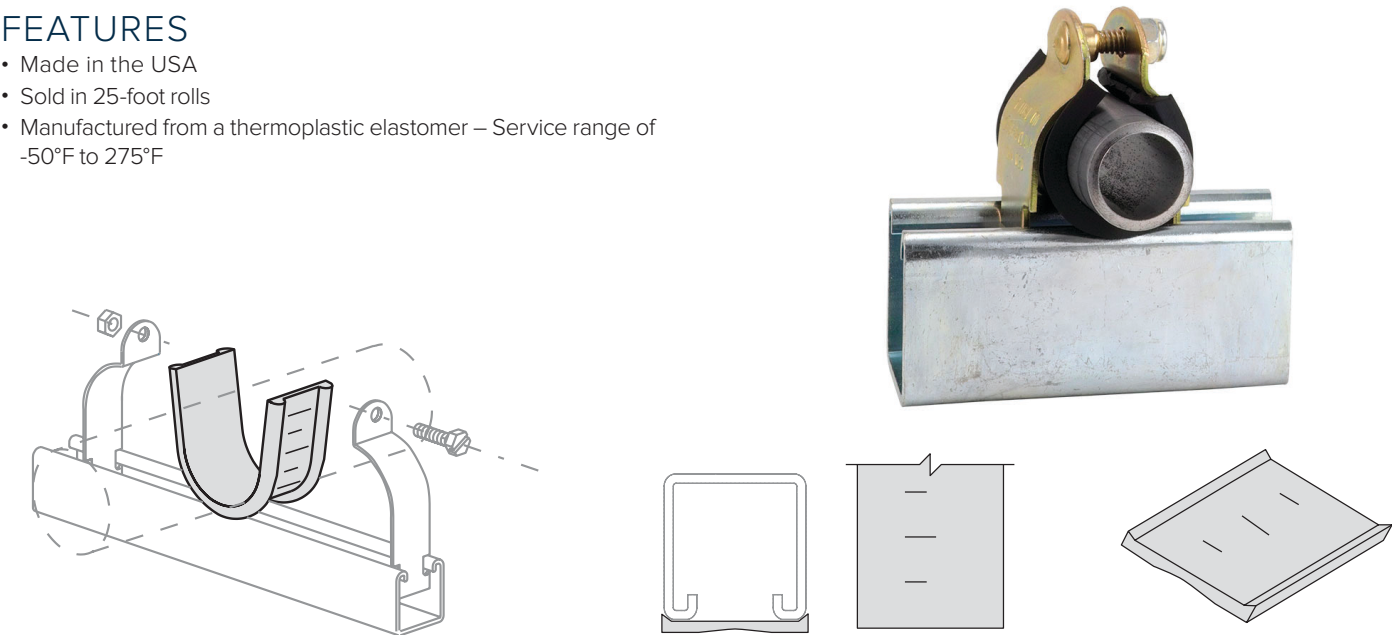

RECOMMENDED CLAMP SIZE AND CUT LENGTH FOR COMMON PIPE AND TUBING

Iron Pipe or Rigid Conduit					
Nominal Pipe Size		PW Cut Length		Clamp Number	Qty Per Roll*
in.	mm	in.	mm		
3/8	10	2-1/8	54	FNW7871Z0075	141
1/2	15	2-5/8	67	FNW7873Z0075	114
3/4	19	3-1/4	83	FNW7872Z0125	92
1	25	4-1/8	105	FNW7871Z0125	72
1-1/4	32	5-3/16	132	FNW7873Z0150	57
1-1/2	38	5-5/16	151	FNW7872Z0212	50
2	51	7-7/16	189	FNW7872Z0262	40
2-1/2	64	9	229	FNW7872Z0312	33
3	76	11	279	FNW7872Z0375	27
3-1/2	89	12-1/2	318	FNW7872Z0425	24
4	102	14-1/8	359	FNW7872Z0475	21
5	127	17-7/16	443	FNW7872Z0575	17
6	152	20-3/4	527	FNW7872Z0687	14

*Quantity per roll is an approximation based on the cut length specified from a 25-foot roll.

FNW7862
STRUT ACCESSORIES



CUSHIONED PIPE WRAP

RECOMMENDED CLAMP SIZE AND CUT LENGTH FOR COMMON PIPE AND TUBING

Thin Wall (EMT) Conduit					
Nominal Pipe Size		PW Cut Length		Clamp Number	Qty Per Roll*
in.	mm	in.	mm		
3/8	10	1-3/16	46	FNW7872Z0075	165
1/2	15	2-3/16	56	FNW7871Z0075	137
3/4	19	2-7/8	73	FNW7871Z0100	104
1	25	3-5/8	92	FNW7872Z0137	82
1-1/4	32	4-11/16	119	FNW7872Z0187	64
1-1/2	38	5-7/16	138	FNW7873Z0150	55
2	51	6-7/8	175	FNW7873Z0200	43

Copper Tubing					
Nominal Pipe Size		PW Cut Length		Clamp Number	Qty Per Roll*
in.	mm	in.	mm		
1/4	6	1-1/8	29	FNW7872Z0062	266
3/8	10	1-9/16	40	FNW7872Z0075	192
1/2	15	1-7/8	48	FNW7872Z0087	160
5/8	17	2-5/16	59	FNW7872Z0100	129
3/4	20	2-3/4	70	FNW7872Z0112	109
1	25	3-1/2	89	FNW7872Z0137	85
1-1/4	32	4-5/16	110	FNW7872Z0162	69
1-1/2	40	5-1/16	129	FNW7872Z0187	59
2	50	6-11/16	170	FNW7873Z0200	44
2-1/2	65	8-1/4	210	FNW7873Z0250	36
3	80	9-13/16	249	FNW7872Z0337	30
3-1/2	90	11-3/8	289	FNW7872Z0387	26
4	100	12-15/16	329	FNW7872Z0437	23
5	125	16-1/16	408	FNW7872Z0537	18
6	150	19-1/4	489	FNW7872Z0637	15
8	200	25-1/2	648	FNW7872Z0837	11

*Quantity per roll is an approximation based on the cut length specified from a 25-foot roll.