

SPECIFICATIONS

FIGURE 7815 STRUT CLAMPS







CUSHIONED PIPE STRUT CLAMP

FEATURES

- Made in the USA
- Helps eliminate shock and vibration
- UL Classified 2043 (25/50) for use in plenums and air handling systems
- Specified MSS-SP 58 Type 60 and Type 61
- Clamps are 1008-1010 carbon steel
- Studs and projection welded
- Nylon insert locknut
- Resist most fuels, oils, gases, greases, solvents, mineral acids, and other harsh materials
- UV resistant
- Allow fluid conductors to be added or removed from installations without disturbing adjacent lines
- Assembled or disassembled with a single hand or power wrench for fast and simple installation
- All metal components have a yellow Tri-Valent (non-hex) plating
- Also available in 304SS (S4) and 316SS (S6)
- Cushion material is a thermoplastic elastometer
- Temperature rating: -65°–275°F (-53.9°–135°C)

MADE IN THE
USA

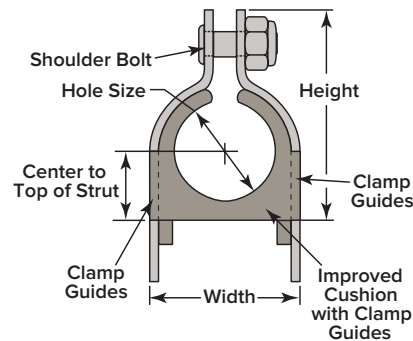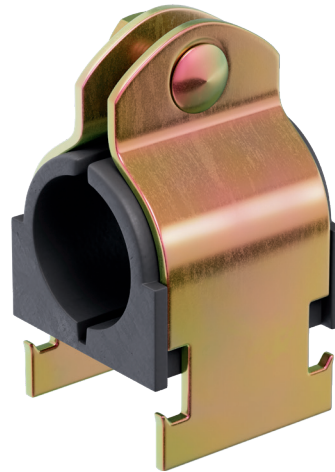

REFERENCE CHART

Item #	Pipe Size (in.)	Hole Size (in.)	Width (in.)	Center to Top of Strut	Height (in.)	Design Load (lbs)
FNW7815Y0050	1/2	0.840	1.45	0.59	1.91	600
FNW7815Y0075	3/4	1.050	1.79	0.72	2.16	600
FNW7815Y0100	1	1.315	2.22	0.91	2.75	600
FNW7815Y0125	1-1/4	1.660	2.47	1.03	3.03	800
FNW7815Y0150	1-1/2	1.900	2.47	1.16	3.28	800
FNW7815Y0200	2	2.375	3.22	1.41	3.78	800
FNW7815Y0250	2-1/2	2.875	3.72	1.66	4.27	800
FNW7815Y0300	3	3.500	4.36	1.97	4.91	1000
FNW7815Y0400	4	4.500	5.47	2.53	6.03	1000
FNW7815Y0600	6	6.625	7.62	3.53	8.03	1000
FNW7815Y0800	8	8.625	9.36	5.00	10.61	1000