

SPECIFICATIONS

FNW7805

STRUT ACCESSORIES



STRUT TO BEAM CLAMP NOTCHED TYPE

FEATURES

- The FNW 7805 notched beam clamp is designed to attach unistrut channel to the bottom flange of an i-beam.
- Made in the U.S.A.
- Material is 1-5/8" [41.3] wide x 1/4" [6.3] thick
- Clamp requires 1/2"-13 HCS and 1/2" channel nut, order separately
- Design load 1100 lbs [4.89 kN] when used in pairs (must be used in pairs only)



PRODUCT SPECIFICATIONS

Material Specifications and Finishes

Carbon Steel – ASTM A1011-00 SS GR 33 or ASTM A1011-00CS Type B


Z: Electro-Galvanized (standard finish). Electroplating deposits zinc on the surface of the steel by electrolysis from a bath of zinc salts. Recommended for relatively dry indoor use. This is the standard coating for most FNW strut products. Thickness of applied zinc is between 0.2 mils to 0.5 mils [5.1 μ m to 12.7 μ m]. Coatings on FNW Z products meet ASTM B633 SC1 Type III.

HD: Hot Dip Galvanized After Fabrication. Fabricated product is dipped in molten zinc and is completely covered on all surfaces. Recommended for outdoor use. Coatings on FNW HD products meet ASTM A123/153. The zinc coating is typically 2.6 mils [66.0 μ m] or 1.5 oz. per square foot [0.46 kg per square meter] per side.

S4: 304 Stainless Steel – ASTM A240 (Type 304)

S6: 316 Stainless Steel – ASTM A240 (Type 316), 316 Stainless Steel Nuts – ASTM A276-03

Y: Yellow Zinc Dichromate. A 0.5 mil [12.7 μ m] electro-galvanized zinc plating meeting ASTM B633 SC1 Type III is applied to the surface of the metal. Yellow dichromate is applied over the zinc. This results in a yellowish gold appearance and acts as a nonporous barrier sealant that is corrosion resistant and can be painted.

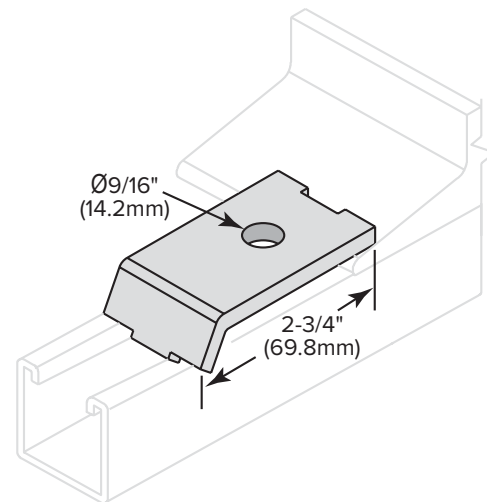

Catalog Number	Weight		Design Load*	
	lbs	kg	lbs	kN
FNW7805Z	0.29	0.132	1100	4.89

* Design load when installed as intended, to be used in pairs only