




see what Delta can do™

LOW FLOW AERATORS

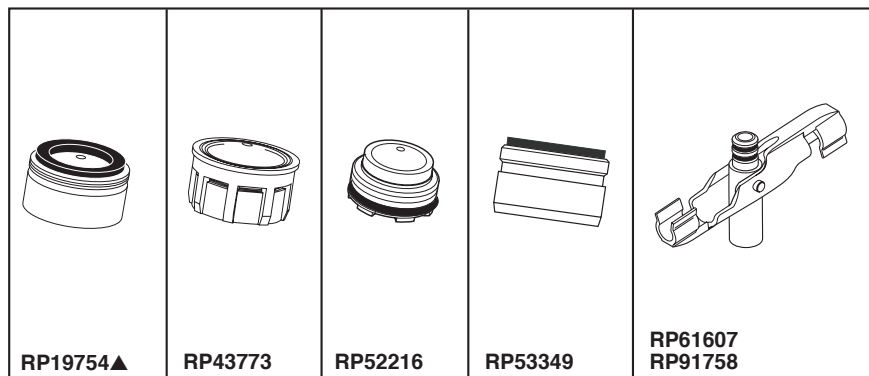

Submitted Model No.: _____

Specific Features: _____

STANDARD SPECIFICATIONS:

- Max. 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa
- Max. 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa

Part #	Description	Models	Finishes
RP19754▲	1.5 gpm aerator assy 15/16"-27 male	100/300/400 (DST & non-DST models) 2100/2400 140/340/440 (DST & non-DST models) 172/174 2176/2476 2274/2276 185	Chrome SS RB
RP53349	1.5 gpm jr. aerator assy 13/16"-27 male	190/2190 2170/2171/2172	Chrome
RP52216	1.5 gpm aerator insert	119/319/419 (DST & non-DST models) 155/156 (DST models) 4380	N/A
RP43773	1.5 gpm aerator insert	155/156 (non-DST models) 100/300/400 (DST & non-DST models) 2100/2400 140/340/440 (DST & non-DST models) 172/174 2176/2476 2274/2276 185 2457	N/A
RP61607	1.5 gpm adapter	Compatible with all DST pull-down or pull-out models	N/A
RP91758	1.0 gpm adapter	Compatible with all DST pull-down or pull-out models	N/A

▲ Designate Proper Finish Suffix

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.