

### Features

- Finish is engineered to resist corrosion and daily wear.
- Ergonomic handshower pivots for targeted hydromassage or rinsing the shower enclosure.
- Multifunction handshower with four spray options: wide coverage, massage, soft aerated, and reduced flow.
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup.
- Handshower offers 2.5 gal/min (9.5 l/min) maximum flow rate.
- Complements Stillness® and Purist® faucets and accessories.
- ADA non-positive shut-off.
- 30" (762 mm) sidebar length offers a custom shower at various heights.
- Features a non-positive shut off: water-saving pause mode to temporarily reduce water flow.

### Material

- KOHLER finishes resist corrosion and tarnishing.

### Recommended Products/Accessories

K-30646 shower filter  
K-30647 shower filter replacement  
K-23723 Faucet cleaner



ADA

OBC

### Codes/Standards



ASME A112.18.1/CSA B125.1  
DOE - Energy Policy Act 1992  
ADA  
ICC/ANSI A117.1  
OBC


### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel

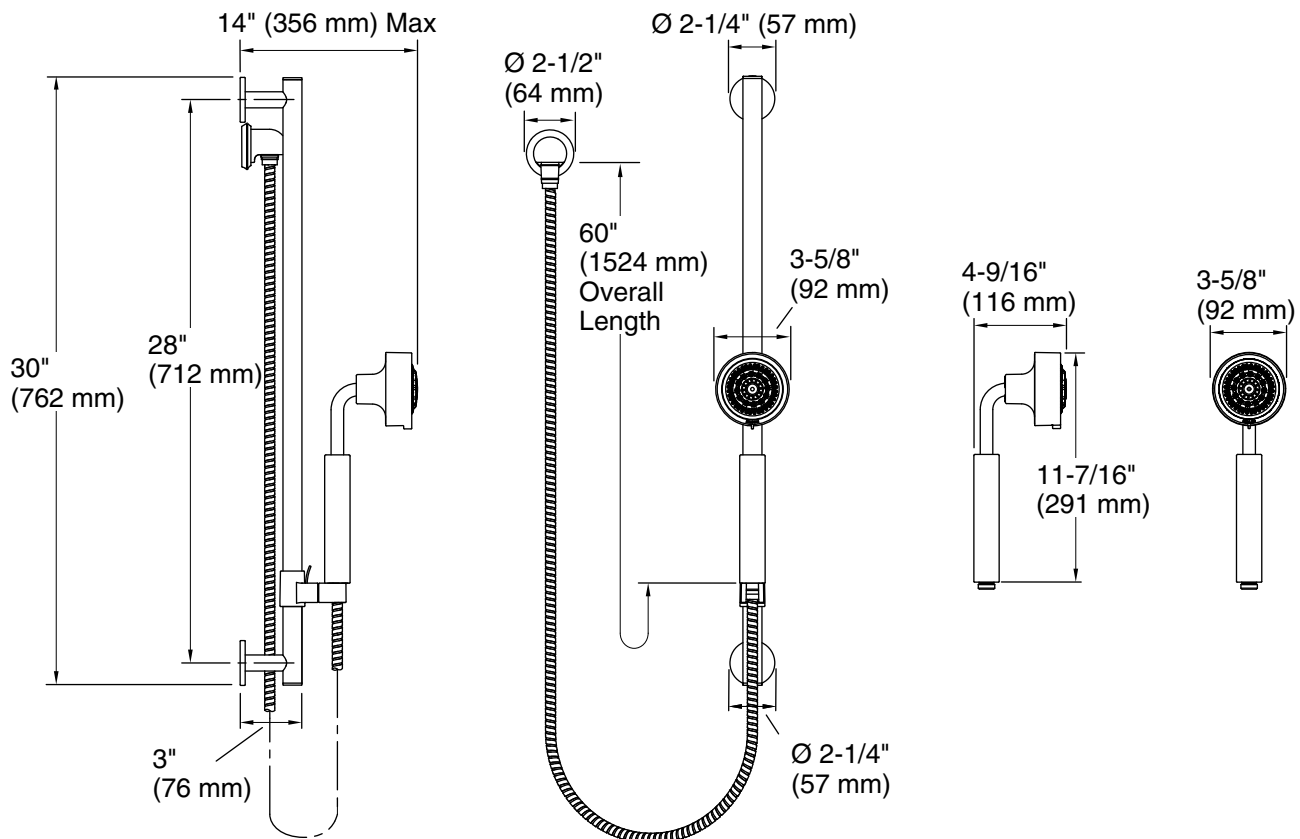

## Technical Information

All product dimensions are nominal.

### Handshower:

Rated maximum flow: 2.5 gal/min (9.5 l/min)

Pressure: 80 psi (5.5 bar)

## Notes

Install this product according to the installation guide.

**IMPORTANT!** The sidebar must be mounted to stud framing at both the top and bottom mounting locations. Do not use or depend on plastic wall anchors to attach the sidebar.

Plumbing codes may require an atmospheric vacuum breaker (such as the KOHLER K-9660) be installed in-line to handshowers. Consult with local plumbing codes.

ADA, OBC compliant when installed to the specific requirements of these regulations.