


Sterling OXY3 Series

Iron Reduction
System



- Reduces staining
- Eliminates odors
- Brighter laundry
- Protects plumbing
- Corrects acid water conditions

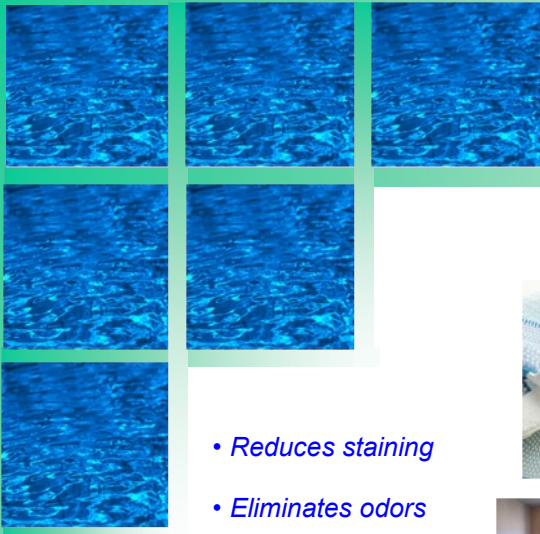

- **No Chemicals.** A chemical regenerant is not required.
- **No In-Line Venturi to Plug or Adjust.**
- **No Air Compressor.** The noise and expense of compressors are eliminated.
- **No Excess Air.**
- **No Air Release Valve Required.**
- **Less Maintenance.** The only maintenance required is the occasional replenishment of media if the raw water pH is below 7. An easy to use fill port is provided.
- **Rugged Mechanical Piston Valve.** No solenoids or flapper valves to stick.
- **Full Flow Bypass Valve.** Simple to use valve allows you to bypass the unit for lawn sprinkling or during filter maintenance.



Patent Pending

Model Number	Media cu. ft.	Backwash Rate Required @ 40 psi	Service Flow Rate (gpm)		Dimensions L x W x H	Pipe Size
			Peak	Cont.		
OXY3-10	1.0	5 GPM	10	3	24" x 14" x 71"	1"
OXY3-15	1.5	5 GPM	12	4	24" x 14" x 71"	
OXY3-20	2.0	7 GPM	12	5	26" x 16" x 65"	
OXY3-30	3.0	9 GPM	15	6	35" x 18" x 82"	
OXY3-10Short	1.0	5 GPM	10	3	24" x 14" x 61"	
OXY3-10-JET	1.0	4 GPM	8	2	22" x 14" x 65"	

NOTE: Residential OXY3 Filter Systems are not designed for continuous flow applications. (Example: Ground water heat pumps, lawn irrigation, etc.) Specifications subject to change without notice.

STERLING
WATER TREATMENT
www.sterlingwatertreatment.com

