




# SELF PIERCING FASTENERS


## Product Features

- Material: C1018/C1022
- Self piercing screws
- IHWH slot
- DRIVE TEST - Driving speed: 2,500 RPM; Axial load: 13.6lb; Test plate thickness: 0.8mm; 2.0 sec or less
- Zinc plated - white head
- Zinc plated
- De-hydrogen embrittlement

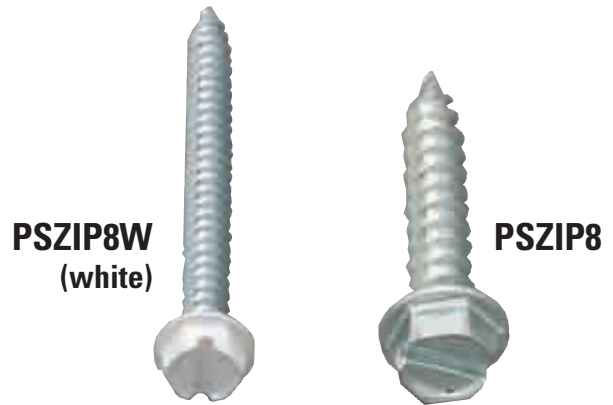

## Product Specifications

<b>PSZIP8D100</b>	8X1/2 ZIP SCRW 100	<b>PSZIP8D1000</b>	8X1/2 ZIP SCRW 1000
<b>PSZIP8D12000</b>	8X1/2 ZIP SCRW 12000	<b>PSZIP8F100</b>	8X3/4 ZIP SCRW 100
<b>PSZIP8F1000</b>	8X3/4 ZIP SCRW 1000	<b>PSZIP8F5000</b>	8X3/4 ZIP SCRW 5000
<b>PSZIP8F10000</b>	8X3/4 ZIP SCRW 10000	<b>PSZIP8G500</b>	8X1 ZIP SCRW 500
<b>PSZIP8G1000</b>	8X1 ZIP SCRW 1000	<b>PSZIP8G5000</b>	8X1 ZIP SCRW 5000
<b>PSZIP8J250</b>	8X1-1/2 ZIP SCRW 250	<b>PSZIP8J1000</b>	8X1-1/2 ZIP SCRW 1000
<b>PSZIP8J5000</b>	8X1-1/2 ZIP SCRW 5000	<b>PSZIP8K100</b>	8X2 ZIP SCRW 100
<b>PSZIP8K250</b>	8X2 ZIP SCRW 250	<b>PSZIP8K1000</b>	8X2 ZIP SCRW 1000
<b>PSZIP8JW250</b>	8X1-1/2 ZIP SCRW WHT 250	<b>PSZIP8KW50</b>	8X2 ZIP SCRW WHT 50
<b>PSZIP8KW250</b>	8X2 ZIP SCRW WHT 250		

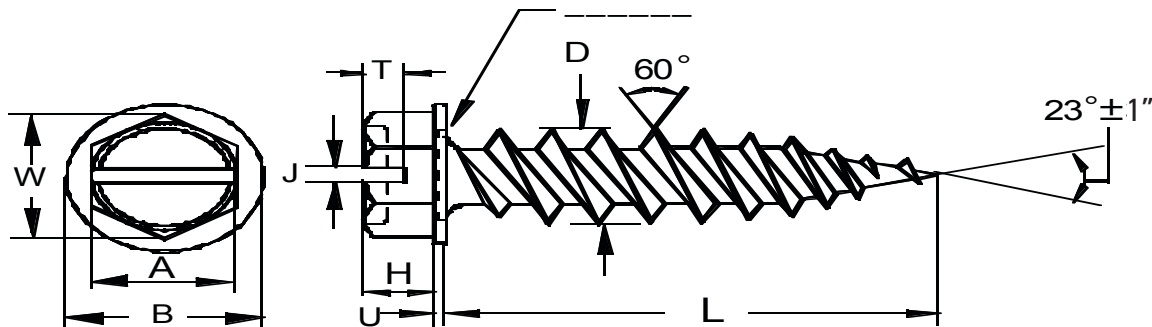

SIZE INCH	TPI	A	W	B	H	U	T	J	D	kgf.cm	SIZE INCH	L
#8	15	0.244 0.250	0.272 min	0.322 0.348	0.110 0.125	0.019 0.031	0.052 0.074	0.045 0.054	0.161 0.169	45 min	1"	0.970~1.030
											2"	1.950~2.050

## Warranty and Codes

This PROSELECT product carries a 1-year limited warranty.