



### SELF TAPPING FASTENERS


#### Product Features

- Material: SAE C1018/C1022
- Self drilling screws
- # 3 point
- IHWH undercut
- DRIVE TEST - Driving speed: 2,500 RPM; Axial load: 35lb;  
Test plate thickness: 1.6~1.73mm; 3.5 sec max
- Zinc plated
- De-hydrogen embrittlement
- IFI ASME B18.6.4 1998



#### Product Specifications

<b>PSBIT10D100</b>	10X1/2 BIT TIP TAP SCRW 100	<b>PSBIT10F1000</b>	10X3/4 BIT TIP TAP SCRW 1000
<b>PSBIT10D500</b>	10X1/2 BIT TIP TAP SCRW 500	<b>PSBIT10F5000</b>	10X3/4 BIT TIP TAP SCRW 5000
<b>PSBIT10F100</b>	10X3/4 BIT TIP TAP SCRW 100	<b>PSBIT10G100</b>	10X1 BIT TIP TAP SCRW 100
<b>PSBIT10F500</b>	10X3/4 BIT TIP TAP SCRW 500	<b>PSBIT10G500</b>	10X1 BIT TIP TAP SCRW 500

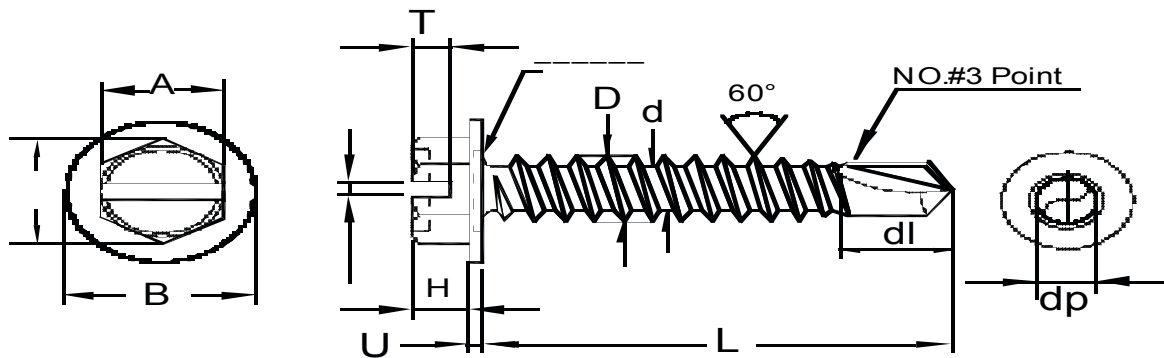

SIZE INCH	TPI	A	W	B	T	J	H	U	D	d	dl	dp	kgf.cm	SIZE INCH	L
#10	16	0.305 0.312	0.340	0.384 0.414	0.057 0.080	0.050 0.060	0.105 0.120	0.019 0.031	0.183 0.189	0.135 0.141	6.80 ref	3.85 4.00	70 min	1/2	0.470~0.500

#### Warranty and Codes

This PROSELECT product carries a 1-year limited warranty.