

SECURITY CHIMNEY™ FOR WOODBURNING, OIL-FIRED, AND GAS-FIRED APPLIANCES

www.securitychimneys.com

INDEX

SECURE BLACK® DOUBLE WALL (DL) STOVE PIPE	13-34	SECURE TEMP® ASHT+ CHIMNEY (cont'd)	
6" DIAMETER	13-34	10" DIAMETER	
7" DIAMETER	13-34	CHIMNEY LENGTHS	13-22
8" DIAMETER	13-35	CHIMNEY TERMINATIONS	13-24
SECURE TEMP® ASHT		FLASHINGS AND DECORATIVE ACCESSORIES	13-24
INFORMATION	13-2 – 13-5	INSULATED TEES AND ELBOWS	13-22
LOADBEARING CAPACITY CHART.....	13-4	SHIELD ACCESSORIES	13-23
INSTALLATION KEY	13-5	SUPPORTS.....	13-23
SECURE TEMP® ASHT+ CHIMNEY		SECURE TEMP® S2100	
5" DIAMETER		INFORMATION	13-6 – 13-9
CHIMNEY LENGTHS	13-10	INSTALLATION KEY	13-9
CHIMNEY TERMINATIONS	13-11	LOADBEARING CAPACITY CHART	13-8
FLASHINGS AND DECORATIVE ACCESSORIES	13-11	6" DIAMETER	13-25
INSULATED TEES AND ELBOWS	13-10	CHIMNEY LENGTHS	13-25
SHIELD ACCESSORIES	13-11	CHIMNEY TERMINATIONS	13-27
SUPPORTS.....	13-10 – 13-11	FLASHINGS AND DECORATIVE ACCESSORIES	13-27
6" DIAMETER		INSULATED TEES AND ELBOWS	13-25
CHIMNEY LENGTHS	13-12	KITS	
CHIMNEY TERMINATIONS	13-15	EXTERIOR INSTALLATION KIT.....	13-27
FLASHINGS AND DECORATIVE ACCESSORIES	13-14 – 13-15	INTERIOR INSTALLATION KIT.....	13-27
INSULATED TEES AND ELBOWS	13-12	WALL SUPPORT KIT	13-27
KITS		SHIELD ACCESSORIES	13-26
EXTERIOR INSTALLATION KIT.....	13-15	SUPPORTS.....	13-25 – 13-26
INTERIOR INSTALLATION KIT	13-15	7" DIAMETER	
INTERIOR NEW CONSTRUCTION KIT.....	13-15	CHIMNEY LENGTHS	13-28
WALL SUPPORT KIT	13-15	CHIMNEY TERMINATIONS	13-30
PREMIUM SHIELD ACCESSORIES.....	13-14	FLASHINGS AND DECORATIVE ACCESSORIES	13-30
SHIELD ACCESSORIES	13-14	INSULATED TEES AND ELBOWS	13-28
SUPPORTS.....	13-12 – 13-13	SHIELD ACCESSORIES	13-29
7" DIAMETER		SUPPORTS.....	13-28 – 13-29
CHIMNEY LENGTHS	13-16	KITS	
CHIMNEY TERMINATIONS	13-18	EXTERIOR INSTALLATION KIT	13-30
FLASHINGS AND DECORATIVE ACCESSORIES	13-18	INTERIOR INSTALLATION KIT.....	13-30
INSULATED TEES AND ELBOWS	13-16	WALL SUPPORT KIT.....	13-30
KITS		8" DIAMETER	
EXTERIOR INSTALLATION KIT.....	13-19	CHIMNEY LENGTHS	13-31
WALL SUPPORT KIT	13-19	CHIMNEY TERMINATIONS	13-33
PREMIUM SHIELD ACCESSORIES.....	13-18	FLASHINGS AND DECORATIVE ACCESSORIES	13-33
SHIELD ACCESSORIES	13-17 – 13-18	INSULATED TEES AND ELBOWS	13-31
SUPPORTS.....	13-16 – 13-17	SHIELD ACCESSORIES	13-32
8" DIAMETER		SUPPORTS.....	13-31 – 13-32
CHIMNEY LENGTHS	13-19		
CHIMNEY TERMINATIONS	13-22		
FLASHINGS AND DECORATIVE ACCESSORIES	13-21 – 13-22		
INSULATED TEES AND ELBOWS	13-19		
PREMIUM SHIELD ACCESSORIES.....	13-21		
SHIELD ACCESSORIES	13-21		
SUPPORTS.....	13-20 – 13-21		

Expert Service. Quality Products. Since 1960.

SECURITY CHIMNEY™ FOR WOOD-BURNING, OIL-FIRED AND GAS FIRED APPLIANCES

www.securitychimneys.com

SECURE TEMP® ASHT

APPLICATIONS

The Secure Temp ASHT is one of the most extensively used factory-built venting systems in North America. It has been specially developed for use with oil and gas burning heating appliances and certified wood-burning fireplaces.

The Secure Temp ASHT high-temperature chimney is certified by Intertek Testing (Warnock Hersey) to ULC S604 standards and ULC S610 (on wood-burning fireplaces) for all diameters of 5, 6, 7, 8 and 10 inches.

CERTIFICATION

The Secure Temp ASHT high-temperature chimney is certified by Intertek Testing (Warnock Hersey) to:

- ULC S604 standards for all diameters of 5, 6, 7, 8, and 10 inches.
- ULC S610 (on wood-burning fireplaces) for all diameters of 5, 6, 7, 8 and 10 inches.
- ULC S629 for wood stove applications in diameters of 6, 7, and 8 inches.

INSTALLATION

Assembly always requires the male coupler to be positioned upwards. Size the chimney in accordance with the appliance instruction manual. Map out the chimney path closest to the heating unit.

For wood stove applications, a third pipe (premium shield) is required for inside installation where the chimney is enclosed between two floors (see premium shield accessories section).

Prior to installation, consult the detailed installation manual included with the support components.

SAFETY

Security Chimneys's Secure Temp ASHT chimneys can be installed as close as 2 inches to combustible materials, regardless of the diameter to be used. Radiation shields and appropriate supports must be used to maintain a safe clearance as the chimney passes through floors and combustible partitions.

Some radiation shields in the Secure Temp ASHT line have been designed specifically for use with wood-burning fireplaces. For the use of Secure Temp ASHT with manufactured wood fireplaces, refer to the instruction of these products.

SECURE TEMP® ASHT VENT SYSTEMS FOR CHIMNEYS



- 1 Twist-Lock stainless steel coupler system with 1-inch overlap**
 - No screws or other attachments required
 - Fast and easy installation with one-eighth of a turn
- 2 Stainless steel inner lining**
 - Provides smoother surface
 - Little restriction of flue gases even with an elbow
 - Outstanding corrosion resistance
- 3 One inch of exclusive Secura Plus insulation**
 - No shifting of the insulation
 - Keeps cooling of gas temperature minimal, which stabilizes at high temperatures
 - Reduces condensation and creosote buildup
 - Low surface temperature
 - Minimum 2-inch safety clearance to combustible materials in all diameters
- 4 Fast venting of combustion products**
 - Delivers a stable and powerful draft
- 5 Stainless steel outer casing**
 - Supports the structural load
 - Corrosion resistance
- 6 Inner liner attached only to the male coupler**
 - Free-floating inner wall means no need for expansion joints
 - Unhindered expansion with rising temperatures
- 7 Lightweight – 6-inch diameter, 5.2 lb. per linear foot**
 - Delivers a more user-friendly design
 - For support, see "Loadbearing Capacity" chart.

– E.&O.E. – All Prices F.O.B. Our Warehouse – Subject to Change Without Notice – All Taxes Extra – May not be Available at All Branches –

SECURITY CHIMNEY™ FOR WOOD-BURNING, OIL-FIRED AND GAS FIRED APPLIANCES

www.securitychimneys.com


SECURE TEMP® ASHT (cont'd)

ELBOW OFFSET AND RISE CHART

Offset and rise calculation

The following steps will help determine the lengths required for installation:

1. Determine the offset required in view of the obstacles that must be avoided.
2. Refer to the "Offset/Rise Chart" to determine the elbows required as well as the insulated lengths needed.
3. Check the corresponding offset height dimensions.



Angle	Dia.	One length between elbows						
		8"	12"	18"	24"	36"	48"	
15	6" and 8"	Offset (in.)	3-5/16	4-5/16	5-7/8	7-7/16	10-1/2	13-5/8
		Rise (in.)	15-11/16	19-9/16	25-3/8	31-3/16	43-3/4	54-3/8
		Two lengths between elbows						
			8" & 48"	12" & 48"	18" & 48"	24" & 48"	36" & 48"	48" & 48"
		Offset (in.)	15-3/8	16-7/16	18	19-1/2	22-5/8	25-3/4
		Rise (in.)	60-15/16	64-3/16	70-9/16	76-3/8	87	99-9/16

Angle	Dia.	One length between elbows						
		8"	12"	18"	24"	36"	48"	
30	6" and 8"	Offset (in.)	7-7/16	9-7/16	12-7/16	15-7/16	21-7/16	27-7/16
		Rise (in.)	20	23-1/2	28-11/16	33-7/8	44-1/4	54-11/16
		Two lengths between elbows						
			8" & 48"	12" & 48"	18" & 48"	24" & 48"	36" & 48"	48" & 48"
		Offset (in.)	30-13/16	32-13/16	35-13/16	38-13/16	44-13/16	50-13/16
		Rise (in.)	60-9/16	64	69-1/4	74-7/16	84-13/16	95-1/4

Angle	Dia.	One length between elbows						
		8"	12"	18"	24"	36"	48"	
45	6" and 8"	Offset (in.)	10-5/16	13-3/16	17-3/8	21-5/8	30-1/8	38-5/8
		Rise (in.)	17-13/16	20-5/8	24-7/8	29-1/8	37-5/8	46-1/8
		Two lengths between elbows						
			8" & 48"	12" & 48"	18" & 48"	24" & 48"	36" & 48"	48" & 48"
		Offset (in.)	43-7/16	46-1/4	50-1/2	54-3/4	63-1/4	71-11/16
		Rise (in.)	50-15/16	53-3/4	58	62-1/4	70-3/4	79-3/16

SECURITY CHIMNEY™ FOR WOOD-BURNING, OIL-FIRED AND GAS FIRED APPLIANCES

www.securitychimneys.com

SECURE TEMP® ASHT CHIMNEYS INSTALLATION (cont'd)

LOADBEARING CAPACITY

Ø interior	Maximum Height				
	5"	6"	7"	8"	10"
Floor support	32'	32'	32'	32'	32'
Tee support	63'	63'	55'	48'	39'
Adjustable tee/ Wall support	63'	63'	55'	48'	39'
Roof support	42'	34'	27'	24'	20'
Offset support	–	28'	24'	20'	14'
Square Cathedral support	–	60'	50'	45'	35'
Finishing support	–	75'	65'	59'	–
Adjustable square support w/ framing arms and coupler	–	27'	22'	–	–
Offset/Wall support	–	28'	24'	20'	14'
Reduced Clearance support	–	60'	50'	45'	–

SIZE OF OPENINGS*

Ø interior	Hole Size (Framing)				
	5"	6"	7"	8"	10"
Floor support	11-3/8"	12-3/8"	13-3/8"	14-3/8"	16-3/8"
Square Cathedral support	–	14-3/8"	14-3/8"	14-3/8"	–
Roof support	14-3/8"	14-3/8"	14-3/8"	14-3/8"	–
Finishing support	11-3/8"	12-3/8"	13-3/8"	14-3/8"	16-3/8"
Wall thimble	11-3/8"	12-3/8"	13-3/8"	14-3/8"	16-3/8"
Firestop	11-3/8"	12-3/8"	13-3/8"	14-3/8"	16-3/8"
Reduced Clearance support	–	10"	11"	12"	–

*The size of the opening may vary depending on the pitch of the roof. Maintain a 2-inch clearance from the chimney.

TEMPERATURE RATING

538°C (1000°F)

760°C (1400°F)

1150° (2100°F)

PERIOD OF OPERATION

Max. continuous

Brief forced fired

3 × 30 minutes, tested

SECURE TEMP ASHT GENERAL SPECIFICATIONS

Ø int.	Ø ext.	Insulation Thickness	Weight lb./ft.*	Twist-Lock Assembly	Clearance to Combustible
5"	7"	1"	4.1	YES	2"
6"	8"	1"	5.2	YES	2"
7"	9"	1"	6.4	YES	2"
8"	10"	1"	7.2	YES	2"
10"	12"	1"	8.9	YES	2"


SECURITY CHIMNEY™ FOR WOOD-BURNING, OIL-FIRED AND GAS FIRED APPLIANCES

www.securitychimneys.com


SECURE TEMP® ASHT CHIMNEYS INSTALLATION (cont'd)

INSTALLATION KEY


- | | | |
|--|---------------------------------------|--|
| 1 Insulated Elbow | 7 Rain Cap | 14 Black Stove Pipe |
| 2 Insulated Wall Radiation Shield | 8 Firestop | 15 Finishing Support |
| 3 Insulated Length | 9 Connector | 16 Telescopic Rigid Shield |
| 4 Universal Offset Support | 10 Base Tee for Twin Connections | 17 Radiation Shield Connector |
| 5 Insulated Attic Radiation Shield | 11 Floor Support | 18 Storm Collar |
| 6 Adjustable Roof Flashing w/ Storm Collar | 12 Universal Roof Support | 19 Radiation Shield Connector Firestop |
| | 13 Flat Roof Flashing w/ Storm Collar | |

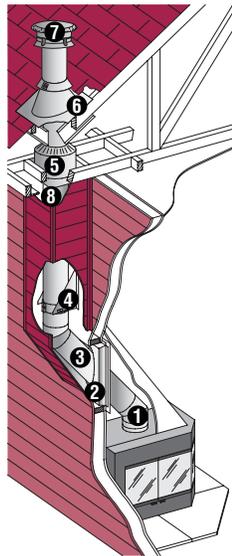


Fireplace through exterior insulated chase

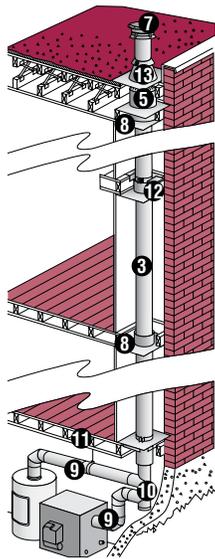

Residential furnace and water heater

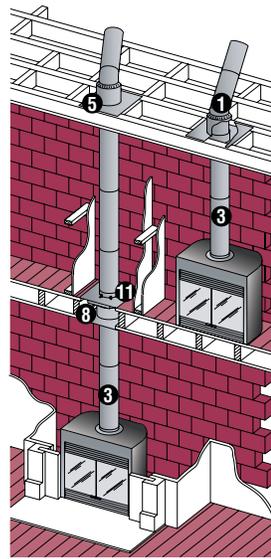

Chimney with several fireplaces

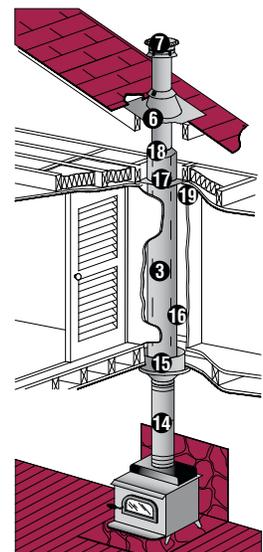

Chimney on a wood stove

– E.&O.E. – All Prices F.O.B. Our Warehouse – Subject to Change Without Notice – All Taxes Extra – May not be Available at All Branches –

SECURITY CHIMNEY™ FOR WOOD-BURNING, OIL-FIRED AND GAS FIRED APPLIANCES

www.securitychimneys.com

SECURE TEMP® S2100

APPLICATIONS

The Secure Temp S2100 has been designed to widely exceed existing safety standards while offering the best available chimney system. It has been designed for use with wood, gas, oil, or coal-burning appliances. The Secure Temp S2100 high-temperature chimney is certified by Intertek Testing Services (Warnock Hersey) to ULC S629 standards for diameters of 6, 7 and 8 inches.

INNOVATIVE COMPOSITION AND EASE OF INSTALLATION

The use of stainless steel, selected for its resistance to high temperatures and corrosion, lends outstanding durability to the Secure Temp S2100 high-temperature chimneys. Secure Temp S2100 has a temperature rating of 650°C (1200°F); max. continuous, 760°C (1400°F) brief forced fired; and 1150°C (2100°F) 3 x 30 minutes, tested.

All chimneys feature 2 inches (S2100) of superior-quality, high-density Secura Plus insulation. This exclusive insulation keeps the temperature of the outer casing relatively low, keeping safety features as simple as possible. The S2100, with 2 inches of insulation, is well-suited for outside installations in areas where very cold temperatures occur.

All Secure Temp S2100 high-temperature chimneys, regardless of diameter, can be installed as close as 2 inches from combustible materials.

The S2100 also features fast and easy Twist-Lock assembly. Lengths and universal fittings fit together and lock into place by twisting one-eighth of a turn. No other part is needed to ensure the chimney's structural stability, keeping installation time to a minimum.

SECURE TEMP® S2100 CHIMNEYS FOR WOOD STOVE APPLICATIONS

FEATURES

Twist-Lock stainless steel coupler system with 1-inch overlap

Stainless steel inner lining

Two inches (S2100) of exclusive Secura Plus insulation

Fast venting of combustion products

Stainless steel outer casing

Inner liner attached only to the male coupler

Lightweight – 6-inch diameter, 8.9lb per linear foot

BENEFITS

- No screws or other attachments required
- Fast and easy installation with one-eighth of a turn

- Provides smoother surface
- Little restriction of the gases even with an elbow
- Outstanding corrosion resistance

- No shifting of the insulation
- Keeps cooling of gas temperatures minimal which stabilizes at high temperatures
- Reduces condensation and creosote buildup
- Increases appliance performance by providing stable draft
- Low surface temperature
- Minimum 2-inch safety clearance to combustible materials in all diameters

- Delivers a stable and powerful draft

- Supports the structural load
- Corrosion resistance

- Free-floating inner wall means no need for expansion joints
- Unhindered expansion with rising temperatures

- Delivers a more user-friendly design
- For support, see "Loadbearing Capacity" chart.

SECURITY CHIMNEY™ FOR WOOD-BURNING, OIL-FIRED AND GAS FIRED APPLIANCES

www.securitychimneys.com


SECURE TEMP® S2100 (cont'd)

ELBOW OFFSET AND RISE CHART

Offset and rise calculation

The following steps will help determine the lengths required for installation:

1. Determine the offset required in view of the obstacles that must be avoided.
2. Refer to the "Offset/Rise Chart" to determine the elbows required as well as the insulated lengths needed.
3. Check the corresponding offset height dimensions.



		One length between elbows						
Angle	Dia.	8"	12"	18"	24"	36"	48"	
15	6 & 8 in.	Offset (in.)	3-5/16	4-5/16	5-7/8	7-7/16	10-1/2	13-5/8
		Rise (in.)	16	19-7/8	25-11/16	31-1/2	43-1/16	54-5/8
		Two lengths between elbows						
		8" & 48"	12" & 48"	18" & 48"	24" & 48"	36" & 48"	48" & 48"	
		Offset (in.)	15-1/2	16-1/2	18-1/16	19-5/8	22-3/4	25-13/16
		Rise (in.)	61-7/16	65-1/4	71-1/16	76-7/8	88-1/2	100-1/16

		One length between elbows						
Angle	Dia.	8"	12"	18"	24"	36"	48"	
30	6 & 8 in.	Offset (in.)	7-3/8	9-3/8	12-3/8	15-3/8	21-3/8	27-3/8
		Rise (in.)	20-11/16	24-3/16	29-3/8	34-9/16	44-15/16	55-5/16
		Two lengths between elbows						
		8" & 48"	12" & 48"	18" & 48"	24" & 48"	36" & 48"	48" & 48"	
		Offset (in.)	30-7/8	32-7/8	35-7/8	38-7/8	44-7/8	50-7/8
		Rise (in.)	61-3/8	64-7/8	70-1/16	75-1/4	85-5/8	96

		One length between elbows						
Angle	Dia.	8"	12"	18"	24"	36"	48"	
45	6 & 8 in.	Offset (in.)	10-5/16	13-3/16	17-3/8	21-5/8	30-1/8	38-5/8
		Rise (in.)	17-13/16	20-5/8	24-7/8	29-1/8	37-5/8	46-1/8
		Two lengths between elbows						
		8" & 48"	12" & 48"	18" & 48"	24" & 48"	36" & 48"	48" & 48"	
		Offset (in.)	43-7/16	46-1/4	50-1/2	54-3/4	63-1/4	71-11/16
		Rise (in.)	50-15/16	53-3/4	58	62-1/4	70-3/4	79-3/16

SECURITY CHIMNEY™ FOR WOOD-BURNING, OIL-FIRED AND GAS FIRED APPLIANCES

www.securitychimneys.com

SECURE TEMP® S2100 CHIMNEYS INSTALLATION (cont'd)

INSTALLATION INFORMATION (cont'd)

Assembly always requires the male coupler to be positioned upwards. Size the chimney in accordance with the appliance instruction manual. Map out the chimney path closest to the heating unit. Prior to installation, consult the detailed installation manual included with the support components.

Any fireplaces and controlled combustion units can be connected to the Secure Temp S2100, since it has been certified, independently, to ULC S629M standards.

SAFETY

Security Chimneys Secure Temp S2100 chimneys can be installed as close as 2 inches to combustible materials, regardless of the diameter to be used. Radiation shields and appropriate supports must be used to maintain a safe clearance as the chimney passes through floors and combustible partitions.

LOADBEARING CAPACITY

Ø int.	Maximum Height		
	6"	7"	8"
Wall support	30'	28'	26'
Adjust. wall/tee support	30'	28'	26'
Roof support	20'	18'	16'
Offset support	18'	16'	14'
Cathedral support	30'	28'	26'
Square Cathedral support	30'	28'	26'
Finish support	30'	28'	26'
Offset/Wall support	24'	21'	20'
Reduced Clearance support	30'	28'	26'

SIZE OF OPENINGS*

Ø int.	Hole Size (Framing)		
	6"	7"	8"
Roof support	14"	15"	16"
Radiation shield	14"	15"	16"
Cathedral support	14-3/8"	14-3/8"	14-3/8"
Square Cathedral support	14-3/8"	14-3/8"	14-3/8"
Finish support	14-3/8"	14-3/8"	14-3/8"
Reduced Clearance support	12"	13"	14"

*The size of the opening may vary depending on the pitch of the roof. Maintain a 2-inch clearance from the chimney.

TEMPERATURE RATING

650°C (1200°F)

700°C (1400°F)

1150° (2100°F)

PERIOD OF OPERATION

Max. continuous

Brief forced fired

3 × 30 minutes, tested

SECURE TEMP S2100 GENERAL SPECIFICATIONS

Ø int.	Ø ext.	Insulation Thickness	Weight lb./ft.*	Twist-Lock Assembly	Clearance to Combustible
6"	10"	2"	8.9	YES	2"
7"	11"	2"	9.9	YES	2"
8"	12"	2"	10.9	YES	2"


SECURITY CHIMNEY™ FOR WOOD-BURNING, OIL-FIRED AND GAS FIRED APPLIANCES

www.securitychimneys.com


SECURE TEMP® S2100 CHIMNEYS INSTALLATION (cont'd)

INSTALLATION KEY


- | | | |
|--------------------------|--|----------------------|
| 1 Black Stove Pipe | 6 Insulated Length | 10 Rain Cap |
| 2 Finishing Cone | 7 Universal Wall Band | 11 Firestop |
| 3 Insulated Wall Thimble | 8 Insulated Attic Radiation Shield | 12 Finishing Support |
| 4 Tee Support | 9 Adjustable Roof Flashing w/ Storm Collar | 13 Anchor Plate |
| 5 Insulated Tee | | |

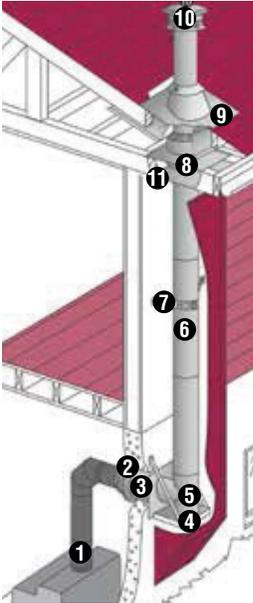

Exterior installation to a wood stove.

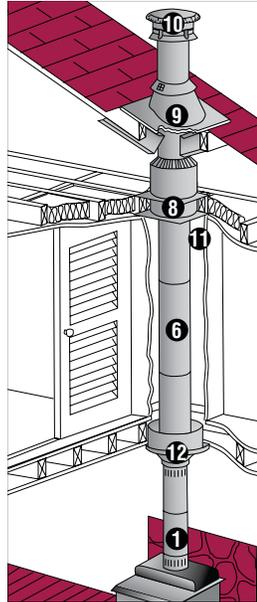

Interior installation on a wood stove using a finishing support.

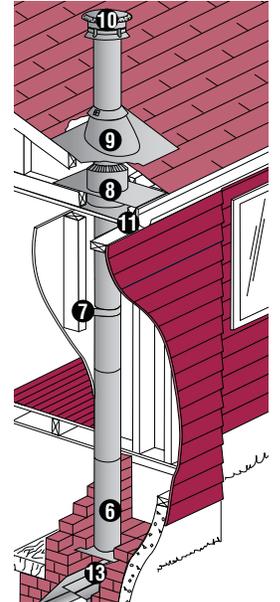

Chimney installed on a masonry fireplace.

SECURITY CHIMNEY™ FOR WOOD-BURNING, OIL-FIRED AND GAS FIRED APPLIANCES

www.securitychimneys.com

SECURE TEMP® ASHT+ CHIMNEY — 1" WALL — 5" DIAMETER CHIMNEY LENGTHS

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600003	5L8	6105SL8	5" x 8" Chimney Length	6.0
600004	5L12	6105SL12	5" x 12" Chimney Length	8.0
600006	5L18	6105SL18	5" x 18" Chimney Length	13.0
600008	5L24	6105SL24	5" x 24" Chimney Length	15.0
600010	5L36	6105SL36	5" x 36" Chimney Length	22.0
600011	5L48	6105SL48	5" x 48" Chimney Length	–
600005	5LA	6105SLA	5" x 12" Adjustable Chimney Length	–



L



LA



TI

TCI

INSULATED TEES AND ELBOWS

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600012	5TI	6105ITS	5" Insulated Tee includes TCS Cap	–
C600000	5TCS	5PTCS	5" Insulated Stainless Steel Tee Cap	–
C600000	5TCI	6105IC	5" Insulated Tee Cap with Coupler; Twist-Lock; Use with SME Support	–
C600000	5E15	6105IES15	5" x 15° Elbow, Insulated	3.8
600020	5E30	6105IES30	5" x 30° Elbow, Insulated	6.0
600022	5E45	6105IES45	5" x 45° Elbow, Insulated	5.0



E15



E30/E45

SUPPORTS

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600024	5UP	5PUP	5" Flue Extension to extend inner casing; may also be attached directly to appliance outlet as a chimney adapter	0.2
C600000	5SFC	6105FCSC	5" Finishing Support (Flat Ceiling Round) with Coupler and Stove Pipe Adapter. Connects to both double-wall and single-wall stove pipe.	–
C600000	5SFCA	–	5" Finishing Support (Flat Ceiling Round) with Coupler and Stove Pipe Adapter. Removeable Collar	–
C600000	5SSAC	–	Adjustable Square Support, Black with Framing Arms. Adjustable arms that extend to reach framing for support. Can be installed between 16" on center joists with 2-1/2" of free play to eliminate need for elbows. No framing required.	–
C600000	PS24	PS	Square Cathedral Support Extension, adds up to 22" Height	–
C600000	5SMA	–	5" Adjustable Tee Support; Adjustable Base Must be installed with insulated Tee cap (TCS)	–
600034	5SME	6105AWS	5" Adjustable Wall Support. When used as a base support, it lends itself to the addition of a Twist-Lock insulated tee cap (TI).	11.0



UP



SFC/SFCA



SSAC



PS24



SMA

SME

(cont'd on next page)



SECURITY CHIMNEY™ FOR WOOD-BURNING, OIL-FIRED AND GAS FIRED APPLIANCES

www.securitychimneys.com

SECURE TEMP® ASHT+ CHIMNEY — 1" WALL — 5" DIAMETER (cont'd)


SUPPORTS (cont'd)

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600028	SO	PSO	Offset/Wall Support – Universal 5-8" ASHT; triangular plates allow a 2" to 4" lateral adjustment of support to the vertical surface. This support can also be used as a wall support above the insulated tee. When used as a tee support, it lends itself to the addition of a Twist-Lock insulated tee cap (TI).	5.0
600030	ST	PST	Roof Support – Universal; 5-8" ASHT	4.6
600032	5SP	6105AP	5" Anchor Plate (Rectangular Mounting Flange)	2.3
600036	5SD	6105ISP	5" Floor Support with Collar Clamp	5.3



SHIELD ACCESSORIES

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600040	5BF	6105FS	5" Firestop	1.3
600042	5RS	6105CFRS	5" Radiation Shield	3.2
600044	5RSM	6105WRS-1	5" Insulated Wall Radiation Shield/Wall Thimble	7.5
600046	5RSA2	6105AFRS2	5" Insulated Attic Radiation Shield; 2 Pce.	5.0
C600000	5ARSA	6105AAFRS	5" Adjustable Insulated Attic Radiation Shield	–
600048	BS2	PBS2	Roof Brace – Universal for 5-8" ASHT	3.3
600050	BM	PBM	Wall Band – Universal for 5-8" ASHT	1.0




FLASHINGS (STORM COLLAR INCLUDED) AND DECORATIVE ACCESSORIES

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600058	5F	6105RFO	5" Flat Roof Flashing	7.2
600060	5FA	6105RF17	5" Adjustable Roof Flashing 1/12-7/12	7.2
C600000	5FB	6105RF812	5" Adjustable Roof Flashing 8/12- 12/12	–
600070	5FC	6105SC	5" Storm Collar	0.5
C600000	FSD	–	Flashing Snow Diverter – Universal; works with all diameters	–



CHIMNEY TERMINATIONS

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600072	5CC	6105RCD	5" Rain Cap	3.0
600074	PE	PPE	Spark Arrester Band – Universal; Cut-To-Fit	0.3



SECURITY CHIMNEY™ FOR WOOD-BURNING, OIL-FIRED AND GAS FIRED APPLIANCES

www.securitychimneys.com

SECURE TEMP® ASHT+ CHIMNEY — 1" WALL — 6" DIAMETER CHIMNEY LENGTHS

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600102	6L8	6106SL8	6" x 8" Chimney Length	6.0
600104	6L12	6106SL12	6" x 12" Chimney Length	8.0
600106	6L18	6106SL18	6" x 18" Chimney Length	13.0
600108	6L24	6106SL24	6" x 24" Chimney Length	15.0
600110	6L36	6106SL36	6" x 36" Chimney Length	22.0
600111	6L48	6106SL48	6" x 48" Chimney Length	-
600105	6LA	6106SLA	6" x 12" Adjustable Chimney Length	-



L



LA

INSULATED TEES AND ELBOWS

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600112	6TI	6106ITS	6" Insulated Tee includes TCS Cap	8.5
600114	6TCS	6PTCS	6" Insulated Stainless Steel Tee Cap	0.3
600116	6TCI	6106IC	6" Insulated Tee Cap with Coupler; Twist-Lock; Use with SME Support	1.2
600176	6TB	IF06BT	6" Galvanized Base Tee w/Cap	3.0
600178	6TBD	IF06BT2	6" Galvanized Double Base Tee w/Cap	4.0
600180	6TBS	IF06BTS	6" Stainless Base Tee w/Cap	3.0
600182	6TC	6TC	6" Base Tee Cap, Galvanized	0.3
600118	6E15	6106IES15	6" x 15° Elbow, Insulated	3.8
600120	6E30	6106IES30	6" x 30° Elbow, Insulated	6.0
600122	6E45	6106IES45	6" x 45° Elbow, Insulated	5.0



TI



TCI



TB/TBS



TBD



TC



E15

SUPPORTS

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600124	6UP	6PUP	6" Flue Extension to extend inner casing. Can also be attached directly to appliance outlet as a chimney adapter.	0.2
600184	-	6106BS2-1	6" Base Support (Use 6SFC Finishing Support) 600128	5.0
600128	6SFC	6106FCSC-1	6" Finishing Support (Flat Ceiling Round) with Coupler and Stove Pipe Adapter. Connects to both double-wall and single-wall stove pipe.	-
C600000	6SFCA	-	6" Finishing Support (Flat Ceiling Round) with Coupler and Stove Pipe Adapter - Removeable Collar	-
C600000	6RCS	-	Insulated Reduced Clearance Support w/ Coupler & Stove Pipe Adapter (24" Height). Use with flat, vaulted or cathedral ceilings. Certified to reduce clearance to combustibles from the usual 2" (per side) down to a 1" (per side) for all diameters. Can connect to both double-wall stove pipe or single-wall stove pipe with included adapter. Functions as both an Attic Insulation Shield and Finishing Support. Adjustable black finish trim, insulation pad and collar included.	-



E30/E45



UP



SFC/SFCA



RCS

(cont'd on next page)

- E.&O.E. - All Prices F.O.B. Our Warehouse - Subject to Change Without Notice - All Taxes Extra - May not be Available at All Branches -

SECURITY CHIMNEY™ FOR WOOD-BURNING, OIL-FIRED AND GAS FIRED APPLIANCES

www.securitychimneys.com

SECURE TEMP® ASHT+ CHIMNEY — 1" WALL — 6" DIAMETER (cont'd)

SUPPORTS (cont'd)

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS		
C600000	SE	–	Extension for *RCS Reduced Clearance Support (Adds up to 22" in Height). Fits all diameters	–		
600129	6SCC	6106CSC-1	6" Round Cathedral Support w/ Coupler and Stove Pipe Adapter. Designed to connect the black stove pipe; decorative black matte finish; must be attached to a frame built from the joists.	–	SE	SCC
600127	6SSC	6106CSBC-1	6" Square Cathedral Support w/ Coupler (While Supplies Last) Discontinued. Use 6SSC24	–		
C600000	6SSC24	6106CSBC24	6" Square Cathedral Support 24" height; c/w coupler & stove pipe adapter. Designed to connect to both double-wall and single-wall stove pipe. Adjustable black finish trim included.	–	SSC24	SSAC
C600000	6SSAC	–	Adjustable Square Support, Black with Framing Arms. Adjustable arms that extend to reach framing for support. Can be installed between 16" on center joists with 2-1/2" of free play to eliminate need for elbows. No framing required.	–		
600638	PS	PPS	Square Cathedral Support Extension, fits 6-8" (While Supplies Last) Discontinued, Use PS24	–	PS24	SM
C600000	PS24	PS	Square Cathedral Support Extension, adds up to 22" Height	–		
600126	6SM	6106WS	6" Tee Support w/ Coupler, Galvanized Steel Must be installed with insulated Tee cap (TCS)	8.5		
C600000	6SMA	–	6" Adjustable Tee Support; Adjustable Base Must be installed with insulated Tee cap (TCS)	–	SMA	SME
600134	6SME	6106AWS	6" Adjustable Wall Support. When used as a base support, it lends itself to the addition of a Twist-Lock insulated tee cap (TI).	11.0		
600028	SO	PSO	Offset/Wall Support – Universal 5-8" ASHT; triangular plates allow a 2" to 4" lateral adjustment of support to the vertical surface. This support can also be used as a wall support above the insulated tee. When used as a tee support, it lends itself to the addition of a Twist-Lock insulated tee cap (TI).	5.0	SO	SO-1
C600000	SO-1	PSO-1	Wall Support. Designed to support chimney on a vertical wall. The triangular plates allow a 2" to 6" lateral adjustment of the support to the vertical surface. When used as a tee support, it lends itself to the addition of a Twist-Lock insulated tee cap (TI).	–		ST
600030	ST	PST	Roof Support – Universal; 5-8" ASHT	4.6		SP
600132	6SP	6106AP	6" Anchor Plate (Rectangular Mounting Flange)	2.3		SD
600136	6SD	6106ISP	6" Floor Support with Collar Clamp	5.3		

– E.&O.E. – All Prices F.O.B. Our Warehouse – Subject to Change Without Notice – All Taxes Extra – May not be Available at All Branches –

SECURITY CHIMNEY™ FOR WOOD-BURNING, OIL-FIRED AND GAS FIRED APPLIANCES

www.securitychimneys.com

SECURE TEMP® ASHT+ CHIMNEY — 1" WALL — 6" DIAMETER (cont'd)

SHIELD ACCESSORIES

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600140	6BF	6106FS	6" Firestop	1.3
600142	6RS	6106CFRS	6" Radiation Shield	3.2
600186	6RSI	6106IWRS	6" Insulated Radiation Shield/Firestop	6.0
600144	6RSM	6106WRS-1	6" Insulated Wall Radiation Shield/Wall Thimble	7.5
600188	6RSMI30	6106IWRS30	6" Insulated Wall Radiation Shield 30°	6.5
600190	6RSMI45	6106IWRS45	6" Insulated Wall Radiation Shield 45°	7.0
600146	6RSA2	6106AFRS2	6" Insulated Attic Radiation Shield; 2 Pce.	5.0
C600000	6ARSA	6106AAFRS	6" Adjustable Insulated Attic Radiation Shield	-
600048	BS2	PBS2	Roof Brace – Universal for 5-8" ASHT	3.3
600050	BM	PBM	Wall Band – Universal for 5-8" ASHT	1.0
C600000	6BM	-	Wall Band – 6" Fixed Configuration	1.0
600156	6BH	6106GWB	6" Guy Wire Band (wire not included)	0.8




PREMIUM SHIELD ACCESSORIES

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600902	6ASP	6106ASP	6" Swivel Adapter	-
600904	6TRS	6106TRS	6" Telescopic Rigid Shield; min. 48" up to max. 136" length	-
600906	6FS	6106FLS	6" Flexible Shield	-
600908	6SRS	6106SRS	6" Radiation Shield Connector; Insulated	-
600910	6RCSP	6106RCSP	6" Radiation Shield Connector Firestop	-
600912	6RSSR	6106RSSR	6" Radiation Shield Connector Support	-



FLASHINGS (STORM COLLAR INCLUDED) AND DECORATIVE ACCESSORIES

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600158	6F	6106RFO	6" Flat Roof Flashing	7.2
600167	6FP	6106RFP17	6" Peak Roof Flashing 1/12-7/12	-
600168	6FPB	6106RFP812	6" Peak Roof Flashing 8/12-12/12	-
600160	6FA	6106RF17	6" Adjustable Roof Flashing 1/12-7/12	7.2
600162	6FB	6106RF812	6" Adjustable Roof Flashing 8/12-12/12	7.4
600164	6FBB	6106RF1221	6" Adjustable Roof Flashing 12/12-21/12	9.6
600165	6FAA	6106RFA17	6" Adjustable Roof Flashing 1/12-7/12 with Malleable Alum. Base (includes Storm Collar)	-
600166	6FBA	6106RFA812	6" Adjustable Roof Flashing 8/12-12/12 with Malleable Alum. Base (includes Storm Collar)	6.5
600170	6FC	6106SC	6" Storm Collar	0.5
600147	6PF	6106TRC-1	6" Decorative Trim Collar	-
600677	6PD	6PPD-1	6" Finishing Cone	-
600125	6PA	6PPA	6" Black Pipe Adapter	-
600174	6PB	6106PB	6" Decorative Collar – Single Wall; ASHT	-
C600000	6DQDH	6PDQDH	6" Decorative Collar – Double Wall; ASHT	-

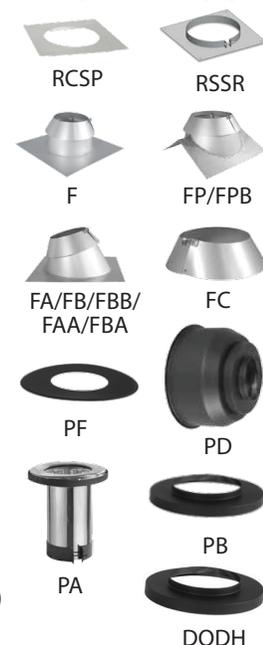

(cont'd on next page)


- E.&O.E. - All Prices F.O.B. Our Warehouse - Subject to Change Without Notice - All Taxes Extra - May not be Available at All Branches -

SECURITY CHIMNEY™ FOR WOOD-BURNING, OIL-FIRED AND GAS FIRED APPLIANCES

www.securitychimneys.com


SECURE TEMP® ASHT+ CHIMNEY — 1" WALL — 6" DIAMETER (cont'd) FLASHINGS (STORM COLLAR INCLUDED) AND DECORATIVE ACCESSORIES (cont'd)

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
601538	6DQ	6PDQ	6" Double Wall Trim Collar (Can be used to conceal joint where stove pipe attaches to adapter)	
C600000	FSD	–	Flashing Snow Diverter – Universal; works with all diameters	–



CHIMNEY TERMINATIONS

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600172	6CC	6106RCD	6" Rain Cap	3.0
600074	PE	PPE	Spark Arrester Band – Universal; Cut-To-Fit	0.3



WALL SUPPORT KIT (PIPE NOT INCLUDED)

Only available for 6" and 7" diameters

Kit Includes: Insulated tee, twist-lock tee cap, adjustable tee support, insulated wall radiation shield, stainless flue extension, double wall decorative collar, wall band, and rain cap.

Can be used for through the wall installations.

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600200	6WSK	6106WSK	6" Wall Support Kit	–



EXTERIOR INSTALLATION KIT

Only available for 6" and 7" diameters

Kit includes: Insulated tee with insulated tee cap, adjustable tee support, insulated wall thimble, decorative collar single wall, flue extension, and decorative collar double wall, spark arrester, rain cap, and wall band.

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600198	6EK-2	6106EK-2	6" Exterior Installation Kit	–



INTERIOR INSTALLATION KIT – 6" DIAMETER ONLY

Kit includes: Finishing support with coupler, 2 piece attic insulation shield, and rain cap.

For interior installations only.

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600199	6IK-1	6106IK-1	6" Interior Installation Kit	–



INTERIOR NEW CONSTRUCTION KIT – 6" DIAMETER ONLY

Kit includes: Finishing support with removeable outer trim collar, adjustable insulated attic radiation shield, and rain cap.

Use for new home construction with through the roof installation.

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
C600000	6IKNC	–	6" New Construction Installation Kit	–



– E.&O.E. – All Prices F.O.B. Our Warehouse – Subject to Change Without Notice – All Taxes Extra – May not be Available at All Branches –

SECURITY CHIMNEY™ FOR WOOD-BURNING, OIL-FIRED AND GAS FIRED APPLIANCES

www.securitychimneys.com

SECURE TEMP® ASHT+ CHIMNEY — 1" WALL — 7" DIAMETER CHIMNEY LENGTHS

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600202	7L8	6107SL8	7" x 8" Chimney Length	7.0
600204	7L12	6107SL12	7" x 12" Chimney Length	9.0
600206	7L18	6107SL18	7" x 18" Chimney Length	13.0
600208	7L24	6107SL24	7" x 24" Chimney Length	17.5
600210	7L36	6107SL36	7" x 36" Chimney Length	25.0
600211	7L48	6107SL48	7" x 48" Chimney Length	-
600205	7LA	6107SLA	7" x 12" Adjustable Chimney Length	-



L



LA

INSULATED TEES AND ELBOWS

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600212	7TI	6107ITS	7" Insulated Tee includes TCS Cap	11.0
600214	7TCS	7PTCS	7" Insulated Stainless Steel Tee Cap	0.3
600216	7TCI	6107IC	7" Insulated Tee Cap with Coupler; Twist-Lock; Use with SME Support	1.4
600276	7TB	IF07BT	7" Galvanized Base Tee w/Cap	3.0
600278	7TBD	IF07BT2	7" Galvanized Double Base Tee w/Cap	4.5
600280	7TBS	IF07BTS	7" Stainless Base Tee w/Cap	3.0
600282	7TC	7TC	7" Base Tee Cap, Galvanized	0.4
600218	7E15	6107IES15	7" x 15° Elbow, Insulated	2.4
600220	7E30	6107IES30	7" x 30° Elbow, Insulated	7.0
600222	7E45	6107IES45	7" x 45° Elbow, Insulated	6.5



TI



TCI



TB/TBS



TBD



TC



E15

SUPPORTS

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600224	7UP	7PUP	7" Flue Extension to extend inner casing; may also be attached directly to appliance outlet as a chimney adapter	0.3
600284	-	6107BS2	7" Base Support (Use 7SFC Finishing Support) 600228	-
600228	7SFC	6107FCSC	7" Finishing Support (Flat Ceiling Round) with Coupler and Stove Pipe Adapter. Connects to both double-wall and single-wall stove pipe.	-
C600000	7RCS	-	Insulated Reduced Clearance Support w/ Coupler & Stove Pipe Adapter (24" Height). Use with flat, vaulted or cathedral ceilings. Certified to reduce clearance to combustibles from the usual 2" (per side) down to a 1" (per side) for all diameters. Can connect to both double-wall stove pipe or single-wall stove pipe with included adapter. Functions as both an Attic Insulation Shield and Finishing Support. Adjustable black finish trim, insulation pad and collar included.	-
C600000	SE	-	Extension for *RCS Reduced Clearance Support (Adds up to 22" in Height). Fits all diameters	-



E30/E45



UP



SFC/SFCA



RCS



SE

(cont'd on next page)

- E.&O.E. - All Prices F.O.B. Our Warehouse - Subject to Change Without Notice - All Taxes Extra - May not be Available at All Branches -


SECURITY CHIMNEY™ FOR WOOD-BURNING, OIL-FIRED AND GAS FIRED APPLIANCES

www.securitychimneys.com

SECURE TEMP® ASHT+ CHIMNEY — 1" WALL — 7" DIAMETER (cont'd)

SUPPORTS (cont'd)

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600229	7SCC	6107CSC	7" Round Cathedral Support w/ Coupler and Stovepipe Adapter. Designed to connect the black stove pipe; decorative black matte finish; must be attached to a frame built from the joists.	–
600227	7SSC	6107CSBC	7" Square Cathedral Support w/ Coupler (While Supplies Last) Discontinued. Use 7SSC24	–
C600000	7SSC24	6107CSBC24	7" Square Cathedral Support 24" height; c/w coupler & stove pipe adapter. Designed to connect to both double-wall and single-wall stove pipe. Adjustable black finish trim included.	–
600638	PS	PPS	Square Cathedral Support Extension, fits 6-8" (While Supplies Last) Discontinued, Use PS24	5.4
C600000	PS24	PS	Square Cathedral Support Extension, adds up to 22" Height	–
600226	7SM	6107WS	7" Tee Support w/Coupler, Galvanized Steel Must be installed with insulated Tee cap (TCS)	9.0
C600000	7SMA		7" Adjustable Tee Support; Adjustable Base Must be installed with Insulated Tee cap (TCS)	–
600234	7SME	6107AWS	7" Adjustable Wall Support. When used as a base support, it lends itself to the addition of a Twist-Lock insulated tee cap (TI).	11.0
600028	SO	PSO	Offset/Wall Support – Universal 5-8" ASHT; triangular plates allow a 2" to 4" lateral adjustment of support to the vertical surface. This support can also be used as a wall support above the insulated tee. When used as a tee support, it lends itself to the addition of a Twist-Lock insulated tee cap (TI).	5.0
C600000	SO-1	PSO-1	Wall Support. Designed to support chimney on a vertical wall. The triangular plates allow a 2" to 6" lateral adjustment of the support to the vertical surface. When used as a tee support, it lends itself to the addition of a Twist-Lock insulated tee cap (TI).	–
600030	ST	PST	Roof Support – Universal; 5-8" ASHT	4.6
600232	7SP	6107AP	7" Anchor Plate (Rectangular Mounting Flange)	2.3
600236	7SD	6107ISP	7" Floor Support with Collar Clamp	5.4



SHIELD ACCESSORIES

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600240	7BF	6107FS	7" Firestop	1.5
600242	7RS	6107CFRS	7" Radiation Shield	3.4
600286	7RSI	6107IWR	7" Insulated Radiation Shield/Firestop	6.0
600244	7RSM	6107WRS	7" Insulated Wall Radiation Shield/Wall Thimble	7.5
600288	7RSMI30	6107IWR530	7" Insulated Wall Radiation Shield 30°	6.5
600290	7RSMI45	6107IWR545	7" Insulated Wall Radiation Shield 45°	6.7



(cont'd on next page)

– E.&O.E. – All Prices F.O.B. Our Warehouse – Subject to Change Without Notice – All Taxes Extra – May not be Available at All Branches –

SECURITY CHIMNEY™ FOR WOOD-BURNING, OIL-FIRED AND GAS FIRED APPLIANCES

www.securitychimneys.com

SECURE TEMP® ASHT+ CHIMNEY — 1" WALL — 7" DIAMETER (cont'd)

SHIELD ACCESSORIES (cont'd)

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600246	7RSA2	6107AFRS2	7" Insulated Attic Radiation Shield; 2 Pce.	5.5
C600000	7ARSA	6107AAFRS	7" Adjustable Insulated Attic Radiation Shield	5.5
600048	BS2	PBS2	Roof Brace – Universal for 5-8" ASHT	3.3
600050	BM	PBM	Wall Band – Universal for 5-8" ASHT	1.0
600256	7BH	6107GWB	7" Guy Wire Band (wire not included)	0.9



PREMIUM SHIELD ACCESSORIES

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600922	7ASP	6107ASP	7" Swivel Adapter	–
600924	7TRS	6107TRS	7" Telescopic Rigid Shield; min. 48" up to max. 136" length	–
600926	7FS	6107FLS	7" Flexible Shield	–
600928	7SRS	6107SRS	7" Radiation Shield Connector; Insulated	–
600930	7RCSP	6107RCSP	7" Radiation Shield Connector Firestop	–
600932	7RSSR	6107RSSR	7" Radiation Shield Connector Support	–



FLASHINGS (STORM COLLAR INCLUDED) AND DECORATIVE ACCESSORIES

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600258	7F	6107RFO	7" Flat Roof Flashing	7.2
600267	7FP	6107RFP17	7" Peak Roof Flashing 1/12-7/12	–
600268	7FPB	6107RFP812	7" Peak Roof Flashing 8/12-12/12	–
600260	7FA	6107RF17	7" Adjustable Roof Flashing 1/12-7/12	7.1
600262	7FB	6107RF812	7" Adjustable Roof Flashing 8/12-12/12	7.3
600264	7FBB	6107RF1221	7" Adjustable Roof Flashing 12/12-21/12	9.5
600265	7FAA	6107RFA17	7" Adjustable Roof Flashing 1/12-7/12 with Malleable Alum. Base (includes Storm Collar)	6.5
600266	7FBA	6107RFA812	7" Adjustable Roof Flashing 8/12-12/12 with Malleable Alum. Base (includes Storm Collar)	6.5
600270	7FC	6107SC	7" Storm Collar	0.5
600247	7PF	6107TRC	7" Decorative Trim Collar	–
600777	7PD	7PPD	7" Finishing Cone	–
600225	7PA	7PPA	7" Black Pipe Adapter	–
C600000	7PB	6107PB	7" Decorative Collar – Single Wall; ASHT	–
C600000	7DQDH	7PDQDH	7" Decorative Collar – Double Wall; ASHT	–
601588	7DQ	7PDQ	7" Double Wall Trim Collar (Can be used to conceal joint where stove pipe attaches to adapter)	–
C600000	FSD	–	Flashing Snow Diverter – Universal; works with all diameters	–



CHIMNEY TERMINATIONS

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600272	7CC	6107RCD	7" Rain Cap	3.5
600074	7PE	PPE	Spark Arrester Band – Universal; Cut-To-Fit	0.3



– E.&O.E. – All Prices F.O.B. Our Warehouse – Subject to Change Without Notice – All Taxes Extra – May not be Available at All Branches –

SECURITY CHIMNEY™ FOR WOOD-BURNING, OIL-FIRED AND GAS FIRED APPLIANCES

www.securitychimneys.com

SECURE TEMP® ASHT+ CHIMNEY — 1" WALL — 7" DIAMETER (cont'd)

WALL SUPPORT KIT (PIPE NOT INCLUDED)

Only available for 6" and 7" diameters

Kit Includes: Insulated tee, twist-lock tee cap, adjustable tee support, insulated wall radiation shield, stainless flue extension, double wall decorative collar, wall band, and rain cap.

Can be used for through the wall installations.



ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600291	7WSK	6107WSK	7" Wall Support Kit	-

EXTERIOR INSTALLATION KIT

Only available for 6" and 7" diameters

Kit includes: Insulated tee with insulated tee cap, adjustable tee support, insulated wall thimble, decorative collar single wall, flue extension, and decorative collar double wall, spark arrestor, rain cap, and wall band.



ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
C600000	7EK	6107EK	7" Exterior Installation Kit	-

SECURE TEMP® ASHT+ CHIMNEY — 1" WALL — 8" DIAMETER CHIMNEY LENGTHS

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600302	8L8	6108SL8	8" x 8" Chimney Length	7.5
600304	8L12	6108SL12	8" x 12" Chimney Length	9.5
600306	8L18	6108SL18	8" x 18" Chimney Length	15.5
600308	8L24	6108SL24	8" x 24" Chimney Length	20.5
600310	8L36	6108SL36	8" x 36" Chimney Length	30.5
600311	8L48	6108SL48	8" x 48" Chimney Length	-
600305	8LA	6108SLA	8" x 12" Adjustable Chimney Length	-



L



LA

INSULATED TEES AND ELBOWS

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600312	8TI	6108ITS	8" Insulated Tee includes TCS Cap	8.5
600314	8TCS	8PTCS	8" Insulated Stainless Steel Tee Cap	0.5
600316	8TCI	6108IC	8" Insulated Tee Cap with Coupler; Twist-Lock; Use with SME Support	1.7
600376	8TB	IF08BT	8" Galvanized Base Tee w/Cap	4.5
600378	8TBD	IF08BT2	8" Galvanized Double Base Tee w/Cap	5.5
600380	8TBS	IF08BTS	8" Stainless Base Tee w/Cap	3.5
600382	8TC	8TC	8" Base Tee Cap, Galvanized	0.5
600318	8E15	6108IES15	8" x 15° Elbow, Insulated	2.8
600320	8E30	6108IES30	8" x 30° Elbow, Insulated	8.5
600322	8E45	6108IES45	8" x 45° Elbow, Insulated	8.5



TI



TCI



TB/TBS



TBD



TC



E15



E30/E45

- E.&O.E. - All Prices F.O.B. Our Warehouse - Subject to Change Without Notice - All Taxes Extra - May not be Available at All Branches -

SECURITY CHIMNEY™ FOR WOOD-BURNING, OIL-FIRED AND GAS FIRED APPLIANCES

www.securitychimneys.com

SECURE TEMP® ASHT+ CHIMNEY — 1" WALL — 8" DIAMETER (cont'd)

SUPPORTS

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600324	8UP	8PUP	8" Flue Extension to extend inner casing; may also be attached directly to appliance outlet as a chimney adapter	0.3
600384	–	6108BS2	8" Base Support (Use 8SFC Finishing Support 600328)	6.6
600328	8SFC	6108FCSC	8" Finishing Support (Flat Ceiling Round) with Coupler and Stove Pipe Adapter. Connects to both double-wall and single-wall stove pipe.	–
C600000	8RCS	–	Insulated Reduced Clearance Support w/ Coupler & Stovepipe Adapter (24" Height). Use with flat, vaulted or cathedral ceilings. Certified to reduce clearance to combustibles from the usual 2" (per side) down to a 1" (per side) for all diameters. Can connect to both double-wall stove pipe or single-wall stove pipe with included adapter. Functions as both an Attic Insulation Shield and Finishing Support. Adjustable black finish trim, insulation pad and collar included.	–
C600000	SE	–	Extension for *RCS Reduced Clearance Support (Adds up to 22" in Height). Fits all diameters	–
600329	8SCC	6108CSC	8" Round Cathedral Support w/ Coupler and Stovepipe Adapter. Designed to connect the black stove pipe; decorative black matte finish; must be attached to a frame built from the joists.	–
600327	8SSC	6108CSBC	8" Square Cathedral Support w/ Coupler (While Supplies Last) Discontinued. Use 8SSC24	–
C600000	8SSC24	6108CSBC24	8" Square Cathedral Support 24" height; c/w coupler & stove pipe adapter. Designed to connect to both double-wall and single-wall stove pipe. Adjustable black finish trim included.	–
600638	PS	PPS	Square Cathedral Support Extension, fits 6-8" (While Supplies Last) Discontinued, Use PS24	–
C600000	PS24	PS	Square Cathedral Support Extension, adds up to 22" Height	–
600326	8SM	6108WS	8" Tee Support w/ Coupler, Galvanized Steel Must be installed with insulated Tee cap (TCS)	9.0
C600000	8SMA	–	8" Adjustable Tee Support; Adjustable Base. Must be installed with Insulated Tee cap (TCS)	–
600334	8SME	6108AWS	8" Adjustable Wall Support. When used as a base support, it lends itself to the addition of a Twist-Lock insulated tee cap (TI).	11.0
600028	SO	PSO	Offset/Wall Support – Universal 5-8" ASHT; triangular plates allow a 2" to 4" lateral adjustment of support to the vertical surface. This support can also be used as a wall support above the insulated tee. When used as a tee support, it lends itself to the addition of a Twist-Lock insulated tee cap (TI).	5.0



UP



SFC



RCS



SE



SCC



SSC24



SSAC



PS24



SM

SMA



SME

SO

(cont'd on next page)

– E.&O.E. – All Prices F.O.B. Our Warehouse – Subject to Change Without Notice – All Taxes Extra – May not be Available at All Branches –

SECURITY CHIMNEY™ FOR WOOD-BURNING, OIL-FIRED AND GAS FIRED APPLIANCES

www.securitychimneys.com

SECURE TEMP® ASHT+ CHIMNEY — 1" WALL — 8" DIAMETER (cont'd)

SUPPORTS (cont'd)

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600030	ST	PST	Roof Support – Universal; 5-8" ASHT	4.6
600332	8SP	6108AP	8" Anchor Plate (Rectangular Mounting Flange)	2.0
600336	8SD	6108ISP	8" Floor Support with Collar Clamp	6.5



SHIELD ACCESSORIES

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600340	8BF	6108FS	8" Firestop	0.9
600342	8RS	6108CFRS	8" Radiation Shield	3.5
600386	8RSI	6108IWRS	8" Insulated Radiation Shield/Firestop	6.0
600344	8RSM	6108WRS	8" Insulated Wall Radiation Shield/Wall Thimble	8.0
600388	8RSMI30	6108IWRS30	8" Insulated Wall Radiation Shield 30°	6.5
600390	8RSMI45	6108IWRS45	8" Insulated Wall Radiation Shield 45°	6.7
600346	8RSA2	6108AFRS2	8" Insulated Attic Radiation Shield; 2 Pce.	6.0
C600000	8ARSA	6108AAFRS	8" Adjustable Insulated Attic Radiation Shield	–
600048	BS2	PBS2	Roof Brace – Universal for 5-8" ASHT	3.3
600050	BM	PBM	Wall Band – Universal for 5-8" ASHT	1.0
600356	8BH	6108GWB	8" Guy Wire Band (wire not included)	1.0



PREMIUM SHIELD ACCESSORIES

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600942	8ASP	6108ASP	8" Swivel Adapter	–
600944	8TRS	6108TRS	8" Telescopic Rigid Shield; min. 48" up to max. 136" length	–
600946	8FS	6108FLS	8" Flexible Shield	–
600948	8SRS	6108SRS	8" Radiation Shield Connector; Insulated	–
600950	8RCSP	6108RCSP	8" Radiation Shield Connector Firestop	–
600952	8RSSR	6108RSSR	8" Radiation Shield Connector Support	–



FLASHINGS (STORM COLLAR INCLUDED) AND DECORATIVE ACCESSORIES

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600358	8F	6108RFO	8" Flat Roof Flashing	9.0
600367	8FP	6108RFP17	8" Peak Flashing 1/12-7/12	–
600368	8FPB	6108RFP812	8" Peak Flashing 8/12-12/12	–
600360	8FA	6108RF17	8" Adjustable Roof Flashing 1/12-7/12	9.0
600362	8FB	6108RF812	8" Adjustable Roof Flashing 8/12-12/12	9.0
600364	8FBB	6108RF1221	8" Adjustable Roof Flashing 12/12-21/12	9.0
600365	8FAA	6108RFA17	8" Adjustable Roof Flashing 1/12-7/12 with Malleable Alum. Base (includes Storm Collar)	8.0
600366	8FBA	6108RFA812	8" Adjustable Roof Flashing 8/12-12/12 with Malleable Alum. Base (includes Storm Collar)	8.0



(cont'd on next page)

– E.&O.E. – All Prices F.O.B. Our Warehouse – Subject to Change Without Notice – All Taxes Extra – May not be Available at All Branches –

SECURITY CHIMNEY™ FOR WOOD-BURNING, OIL-FIRED AND GAS FIRED APPLIANCES

www.securitychimneys.com

SECURE TEMP® ASHT+ CHIMNEY — 1" WALL — 8" DIAMETER (cont'd)

FLASHINGS (STORM COLLAR INCLUDED) AND DECORATIVE ACCESSORIES (cont'd)

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600370	8FC	6108SC	8" Storm Collar	0.5
600347	8PF	6108TRC	8" Decorative Trim Collar	—
600877	8PD	8PPD	8" Finishing Cone	—
600325	8PA	8PPA	8" Black Pipe Adapter	—
600374	8PB	6108PB	8" Decorative Collar – Single Wall; ASHT	—
C600000	8DQDH	8PDQDH	8" Decorative Collar – Double Wall; ASHT	—
601638	8DQ	8PDQ	8" Double Wall Trim Collar (Can be used to conceal joint where stove pipe attaches to adapter)	—
C600000	FSD	—	Flashing Snow Diverter – Universal; works with all diameters	—



CHIMNEY TERMINATIONS

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600372	8CC	6108RCD	8" Rain Cap	4.0
600074	PE	PPE	Spark Arrester Band 5"-10"	0.3



SECURE TEMP® ASHT+ CHIMNEY — 1" WALL — 10" DIAMETER CHIMNEY LENGTHS

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600402	10L8-N	6110SL8	10" × 8" Chimney Length	9.0
600404	10L12-N	6110SL12	10" × 12" Chimney Length	12.0
600406	10L18-N	6110SL18	10" × 18" Chimney Length	19.0
600408	10L24-N	6110SL24	10" × 24" Chimney Length	25.5
600410	10L36-N	6110SL36	10" × 36" Chimney Length	37.0
600411	10L48-N	6110SL48	10" × 48" Chimney Length	—
600405	10LA	6110SLA	10" × 12" Adjustable Chimney Length	—



INSULATED TEES AND ELBOWS

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600412	10TI	6110ITS	10" Insulated Tee includes TCS Cap	18.5
600414	10TCS	10PTCS	10" Insulated Stainless Steel Tee Cap	0.7
600416	10TCI	6110IC	10" Insulated Tee Cap with Coupler; Twist-Lock; Use with SME Support	2.4
600476	10TB	IF10BT	10" Galvanized Base Tee w/Cap	8.0
600478	10TBD	IF10BT2	10" Galvanized Double Base Tee w/Cap	8.5
600480	10TBS	IF10BTS	10" Stainless Base Tee w/Cap	7.0
600482	10TC	10TC	10" Base Tee Cap, Galvanized	0.7
600418	10E15	6110IES15	10" × 15° Elbow, Insulated	3.3
600420	10E30	6110IES30	10" × 30° Elbow, Insulated	10.0
600422	10E45	6110IES45	10" × 45° Elbow, Insulated	11.0




– E.&O.E. – All Prices F.O.B. Our Warehouse – Subject to Change Without Notice – All Taxes Extra – May not be Available at All Branches –

SECURITY CHIMNEY™ FOR WOOD-BURNING, OIL-FIRED AND GAS FIRED APPLIANCES

SECURE TEMP® ASHT+ CHIMNEY — 1" WALL — 10" DIAMETER (cont'd)

SUPPORTS

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600424	10UP	10PUP	10" Flue Extension to extend inner casing; may also be attached directly to appliance outlet as chimney adapter	0.5
600426	10SM	6110WS	10" Tee Support w/ Coupler, Galvanized Steel Must be installed with insulated Tee cap (TCS)	8.5
C600000	10SMA	-	10" Adjustable Tee Support; Adjustable Base. Must be installed with Insulated Tee cap (TCS)	-
600434	10SME	6110AWS	10" Adjustable Wall Support. When used as a base support, it lends itself to the addition of a Twist-Lock insulated tee cap (TI).	17.6
600640	XSO	PXSO	Offset/Wall Support – Universal S2100 & 10" ASHT; triangular plates allow a 2" to 4" lateral adjustment of support to the vertical surface. This support can also be used as a wall support above the insulated tee. When used as a tee support, it lends itself to the addition of a Twist-Lock insulated tee cap (XTCI).	5.0
600632	XST	PXST	Roof Support Universal for S2100 and 10" ASHT	4.6
600432	10SP	6110AP	10" Anchor Plate (Rectangular Mounting Flange)	3.0
600436	10SD	6110ISP	10" Floor Support with Collar Clamp	6.7

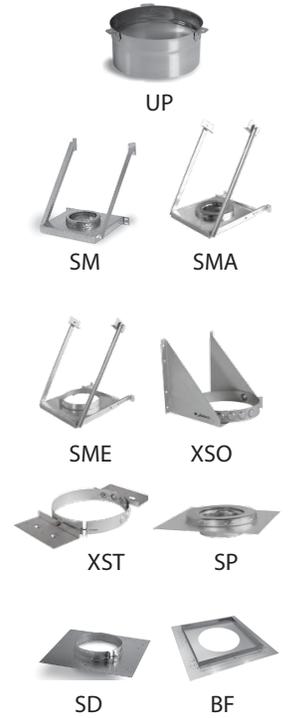

SHIELD ACCESSORIES

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600440	10BF	6110FS	10" Firestop	1.0
600442	10RS	6110CFRS	10" Radiation Shield	5.0
600486	10RSI	6110IWRS	10" Insulated Radiation Shield/Firestop	7.0
600444	10RSM	6110WRS	10" Insulated Wall Radiation Shield/Wall Thimble	6.0
600488	10RSMI30	6110IWRS30	10" Insulated Wall Radiation Shield 30°	7.5
C600000	10RSMI45	6110IWRS45	10" Insulated Wall Radiation Shield 45°	8.0
600446	10RSA2	6110AFRS2	10" Insulated Attic Radiation Shield; 2 Pce.	7.5
C600000	10ARSA	6110AAFRS	10" Adjustable Insulated Attic Radiation Shield	-
600650	XBS2	PXBS2	Roof Brace – Universal for S2100 and 10" ASHT	3.5
600648	XBM	PXBM	Wall Band – Universal for S2100 and 10" ASHT	1.0
600456	10BH	6110GWB	10" Guy Wire Band (wire not included)	1.1



SECURITY CHIMNEY™ FOR WOOD-BURNING, OIL-FIRED AND GAS FIRED APPLIANCES

www.securitychimneys.com

SECURE TEMP® ASHT+ CHIMNEY — 1" WALL — 10" DIAMETER (cont'd)

FLASHINGS (STORM COLLAR INCLUDED) AND DECORATIVE ACCESSORIES

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600458	10F	6110RFO	10" Flat Roof Flashing	6.6
C600000	10FP	6110RFP17	10" Peak Roof Flashing 1/12-7/12	-
C600000	10FPB	6110RFP812	10" Peak Roof Flashing 8/12-12/12	-
600460	10FA	6110RF17	10" Adjustable Roof Flashing 1/12-7/12	6.6
600462	10FB	6110RF812	10" Adjustable Roof Flashing 8/12-12/12	7.0
600464	10FBB	6110RF1221	10" Adjustable Roof Flashing 12/12-21/12	9.0
600470	10FC	6110SC	10" Storm Collar	0.8
C600000	FSD	-	Flashing Snow Diverter – Universal; works with all diameters	-



F



FP/FPB



FA/FB/FBB



FC



FSD

CHIMNEY TERMINATIONS

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600472	10CC	6110RCD	10" Rain Cap	3.5
600074	PE	PPE	Spark Arrester Band – Universal; Cut-To-Fit	0.3



CC



PE

SECURITY CHIMNEY™ FOR WOOD-BURNING, OIL-FIRED AND GAS FIRED APPLIANCES

SECURE TEMP® S2100+ CHIMNEY — 2" WALL — 6" DIAMETER CHIMNEY LENGTHS

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600602	6XL8	6006SL8	6" x 8" Chimney Length	10.5
600604	6XL12	6006SL12	6" x 12" Chimney Length	15.0
600606	6XL18	6006SL18	6" x 18" Chimney Length	23.5
600608	6XL24	6006SL24	6" x 24" Chimney Length	29.0
600610	6XL36	6006SL36	6" x 36" Chimney Length	43.0
600611	6XL48	6006SL48	6" x 48" Chimney Length	58.0
600609	6XLA	6006SLA	6" Adjustable Chimney Length	-



XL



XLA

INSULATED TEES AND ELBOWS

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600612	6XTI	6006ITS	6" Insulated Tee w/Cap (TCS)	17.5
600114	6TCS	6PTCS	6" Insulated Stainless Steel Tee Cap	0.3
600616	6XTCI	6006IC	6" Tee Cap with Coupler; Twist-Lock; Use with XSME Support	1.4
600176	6TB	IF06BT	6" Galvanized Base Tee w/Cap	-
600178	6TBD	IF06BT2	6" Galvanized Double Base Tee w/Cap	-
600180	6TBS	IF06BTS	6" Stainless Base Tee w/Cap	-
600182	6TC	6TC	6" Base Tee Cap, Galvanized	-
600618	6XE15	6006IES15	6" x 15° Elbow, Insulated	3.5
600620	6XE30	6006IES30	6" x 30° Elbow, Insulated	9.0
600622	6XE45	6006IES45	6" x 45° Elbow, Insulated	11.0



XTI



XTCI



TB/TBS



TBD



TC



XE15

SUPPORTS

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600124	6UP	6PUP	6" Flue Extension to extend inner casing; may also be attached directly to appliance outlet as a chimney adapter	2.0
600627	6XSFC	6006FCSC	6" Finishing Support (Flat Ceiling Round) with Coupler and Stove Pipe Adapter. Connects to both double-wall and single-wall stove pipe.	8.0
C600000	6XRCS	-	Insulated Reduced Clearance Support w/ Coupler & Stovepipe Adapter (24" Height). Use with flat, vaulted or cathedral ceilings. Certified to reduce clearance to combustibles from the usual 2" (per side) down to a 1" (per side) for all diameters. Can connect to both double-wall stove pipe or single-wall stove pipe with included adapter. Functions as both an Attic Insulation Shield and Finishing Support. Adjustable black finish trim, insulation pad and collar included.	-
C600000	XSE	-	Extension for *XRCS Reduced Clearance Support (Adds up to 22" in Height). Fits all diameters	-



XE30/XE45



UP



XSFC



XRCS



XSE

(cont'd on next page)



SECURITY CHIMNEY™ FOR WOOD-BURNING, OIL-FIRED AND GAS FIRED APPLIANCES

www.securitychimneys.com

SECURE TEMP® S2100+ CHIMNEY — 2" WALL — 6" DIAMETER (cont'd)

SUPPORTS (cont'd)

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600633	6XSCC	6006CSC	6" Round Cathedral Support w/ Coupler and Stovepipe Adapter. Designed to connect the black stove pipe; decorative black matte finish; must be attached to a frame built from the joists.	15.0
600637	6XSSC	6006CSBC	6" Square Cathedral Support w/ Coupler (While Supplies Last) Discontinued. Use 6XSSC24	15.0
C600000	6XSSC24	6006CSBC24	6" Square Cathedral Support 24" height; c/w coupler & stove pipe adapter. Designed to connect to both double-wall and single-wall stove pipe. Adjustable black finish trim included.	-
600638	PS	PPS	Square Cathedral Support Extension – Fits 6"-8". (While Supplies Last) Discontinued Use PS24	10.0
C600000	PS24	PS	Square Cathedral Support Extension, adds up to 22" height	-
600628	6XSM	6006WS	6" Tee Support w/Coupler, Galvanized Steel Must be installed with insulated Tee cap (TCS)	9.0
C600000	6XSMA	6006WSA	6" Adjustable Tee Support; Adjustable Base Must be installed with insulated Tee cap (TCS)	-
600630	6XSME	6006AWS	6" Adjustable Wall Support. When used as a base support, it lends itself to the addition of a Twist-Lock insulated tee cap (XTCI).	11.0
600640	XSO	PXSO	Offset/Wall Support – Universal S2100 & 10" ASHT; triangular plates allow a 2" to 4" lateral adjustment of support to the vertical surface. This support can also be used as a wall support above the insulated tee. When used as a tee support, it lends itself to the addition of a Twist-Lock insulated tee cap (XTCI).	5.0
C600000	XSO-1		Wall Support. Designed to support chimney on a vertical wall. The triangular plates allow a 2" to 6" lateral adjustment of the support to the vertical surface. When used as a tee support, it lends itself to the addition of a Twist-Lock insulated tee cap (XTCI).	-
600632	XST	PXST	Roof Support Universal for S2100 & 10" ASHT	4.6
600624	6XSP	6006AP	6" Anchor Plate (Rectangular Mounting Flange)	3.1



SHIELD ACCESSORIES

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600642	6XBF	6006FS	6" Firestop	1.0
600643	6XRS	6006CFRS	6" Radiation Shield	3.5
600680	6XRSI	6006IWRS	6" Insulated Radiation Shield/Firestop	-
600646	6XRSM	6006WRS	6" Insulated Wall Radiation Shield/Wall Thimble	7.5
600682	6XRSMI30	6006IWRS30	6" Insulated Wall Radiation Shield – 30°	-
C600000	6XRSMI45	6006IWRS45	6" Insulated Wall Radiation Shield – 45°	-
600644	6XRSA2	6006AFRS2	6" Insulated Attic Radiation Shield; 2 Pce.	4.5
C600000	6XARSA	6006AAFRS	6" Adjustable Insulated Attic Radiation Shield	-
600650	XBS2	PXBS2	Roof Brace – Universal for S2100 and 10" ASHT	0.7
600648	XBM	PXBM	Wall Band – Universal for S2100 and 10" ASHT	1.5

– E.&O.E. – All Prices F.O.B. Our Warehouse – Subject to Change Without Notice – All Taxes Extra – May not be Available at All Branches –

SECURITY CHIMNEY™ FOR WOOD-BURNING, OIL-FIRED AND GAS FIRED APPLIANCES

www.securitychimneys.com

SECURE TEMP® S2100+ CHIMNEY — 2" WALL — 6" DIAMETER (cont'd)


FLASHINGS (STORM COLLAR INCLUDED) AND DECORATIVE ACCESSORIES

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600656	6XF	6006RFO	6" Flat Roof Flashing	4.6
C600000	6XFP	6006RFP17	6" Peak Roof Flashing 1/12-7/12	-
C600000	6XFPB	6006RFP812	6" Peak Roof Flashing 8/12-12/12	-
600658	6XFA	6006RF17	6" Adjustable Roof Flashing 1/12-7/12	4.6
600660	6XFB	6006RF812	6" Adjustable Roof Flashing 8/12-12/12	5.4
600662	6XFBB	6006RF1221	6" Adjustable Roof Flashing 12/12-21/12	6.8
600666	6XFC	6006SC	6" Storm Collar	0.5
600672	6XPF	6006TRC	6" Decorative Trim Collar	2.6
600677	6PD-1	6PPD-1	6" Finishing Cone	3.5
600676	6XPA	6PXA	6" S/W Black Pipe Adapter	2.5
600674	6XPB	6006PB	6" Decorative Collar – Single Wall; S2100 (Can.)	0.9
601536	6DQDX	6PDQDX	6" Decorative Collar – Double Wall; S2100 (Can.)	-
601538	6DQ	6PDQ	6" Double Wall Trim Collar (Can be used to conceal joint where stove pipe attaches to adapter)	4.0
C600000	FSD	-	Flashing Snow Diverter – Universal; works with all diameters	-



CHIMNEY TERMINATIONS

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600172	6CC	6106RCD	6" Rain Cap	3.5
600074	PE	PPE	Spark Arrester Band – Fits all diameters	0.3



WALL SUPPORT KIT (PIPE NOT INCLUDED) – 6" AND 7" DIAMETER ONLY

Kit Includes: Insulated tee, twist-lock tee cap, adjustable tee support, insulated wall radiation shield, stainless flue extension, double wall decorative collar, wall band, and rain cap.

Can be used for through the wall installations.

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600687	6XWSK	6006WSK	6" Wall Support Kit	30.0



EXTERIOR INSTALLATION KIT – 6" AND 7" DIAMETER ONLY

Kit includes: Insulated tee with insulated tee cap, adjustable tee support, insulated wall thimble, decorative collar single wall, flue extension, and decorative collar double wall, spark arrester, rain cap, and wall band.

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600686	6XKE	6006PKT	6" Exterior Installation Kit	35.0



INTERIOR INSTALLATION KIT – 6" AND 7" DIAMETER ONLY

Kit includes: Finishing support with coupler, 2 piece attic insulation shield, and rain cap. For interior installations only.

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600684	6XKI	6006PKS	6" Interior Installation Kit	30.0



– E.&O.E. – All Prices F.O.B. Our Warehouse – Subject to Change Without Notice – All Taxes Extra – May not be Available at All Branches –

SECURITY CHIMNEY™ FOR WOOD-BURNING, OIL-FIRED AND GAS FIRED APPLIANCES

www.securitychimneys.com

SECURE TEMP® S2100+ CHIMNEY — 2" WALL — 7" DIAMETER CHIMNEY LENGTHS

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600702	7XL8	6007SL8	7" × 8" Chimney Length	12.0
600704	7XL12	6007SL12	7" × 12" Chimney Length	16.0
600706	7XL18	6007SL18	7" × 18" Chimney Length	23.0
600708	7XL24	6007SL24	7" × 24" Chimney Length	33.0
600710	7XL36	6007SL36	7" × 36" Chimney Length	44.0
600711	7XL48	6007SL48	7" × 48" Chimney Length	66.0
600709	7XLA	6007SLA	7" Adjustable Chimney Length	16.0



INSULATED TEES AND ELBOWS

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600712	7XTI	6007ITS	7" Insulated Tee with Cap (TCS)	20.0
600214	7TCS	7PTCS	7" Insulated Stainless Steel Tee Cap	1.0
600716	7XTCI	6007IC	7" Tee Cap with Coupler; Twist-Lock; Use with XSME Support	1.7
600276	7TB	IF07BT	7" Galvanized Base Tee w/Cap	–
600278	7TBD	IF07BT2	7" Galvanized Double Base Tee w/Cap	–
600280	7TBS	IF07BTS	7" Stainless Base Tee w/Cap	–
600282	7TC	7TC	7" Base Tee Cap, Galvanized	–
600718	7XE15	6007IES15	7" × 15" Elbow, Insulated	3.8
600720	7XE30	6007IES30	7" × 30" Elbow, Insulated	11.0
600722	7XE45	6007IES45	7" × 45" Elbow, Insulated	13.0



SUPPORTS

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600224	7UP	7PUP	7" Flue Extension to extend inner casing; may also be attached directly to appliance outlet as a chimney adapter	0.3
600727	7XSFC	6007FCSC	7" Finishing Support (Flat Ceiling Round) with Coupler and Stove Pipe Adapter. Connects to both double-wall and single-wall stove pipe.	7.5
C600000	7XRCS	–	Insulated Reduced Clearance Support w/ Coupler & Stovepipe Adapter (24" Height). Use with flat, vaulted or cathedral ceilings. Certified to reduce clearance to combustibles from the usual 2" (per side) down to a 1" (per side) for all diameters. Can connect to both double-wall stove pipe or single-wall stove pipe with included adapter. Functions as both an Attic Insulation Shield and Finishing Support. Adjustable black finish trim, insulation pad and collar included.	–
C600000	XSE	–	Extension for *XRCS Reduced Clearance Support (Adds up to 22" in Height). Fits all diameters	–
600733	7XSCE	6007CSC	7" Round Cathedral Support w/ Coupler and Stovepipe Adapter. Designed to connect the black stove pipe; decorative black matte finish; must be attached to a frame built from the joists.	10.0

(cont'd on next page)

– E.&O.E. – All Prices F.O.B. Our Warehouse – Subject to Change Without Notice – All Taxes Extra – May not be Available at All Branches –

SECURITY CHIMNEY™ FOR WOOD-BURNING, OIL-FIRED AND GAS FIRED APPLIANCES

www.securitychimneys.com

SECURE TEMP® S2100+ CHIMNEY — 2" WALL — 7" DIAMETER (cont'd)

SUPPORTS (cont'd)

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600737	7XSSC	6007CSBC	7" Square Cathedral Support w/ Coupler (While Supplies Last) Discontinued. Use 7XSSC24	15.0
C600000	7XSSC24	6007CSBC24	7" Square Cathedral Support 24" height; c/w coupler & stove pipe adapter. Designed to connect to both double-wall and single-wall stove pipe. Adjustable black finish trim included.	-
600638	PS	PPS	Square Cathedral Support Extension – Fits 6"-8". (While Supplies Last) Discontinued Use PS24	10.0
C600000	PS24	PS	Square Cathedral Support Extension, adds up to 22" Height	-
600728	7XSM	6007WS	7" Tee Support w/ Coupler, Galvanized Steel Must be installed with insulated Tee cap (TCS)	9.5
C600000	7XSMA	6007WSA	7" Adjustable Tee Support; Adjustable Base Must be installed with insulated Tee cap (TCS)	-
600730	7XSME	6007AWS	7" Adjustable Wall Support When used as a base support, it lends itself to the addition of a Twist-Lock insulated tee cap (XTCI).	11.0
600640	XSO	PXSO	Offset/Wall Support – Universal S2100 & 10" ASHT; triangular plates allow a 2" to 4" lateral adjustment of support to the vertical surface. This support can also be used as a wall support above the insulated tee. When used as a tee support, it lends itself to the addition of a Twist-Lock insulated tee cap (XTCI).	5.0
C600000	XSO-1	-	Wall Support. Designed to support chimney on a vertical wall. The triangular plates allow a 2" to 6" lateral adjustment of the support to the vertical surface. When used as a tee support, it lends itself to the addition of a Twist-Lock insulated tee cap (XTCI).	-
600632	XST	PXST	Roof Support Universal for S2100 and 10" ASHT	4.6
600724	7XSP	6007AP	7" Anchor Plate (Rectangular Mounting Flange)	3.1



XSSC24



PS24



XSM



XSMA



XSME



XSO




XSO-1



XST



XSP



XBF



XRS



XRSI



XRSM


 XRSMI30/
XRSMI45


XRSA2



XARSA



XBS2



XBM

SHIELD ACCESSORIES

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600742	7XBF	6007FS	7" Firestop	1.0
600743	7XRS	6007CFRS	7" Radiation Shield	3.9
600778	7XRSI	6007IWR5	7" Insulated Radiation Shield/Firestop	6.0
600746	7XRSM	6007WRS	7" Insulated Wall Radiation Shield/Wall Thimble	7.5
600780	7XRSMI30	6007IWR530	7" Insulated Wall Radiation Shield – 30°	6.5
C600000	7XRSMI45	6007IWR545	7" Insulated Wall Radiation Shield – 45°	-
600744	7XRSA2	6007AFRS2	7" Insulated Attic Radiation Shield; 2 Pce.	5.0
C600000	7XARSA	6007AAFRS	7" Adjustable Insulated Attic Radiation Shield	-
600650	XBS2	PXBS2	Roof Brace – Universal for S2100 and 10" ASHT	0.7
600648	XBM	PXBM	Wall Band – Universal for S2100 and 10" ASHT	1.5

– E.&O.E. – All Prices F.O.B. Our Warehouse – Subject to Change Without Notice – All Taxes Extra – May not be Available at All Branches –

SECURITY CHIMNEY™ FOR WOOD-BURNING, OIL-FIRED AND GAS FIRED APPLIANCES

www.securitychimneys.com

SECURE TEMP® S2100+ CHIMNEY — 2" WALL — 7" DIAMETER (cont'd)


FLASHINGS (STORM COLLAR INCLUDED) AND DECORATIVE ACCESSORIES

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600756	7XF	6007RFO	7" Flat Roof Flashing	5.0
C600000	7XFP	6007RFP17	7" Peak Roof Flashing 1/12-7/12	-
C600000	7XFPB	6007RFP812	7" Peak Roof Flashing 8/12-12/12	-
600758	7XFA	6007RF17	7" Adjustable Roof Flashing 1/12-7/12	5.0
600760	7XFB	6007RF812	7" Adjustable Roof Flashing 8/12-12/12	5.4
600762	7XFBB	6007RF1221	7" Adjustable Roof Flashing 12/12-21/12	7.0
600766	7XFC	6007SC	7" Storm Collar	0.7
600772	7XPF	6007TRC	7" Decorative Trim Collar	2.6
600777	7PD	7PPD	7" Finishing Cone	4.0
600776	7XPA	7PXA	7" S/W Black Pipe Adapter	2.5
600774	7XPB	6007PB	7" Decorative Collar – Single Wall; S2100 (Can.)	1.0
601586	7DQDX	7PDQDX	7" Decorative Collar – Double Wall; S2100 (Can.)	-
601588	7DQ	7PDQ	7" Double Wall Trim Collar (Can be used to conceal joint where stove pipe attaches to adapter)	4.0
C600000	FSD	-	Flashing Snow Diverter – Universal; works with all diameters	-



CHIMNEY TERMINATIONS

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600272	7CC	6107RCD	7" Rain Cap	4.5
600074	PE	PPE	Spark Arrester Band – Fits all diameters	0.3



WALL SUPPORT KIT (PIPE NOT INCLUDED) – 6" AND 7" DIAMETER ONLY

Kit Includes: Insulated tee, twist-lock tee cap, adjustable tee support, insulated wall radiation shield, stainless flue extension, double wall decorative collar, wall band, and rain cap.

Can be used for through the wall installations.

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600787	7XWSK	6007WSK	7" Wall Support Kit	30.0



EXTERIOR INSTALLATION KIT – 6" AND 7" DIAMETER ONLY

Kit includes: Insulated tee with insulated tee cap, adjustable tee support, insulated wall thimble, decorative collar single wall, flue extension, and decorative collar double wall, spark arrester, rain cap, and wall band.

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600786	7XKE	6007PKT	7" Exterior Installation Kit	40.0



INTERIOR INSTALLATION KIT – 6" AND 7" DIAMETER ONLY

Kit includes: Finishing support with coupler, 2 piece attic insulation shield, and rain cap.

For interior installations only.

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600784	7XKI	6007PKS	7" Interior Installation Kit	35.0



SECURITY CHIMNEY™ FOR WOOD-BURNING, OIL-FIRED AND GAS FIRED APPLIANCES

www.securitychimneys.com

SECURE TEMP® S2100+ CHIMNEY — 2" WALL — 8" DIAMETER CHIMNEY LENGTHS

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600802	8XL8	6008SL8	8" x 8" Chimney Length	13.0
600804	8XL12	6008SL12	8" x 12" Chimney Length	18.0
600806	8XL18	6008SL18	8" x 18" Chimney Length	27.0
600808	8XL24	6008SL24	8" x 24" Chimney Length	36.0
600810	8XL36	6008SL36	8" x 36" Chimney Length	54.0
600811	8XL48	6008SL48	8" x 48" Chimney Length	72.0
600809	8XLA	6008SLA	8" Adjustable Chimney Length	-



XL



XLA

INSULATED TEES AND ELBOWS

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600812	8XTI	6008ITS	8" Insulated Tee w/Cap (TCS)	23.0
600314	8TCS	8PTCS	8" Insulated Stainless Steel Tee Cap	3.0
600816	8XTCI	6008IC	8" Tee Cap with Coupler; Twist-Lock; Use with XSME Support	2.4
600376	8TB	IF08BT	8" Galvanized Base Tee w/Cap	-
600378	8TBD	IF08BT2	8" Galvanized Double Base Tee w/Cap	-
600380	8TBS	IF08BTS	8" Stainless Base Tee w/Cap	-
600382	8TC	8TC	8" Base Tee Cap, Galvanized	-
600818	8XE15	6008IES15	8" x 15° Elbow, Insulated	4.3
600820	8XE30	6008IES30	8" x 30° Elbow, Insulated	13.0
600822	8XE45	6008IES45	8" x 45° Elbow, Insulated	-



XTI



XTCI



TB/TBS



TBD



TC



XE15

SUPPORTS

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600324	8UP	8PUP	8" Flue Extension to extend inner casing; may also be attached directly to appliance outlet as a chimney adapter	0.3
600827	8XSFC	6008FCSC	8" Finishing Support (Flat Ceiling Round) with Coupler and Stove Pipe Adapter. Connects to both double-wall and single-wall stove pipe.	8.0
C600000	8XRCS	-	Insulated Reduced Clearance Support w/ Coupler & Stovepipe Adapter (24" Height). Use with flat, vaulted or cathedral ceilings. Certified to reduce clearance to combustibles from the usual 2" (per side) down to a 1" (per side) for all diameters. Can connect to both double-wall stove pipe or single-wall stove pipe with included adapter. Functions as both an Attic Insulation Shield and Finishing Support. Adjustable black finish trim, insulation pad and collar included.	-
C600000	XSE	-	Extension for *XRCS Reduced Clearance Support (Adds up to 22" in Height). Fits all diameters	-



XE30/XE45



UP



XSFC



XRCS



XSE

- E.&O.E. - All Prices F.O.B. Our Warehouse - Subject to Change Without Notice - All Taxes Extra - May not be Available at All Branches -

SECURITY CHIMNEY™ FOR WOOD-BURNING, OIL-FIRED AND GAS FIRED APPLIANCES

www.securitychimneys.com

SECURE TEMP® S2100+ CHIMNEY — 2" WALL — 8" DIAMETER (cont'd)

SUPPORTS (cont'd)

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600833	8XSCC	6008CSC	8" Round Cathedral Support w/ Coupler and Stovepipe Adapter. Designed to connect the black stove pipe; decorative black matte finish; must be attached to a frame built from the joists.	10.5
600837	8XSSC	6008CSBC	8" Square Cathedral Support w/ Coupler (While Supplies Last) Discontinued. Use 8XSSC24	15.5
C600000	8XSSC24	6008CSBC24	8" Square Cathedral Support 24" height; c/w coupler & stove pipe adapter. Designed to connect to both double-wall and single-wall stove pipe. Adjustable black finish trim included.	-
600638	PS	PPS	Square Cathedral Support Extension – Fits 6"-8". (While Supplies Last) Discontinued Use PS24	10.0
C600000	PS24	PS	Square Cathedral Support Extension, adds up to 22" Height	-
600828	8XSM	6008WS	8" Tee Support w/Coupler, Galvanized Steel Must be installed with insulated Tee cap (TCS)	9.0
C600000	8XSMA	6008WSA	8" Adjustable Tee Support; Adjustable Base Must be installed with insulated Tee cap (TCS)	-
600830	8XSME	6008AWS	8" Adjustable Wall Support. When used as a base support, it lends itself to the addition of a Twist-Lock insulated tee cap (XTCI).	15.0
600640	XSO	PXSO	Offset/Wall Support – Universal S2100 & 10" ASHT; triangular plates allow a 2" to 4" lateral adjustment of support to the vertical surface. This support can also be used as a wall support above the insulated tee. When used as a tee support, it lends itself to the addition of a Twist-Lock insulated tee cap (XTCI).	5.0
600632	XST	PXST	Roof Support Universal for S2100 and 10" ASHT	4.6
600824	8XSP	6008AP	8" Anchor Plate (Rectangular Mounting Flange)	3.1



XSCC



XSSC24



PS24



XSM



XSMA



XSME




XSO



XST



XSP



XBF



XRS



XRSI



XRSM


 XRSMI30/
XRSMI45


XRSA2



XARSA



XBS2



XBM

SHIELD ACCESSORIES

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600842	8XBF	6008FS	8" Firestop	1.2
600843	8XRS	6008CFRS	8" Radiation Shield	4.2
C600000	8XRSI	6008IWRS	8" Insulated Radiation Shield/Firestop	6.5
600846	8XRSM	6008WRS	8" Insulated Wall Radiation Shield/Wall Thimble	5.0
600880	8XRSMI30	6008IWRS30	8" Insulated Wall Radiation Shield 30°	7.0
C600000	8XRSMI45	6008IWRS45	8" Insulated Wall Radiation Shield 45°	-
600844	8XRSA2	6008AFRS2	8" Insulated Attic Radiation Shield; 2 Pce.	8.0
C600000	8XARSA	6008AAFRS	8" Adjustable Insulated Attic Radiation Shield	-
600650	XBS2	PXBS2	Roof Brace – Universal for S2100 and 10" ASHT	0.7
600648	XBM	PXBM	Wall Band – Universal for S2100 and 10" ASHT	1.5

SECURITY CHIMNEY™ FOR WOOD-BURNING, OIL-FIRED AND GAS FIRED APPLIANCES

www.securitychimneys.com

SECURE TEMP® S2100+ CHIMNEY — 2" WALL — 8" DIAMETER (cont'd)


FLASHINGS (STORM COLLAR INCLUDED) AND DECORATIVE ACCESSORIES

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600856	8XF	6008RFO	8" Flat Roof Flashing	5.2
C600000	8XFP	6008RFP17	8" Peak Roof Flashing 1/12-7/12	–
C600000	8XFPB	6008RFP812	8" Peak Roof Flashing 8/12-12/12	–
600858	8XFA	6008RF17	8" Adjustable Roof Flashing 1/12-7/12	5.0
600860	8XFB	6008RF812	8" Adjustable Roof Flashing 8/12-12/12	6.4
600862	8XFBB	6008RF1221	8" Adjustable Roof Flashing 12/12-21/12	7.0
600866	8XFC	6008SC	8" Storm Collar	0.6
600872	8XPF	6008TRC	8" Decorative Trim Collar	2.4
600877	8PD	8PPD	8" Finishing Cone	4.5
600876	8XPA	8PXP	8" S/W Black Pipe Adapter	3.5
600874	8XPB	6008PB	8" Decorative Collar – Single Wall; S2100 (Can.)	1.1
601636	8DQDX	8PDQDX	8" Decorative Collar – Double Wall; S2100 (Can.)	–
601638	8DQ	8PDQ	8" Double Wall Trim Collar (Can be used to conceal joint where stove pipe attaches to adapter)	–
C600000	FSD	–	Flashing Snow Diverter – Universal; works with all diameters	–



CHIMNEY TERMINATIONS

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
600372	8CC	6108RCD	8" Rain Cap	4.0
600074	PE	PPE	Spark Arrester Band – Fits all diameters	0.3



SECURITY CHIMNEY™ FOR WOOD-BURNING, OIL-FIRED AND GAS FIRED APPLIANCES

www.securitychimneys.com

SECURE BLACK® DOUBLE WALL (DL) STOVE PIPE

6" DIAMETER

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
601502	6DL6	6PDL6	6" x 6" Pipe	1.2
601504	6DL12	6PDL12	6" x 12" Pipe	2.2
601506	6DL24	6PDL24	6" x 24" Pipe	4.3
601508	6DL36	6PDL36	6" x 36" Pipe	6.4
601518	6DL3A	6PDL3A	6" Adjustable 3"-9" Pipe	2.3
601509	6DL36A	6PDL36A	6" Telescopic 3"-36" Pipe	8.0
601510	6DL42A	6PDL42A	6" Telescopic 42"-66" Pipe	13.0
601512	6DT	6PDT	6" Tee	3.4
601514	6DE45	6PDE45	6" x 45° Elbow	1.7
601516	6DE90	6PDE90	6" x 90° Elbow	2.2
601520	6DMA	6PDMA	6" Masonry Adapter	1.9
600124	6UP	6PUP	6" Flue Extension to extend inner casing; may also be attached directly to appliance outlet as a chimney adapter	2.0
601524	6DAB	6PDAB	6" Stove Adapter	1.2
601526	6DLW7	6PDLW7	6"-7" Increaser	1.9
601527	6DLW8	6PDLW8	6"-8" Increaser	2.0
601534	6DLK	6PDLK	6" Pipe Damper	1.3
601536	6DQDX	6PDQDX	6" Decorative Collar	0.4
601538	6DQ	6PDQ	6" Trim Collar	3.0

7" DIAMETER

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
601552	7DL6	7PDL6	7" x 6" Pipe	1.2
601554	7DL12	7PDL12	7" x 12" Pipe	2.3
601556	7DL24	7PDL24	7" x 24" Pipe	4.6
601558	7DL36	7PDL36	7" x 36" Pipe	7.2
601568	7DL3A	7PDL3A	7" Adjustable 3"-9" Pipe	2.0
601559	7DL36A	7PDL36A	7" Telescopic 3"-36" Pipe	8.0
601560	7DL42A	7PDL42A	7" Telescopic 42"-66" Pipe	15.0
601562	7DT	7PDT	7" Tee	4.0
601564	7DE45	7PDE45	7" x 45° Elbow	2.0
601566	7DE90	7PDE90	7" x 90° Elbow	4.0
601570	7DMA	7PDMA	7" Masonry Adapter	4.0
600224	7UP	7PUP	7" Flue Extension to extend inner casing; may also be attached directly to appliance outlet as a chimney adapter	3.0
601574	7DAB	7PDAB	7" Stove Adapter	1.2
601578	7DLW8	7PDLW8	7"-8" Increaser	2.5
601580	7DLR6	7PDLR6	7"-6" Reducer	2.5
601584	7DLK	7PDLK	7" Pipe Damper	3.2
601586	7DQDX	7PDQDX	7" Decorative Collar	0.4
601588	7DQ	7PDQ	7" Trim Collar	4.0

- E.&O.E. - All Prices F.O.B. Our Warehouse - Subject to Change Without Notice - All Taxes Extra - May not be Available at All Branches -

SECURITY CHIMNEY™ FOR WOOD-BURNING, OIL-FIRED AND GAS FIRED APPLIANCES

SECURE BLACK® DOUBLE WALL (DL) STOVE PIPE (cont'd)

8" DIAMETER

ITEM #	NEW MODEL #	PREVIOUS MODEL #	DESCRIPTION	WT./LBS
601602	8DL6	8PDL6	8" x 6" Pipe	1.4
601604	8DL12	8PDL12	8" x 12" Pipe	2.9
601606	8DL24	8PDL24	8" x 24" Pipe	5.8
601608	8DL36	8PDL36	8" x 36" Pipe	9.0
601618	8DL3A	8PDL3A	8" Adjustable 3"-9" Pipe	2.9
601609	8DL36A	8PDL36A	8" Telescopic 3"-36" Pipe	9.0
601610	8DL42A	8PDL42A	8" Telescopic 42"-66" Pipe	18.0
601612	8DT	8PDT	8" Tee	5.1
601614	8DE45	8PDE45	8" x 45° Elbow	2.3
601616	8DE90	8PDE90	8" x 90° Elbow	3.7
601620	8DMA	8PDMA	8" Masonry Adapter	2.5
600324	8UP	8PUP	8" Flue Extension to extend inner casing; may also be attached directly to appliance outlet as a chimney adapter	3.0
601624	8DAB	8PDAB	8" Stove Adapter	1.5
601632	8DLR7	8PDLR7	8"-7" Reducer	2.5
C600000	8DLR6	8PDLR6	8"-6" Reducer	-
601634	8DLK	8PDLK	8" Pipe Damper	3.8
601636	8DQDX	8PDQDX	8" Decorative Collar	0.6
601638	8DQ	8PDQ	8" Trim Collar	4.0