

FEATURES

- Solid brass construction for durability and reliability
- Allows bather to set precise temperature
- Patented K-joint installation ensures consistent trim appearance, regardless of variability in valve rough-in
- Complements the One Collection



CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:


- ASME A112.18.1/CSA B125.1
- ADA
- ICC/ANSI A117.1

P24421, P24422



ADA

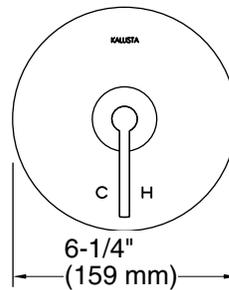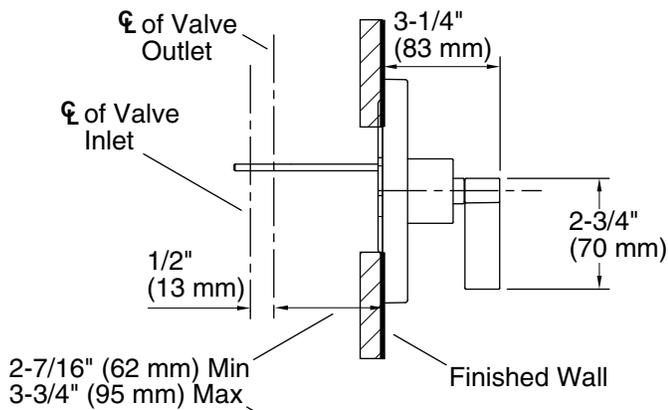


P24421-LV

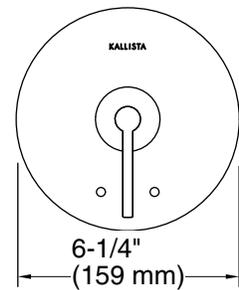

P24422-LV

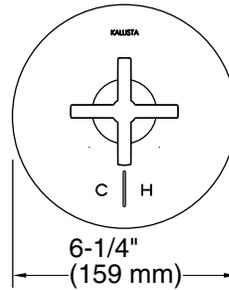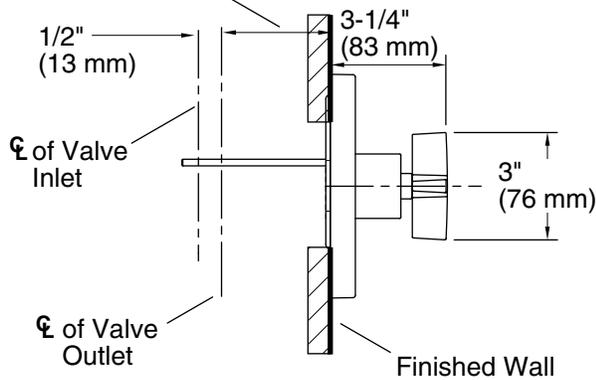

P24421-CR

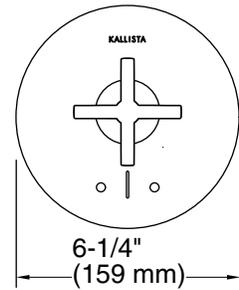

P24422-CR

SPECIFIED MODEL

Model	Description	Finishes			
P24421-CR	One Thermostatic Valve Trim, H&C, Cross Handles	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> AD Nickel Silver	<input type="checkbox"/> AG Brushed Nickel	<input type="checkbox"/> GN Gunmetal
P24421-LV	One Thermostatic Valve Trim, H&C, Lever Handles	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> AD Nickel Silver	<input type="checkbox"/> AG Brushed Nickel	<input type="checkbox"/> GN Gunmetal
P24422-CR	One Thermostatic Valve Trim, Red & Blue Indicators, Cross Handles	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> AD Nickel Silver	<input type="checkbox"/> AG Brushed Nickel	<input type="checkbox"/> GN Gunmetal
P24422-LV	One Thermostatic Valve Trim, Red & Blue Indicators, Lever handles	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> AD Nickel Silver	<input type="checkbox"/> AG Brushed Nickel	<input type="checkbox"/> GN Gunmetal
Required Rough-in					
P29511-WS	1/2" Thermostatic Mixing Valve	<input type="checkbox"/> NA			
P29512-WS	3/4" Thermostatic Mixing Valve	<input type="checkbox"/> NA			

We reserve the right to make revisions without notice in the design of products or in packaging unless this right has specifically been waived at the time the order is accepted.