Perfect 69" x 37" Bathtub

FEATURES

- Durable acrylic construction
- Generous 69" (1753 mm) x 37" (940 mm) size comfortably accommodates two bathers
- Integrated lumbar allows for a deep, relaxing soak
- Drop-in or custom undermount version
- Center side drain and overflow
- Complements multiple Kallista collections

CODES/STANDARDS APPLICABLE

P50045


Specified model meets or exceeds the following:

- CSA B45.5/IAPMO Z124
- ASME A112.19.7/CSA B45.10 (-G5 Model)
- UL 1795 (-G5 Model)
- ASTM E162
- ASTM E662
- EPA TSCA Title VI

9-1/8"

37"


• CARB P2

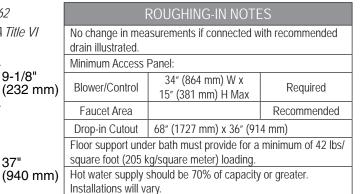

REQUIRED ELECTRICAL SERVICE

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):

Blower Motor/Control 220-240 V, 15 A, 50/60 Hz

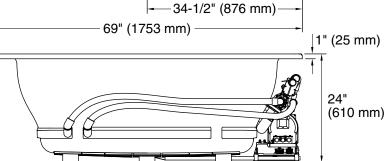

PRODUCT INFORMATION							
Fixture*:	Fixture*: Top Area Inside Area		Weight				
Bathing Well	57-3/8" (1457 mm)	46-3/4" (1187 mm)	95 lbs (43.1 kg) (-00)				
	x 28-3/4" (730 mm)	x 25-3/4" (654 mm)	160 lbs (72.6 kg) (-G5)				
	Water Depth	Capacity					
To Overflow 17-7/8" (454 mm)		103 gal (390 L)					
*Approximate measurements for comparison only							

PRODUCT INFORMATION (CONT.)						
Heater	Voltage	Frequency	Amperage			
300 W	220-240	50/60 Hz	3A			

Tippe of made in control of the cont							
SPECIFIED MODEL							
Model	Description	Finishes					
P50045-00	Perfect Bathtub	□ 0 Stucco White					
P50045-G5	Perfect Airbath	□ 0 Stucco White					
Recommended Accessories							
P21581-00	Kallista Cable Drain	□ NA					
P21582-00	Kallista Cable Drain Trim Kit	☐ CP Polished Chrome	☐ AD Nickel Silver	☐ AG Brushed Nickel			
		☐ BZ Antique Bronze	☐ GN Gunmetal	☐ LB Bronze			
Optional Accessories							
K-1179	Vinyl Tile-in Bead Installation Kit	□ NA					
P50046-00	Undermount Kit	□ NA					

We reserve the right to make revisions without notice in the design of products or in packaging unless this right has specifically been waived at the time the order is accepted.