



Innovative Design Breeds Quality Structures

Tindall has the experience, commitment and know-how to design and manufacture quality precast utility products that solve today's underground challenges.

Partnering with Tindall improves project budgets and shortens schedules with in-stock or custom products delivered on time, ready for one-pass installation and designed for maintenance-free performance for decades to come.

CONTENTS	PAGE
PRODUCT LINE ABBREVIATIONS	3
KO SERIES	
Multipurpose Boxes	4
Tops	4
CURB INLET COMPONENTS	
Boxes	5
Tops and Adaptors	5
Wing Inlet Adaptors	6
Curb And Ditch Adaptors	6
G SERIES STORM STRUCTURE HOLE BASES	
B00	7
B35	7
B70	8
DE	8
VAULTS	
UV Series	9
SC Series	11
DC Series	12
TRENCH COMPONENTS	
Trenches	14
Tops	15
Grating	15
PACKAGED PRODUCTS	
Sewage Pumping Stations	16
Backflow Preventor and Meter Vaults	16
T SERIES BASES	
Large Diameter Sewers	17
0 Degree	17
35 Degree	18
70 Degree	18
25 Degree	19
50 Degree	19

CONTENTS	PAGE
SANITARY SEWER 1st CAST INVERTS	20
G SERIES BASES, RISERS, CONES AND TOPS	
Bases	21
Risers	22
Extended Bases	23
Eccentric Cones	24
Concentric Cones	24
Transition Cones	25
Monolithic Tops	25
Tops	26
FLEXIBLE CONNECTORS (BOOTS)	27
CAST IRON PRODUCTS	
Round Grade Ring	28
Rings and Covers	28
Grates	28
Frames	28
HANDLING DEVICES	
Handling Devices	29
MISCELLANEOUS PRODUCTS	
Manhole Steps	30
G Series Joint Heights	30
Joint Materials	30
Coatings and Liners	30
GENERAL INFORMATION	
Materials, Design and Manufacturing Standards	31
INDUSTRIAL & SPECIALIZED PRODUCTS	32
POWER PLANT PRODUCTS	33
SPAN SYSTEMS	34
NOTES	35
DESIGN GUIDES & INFO	37



G Series Cones


G48 SERIES ECCENTRIC CONES



Series	G48	G60
Inside Diameter, in.	48 to 24	60 to 24
Wall Thickness, in.	5	6
Ledge Thickness, in.	8	8
Live Load Rating	HS20	HS20

Lay Length, in.	Section	G48, lb	G60, lb
32	32C	2,050	—
40	40C	2,672	3,750
48	48C	3,292	—
56	56C	3,919	—
64	64C	4,540	—

G48-20C SERIES CONCENTRIC CONE

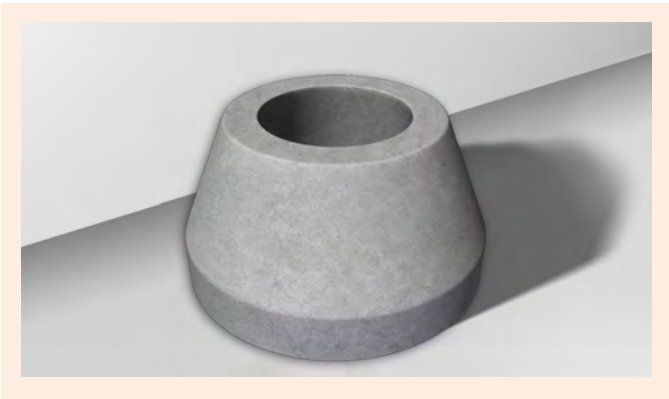

Series	G48-20C
Inside Diameter, in.	48 to 24
Wall Thickness, in.	5
Ledge Thickness, in.	8
Lay Length, in.	20
Weight, lb	1,460
Live Load Rating	HS20