

High-Efficiency Toilet EcoPower® Flushometer Valve, 1.28 gpf

FEATURES

- Hydropower self-generating system
- Electronic flushometer valve, neutral rough-in, complete with 1" angle stop and 1-1/2" vacuum breaker set
- 1.28 gpf or less
- Manual override button
- 24 hour automatic flush for trap seal protection

MODELS

- ☐ TET1LN#CP
Valve only, Left and right rough,
Polished Chrome finish
- ☐ TET1LN32#CP (1-1/2" Vacuum breaker)
Left and right rough, Polished Chrome finish
Complete set supplied with:
Vacuum breaker & angle stop set - VB9CP-32
 - 1" Angle stop - 10077t3
 - 1-1/2" Vacuum breaker - 10075t1
 - Spud nut & escutcheon - 71051Nt6
 - Sweat solder kit - TH559EDVSJ3
- ☐ Optional Part:
Z-4000-J - Adapter for ground joint angle stops

COLORS/FINISHES

- #CP Polished Chrome

CODES/STANDARDS

- Meets or exceeds ASSE 1037, CSA B125.3
- Certifications: IAPMO(cUPC), ASSE, State of Massachusetts, City of Los Angeles, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- ADA compliant



Piston Valve

PRODUCT SPECIFICATION

TOTO® Model No. _____
Automatic infrared sensor activated, toilet flush valve. Heavy-duty zinc die cast cover with polished chrome finish. Vandal resistant hex head screws. Low water consumption of 1.28 gallons per flush. Automatic sensor adjustment on installation. Manual override button incorporated. Piston valve and solenoid with self-cleaning mechanism. Automatic flush every twenty four hours if not used. Angle stop and vacuum breaker included with accessories. Through the use of TOTO's EcoPower® Flush Valves, using the valve 12 flushes per day will fully recharge the valve for up to 10 years.

TET1LN Series

High-Efficiency Toilet EcoPower® Flushometer Valve, 1.28 gpf

SPECIFICATIONS

- | | |
|-------------------------|--|
| • Warranty | Three Year Warranty |
| • Material | Bronze casting with polished chrome finish |
| • Power Supply | Hydropower self-generating system |
| • Water Supply | 1" NPT |
| • Detection time | Factory setting at six (6) seconds minimum |
| • Detection range | Self-adjusting to environment |
| • Discharge quantity | Preset to 1.28 gpf / 4.8 lpf |
| • Operating temperature | 32°-104°F (0°-40°C) |
| • Supply water pressure | 35 psi (flowing) - 125 psi*
(minimum flow rate of 23 gpm) |
| • Trap seal protection | Automatically flushes once after twenty-four (24) hours of non-use |

These specifications are subject to change without notice.


*Water pressures over 80 psi are not recommended for most plumbing fixtures.

Check your local plumbing code for details.


INSTALLATION NOTES

*Alternate ADA Installation

Mount grab bar at the 36" (914mm) maximum allowed height or use the split grab bars.

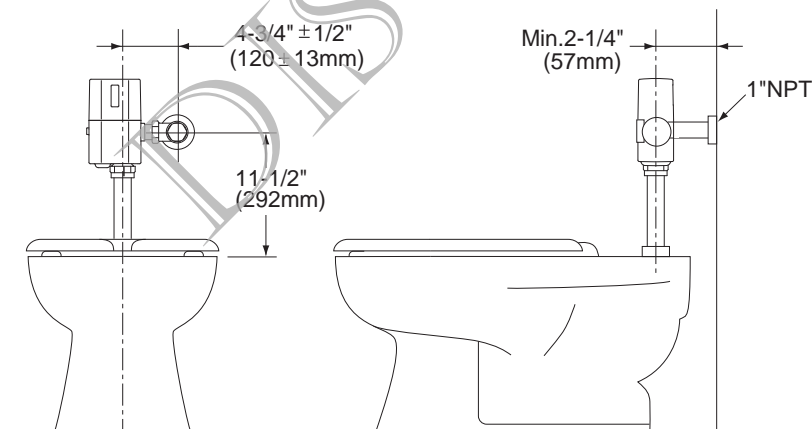

**Check local codes

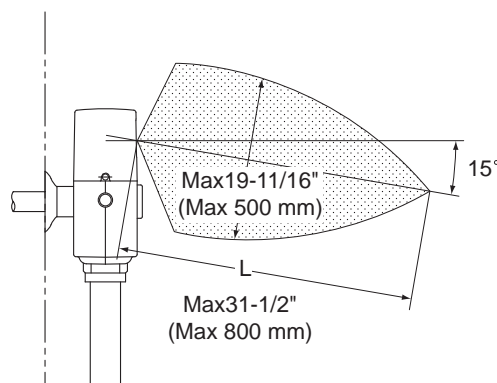

TOTO®

These dimensions and specifications are subject to change without notice