



Buy it for looks. Buy it for life.®

Specifications

DESCRIPTION

- Metal construction
- Designed to be installed on decks up to 1-7/8" (48mm)
- Accommodates 1/2" (13mm) additional finish deck

OPERATION

- Can be installed with any Moen Deck Mounted Roman Tub Trim Kit
- Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle clockwise to open (counterclockwise to close)

FLOW

- Designed to deliver 19 gpm at 45 psi. (72L/min)

CARTRIDGE


- Nonmetallic and stainless steel materials

STANDARDS

- Designed and manufactured to comply with the applicable requirements of: ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein


WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

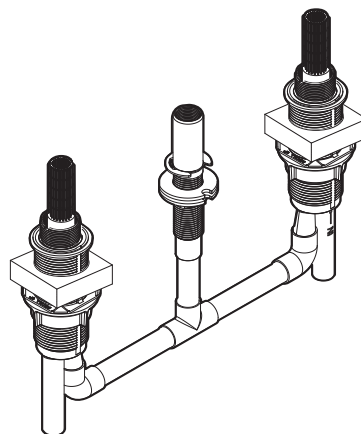

**Roman Tub High Flow Rough-In Valve
(Fixed Type)**

Model: 4996

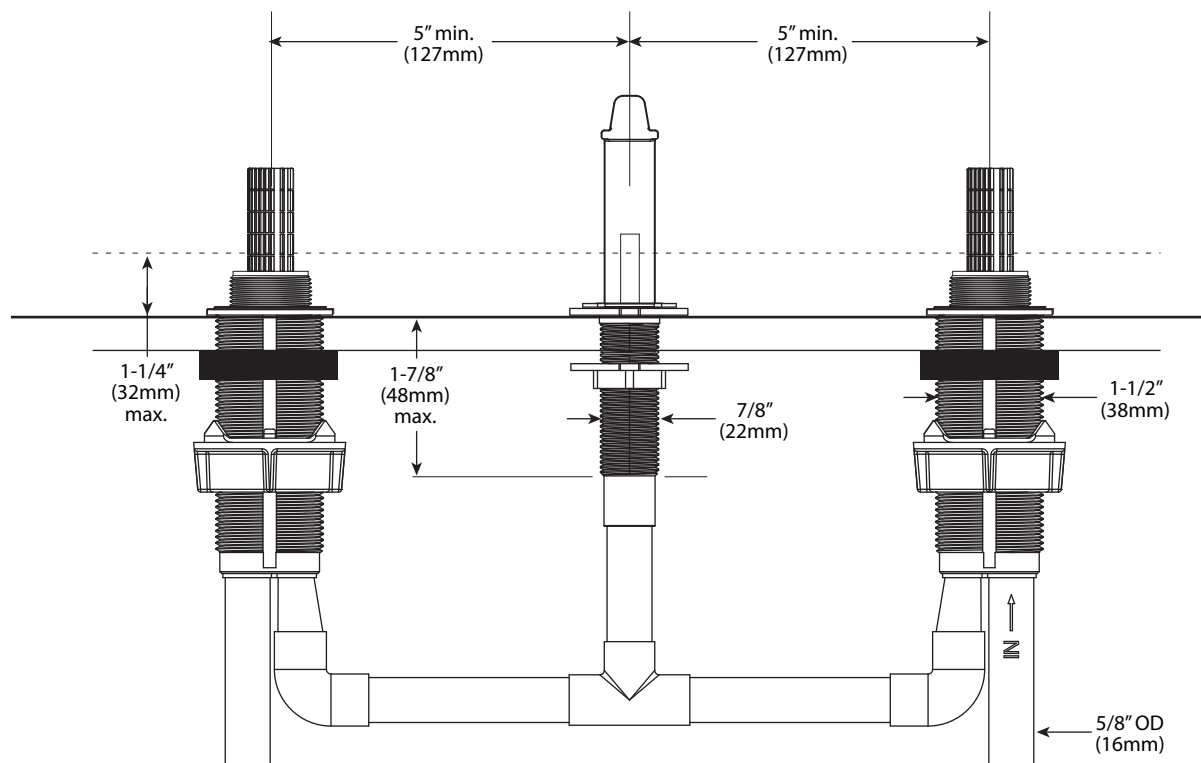

CRITICAL DIMENSIONS

(DO NOT SCALE)