


# SAFE-T-SWITCH® MODEL SS2AP



## COMMENTS/REQUIREMENTS:

- \* Potted, electrically water sealed reed/magnet switch design.
- \* UL508 and UL2043 Compliant
- \* Schedule 40 CPVC components.
- \* 24 VAC
- \* 1.25 Amp switching capacity

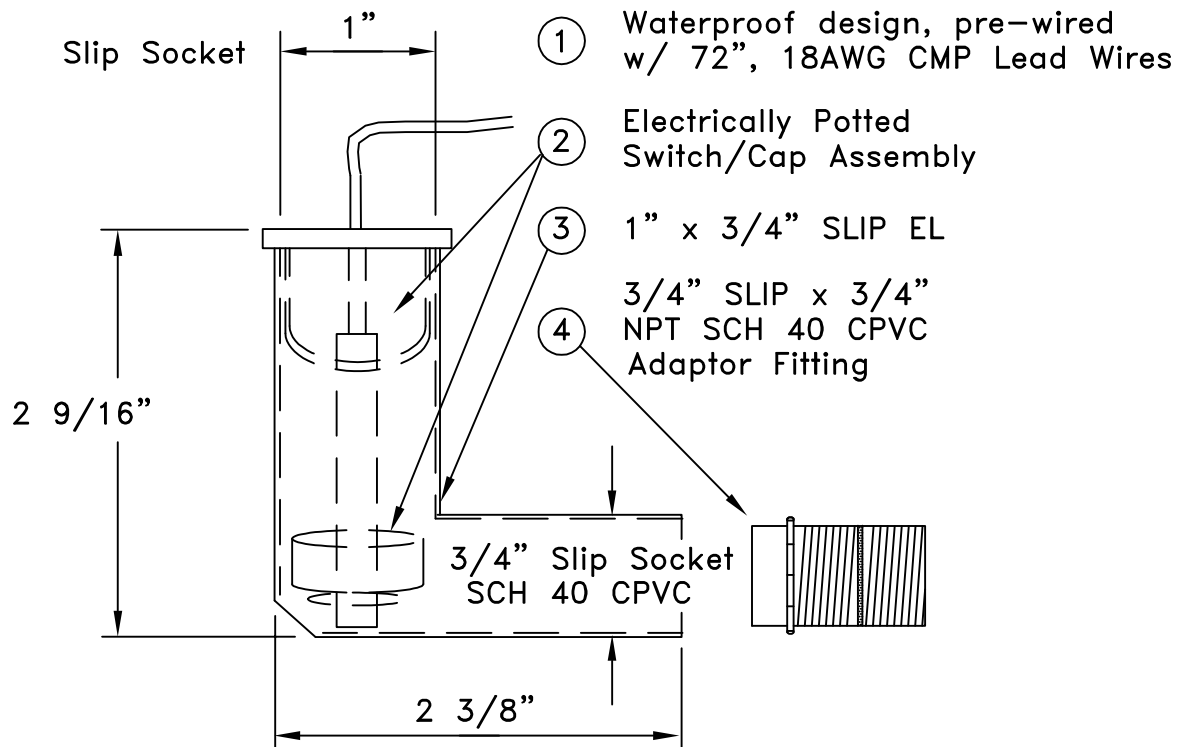

SAFE-T-SWITCH MODEL SS2AP  
3/4" Closed Coupled Plenum-rated  
Condensate Drainpan Overflow Kit



E209344  
IND. CONT. EQ  
75MF