


## PEX LAVATORY FAUCET RISER WITH BULLNOSE AND FERRULE



- Used to connect supply valve to faucet
- Includes a formed nosepiece to fit faucet inlet
- Comes with Delrin compression ring to prevent leaks
- Can easily be cut-to-length for a perfect fit
- Working pressure: 125 PSI
- Temperature range: 40°F - 160°F
- Corrosion resistant
- Freeze resistant
- For use in potable water distribution systems in accessible locations only
- UPC listed
- cUPC listed
- Meets NSF/ANSI/CAN 372 and NSF/ANSI/CAN 61: Q ≤ 0.5 standards

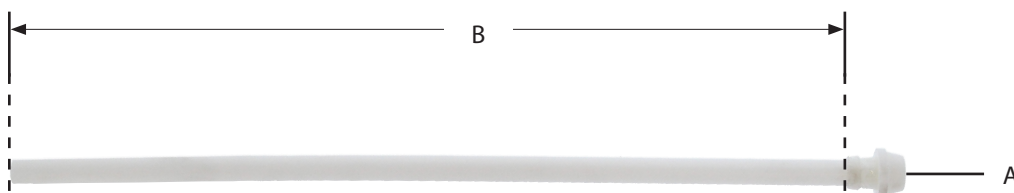

Part No.	OD - A	Length - B
S04123	0.37"	20"
S04124	0.37"	30"
S04128	0.37"	36"