



COMPRESSION X FIP BRAIDED STAINLESS STEEL FAUCET CONNECTOR

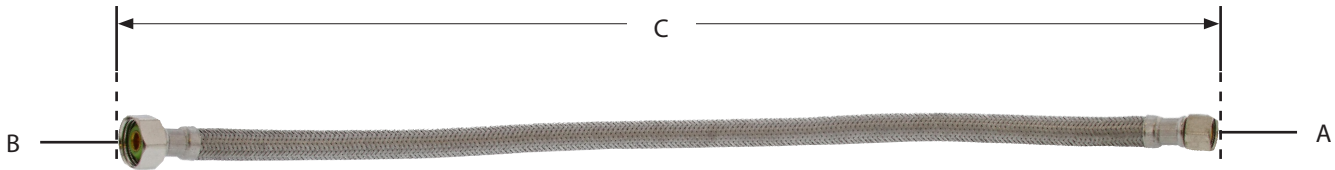

- Used for supplying water to faucets
- Working pressure: 124 PSI
- Inner core of PVC withstands temperatures of 68°F-158°F
- Quick and easy installation
- No special tools needed
- Flexible, braided stainless steel connector resists kinking and creasing
- Nickel plated nut
- UPC listed
- cUPC listed
- Meets NSF/ANSI/CAN 372, NSF/ANSI/CAN 61: Q ≤0.5, and NSF/ANSI 14 standards
- Lead free



Part No.	Compression - A	FIP - B	Length - A
S04200	0.37"	0.50"	9"
S04201	0.37"	0.50"	12"
S04202	0.37"	0.50"	16"
S04203	0.37"	0.50"	20"
S04204	0.37"	0.50"	30"
S04205*	0.37"	0.50"	36"
S04206	0.50"	0.50"	12"
S04207	0.50"	0.50"	16"
S04208	0.50"	0.50"	20"
S04209	0.50"	0.50"	30"
S04210	0.50"	0.50"	36"

*Part is UPC only