


FIP X BC X FLEXIBLE VINYL TOILET CONNECTOR



- Used to connect water supply to toilet
- Working pressure: 124 PSI
- Inner core of PVC withstands temperatures of 68°F-158°F
- Quick and easy installation
- No special tools needed
- Nickel plated nut
- Flexible vinyl connector resists kinking and creasing
- cUPC listed
- Meets NSF/ANSI/CAN 372, NSF/ANSI/CAN 61: Q ≤0.5, and NSF/ANSI 14 standards
- ASME A112.18.6/CSA B125.6

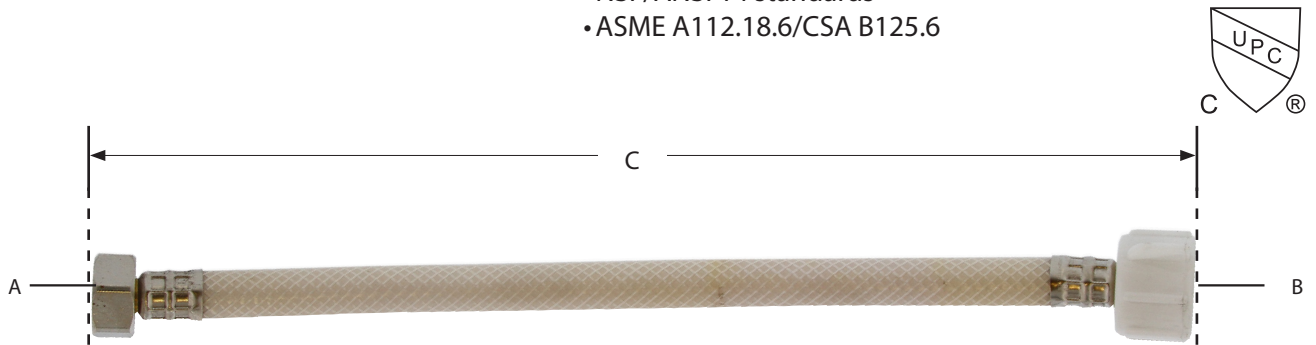

Part No.	FIP - A	BC - B	Length - C
S04422	0.50"	0.87"	9"
S04423	0.50"	0.87"	12"
S04424	0.50"	0.87"	20"