


# PRODUCT SPECIFICATION DRAWING

## PEXRITE® #705

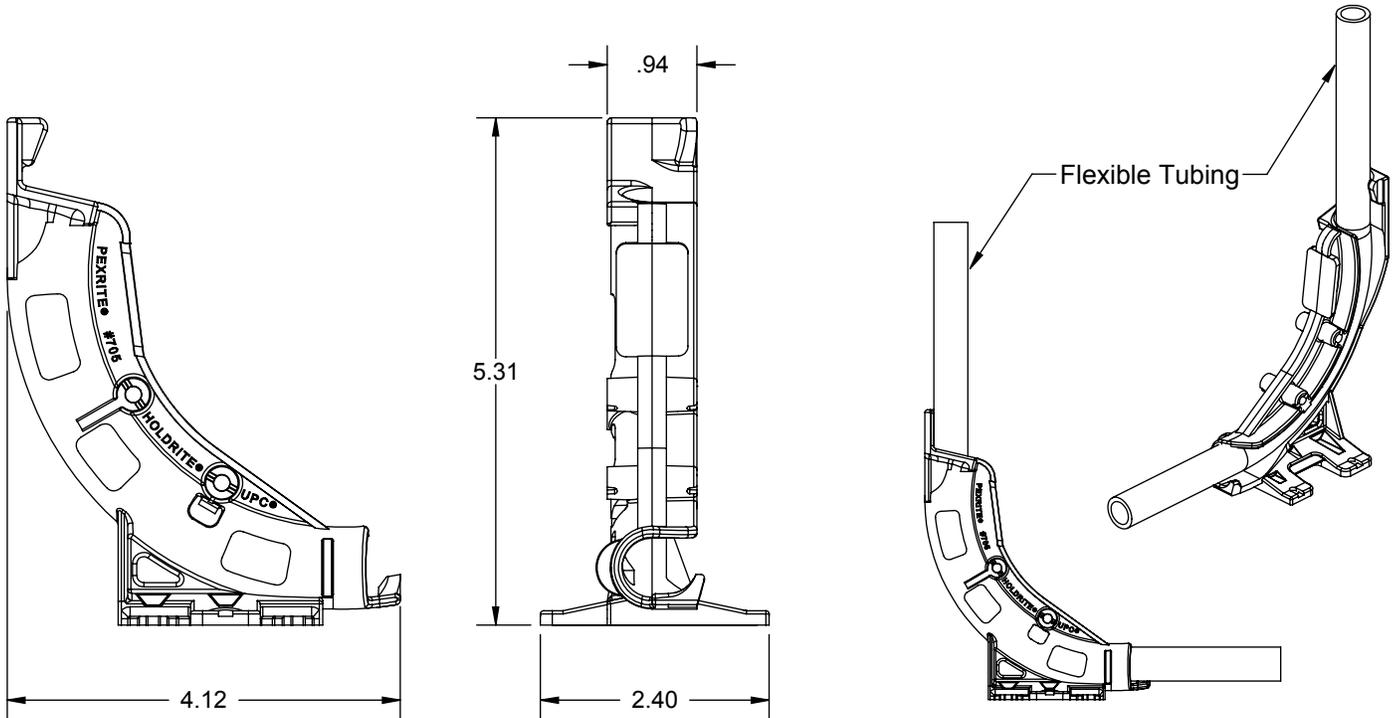

ALL DIMENSIONS IN INCHES

**The PEXRITE® #705 supports one 3/8" - 5/8" O.D. flexible tubing line (PEX or soft copper). Ideal for positioning tubing at 90° prior to concrete slab pouring. For elevated slabs, nail bracket to form decking or edge form. When used at a fixture stub-out location, nail or screw support base to framing cross-member.**

### Product Information:

- Material: Polypropylene, 30% Glass Filled
- Temperature range: -10°F to +190°F
- Load rating: 25 pounds
- Patent Pending

THIS INFORMATION IS PROPRIETARY TO HOLDRITE AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IT MAY NOT BE REPRODUCED IN PART OR WHOLE WITHOUT WRITTEN AUTHORIZATION.

# HOLDRITE®

CONVERTING MAKESHIFT METHODS INTO ENGINEERED SOLUTIONS<sup>SM</sup>

800-321-0316 OR 760-744-6944 / FAX: 760-744-0507 / WWW.HOLDRITE.COM  
spec\_705\_RevC

Product Submittal	
Job Name:	
Date:	
Part Number:	Qty:
Architect / Owner:	
Contractor:	
Notes:	