



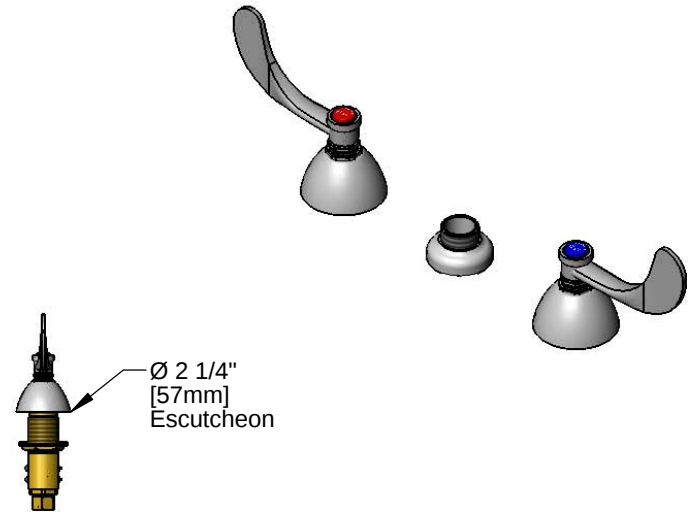

Architect/Engineering Specifications:

8" adjustable center, deck mount mixing faucet, less nozzle, compression cartridges, 4" wrist action handles, chrome plated escutcheons and 1/2" NPT male inlets. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.

Job Name _____
 Model Specified _____ Quantity _____
 Variations Specified _____
 Date _____

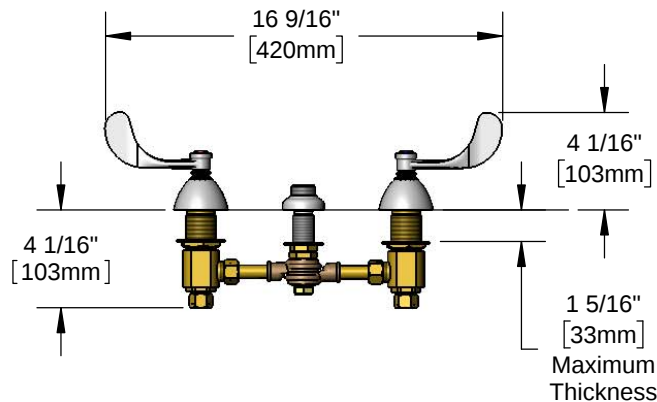

Features & Benefits:

- 8" (max.) adjustable center, deck mount lavatory mixing faucet
- 4" wrist action handles with color coded indexes
- Quarter-turn Eterna compression cartridges
- 1/2" NPT male inlets w/ coupling nuts
- Material: Brass body, chrome plated metal handles & escutcheons

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)

Warranty: One Year (Limited)

Performance Data:

- Pressure: 20 - 125 psi
- Temperature: 40 °F - 140 °F
- Flow Rate: TBD GPM @ 60 psi

(Outlet Device &/or Final Configuration May Reduce Flow Rate)



T&S Swing Nozzles

- ☐ 059X 6" Swing Nozzle
- ☐ 060X 8" Swing Nozzle
- ☐ 061X 10" Swing Nozzle
- ☐ 062X 12" Swing Nozzle
- ☐ 063X 14" Swing Nozzle
- ☐ 064X 16" Swing Nozzle
- ☐ 065X 18" Swing Nozzle
- ☐ 066X 12" Double Joint Swing Nozzle
- ☐ 067X 15" Double Joint Swing Nozzle
- ☐ 068X 18" Double Joint Swing Nozzle
- ☐ 069X 24" Double Joint Swing Nozzle

T&S Swivel Goosenecks (D x K)

- ☐ 131X 2 13/16" x 2 9/16" Swivel Gooseneck
- ☐ 132X 2 5/8" x 5 7/16" Swivel Gooseneck
- ☐ 133X 5 11/16" x 6 1/4" Swivel Gooseneck
- ☐ 135X 8 3/4" x 5 5/8" Swivel Gooseneck

Optional Handles

- ☐ 4" Wrist Action (Standard)
- ☐ Lever
- ☐ 4-Arm

Optional Cartridges

- ☐ Quarter-Turn Cerama
- ☐ Eterna (Standard)
- ☐ Quarter-Turn Eterna

