


HIGH EFFICIENCY ADHESIVE TAKEOFF w/ CMCL DMPR — TA57CE

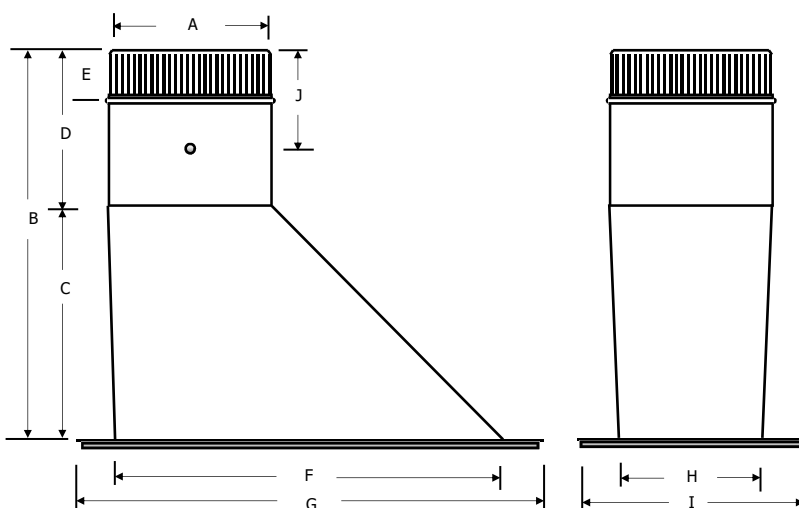

HETO with 3/8" Rodded Damper and 9 position 2" High Commercial type Locking Regulator

A	B	C	D	E	F	G	H	I	J	GA
4	13	8	5	1.75	6	8	4	6	3.875	28
5	13	8	5	1.75	8	10	5	7	3.875	28
6	13	8	5	1.75	10	12	6	8	3.875	28-26
7	13	8	5	1.75	11	13	5	7	3.875	28-26
8	13	8	5	1.75	12	14	6	8	3.875	28-26
9	14	8	6	1.75	13	15	7	9	3.875	26
10	14	8	6	1.75	14	16	8	10	3.875	26
12	14	8	6	1.75	16	18	10	12	3.875	26
14	16	10	6	1.75	18	20	12	14	3.875	26
16	16	10	6	1.75	20	22	14	16	3.875	26
18	16	10	6	1.75	22	24	16	18	3.875	26
20	16	10	6	1.75	24	26	18	20	3.875	26

Gal. Steel, 1"W adhesive gasket, riveted corner braces, pre-drilled holes

Part Number designations

TA57CEXX

Where: XX = Diameter (04-24)
CE = Commercial Stand-off Damper
3/8" Solid Rod Damper

Options: Standard 28/26GA; 24GA and 22GA available
G40 Standard, G90 Available

PROJECT: _____ COMPANY: _____ DATE : _____
LOCATION: _____ SUBMITTED BY: _____