


## Thermostatic™ Tub & Shower Trim

- |   |  |
|---|--|
| R89-1TUC Finish(C) <input type="checkbox"/> | LG89-7TUC Finish(C) <input type="checkbox"/> |
| R89-1TUK Finish(K) <input type="checkbox"/> | LG89-7TUK Finish(K) <input type="checkbox"/> |
| R89-1TUY Finish(Y) <input type="checkbox"/> | LG89-7TUY Finish(Y) <input type="checkbox"/> |
|   | LG89-8TUC Finish(C) <input type="checkbox"/> |
|   | LG89-8TUK Finish(K) <input type="checkbox"/> |
|   | LG89-8TUY Finish(Y) <input type="checkbox"/> |

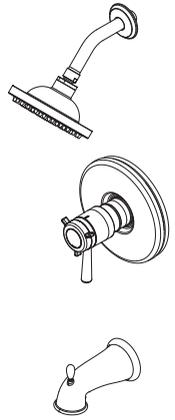

## Specifications

- Trim Only, Valve Not Included

### Features

- 1.8 GPM Flow Rate (Showerhead)
- Valve Trim Only (1TU Only)
- Shower Only (7TU Only)
- Tub and Shower (8TU Only)
- Trim Only, Valve Not Included
- Requires TX9 Valve Body
- 1/2" Thermostatic System
- Temperature and Volume Control
- PVD Finish (K Finish Only)
- Pforever Warranty®

### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- Cal Green Compliant
- CEC Compliant
- EPA WaterSense Certification 1.8 gpm, 6.8 L/Min
- ADA Compliant-ANSI A117.1 (Lever handles only)



## Dimensions

