DIVERSITECH®

Simplify Your Work™



HVAC/R

PRODUCT CATALOG

ISSUE 28

Packard FRESHAIRE UV PRO QUICK-SLING Asurity MasterCare hilmar SWOOSH SPEEDCLEAN Spin Imperial

EQUIPMENT MOUNTING 1

CONDENSATE MANAGEMENT 21

ELECTRICAL 42

TOOLS 322

COMPONENTS AND CONSUMABLES 374

INDOOR AIR QUALITY 428



THERMOSTATS AND CONTROLS 434



EQUIPMENT MOUNTING





PADS

Standard Plastic Pads 2
The Heat Pump Pad 3
Standard Concrete Pads 3-5
Hurricane Pads 5-6

EQUIPMENT STANDS

Ductless Mini-Split Stands 6-8
VRF Stands 8
Air Handler Stands 9
Boiler and Water Heater Stands 9
Stand Accessories 10

WALL BRACKETS

Condenser Wall Brackets 11
Ductless Mini-Split Brackets 11

MOUNTING BLOCKS, FEET AND RISERS

Air Handler - Furnace Blocks 12
Condenser Blocks and Feet 12
Heat Pump Riser 13

HANGING BRACKETS


Unit Heater Swivel Brackets 13
Air Handler Hanging Bracket 14

MOUNTING ACCESSORIES

Anti-Vibration Pads 14
Tie Down Clips 15
Vibration Isolation Strips 15
Rain and Snow Shields 15
Strut Clips and Clamps 16-20

STANDARD PLASTIC PADS

E Lite's rugged design provides uniform and generous ribbing for optimum, self-leveling ground support without inserts. The result is a pad that is lightweight, but not too light. A subtle texture prevents unit slide and presents a classic appearance, which is enhanced by rounded edges and a concrete gray color. Each pad is molded with a size label and a symbol representing content of recycled material.





2" E Lite® Pads

The 2" thick E Lite® pad is the choice for plastic pads. Codes have moved toward requiring 3" pads, check local codes for your requirements.

CATALOG NO.	SIZE (IN.)	PAD WT. (LBS.)	PALLET QTY.	PALLET WT. (LBS.)	UOM	ORDER MUL.
EL2424-2	24 X 24	6	44	310	EA	44
EL2430-2	24 X 30	9	22	203	EA	22
EL2436-2	24 X 36	10	22	270	EA	22
EL2626-2	26 X 26	9	22	201	EA	22
EL3030-2	30 X 30	9	22	209	EA	22
EL3036-2	30 X 36	13	22	290	EA	22
EL3040-2	30 X 40	14	22	307	EA	22
EL3232-2	32 X 32	10	22	231	EA	22
EL3434-2	34 X 34	14	22	306	EA	22
EL3636-2	36 X 36	12	22	291	EA	22
EL3640-2	36 X 40	18	22	380	EA	22
EL3648-2	36 X 48	25	22	384	EA	22
EL3842-2	38 X 42	17	22	446	EA	22

An injection molded equipment pad created from 100% recycled materials to minimize environmental impact. It does not require any additional equipment for moving and handling. EcoPad™ is resistant to impact, ultra-violet degradation and weathering (virtually impervious to climatic variations), and will not crack, flake, or warp. Drillable to permit installation of refrigerant and electrical lines under and through the pad and to allow equipment to easily secure to the pad.



EP3636-2

EcoPad™ — 2"

The 2" thick EcoPad™ is the choice for plastic pads, Codes have moved toward requiring 3" pads, check local codes for your requirements.

CATALOG NO.	SIZE (IN.)	PAD WT. (LBS.)	PALLET QTY.	PALLET WT. (LBS.)	UOM	ORDER MUL.
EP2424-2	24 X 24 X 2	6	24	166	EA	24
EP2436-2	24 X 36 X 2	10	24	227	EA	24
EP2626-2	26 X 26 X 2	9	24	226	EA	24
EP3030-2	30 X 30 X 2	9	24	224	EA	24
EP3036-2	30 X 36 X 2	13	24	294	EA	24
EP3232-2	32 X 32 X 2	10	24	260	EA	24
EP3434-2	34 X 34 X 2	14	24	339	EA	24
EP3636-2	36 X 36 X 2	12	24	299	EA	24
EP3648-2	36 X 48 X 2	19	24	476	EA	24
EP3842-2	38 X 42 X 2	17	24	430	EA	24

3" E Lite® Pads

Codes have moved toward requiring 3" pads, check local codes for your requirements.



EL5658-3

CATALOG NO.	SIZE (IN.)	PAD WT. (LBS.)	PALLET QTY.	PALLET WT. (LBS.)	UOM	ORDER MUL.
EL1838-3	18 X 38	9	32	320	EA	32
EL2424-3	24 X 24	9	16	157	EA	16
EL2436-3	24 X 36	12	16	230	EA	16
EL2448-3	24 X 48	14	32	629	EA	32
EL3030-3	30 X 30	12	16	209	EA	16
EL3232-3	32 X 32	13	16	251	EA	16
EL3244-3	32 X 44	21	16	354	EA	16
EL3636-3	36 X 36	16	16	291	EA	16
EL3640-3	36 X 40	23	16	360	EA	16
EL3648-3	36 X 48	25	16	402	EA	16
EL3842-3	38 X 42	18	16	308	EA	16
EL3870-3	38 X 70	36	16	557	EA	16
EL4040-3	40 X 40	26	16	412	EA	16
EL4558-3	45 X 58	43	16	674	EA	16
EL4848-3	48 X 48	36	16	604	EA	16
EL5042-3	50 X 42	28	16	555	EA	16
EL5060-3	50 X 60	40	16	712	EA	16
EL5070-3	50 X 70	47	16	805	EA	16
EL5252-3	52 X 52	40	16	648	EA	16
EL5658-3	56 X 58	55	16	884	EA	16

EcoPad™ — 3"

Used where codes have moved toward requiring 3" pads, check local codes for your requirements.



EP3636-3

CATALOG NO.	SIZE (IN.)	PAD WT. (LBS.)	PALLET QTY.	PALLET WT. (LBS.)	UOM	ORDER MUL.
EP1838-3	18 X 38 X 3	9	32	292	EA	32
EP2424-3	24 X 24 X 3	9	16	150	EA	16
EP2436-3	24 X 36 X 3	12	16	210	EA	16
EP2448-3	24 X 48 X 3	14	32	645	EA	32
EP3030-3	30 X 30 X 3	12	16	212	EA	16
EP3232-3	32 X 32 X 3	13	16	220	EA	16
EP3434-3	34 X 34 X 3	21	16	291	EA	16
EP3636-3	36 X 36 X 3	16	16	271	EA	16
EP3640-3	36 X 40 X 3	23	16	360	EA	16
EP3648-3	36 X 48 X 3	25	16	433	EA	16
EP3842-3	38 X 42 X 3	18	16	311	EA	16
EP3870-3	38 X 70 X 3	36	16	545	EA	16
EP4040-3	40 X 40 X 3	26	16	406	EA	16
EP4558-3	45 X 58 X 3	43	16	725	EA	16
EP4848-3	48 X 48 X 3	36	16	591	EA	16
EP5042-3	50 X 42 X 3	28	16	511	EA	16
EP5060-3	50 X 60 X 3	40	16	705	EA	16
EP5070-3	50 X 70 X 3	47	16	808	EA	16
EP5252-3	52 X 52 X 3	40	16	633	EA	16
EP5658-3	56 X 58 X 3	55	16	884	EA	16

Pad Feet

Pad-Disc is a circular insert pad foot that provides additional surface area and support under the pad, preventing pads from excess settling in loose soil conditions. These inserts are designed to fit only specific sizes of E Lite® and EcoPad™ that have the circular grid pattern footprint.



PAD-DISC

CATALOG NO.	SIZE (IN.)	PAD WT. (LBS.)	UOM	ORDER MUL.
PAD-DISC	6	1	CS	1

NOTE: Item numbers in **RED** indicate **Made in the U.S.A.**

THE HEAT PUMP PAD™

The Heat Pump Pad™

Provides an effective base for heat pump equipment installed in snowy climates. Rather than a combination of a typical 2" (or 3") equipment pad and 6" heat pump risers, the Heat Pump Pad™ provides a full 8" of elevation in a simple square footprint. The star pattern of the integral risers allows for installation of equipment with different size footprints up to 36" x 36". Also included are eight anti-vibration pads uniquely designed to fit into the guide slots on the top of the integral risers. The base is sloped outward to allow for easy drainage of condensate or defrost cycle condensate when the outdoor coil is operating in heat pump mode. Nestable for efficient shipping, transportation, and warehousing. Injection molded from concrete gray, recycled polypropylene material, the Heat Pump Pad™ is environmentally friendly and designed to last longer than the equipment it supports. US Patent Number 7,891,635, and other patent(s) pending.



HP3636-8



Nestable!

CATALOG NO.	SIZE	UOM	ORDER MUL.
HP3232-8	32" x 32" x 8"	EA	16
HP3636-8	36" x 36" x 8"	EA	16

STANDARD CONCRETE PADS

3" UltraLite® Pads

A true concrete equipment pad at the weight of plastic (about 2.5 lbs. per square foot). UltraLite® is strengthened by miles of fiber in each square foot of fiber-cement coating. This fiber allows the pad to flex instead of cracking or breaking. The textured surface prevents the condensing unit or portable generator from sliding, and allows water drainage, while the engineered expanded polystyrene (EPS) core prevents warping and provides a solid bottom to resist settling. Unaffected by soil conditions, ultraviolet (UV) light, temperature extremes, and other weather conditions.



UC2424-3

CATALOG NO.	SIZE (IN.)	PAD WT. (LBS.)	PALLET QTY.	PALLET WT. (LBS.)	UOM	ORDER MUL.
UC1636-3	16 X 36	18	30	565	EA	30
UC1838-3	18 X 38	20	30	625	EA	30
UC2424-3	24 X 24	18	15	295	EA	15
UC2430-3	24 X 30	22	15	332	EA	15
UC2436-3	24 X 36	26	15	415	EA	15
UC2442-3	24 X 42	28	15	445	EA	15
UC2448-3	24 X 48	30	15	475	EA	15
UC2626-3	26 X 26	17	15	280	EA	15
UC3030-3	30 X 30	23	15	370	EA	15
UC3036-3	30 X 36	25	15	400	EA	15
UC3040-3	30 X 40	33	15	520	EA	15
UC3232-3	32 X 32	26	15	415	EA	15
UC3237-3	32 X 37	29	15	460	EA	15
U3353-3	33 X 53	68	15	1,045	EA	15
UC3434-3	34 X 34	27	15	430	EA	15
UC3445-3	34 X 45	39	15	610	EA	15
UC3636-3	36 X 36	30	15	475	EA	15
UC3642-3	36 X 42	32	15	505	EA	15
UC3648-3	36 X 48	37	15	580	EA	15

CATALOG NO.	SIZE (IN.)	PAD WT. (LBS.)	PALLET QTY.	PALLET WT. (LBS.)	UOM	ORDER MUL.
U3650-3	36 X 50	62	15	955	EA	15
U3654-3	36 X 54	71	15	1,090	EA	15
U3660-3	36 X 60	49	15	760	EA	15
UC3842-3	38 X 42	35	15	550	EA	15
U3865-3	38 X 65	85	15	1,300	EA	15
U3870-3	38 X 70	113	15	1,720	EA	15
UC4040-3	40 X 40	34	15	535	EA	15
UC4042-3	40 X 42	36	15	565	EA	15
U4054-3	40 X 54	81	15	1,240	EA	15
U4550-3	45 X 50	82	15	1,255	EA	15
U4558-3	45 X 58	93	15	1,420	EA	15
U4848-3	48 X 48	85	15	1,300	EA	15
U4854-3	48 X 54	91	15	1,390	EA	15
U4866-3	48 X 66	108	15	1,645	EA	15
U5053-3	50 X 53	92	15	1,405	EA	15
U5056-3	50 X 56	97	15	1,480	EA	15
U5252-3	52 X 52	94	15	1,435	EA	15
U5557-3	55 X 57	109	15	1,660	EA	15

3" UltraLite® Wedge Pads

The UltraLite® Wedge Pad is designed for Lennox condensing units.



UC3132-3L

CATALOG NO.	SIZE (IN.)	PAD WT. (LBS.)	PALLET QTY.	PALLET WT. (LBS.)	UOM	ORDER MUL.
UC3132-3L	31 X 32	23.33	15	350	EA	15
UC3539-3L	35 X 39	33.46	15	502	EA	15
UC4044-3L	40 X 44	37.53	15	563	EA	15

STANDARD CONCRETE PADS CONT'D

UltraLite® Earthquake Code Compliant Pads



UC2424-3CA


Required nearly exclusively in Southern California, the UltraLite® pad is available for compliance with strict attachment provisions detailed in earthquake prone local building codes. UltraLite® earthquake code compliant pads are only available for sale in regions where local codes mandate installation of pads with these particular characteristics. Currently these locales include most of Southern California, portions of Washington, and portions of Oregon.

CATALOG NO.	SIZE (IN.)	PAD WT. (LBS.)	PALLET QTY.	PALLET WT. (LBS.)	UOM	ORDER MUL.
UC1838-3CA	18 X 38	18	15	295	EA	15
UC2424-3CA	24 X 24	14	15	235	EA	15
UC2436-3CA	24 X 36	22	15	355	EA	15
UC2448-3CA	24 X 48*	28	15	445	EA	15
UC3030-3CA	30 X 30	22	15	355	EA	15
UC3036-3CA	30 X 36	25	15	400	EA	15
UC3232-3CA	32 X 32	24	15	385	EA	15
UC3636-3CA	36 X 36	28	15	445	EA	15
UC3642-3CA	36 X 42	32	15	505	EA	15
UC3648-3CA	36 X 48	37	15	580	EA	15
UC4040-3CA	40 X 40	34	15	535	EA	15

*With Strapping

3" CladLite® Pads


Used where codes have moved toward requiring 3" pads, check local codes for your requirements.



2424-3

CATALOG NO.	SIZE (IN.)	PAD WT. (LBS.)	PALLET QTY.	PALLET WT. (LBS.)	UOM	ORDER MUL.
1636-3	16 X 36	48	20	985	EA	20
2424-3	24 X 24	43	20	877	EA	20
2424-3-CORNER	24 X 24	43	20	877	EA	20
2436-3	24 X 36	60	20	1,215	EA	20
2448-3	24 X 48	84	20	1,695	EA	20
3030-3	30 X 30	62	20	1,255	EA	20
3036-3	30 X 36	73	20	1,487	EA	20
3232-3	32 X 32	68	20	1,379	EA	20
3237-3	32 X 37	73	20	1,485	EA	20
3636-3	36 X 36	80	20	1,633	EA	20
3640-3	36 X 40	97	20	1,969	EA	20
3648-3	36 X 48	109	20	2,207	EA	20
3660-3	36 X 60	163	15	2,470	EA	15
3842-3	38 X 42	120	20	2,417	EA	20
4042-3	40 X 42	170	10	1,605	EA	10
4550-3	45 X 50	184	15	2,785	EA	15
4558-3	45 X 58	203	15	3,070	EA	15
4766-3	47 X 66	219	10	2,215	EA	10
4848-3	48 X 48	184	15	2,785	EA	15
5053-3	50 X 53	197	15	2,980	EA	15

Concrete surface and superior performance at 20% the weight of conventional concrete pads. The cladding provides superior resistance to sun, moisture and freeze-thaw conditions; the engineered expanded polystyrene (EPS) core is virtually impervious to water, soil conditions, fungus and bacteria. Large CladLite® pads are further strengthened by continuous steel reinforcement throughout the cladding. CladLite® is code approved for installation throughout the U.S.



2424-2

2" CladLite® Pads

The 2" thick CladLite® pad is the choice for equipment pads. Codes have moved toward requiring 3" pads, check local codes for your requirements.

CATALOG NO.	SIZE (IN.)	PAD WT. (LBS.)	PALLET QTY.	PALLET WT. (LBS.)	UOM	ORDER MUL.
2436-2	24 X 36	50	25	1,275	EA	25
2442-2	24 X 42	57	25	1,450	EA	25
3030-2	30 X 30	36	25	925	EA	25
3036-2	30 X 36	43	25	1,093	EA	25
3040-2	30 X 40	60	25	1,525	EA	25
3232-2	32 X 32	44	25	1,125	EA	25
3434-2	34 X 34	51	25	1,300	EA	25
3636-2	36 X 36	63	25	1,598	EA	25
3640-2	36 X 40	71	25	1,798	EA	25
3648-2	36 X 48	88	25	2,220	EA	25

U.S. Patent number 4,505,449, and patents pending. ICBO No. PFC-5112.

2" HunkLite® Pads



L2436-2

HunkLite® Pads are designed to support outdoor HVAC equipment such as condensers, heat pumps, and continuous heating devices such as water heaters and pool heaters. Made from 3000+ psi solid concrete with continuous steel reinforcement, this pad is extremely durable even in extreme outdoor conditions, while being up to 18% lighters than solid concrete. HunkLite pads are specifically designed for local markets where solid concrete is required. Available in both 2" and 3", depending on local building codes requirements.

CATALOG NO.	SIZE (IN.)	PAD WT. (LBS.)	PALLET QTY.	PALLET WT. (LBS.)	UOM	ORDER MUL.
L2436-2	24x36x2	55	20	1091	EA	20
L3636-2	36x36x2	120	15	1825	EA	15

STANDARD CONCRETE PADS CONT'D

3" HunkLite® Pads



L2424-3

HunkLite® Pads are designed to support outdoor HVAC equipment such as condensers, heat pumps, and continuous heating devices such as water heaters and pool heaters. Made from 3000+ psi solid concrete with continuous steel reinforcement, this pad is extremely durable even in extreme outdoor conditions, while being up to 18% lighters than solid concrete. HunkLite pads are specifically designed for local markets where solid concrete is required. Available in both 2" and 3", depending on local building codes requirements.

CATALOG NO.	SIZE (IN.)	PAD WT. (LBS.)	PALLET QTY.	PALLET WT. (LBS.)	UOM	ORDER MUL.
L2424-3	24x24x3	52	15	776	EA	15
L2436-3	24x36x3	106	15	1590	EA	15
L3030-3	30x30x3	69	10	1039	EA	10
L3036-3	30x36x3	94	15	1412	EA	15
L3048-3	30x48x3	120	15	1800	EA	15
L3232-3	32x32x3	87	15	1300	EA	15
L3636-3	36x36x3	105	10	1050	EA	10
L3642-3	36x42x3	120	10	1198	EA	10
L3648-3	36x48x3	135	10	1349	EA	10
L3842-3	38X42X3	215	10	2168	EA	10

THE HURRICANE PAD™ CONCRETE EQUIPMENT PADS

The Hurricane Pad™



H2424-4

Designed specifically for the hurricane prone regions of Florida and the Gulf Coast, The Hurricane Pad™ meets stringent local code requirements for wind resistance. Heavier than a normal concrete pad, this 4" pad provides sufficient weight to meet code. The Hurricane Pad meets the Florida Building Code Notice and can withstand winds up to 150 MPH. For certain taller equipment, The Hurricane T Class Pad™ is needed. Due to their extreme weight, standard freight terms for The Hurricane Pad only apply for shipment to FL, GA, & AL. All other shipments are shipped FOB Leesburg, FL.

CATALOG NO.	SIZE (IN.)	PALLET QTY.	UOM	ORDER MUL.
H1840-4	18 X 40	16	EA	16
H2424-4	24 X 24	16	EA	16
H2436-4	24 X 36	8	EA	8
H2448-4	24 X 48	8	EA	8
H3030-4	30 X 30	8	EA	8
H3232-4	32 X 32	8	EA	8
H3636-4	36 X 36	8	EA	8
H3642-4	36 X 42	8	EA	8
H3648-4	36 X 48	8	EA	8
H3652-4	36 X 52	8	EA	8
H3654-4	36 X 54	8	EA	8
H3656-4	36 X 56	8	EA	8
H3672-4	36 X 72	8	EA	8
H3852-4	38 X 52	8	EA	8
H3865-4	38 X 65	8	EA	8
H3872-4	38 X 72	8	EA	8
H4040-4	40 X 40	8	EA	8
H4242-4	42 X 42	8	EA	8
H4558-4	45 X 58	8	EA	8
H5557-4	55 X 57	8	EA	8

The Hurricane T-Class Pad™



HT3030-4

The Hurricane T Class Pad™ is even heavier than The Hurricane Pad™ and is designed to meet the higher wind loads of taller equipment. The taller the piece of equipment mounted to the pad, the greater the wind load on the pad. These heavier 4" pads provide sufficient weight to meet code for these taller condensing units. The Hurricane T-Class Pad meets the Florida Building Code Notice and can withstand winds up to 175 MPH. Due to their extreme weight, standard freight terms for The Hurricane Pad only apply for shipment to FL, GA, & AL. All other shipments are shipped FOB Leesburg, FL.

CATALOG NO.	SIZE (IN.)	PALLET QTY.	UOM	ORDER MUL.
HT1840-4	18 X 24	10	EA	10
HT2436-4	24 X 36	5	EA	5
HT2448-4	24 X 48	5	EA	5
HT3030-4	30 X 30	5	EA	5
HT3232-4	32 X 32	5	EA	5
HT3636-4	36 X 36	5	EA	5
HT3648-4	36 X 48	5	EA	5
HT4040-4	40 X 40	5	EA	5
HT4242-4	42 X 42	5	EA	5
HT4558-4	45 X 58	5	EA	5

The Hurricane Pad™ MD



HMD3030-4

The new Hurricane Pad™ MD is the newest in concrete pad technology from DiversiTech. The Hurricane Pad MD is a solid concrete pad designed for the strict requirements of Miami Dade county. The Hurricane Pad MD meets the Florida Building Code Notice and can withstand winds up to 175 MPH. This pad is made from a minimum 7000PSI solid concrete. For Florida shipments only.

CATALOG NO.	SIZE (IN.)	PALLET QTY.	UOM	ORDER MUL.
HMD1840-4	18 X 40 X 4	5	EA	5
HMD2448-4	24 X 48 X 4	5	EA	5
HMD3030-4	30 X 30 X 4	5	EA	5
HMD3636-4	36 X 36 X 4	5	EA	5
HMD3648-4	36 X 48 X 4	5	EA	5
HMD4040-4	40 X 40 X 4	5	EA	5

THE HURRICANE PAD™ CONCRETE EQUIPMENT PADS CONT'D

Pad Anchor System Kit

The DiversiTech® Pad Anchor Kit EP-TDK is used in hurricane prone areas to secure the condenser to The Hurricane Pad®. Angle brackets attach the condenser to The Hurricane Pad and anchor cables provide additional strength by securing it to the ground. Kit contains 2 galvanized angle brackets, 2 stainless steel anchor cables and anchors, and 16 #14 stainless steel self tapping screws. Drive rod EP-TDK-STAKE (sold separately) is needed to drive the anchors of the EP-TDK Pad Anchor Kit into the ground, and can be used for future installations.



HMD3030-4

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
EP-TDK	PAD Anchor System Kit	EA	1
EP-TDK-STAKE	Drive Rod Tool for EP-TDK	EA	1

DUCTLESS MINI-SPLIT STANDS

Mini-Split Stands

The DiversiTech Aluminum Mini-Split Stand is a 12, 18 and 24 in. high, aluminum mini-split stand that provides a safe, stable platform for mounting ductless condensers. It keeps the unit elevated above lawn mowers, weed trimmers, pets, snow and flooding. This durable aluminum stand can be used in harsh environments such as coastal regions.



DT1801-AL

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DT1201-AL	Mini-Split Stand Wide - 12", Unfinished Aluminum	EA	1
DT1801-AL	Mini-Split Stand Wide - 18", Unfinished Aluminum	EA	1
DT2401-AL	Mini-Split Stand Wide - 24", Unfinished Aluminum	EA	1

Mini-Split Stands

Our Quick-Sling® Mini-Split Stands provide a safe, stable platform to mount your unit on. It keeps unit elevated above lawn mowers, weed whackers, pets, snow, and flooding. The elevated height allows for ease of installation, maintenance and service. Now available in Stainless Steel.



QSMS1200

QUICK-SLING®

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSMS1200	Mini-Split Stand Thin - 12", Powder Coated Steel	EA	1
QSMS1201	Mini-Split Stand Wide - 12", Powder Coated Steel	EA	1
QSMS1201-AL	Mini-Split Stand Wide - 12", Unfinished Aluminum	EA	1
QSMS1201-PAL	Mini-Split Stand Wide - 12", Powder Coated Aluminum	EA	1
QSMS1201-SS	Mini-Split Stand Wide - 12", Stainless Steel	EA	1
QSMS1800	Mini-Split Stand Thin - 18", Powder Coated Steel	EA	1
QSMS1801	Mini-Split Stand Wide - 18", Powder Coated Steel	EA	1
QSMS1801-AL	Mini-Split Stand Wide - 18", Unfinished Aluminum	EA	1
QSMS1801-PAL	Mini-Split Stand Wide - 18", Powder Coated Aluminum	EA	1
QSMS1801-SS	Mini-Split Stand Wide - 18", Stainless Steel	EA	1
QSMS2400	Mini-Split Stand Thin - 24", Powder Coated Steel	EA	1
QSMS2401	Mini-Split Stand Wide - 24", Powder Coated Steel	EA	1
QSMS2401-AL	Mini-Split Stand Wide - 24", Unfinished Aluminum	EA	1
QSMS2401-PAL	Mini-Split Stand Wide - 24", Powder Coated Aluminum	EA	1
QSMS2401-SS	Mini-Split Stand Wide - 24", Stainless Steel	EA	1

DUCTLESS MINI-SPLIT STANDS CONT'D

Large Mini-Split Stands

The large Quick-Sling® Mini-Split Stand is made extra wide to accomodate larger equipment with up to 38" wide mounting hole locations. This stand comes with 2 mounting rails.



QSMS1204

QUICK-SLING®

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSMS1204	Mini-Split Stand - Extra Wide - 2 Rails, 12" Tall, Powder Coated Steel	EA	1
QSMS1204-AL	Mini-Split Stand - Extra Wide - 2 Rails, 12" Tall, Unfinished Aluminum	EA	1
QSMS1804	Mini-Split Stand - Extra Wide - 2 Rails, 18" Tall, Powder Coated Steel	EA	1
QSMS1804-AL	Mini-Split Stand - Extra Wide - 2 Rails, 18" Tall, Unfinished Aluminum	EA	1
QSMS2404	Mini-Split Stand - Extra Wide - 2 Rails, 24" Tall, Powder Coated Steel	EA	1
QSMS2404-AL	Mini-Split Stand - Extra Wide - 2 Rails, 24" Tall, Unfinished Aluminum	EA	1

Combo Mini-Split Stand

The combo unit stand accomodates two single or double outdoor mini-splits. Ideal for rooftop installations. Made from heavy duty 1-1/2" square tubing and large 12" x 12" square feet.



QSMS4000-12

QUICK-SLING®

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSMS4000-12	Combo Mini-Split Stand - 12"	EA	1
QSMS4000-18	Combo Mini-Split Stand - 18"	EA	1
QSMS4000-24	Combo Mini-Split Stand - 24"	EA	1

Mini-Split Super Stand

The Quick-Sling® Mini-Split Super Stand accommodates up to 6 outdoor mini-split condensing units on a single stand. With the addition of the extender kits condensing units can be added in increments of 2 per kit. The Mini-Split Super Stand is made from the same heavy-duty steel structural design as the VRF Super Stands.



QSMS3001-12

QUICK-SLING®

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSMS3001-12	Mini-Split Super Stand, 6 systems, 12" High	EA	1
QSMS3001-18	Mini-Split Super Stand, 6 systems, 18" High	EA	1
QSMS3001-24	Mini-Split Super Stand, 6 systems, 24" High	EA	1
QSMS3001-12EXT	Mini-Split Super Stand Extender Kit, 2 systems, 12" High	EA	1
QSMS3001-18EXT	Mini-Split Super Stand Extender Kit, 2 systems, 18" High	EA	1
QSMS3001-24EXT	Mini-Split Super Stand Extender Kit, 2 systems, 24" High	EA	1

Mini-Split Dual Fan Stands

Our Quick-Sling® Mini-Split Dual Fan Stands provide a safe, stable platform to mount your unit on. It keeps unit elevated above lawn mowers, weed whackers, pets, snow, and flooding. The elevated height allows for ease of installation, maintenance and service.



QSMS1202

QUICK-SLING®

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSMS1202	Mini-Split Dual Fan Stand - 12", Powder Coated Steel	EA	1
QSMS1202-AL	Mini-Split Dual Fan Stand - 12", Unfinished Aluminum	EA	1
QSMS1202-PAL	Mini-Split Dual Fan Stand - 12", Powder Coated Aluminum	EA	1
QSMS1802	Mini-Split Dual Fan Stand - 18", Powder Coated Steel	EA	1
QSMS1802-AL	Mini-Split Dual Fan Stand - 18", Unfinished Aluminum	EA	1
QSMS1802-PAL	Mini-Split Dual Fan Stand - 18", Powder Coated Aluminum	EA	1
QSMS2402	Mini-Split Dual Fan Stand - 24", Powder Coated Steel	EA	1
QSMS2402-AL	Mini-Split Dual Fan Stand - 24", Unfinished Aluminum	EA	1
QSMS2402-PAL	Mini-Split Dual Fan Stand - 24", Powder Coated Aluminum	EA	1

Pitched Roof Mini-Split Mounting Bracket

The Quick-Sling® Pitched Roof Mini-Split Mounting Bracket is a fast and easy solution to mounting outdoor condensing units to a sloped roof.



QSPR1000

QUICK-SLING®

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSPR1000	Pitched Roof Bracket 300 lbs. capacity, 9° - 45° sloped roofs	EA	1

Mini-Split Double Stack Stand

Our Quick-Sling® Mini-Split Double Stack Stand provide a safe, stable platform to mount your unit on. It keeps unit elevated above lawn mowers, weed whackers, pets, snow, and flooding. The elevated height allows for ease of installation, maintenance and service.



QSMS1203

QUICK-SLING®

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSMS1203	Mini-Split Double Stack Stand, Powder Coated Steel	EA	1
QSMS1203-N	Mini-Split Double Stack Stand - Narrow, Powder Coated Steel	EA	1
QSMS1203-N-AL	Mini-Split Double Stack Stand - Narrow, Unfinished Aluminum	EA	1
QSMS1203-N-PAL	Mini-Split Double Stack Stand - Narrow, Powder Coated Aluminum	EA	1

DUCTLESS MINI-SPLIT STANDS CONT'D

Heat Pump Stand

Our Quick-Sling® Heat Pump Stand provides a safe stable platform to mount your unit on. Keep it elevated above lawn mowers, weed whackers, pets, snow, and flooding. Elevated height allows for ease of installation, service, and maintenance.



QSTD3000

QUICK-SLING®

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSTD3000	Quick Heat Pump Stand, 18" Tall	EA	1
QSTD3000-12	Quick Heat Pump Stand, 12" Tall	EA	1

3 Rail Large Mini-Split Stands

The large 3 Rail Mini-Split Stand is made extra wide to accomodate larger equipment with up to 38" wide mounting hole locations. This stand comes with 3 mounting rails.



QSMS1205

QUICK-SLING®


CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSMS1205	Mini-Split Stand - Extra Wide - 3 Rails, 12" Tall	EA	1
QSMS1805	Mini-Split Stand - Extra Wide - 3 Rails, 18" Tall	EA	1
QSMS2405	Mini-Split Stand - Extra Wide - 3 Rails, 24" Tall	EA	1

VRF STANDS

VRV/VRF Super Stand®

The New VRV/VRF Super Stand® Equipment Stands are now simpler to order, easier to size and compatible with more equipment model families.

- New sliding rail design allows infinite depth adjustments to fit most all VRF/VRV systems.
- New rail mounting slots align to all equipment mounting hole configurations.
- New Base and Extension models reduces number of model numbers making selecting and configuring the right stands quick and easy.
- Available with optional plastic feet for non-penetrable roof applications.



BASE
QSSB48-12



EXTENSION
QSSX48-12

QUICK-SLING®

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSSB48-12	VRV/VRF Super Stand® Base Module, 12" High	EA	1
QSSB48-18	VRV/VRF Super Stand® Base Module, 18" High	EA	1
QSSB48-24	VRV/VRF Super Stand® Base Module, 24" High	EA	1
QSSX48-12	VRV/VRF Super Stand® Extension Kit, 12" High	EA	1
QSSX48-18	VRV/VRF Super Stand® Extension Kit, 18" High	EA	1
QSSX48-24	VRV/VRF Super Stand® Extension Kit, 24" High	EA	1
QSSB62-12	VRV/VRF Super Stand® Base Module, 12" High	EA	1
QSSB62-18	VRV/VRF Super Stand® Base Module, 18" High	EA	1
QSSB62-24	VRV/VRF Super Stand® Base Module, 24" High	EA	1
QSSX62-12	VRV/VRF Super Stand® Extension Kit, 12" High	EA	1
QSSX62-18	VRV/VRF Super Stand® Extension Kit, 18" High	EA	1
QSSX62-24	VRV/VRF Super Stand® Extension Kit, 24" High	EA	1
QSSB74-12	VRV/VRF Super Stand® Base Module, 12" High	EA	1
QSSB74-18	VRV/VRF Super Stand® Base Module, 18" High	EA	1
QSSB74-24	VRV/VRF Super Stand® Base Module, 24" High	EA	1
QSSX74-12	VRV/VRF Super Stand® Extension Kit, 12" High	EA	1
QSSX74-18	VRV/VRF Super Stand® Extension Kit, 18" High	EA	1
QSSX74-24	VRV/VRF Super Stand® Extension Kit, 24" High	EA	1

AIR HANDLER STANDS

Vertical Air Handler Stand

Our Quick-Sling® Vertical Air Handler Stand fits all LG, Unico and Mitsubishi Air Handlers. It is adjustable left to right in 1" increments up to 6". 18" and 24" stands include 2 stability arms. 500 lbs. max. capacity.



QSTD4000

QUICK-SLING®

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSTD4002	12" Vert Air Hdler Std 27" Arm	EA	1
QSTD5000	18" Vert Air Hdler Std 19" Arm	EA	1
QSTD5001	18" Vert Air Hdler Std 23" Arm	EA	1
QSTD6000	24" Vert Air Hdler Std 19" Arm	EA	1
QSTD6002	24" Vert Air Hdler Std 27" Arm	EA	1
QSTD-VRP2	24" Vert Air Hdler Std 27" Arm	EA	1

Horizontal Air Handler Stand

Our Quick-Stand is made of 14-gauge square tubing. This not only cuts down on vibration but allows the stand to hold up to 500 lbs. Each leg individually extends in 1" increments using thumb screws & wing nuts for speed and versatility. Installs as low as 22" on flat or uneven surfaces.



QSTD1000

QUICK-SLING®

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSTD1000	Quick-Stand Heavy Duty	EA	1

Flexi Frame Equipment Stand

The galvanized steel Flexi Frame is a strong weather-resistant stand for mounting mini-splits & other equipment. The Flexi Frame can be configured with a base on multiple extensions to meet most application requirements.



FF-BF-B

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
FF-BF-B	Flexi Base Frame	EA	1
FF-EF-B	Flexi Extension Frame	EA	1
FF-BF-1500-B	Flexi Base Frame 1500	EA	1
FF-EF-1500-B	Flexi Extension Frame 1500	EA	1

BOILER AND WATER HEATER STANDS

Boiler/Water Heater Bracket

Newly redesigned mounting bracket for boilers and tankless water heaters. Available in wall mount or stand-alone configurations. Fits most boilers and tankless water heater designs. Bracket comes partially assembled for quick installations.



QSBB3000 QSBB4000

QUICK-SLING®

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSBB3000	Boiler Bracket - Wall Mount, Fixed Horizontal Arm: 32", 350 lbs. capacity	EA	1
QSBB4000	Boiler Bracket - Free Standing, Fixed Horizontal Arm: 24", Adjustable Arm Height: 6" to 33", 350 lbs. capacity	EA	1

STAND ACCESSORIES

Quick-Sling® Accessories - Steel & Wood Beam Adapters



QSAC1000

QUICK-SLING®

- The QSAC1000 (set of 4) & 1100 (set of 2) steel beam adapters are made out of aluminum & able to hold up to 250 lbs each.
- Each QSAC1000 is slotted to receive 3/8" threaded rod or C - clamps for easy mounting.
- The QSAC2000 (set of 4) & 2100 (set of 2) wood beam adapters are made of steel & are 12" long & 2" wide.
- Each of our adapters are able to hold up to 200 lbs.
- They have a 1.5" bend that simply clips over the wood joist. All the necessary hardware is provided.
- QSAC1000 and QSAC2000 adapts: QSLG1000 & QSLG2000
- QSAC1100 and QSAC2100 adapts: QSWI1000 & QSWI2000

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSAC1000	Adapters, Steel Pk of 4	EA	1
QSAC1100	Adapters, Steel Pk of 2	EA	1
QSAC2000	Adapters, Wood Pk of 4	EA	1
QSAC2100	Adapters, Wood Pk of 2	EA	1

Anti-Vibration Feet

Anti-Vibration Feet: Quick-Sling® QSAC3000 kit is a set of 4 ea. 6 in. x 6 in. anti-vibration feet for QSMS and QSTD stands. This is an accessory kit that replaces the existing 6 in. x 6 in. feet on any QSMSxxxx or QSTDxxxx equipment stands. These anti-vibration feet provide 3 times more deflection than standard AV pads and can be used on any application where additional vibration isolation or noise reduction is needed.



QSAC3000

QUICK-SLING®

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSAC3000	Anti-Vibration Feet	EA	1

Quick-Sling WeatherShield®

The Quick-Sling WeatherShield® protects outdoor ductless condensing units from weather damage. Quick-Sling WeatherShield® mounts directly to the mini-split and fits most sizes of equipment.



QSWS1000

QUICK-SLING®

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSWS1000	Quick-Sling WeatherShield® - 31.5" - 41.5" x 6" - 12"	EA	1

12 x 12 Feet for MS Stands

The Quick-Sling® QSMSFT12 is a 4 pack of 12 in. x 12 in. feet for QSMS stands. These would typically be used on rooftop applications where larger feet are needed to replace the QSMS existing 6 in. x 6 in. feet.



QSMSFT12

QUICK-SLING®

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSMSFT12	12" x12" Feet for MS Stands	PK	4

CONDENSER WALL BRACKETS

Air Conditioner Brackets



ACB-30

HURRICANE RATED

These heavy duty 10ga thick steel AC brackets are perfect for hanging A/C condensers and heat pumps outside the home. Mount at any height to allow for easy maintenance under units. No need to wait for finished grade or landscaping prior to installation of AC unit. Pre punched holes for easy installation. Powder coated gray finish. Load rating 600 lbs. per pair.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
ACB-30	AC Mounting Bracket - 30"	PK	1
ACB-36	AC Mounting Bracket - 36"	PK	1
ACB-42	AC Mounting Bracket - 42"	PK	1
ACB-48	AC Mounting Bracket - 48"	PK	1
ACB-30-AL	AC Mounting Bracket, Aluminum - 30"	PK	1
ACB-36-AL	AC Mounting Bracket, Aluminum - 36"	PK	1
ACB-42-AL	AC Mounting Bracket, Aluminum - 42"	PK	1
ACB-48-AL	AC Mounting Bracket, Aluminum - 48"	PK	1

DUCTLESS MINI-SPLIT BRACKETS

Wall Brackets - Flat Wall



QSWB1000

QUICK-SLING®

The QSWB1000 Condenser Wall Bracket provides a quick and safe mount that is perfectly designed for installation to a flat wall surface and can hold up to 500 lbs. It also has the flexibility to be installed in the up and out orientation or down and out.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSWB1000	Mini Split Wall Bracket	EA	1

Wall Bracket - Foundation Mount



QSWB3000

QUICK-SLING®

This unique, 300 lb. condenser mounting bracket is designed to install directly to a foundation and still provides 7" clearance between the wall and the unit. The shelf depth is 19" and allows plenty of room for piping and service.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSWB3000	Wall Bracket w/Rails Heavy Duty	EA	1

Wall Brackets - Siding or Flat Wall



QSWB1100

QUICK-SLING®

This condenser wall bracket combines the installation flexibility of the QSWB1000 and the slider track mounting rail of the QSWB2000 to create a Heavy Duty, versatile mounting solution.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSWB1100	Wall Bracket w/Rails Light Dty	EA	1

Hef-T-Bracket™



230-B2L

Used for supporting condensing units, Hef-T- Brackets (Type 2) feature a cross bar that is attached to a wall, and two L shaped brackets that are hooked and bolted into place on the cross bar. The condensing unit is mounted onto the L shaped brackets, and fastened using the bolts and anti vibration washers provided. Hinged models help ensure unit can be easily leveled on any type of wall surface.
*Not approved for South Florida.

CATALOG NO.	DESCRIPTION	MATERIAL	ARM LENGTH	LOAD RATING PER ARM	UOM	ORDER MULTIPLE
230-A2S	Hef-T-Bracket™ - Sm.	Aluminum	16.6"	176 lbs.	EA	1
230-B2M	Hef-T-Bracket™- Med. w/Top Hinge	Powder-Ctd. Steel	18"	250 lbs.	EA	1
230-B3M	Hef-T-Bracket™– Med.	Powder-Ctd. Steel	18"	250 lbs.	EA	1
230-B2L	Hef-T-Bracket™ – Lg. w/Top Hinge	Powder-Ctd. Steel	21"	250 lbs.	EA	1
230-B3L	Hef-T-Bracket™ – Lg.	Powder-Ctd. Steel	21"	250 lbs.	EA	1
230-B2XL	Hef-T-Bracket™ - Ex. Lg.	Powder-Ctd. Steel	26"	250 lbs.	EA	1

Wall Bracket - Siding or Flat Wall



QSWB2000

QUICK-SLING®

HURRICANE RATED

These hurricane rated wall brackets are strong, easy to install and are designed to be mounted into framing studs at 12" or 16" on center. These fit most mini-split models on the market today and provides the required distance between the wall and the condenser for optimal air flow. The QSWB2000 is rated for 300 lbs. and the heavy duty QSWB4000 is rated for 600 lbs. Both models are also available in 316 stainless steel.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSWB2000	Wall Bracket w/Z Bend	EA	1
QSWB2000SS	Wall Bracket w/Z Bend, Stainless Steel	EA	1
QSWB2000-3	Wall Bracket w/Z Bend, 3 Mounting Arms	EA	1
QSWB2004	Wall Bracket - Extra Large	EA	1
QSWB2005	Wall Bracket - Extra Large, 3 Mounting Arms	EA	1
QSWB4000	Wall Bracket w/Z Bend, Heavy Duty	EA	1
QSWB4000SS	Wall Bracket w/Z Bend, Heavy Duty, Stainless Steel	EA	1

AIR HANDLER - FURNACE BLOCKS

Air Handler Block


Lightweight styrofoam block (white) provides A/C air handler support in attic installations.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
7-60	Air Handler Block 8" x 8" x 4" (White)	EA	144
7-64	Air Handler Block 8" x 8" x 4", pack of 4	PK	4

Furnace Mounting Blocks

Each furnace mounting block can support 40% more weight than competitive products – over 500 pounds! Easy peel and stick installation.



FB-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
FB-1	Furnace Mounting Block	EA	72

CONDENSER BLOCKS AND FEET

Base Pad

Used as a mounting base when condensing units must be bolted down. Maximum load capacity is 220 lbs. per pad. Sliding rail design for easy and fast installation. Includes mounting bolts. Available in 17" lengths. Ivory color.



230-BP17W

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-BP17W	17" Base Pad, pack of 2	PK	10

Hef-T-Block™

Used as mounting bases when condensing units must be bolted down. Available in three lengths. Furnished complete with end caps and mounting bolts. Maximum load capacity is 440 pounds per mounting block. Installation temperature range from -4°F (-20°C) to 140°F (60°C). Hef T Blocks fit all mini split condensing units with a unique sliding rail feature.



230-MB17W

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-MB14W	14" Hef-T-Block™ (White), pack of 2	PK	1
230-MB17W	17" Hef-T-Block™ (White), pack of 2	PK	1
230-MB36W	36" Hef-T-Block™ (White), pack of 2	PK	1
230-MBCW	Hef-T-Block™ Replacement End Cap (White), pack of 4	PK	25

H-Frame Kits

Ideal for supportsing ducts, pipes and electrical equipment. Kits include a pair of feet, brackets and hardware. 12.6" or 19.7" square feet available.



F-HF-320

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
F-HF-320	H-Frame Kit - 12.5" foot	EA	1
F-HF-500	H-Frame Kit - 19.7" foot	EA	1

Hef-T-Foot™

The Hef-T-Foot™ is used to support small pipework, runs of cable tray, or used as an alternative to supporting condensing units, air source heat pumps or a variety of outdoor equipment. The Hef-T-Foot™ with strut comes in four lengths — 9.8", 15.7", 23.6", 39.4". They are manufactured from heavy duty recycled rubber and come complete with .8" x 1.6" galvanized steel strut adhered to the rubber with industrial adhesive. The rubber is strong and durable with drain slots moulded into the underside to allow standing water to flow under the foot.



FF-250-S



FF-250-UNI

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
FF-250-S	Hef-T-Foot™ – 9.8" with 1.6" x .8" strut	EA	1
FF-400-S	Hef-T-Foot™ – 15.7" with 1.6" x .8" strut	EA	1
FF-600-S	Hef-T-Foot™ – 23.6" with 1.6" x .8" strut	EA	1
FF-1000-S	Hef-T-Foot™ – 39.4" with 1.6" x .8" strut	EA	1
FF-250-UNI	Hef-T-Foot™ – 9.8" Universal	EA	1
FF-400-S-KIT	Mini-Split Installation Kit - 15.7"	EA	1
FF-450-S-KIT	Mini-Split Installation Kit - 17.7"	EA	1
FF-600-S-KIT	Mini-Split Installation Kit - 23.6"	EA	1
FF-1000-S-KIT	Mini-Split Installation Kit - 39.4"	EA	1

Hef-T-Foot™ Installation Variants



Mini-Split Installation Kit
Comes with 2 feet & Mounting Hardware



HEAT PUMP RISERS

One Piece Heat Pump Risers

Sturdy and stable, DiversiTech's Heat Pump Riser provides the desired elevation for condensers, heat pumps, and air handlers. The one piece, heavy duty plastic unit is manufactured in three heights. Butyl mastic on the top and bottom guarantees no slipping and reduced vibration and noise.



HPR-6

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
HPR-3	Riser – 3"	EA	48
HPR-3BL	Riser – 3", Black	EA	48
HPR-6	Riser – 6"	EA	36
HPR-6BL	Riser – 6", Black	EA	36
HPR-12	Riser – 12"	EA	16

Two Piece Heat Pump Risers

Sturdy and stable, DiversiTech's Heat Pump Riser provides the desired elevation for condensers, heat pumps, and air handlers. The one piece, heavy duty plastic unit is manufactured in two heights and an extension. Butyl mastic on the top and bottom guarantees no slipping and reduced vibration and noise.



HPR-6-2PG

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
HPR-3-2P	Two Piece Riser – 3"	EA	32
HPR-6-2P	Two Piece Riser – 6"	EA	16
HPR-3-2PG	Two Piece Black Riser – 3"	EA	32
HPR-6-2PG	Two Piece Black Riser – 6"	EA	16
HPR-EXT	4" Extension	EA	28

Adjustable Equipment Risers

Adjustable equipment risers easily adjust up or down as needed to secure equipment at the correct height. The large center barrel twists up from starting height of 5" to a max of 8". A separate top cap allows for raising or lowering the riser even with equipment already on it. Convenient height markings provided for reference.



AER-8

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
AER-8	Adjustable Equipment Riser - 8"	EA	4
AER-8BL	Adjustable Equipment Riser - 8", Black	EA	4

UNIT HEATER SWIVEL BRACKETS

Quick Swivel Flush Mount w/ "H" Bracket - Unit Heater Bracket

Our Quick Swivel is made of 14-gauge steel able to hold 200 lbs. The swivel allows for 360° rotation for setting the perfect direction of air flow.



QSWI3000

QUICK-SLING®

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSWI3000	Swivel Flush H Bracket	EA	1
QSWI3001	Swivel Flush H Bracket 36" Spd	EA	1
QSWI3002	Swivel Flush H Bracket 17" Spd	EA	1
QSWI5003	Swivel Flush H Bracket Heavy Duty	EA	1

Quick Swivel "U" Mount - Unit Heater Bracket

Our Quick Swivel is made of 14-gauge steel able to hold 200 lbs. The swivel allows for 360° rotation for setting the perfect direction of air flow.



QSWI1000

QUICK-SLING®

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSWI1000	Swivel "U" Mount w/H-Bracket	EA	1
QSWI2000	Swivel "U" Mount w/I-Bracket	EA	1

Quick Swivel Flush Mount w/ "I" Bracket - Unit Heater Bracket

Our Quick Swivel is made of 14-gauge steel able to hold 200 lbs. The swivel allows for 360° rotation for setting the perfect direction of air flow.



QSWI4000

QUICK-SLING®

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSWI4000	Swivel Flush w/ I Bracket	EA	1
QSWI4001	Swivel Flush w/26" I Bracket	EA	1
QSWI5001	Swivel Flush w/34" I Bracket	EA	1
QSWI5002	Swivel Flush w/52" I Bracket	EA	1
QSWI6000	Swivel Flush w/2 I Brackets	EA	1

AIR HANDLER HANGING BRACKETS

Ductless Cassette Hangers



QSCH1000

QUICK-SLING®

The Ductless Cassette Hangers are an innovative bracket design that is made of light-weight aluminum to provide quick and easy installation of ductless cassettes. Only two skus are compatible with most of the ductless cassettes on the market today. The built-in adjustability allows the alignment of the unit after it has been hung.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSCH1000	Ductless Cassette Hanger - Small Holds up to 200 lbs.	EA	1
QSCH2000	Ductless Cassette Hanger - Large Holds up to 200 lbs.	EA	1

Quick-Sling® - Air Handler Hanging Bracket



QSLG2000

QUICK-SLING®

Our Quick-Sling is made of 14-gauge square tubing. This not only cuts down on vibration but allows the stand to hold up to 400 lbs. Extension arms individually adjust in one inch increments using thumb screws & wing nuts for speed & versatility. Installs as high as 24" or as low as 48" on flat or pitched roofs.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSLG2000	Sling Bracket Heavy Duty 2 Arm	EA	1

Air Handler, Light Duty



QSLD1001


QUICK-SLING®

The Quick-Sling® QSLD1001 is a light duty horizontal air handler hanging system. It is designed to hang up to 250 lbs. of equipment on a flat or pitched roof. Extension arms adjust individually in one inch increments using thumb screws and wing nuts for speed and versatility.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSLD1001	Air Handler, Light Duty	EA	1

ANTI-VIBRATION PADS

E.V.A. Anti-Vibration Pad



MP-4E

The latest generation in vibration dampening technology. The most effective vibration dampening pad available on the market. The EVA Pad was tested against other pads at four different vibration settings. In the most severe vibration extremes, the EVA Pad outperforms cork and rubber by a margin of greater than 3:1! This is due to the special composite foam center which is much more structurally sound than cork. It is not affected by oils or chemicals that can break down cork and is much more effective at vibration dampening than solid rubber. All this at a very competitive price. Designed to withstand 50 psi.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
MP-2E	2" x 2" x 7/8" E.V.A. Pad	EA	48
MP-3E	3" x 3" x 7/8" E.V.A. Pad	EA	36
MP-4E	4" x 4" x 7/8" E.V.A. Pad	EA	24
MP-6E	6" x 6" x 7/8" E.V.A. Pad	EA	24
MP-12E	12" x 12" x 7/8" E.V.A. Pad	EA	12
MP-18E	18" x 18" x 7/8" E.V.A. Pad	EA	6

Rubber Anti-Vibration Pad




MP-3

Highest quality elastomeric oil resistant padding. Designed to withstand 50 lbs. psi. The rubber pads are corrugated on both sides. Ideal for air conditioners, compressors, cooling towers, presses, machines, etc.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
MP-2	2" x 2" x 3/8" Rubber	EA	48
MP-3	3" x 3" x 3/8" Rubber	EA	36
MP-4	4" x 4" x 3/8" Rubber	EA	24
MP-6	6" x 6" x 3/8" Rubber	EA	24
MP-8	8" x 8" x 3/8" Rubber	EA	12
MP-12	12" x 12" x 3/8" Rubber	EA	12
MP-18	18" x 18" x 3/8" Rubber	EA	6

Rubber/Cork Anti-Vibration Pad



MP-4C

Highest quality elastomeric oil resistant padding. Designed to withstand 50 psi. The rubber pads are corrugated on both sides. The cork is laminated between two corrugated pads. Ideal for air conditioners, compressors, cooling towers, presses, machines, etc.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
MP-2C	2" x 2" x 7/8" Rubber/Cork	EA	48
MP-3C	3" x 3" x 7/8" Rubber/Cork	EA	36
MP-4C	4" x 4" x 7/8" Rubber/Cork	EA	24
MP-6C	6" x 6" x 7/8" Rubber/Cork	EA	24
MP-12C	12" x 12" x 7/8" Rubber/Cork	EA	12
MP-18C	18" x 18" x 7/8" Rubber/Cork	EA	6

Iso-Cube Economy Anti-Vibration Pad




ISO-4

Natural rubber pads, designed to reduce vibration and noise emanating from refrigeration and air conditioning equipment. The circular design in each pad offers a suction cup effect, which eliminates the need to bolt the pads down. A standard 18" (46cm) pad is divided into eighty-one 2" (5cm) segments, each of which may be cut or torn to provide smaller pads. These 50 durometer pads will withstand a load of 180 psi with greater resiliency.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
ISO-2	2" x 2" x 3/4" Iso-Cube	EA	24
ISO-4	4" x 4" x 3/4" Iso-Cube	EA	12
ISO-18	18" x 18" x 3/4" Iso-Cube	EA	6

TIE-DOWN CLIPS

The Hurricane Pad™ Tie Down Clips



Brackets used to secure condensing units to a pad or stand. These Florida approved clips use #8 self-tapping or self-drilling screws to secure to condenser. Florida Product Approved for use in Hurricane Zones.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
TDC-4	The Hurricane Pad™ Attachment Bracket - 4", pack of 4	PK	1
TDC-4-100	The Hurricane Pad™ Attachment Bracket - 4", pack of 100	PK	1
TDC-6	The Hurricane Pad™ Attachment Bracket - 6", pack of 4	PK	1
TDC-8	The Hurricane Pad™ Attachment Bracket - 8", pack of 4	PK	1
TDC-10	The Hurricane Pad™ Attachment Bracket - 10", pack of 4	PK	1
TDC-12	The Hurricane Pad™ Attachment Bracket - 12", pack of 4	PK	1

VIBRATION ISOLATION STRIPS

Vibration Isolation Strips for Mini-Split & VRF/VRV

These high-density elastometric-coated, molded and pre-compressed fiberglass strips are UV resistent and designed to provide vibration isolation and allow controlled movement in the fiber media.



QSAC5101



QSAC5201

QUICK-SLING®

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSAC5100	Mini-Split Vibration Isolation Strips - "00" for narrow mini-split stands	EA	1
QSAC5101	Mini-Split Vibration Isolation Strips - "01" for standard mini-split stands	EA	1
QSAC5102	Mini-Split Vibration Isolation Strips - "02" for two fan mini-split stands	EA	1
QSAC5104	Mini-Split Vibration Isolation Strips - "04" for 2-arm large mini-split stands	EA	1
QSAC5105	Mini-Split Vibration Isolation Strips - "05" for 3-arm large mini-split stands	EA	1
QSAC5200	Super Stand® Vibration Isolation Strips - 48 in.	EA	1
QSAC5201	Super Stand® Vibration Isolation Strips - 62 in.	EA	1
QSAC5202	Super Stand® Vibration Isolation Strips - 74 in.	EA	1

RAIN AND SNOW SHIELDS

Roof Bracket

The Quick-Sling® Roof Bracket mounts to QSWB3000 or the QSMS1200, 1201, 1202, 1800, 1801, 1802, 2400, 2401 and protects the equipment from snow and freezing rain.



QSRB1000

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QSRB1000	Roof Bracket	EA	1

STRUT CLIPS & CLAMPS

Studded Clips



Studded Clips fit directly onto 5/16" (M8) or 3/8" (M10) size threaded rods. No tool required to intall. Use for refrigeration, A/C tubing, PEX piping, conduit, and cabling support. The clips are UL2043 compliant and suitable for Plenum spaces. They are heat, light and U.V. stabilized for outdoor use. Available in 11 sizes to fit pipes with 5/8" to 2-1/8" outer diameter.

CATALOG NO.	ROD SIZE	TUBE O.D. (IN.)	UOM	ORDER MUL.
SC08-15	5/16"	5/8"	10 Pack	1
SC08-20	5/16"	3/4"	10 Pack	1
SC08-22	5/16"	7/8"	10 Pack	1
SC08-25	5/16"	1"	10 Pack	1
SC08-28	5/16"	1-1/8"	10 Pack	1
SC08-32	5/16"	1-1/4"	10 Pack	1
SC08-35	5/16"	1-3/8"	10 Pack	1
SC08-40	5/16"	1-1/2"	10 Pack	1
SC08-42	5/16"	1-5/8"	10 Pack	1
SC08-50	5/16"	2"	10 Pack	1
SC08-54	5/16"	2-1/8"	10 Pack	1
SC10-15	3/8"	5/8"	10 Pack	1
SC10-20	3/8"	3/4"	10 Pack	1

*Add "-100" to the end of part numbers for 100 pieces pack.

InsulClips



InsulClips fit directly into vertical and horizontal standard 1-5/8" strut channels. No tool required to intall. Use for refrigeration, A/C tubing, PEX piping, conduit and cabling support. They are ideal for insulated pipes, to maintain vapor seal of the insulation and eliminates sweating. The clips are UL2043 compliant and suitable for Plenum spaces. They are heat, light and U.V. stabilized for outdoor use. Available in 11 sizes to fit pipes with 5/8" to 2-1/8" outer diameter.

CATALOG NO.	TUBE O.D. (IN.)	UOM	ORDER MUL.
IC00-15	5/8"	10 Pack	1
IC00-20	3/4"	10 Pack	1
IC00-22	7/8"	10 Pack	1
IC00-25	1"	10 Pack	1
IC00-28	1-1/8"	10 Pack	1
IC00-32	1-1/4"	10 Pack	1
IC00-35	1-3/8"	10 Pack	1
IC00-40	1-1/2"	10 Pack	1
IC00-42	1-5/8"	10 Pack	1
IC00-50	2"	10 Pack	1
IC00-54	2-1/8"	10 Pack	1

*Add "-100" to the end of part numbers for 100 pieces pack.

CATALOG NO.	ROD SIZE	TUBE O.D. (inch)	UOM	ORDER MUL.
SC10-25	3/8"	1"	10 Pack	1
SC10-28	3/8"	1-1/8"	10 Pack	1
SC10-32	3/8"	1-1/4"	10 Pack	1
SC10-35	3/8"	1-3/8"	10 Pack	1
SC10-40	3/8"	1-1/2"	10 Pack	1
SC10-42	3/8"	1-5/8"	10 Pack	1
SC10-50	3/8"	2"	10 Pack	1
SC10-54	3/8"	2-1/8"	10 Pack	1

*Add "-100" to the end of part numbers for 100 pieces pack.

Cable Tie Channel Clips



Cable Tie Channel Clips fit directly into vertical and horizontal standard 1-5/8" strut channels. No tool required to intall. Use for refrigeration, A/C tubing, PEX piping, conduit and cabling support. The clips are compliant with UL2043 and suitable for Plenum spaces. They are heat, light and U.V. stabilized for outdoor use. They accommodate PVC or metal cable ties up to a width of 11/16"(17mm). Three support base lengths available in 2" (50mm), 2-1/2" (65mm) and 3" (80mm).

CATALOG NO.	LENGTH	UOM	ORDER MUL.
CTC-050	2"	10 Pack	1
CTC-065	2-1/2"	10 Pack	1
CTC-080	3"	10 Pack	1

*Add "-100" to the end of part numbers for 100 pieces pack.

Rigid Strut Clamp



Extra durable Zinc Electroplate Finished Strut Clamps to secure rigid and IMC conduits and pipes to struts. The Clamps with 2-1/2" through 8" diameter are suitable for rigid and EMT conduits.

CATALOG NO.	PINCH SIZE (IN.)	O.D. (IN.)	DESIGN LOAD (LBS.)	UOM	ORDER MUL.
17515	3/4"	1.050"	600	EA	100
17516	1"	1.315"	600	EA	100
17518	1-1/2"	1.900"	800	EA	50
17519	2"	2.375"	800	EA	50
17520	2-1/2"	2.875"	800	EA	50
17521	3"	3.500"	800	EA	25
17522	3-1/2"	4.000"	1000	EA	25
17523	4"	4.500"	1000	EA	25

STRUT CLIPS & CLAMPS CONT'D

Flat Surface Adapter



RPC-FB

The new Flat Surface Adapter is designed as a mounting base for RPC Clips, InsulClips, and Cable Tie Channel Clips. It easily screws onto any flat surface to provide a secure base for mounting. Made of a strong and lightweight polyamide (nylon) material.

- UL2043 compliant
- Includes slots for cable ties
- Fast and easy to install as a mounting base

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
RPC-FB	RPC Flat Surface Adapter	10 Pack	1
RPC-FB-100	RPC Flat Surface Adapter	10 Pack	1

Universal Strut Clamp



17532

A highly versatile Universal Strut Clamp. Fits both pipe (rigid conduit)/IMC and thin walled tubing (EMT) in the corresponding sizes. Secures conduit to strut. Zinc Electro-Plate Finish.

CATALOG NO.	PINCH SIZE (IN.)	O.D. (IN.)	DESIGN LOAD (LBS.)	UOM	ORDER MUL.
17532	1/2"	0.773"	400	EA	100
17533	3/4"	0.986"	600	EA	100
17534	1"	1.239"	600	EA	100
17535	1-1/4"	1.585"	600	EA	50
17536	1-1/2"	1.820"	800	EA	50
17537	2"	2.286"	800	EA	50

Cushion Clamps



538-1/4

An industry standard universal clamp that mounts to standard strut. Steel with electrodichromate finish to resist corrosion. The lock nut has a nylon insert for a posittve lock. The polymeric grommet withstands temperatures from -25°C TO 125°C and resists the effects of most oils, chemicals, and industrial cleaning compounds.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
538-1/4	Clamp Cushion - 1/4"	PK	25
538-3/8	Clamp Cushion - 3/8"	PK	25
538-1/2	Clamp Cushion - 1/2"	PK	25
538-5/8	Clamp Cushion - 5/8"	PK	25
538-3/4	Clamp Cushion - 3/4"	PK	25
538-7/8	Clamp Cushion - 7/8"	PK	25
538-1-1/8	Clamp Cushion - 1-1/8"	PK	10
538-1-3/8	Clamp Cushion - 1-3/8"	PK	10
538-1-5/8	Clamp Cushion - 1-5/8"	PK	10
538-2-1/8	Clamp Cushion - 2-1/8"	PK	10
538-2-5/8	Clamp Cushion - 2-5/8"	PK	10
538-3-1/8	Clamp Cushion - 3-1/8"	CS	40
538-4-1/8	Clamp Cushion - 4-1/8"	PK	10

Rapid Positioning Clips



Rapid Positioning Clips fit directly into vertical and horizontal standard 1-5/8" strut channels. No tool required to intall. Use for refrigeration, A/C tubing, PEX piping, and conduit support. They prevent cracked and fractured joints by allowing secured pipe to expand. The clips are UL2043 compliant and suitable for Plenum spaces. They are heat, light and U.V. stabilized for outdoor use. Available in 9 sizes to fit pipes with 1/4" to 1-5/8" outer diameter.

CATALOG NO.	TUBE O.D. (IN.)	UOM	ORDER MUL.
RPC-0014	1/4"	10 Pack	1
RPC-0038	3/8"	10 Pack	1
RPC-0012	1/2"	10 Pack	1
RPC-0058	5/8"	10 Pack	1
RPC-0034	3/4"	10 Pack	1
RPC-0078	7/8"	10 Pack	1
RPC-0118	1-1/8"	10 Pack	1
RPC-0138	1-3/8"	10 Pack	1
RPC-0158	1-5/8"	10 Pack	1

*Add "-100" to the end of part numbers for 100 pieces pack.

EMT Strut Clamp



17542

Zinc Electroplate Finished Strut Clamps to secure EMT conduits and pipes to struts.

CATALOG NO.	PINCH SIZE (IN.)	O.D. (IN.)	DESIGN LOAD (LBS.)	UOM	ORDER MULTIPLE
17542	1/2"	0.706"	400	EA	100
17543	3/4"	0.922"	400	EA	100
17544	1"	1.163"	600	EA	100
17545	1-1/4"	1.510"	600	EA	50
17546	1-1/2"	1.740"	800	EA	50
17547	2"	2.197"	800	EA	50

Channel Post Base for 1-5/8" Strut Channels



17452

A Post Base secures a strut assembly to the floor or other surfaces. These Post Bases are made of galvanized steel and are available as 2 and 4 hole, heavy-duty, mounting option.

CATALOG NO.	DESCRIPTION	SIZE	UOM	ORDER MUL.
17450	Post Base 2 Hole	4" x 6"	EA	5
17452	Post Base 4 Hole, Corner Orientation	6" x 6"	EA	5
17454	Post Base 4 Hole, Side Orientation	6" x 6"	EA	5

STRUT CLIPS & CLAMPS CONT'D

Channel Nuts

Spring Channel Nuts to attach a threaded rod to a strut. They are available with short springs for 13/16" & 1" channels and with regular springs for 1-3/8" & 1-5/8" channels. Zinc Electroplate finished.



17430

CATALOG NO.	DESCRIPTION	THREAD	THICKNESS	UOM	OM
17412	Channel Nut-Short Spring	1/4" - 20"	.25"	EA	100
17438	Channel Nut-Regular Spring	3/8" - 16"	.37"	EA	100
17442	Channel Nut-Regular Spring	1/2" - 13"	.50"	EA	100

Strut to Beam Clamps

These clamps connect a beam to a strut installation. They are designed for a load up to 1200 lbs. when used in pairs. Zinc Electroplate Finish.



17462

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
17462	Beam Clamp for 13/16" & 1-5/8" Channel	EA	25
17464	Beam Clamp for 2-7/16" & 3-1/4" Channel	EA	25

Spring Steel Beam Clamp

This fast-installing Beam Clamp fits beam flanges up to 1/2". It can be used with 1/4" and 3/8" threaded rod, "S" hooks, conduit hangers, electrical boxes, and #10-24 or 1/4"-20 bridle rings.



18016

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
18016	Spring Steel Beam Clamp, 1/2 in.	EA	100

Flange Mount Conduit Assembly - Bottom Mount

The Assembly suspends a conduit from the bottom of a beam with a Posi-Lock mechanism. It installs with a hammer only and can pivot 360°. The rated static load limit is 75 lbs.



18200

CATALOG NO.	DESCRIPTION	FLANGE THICKNESS	FITS CONDUIT	UOM	ORDER MUL.
18200	Flange Mount Conduit Assembly - Bottom Mount - Posi-Lock	1/8"-1/4"	3/8"	EA	100
18050	Flange Mount Conduit Assembly - Bottom Mount - Posi-Lock	1/8"-1/4"	1/2" - 3/4"	EA	100
18202	Flange Mount Conduit Assembly - Bottom Mount - Posi-Lock	1/8"-1/4"	1	EA	100

Connection Plates for 1-5/8" Strut Channels

Connection Plates are used to connect strut channels to each other. Splice plates allow to make extensions by connecting several channels while corner and angle plates make 90° connections. All plates are manufactured of steel with Zinc Electroplate finish, are 1/4" thick, and designed to be used with 1-5/8" strut channels.



17626




17636

17634

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
17618	Square Washer 1/2"	EA	100
17628	2 Hole Corner Angle	EA	50
17630	2 Hole Cross Corner Angle	EA	50
17632	3 Hole Corner Plate	EA	25
17633	3 Hole Cross Corner Angle	EA	50
17634	4 Hole 3 Way Corner Angle	EA	25
17638	2 Hole Open 45° Corner Angle	EA	25

Plastic White End Caps

Plastic White End Caps are used to cover the ends of a strut channel. Made of soft PVC material they provide a safe, smooth capping.



17682

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
17684	Plastic White End Caps for 1-5/8" Channel	EA	100

Spring Steel Beam Clamps

Spring Steel Clamps allow to suspend boxes, fixtures and bridle rings to 1/8" through 3/4" beam flanges.



18123



18018

CATALOG NO.	DESCRIPTION	FLANGE THICKNESS	STATIC LOAD	UOM	ORDER MULTIPLE
18123	Spring Steel Beam Clamps 1/4"-20 x 3/8" Stud	1/8" to 1/4"	75 Lbs	EA	100
18124	Spring Steel Beam Clamps 1/4"-20 x 3/8" Stud	5/16" to 1/2"	75 Lbs	EA	100
18018	Spring Steel Beam Clamps Universal	1/8" to 1/4"	200 Lbs	EA	100

Spring Steel Cable Clips

The Cable Clip for MC, AC, or BX support 14-2, 14-3 & 12-2 cables in horizontal or vertical position.
NOTE: The product is designed for positioning only, with no load rating.



18026

CATALOG NO.	DESCRIPTION	FOR USE WITH	UOM	ORDER MUL.
18026	Spring Steel Cable Clips	OD's from .433 to .535	EA	100

Flange Mount Conduit Assembly - Side Mount

The Assembly suspends a conduit from the side of a beam with a Posi-Lock mechanism. It installs with a hammer only and can pivot 360°. The rated static load limit is 25 lbs.



18231

CATALOG NO.	DESCRIPTION	FLANGE THICKNESS	FITS CONDUIT	UOM	ORDER MUL.
18231	Flange Mount Conduit Assembly - Side Mount - Posi-Lock	1/8"-1/4"	1/2" - 3/4"	EA	100
18232	Flange Mount Conduit Assembly - Side Mount - Posi-Lock	1/8"-1/4"	1"	EA	100
18240	Flange Mount Conduit Assembly - Side Mount - Posi-Lock	5/16"-1/2"	1/2" - 3/4"	EA	100

Beam Clamp to Conduit Hanger Assembly

The Spring Steel Beam Clamp with a Pre-Installed Posi-Lock conduit hanger is available for bottom and side mount of conduits. The rated static load is 100 lbs. for the vertical, and 25 lbs. for the horizontal installation.



18130

CATALOG NO.	DESCRIPTION	FOR USE WITH	UOM	ORDER MUL.
18130	Bottom Mount	1/2"-3/4"	EA	100
18140	Side Mount	1/2"-3/4"	EA	100

Bridle Rings

Zinc-Plated Bridle Rings are a good support for communication cables & other low voltage uses. They are available as Bolt-On, commonly used with Beam Clamps, and as Screw-In, commonly used with Wooden Beams. The Cable Support Bridle Rings with saddle are a cost-effective alternative to expensive cable tray. Their wide surface saddle provides support without stress for Category 5, fiber-optic, and other sensitive voice/Datacom cables.



18422



18058

CATALOG NO.	DESCRIPTION	RING DIAMETER	THREAD	UOM	ORDER MUL.
18421	Bridle Rings - Bolt-On	1/4" - 20"	1/4"-20	EA	100
18422	Bridle Rings - Bolt-On	2"	1/4"-20	EA	100
18425	Bridle Rings - Screw-On	1"	3/16"	EA	100
18426	Bridle Rings - Screw-On	1-1/2"	1/4"	EA	100
18427	Bridle Rings - Screw-On	2"	1/4"	EA	100
18058	Bridle Rings - Bolt-On with Saddle	2"	1/4"-20	EA	50
18060	Bridle Rings - Bolt-On with Saddle	4"	1/4"-20	EA	50

Z Purlin Hanger

Z Purlin Angled Flange Hangers are used to attach threaded rod or hooks and straps to an angled Z purlin. The Hangers are holding up to 100 lbs.



18180



18160

CATALOG NO.	DESCRIPTION	FOR USE WITH	UOM	ORDER MUL.
18180	Z Purlin Flange Hanger	Flange from 1/16" to 1/4"	EA	100
18160	Z Purlin Rod Hanger Assembly	1/4" Threaded Rod	EA	100
18161	Z Purlin Rod Hanger Assembly	3/8" Threaded Rod	EA	100

J-Hooks

2" J Hooks for Datacom applications are a cost-effective alternative to expensive cable tray. Their wide base provides support without stress for Cat5, fiber-optic and other sensitive voice/Datacom cables. The continuous wide base radius supports the natural curve of cables and ensures eliminating kinks & bending. A cable wire retainer is supplied with every part. Its unique design eliminates the need for an attachment plate when stacked. These J-Hooks can be attached to a wide variety of structures using beam clamps, clips and many other components.



18056

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
18056	J Hooks - 2", Screw Mount	EA	25

Box To T-Bar Fastener

A Snap-On 24" span box hanger with dual height adjustment that allows flush or 3/4" offset mounting of boxes. It is produced of pre-galvanized steel with spring steel hardware and has 1 BBC mounting clip with screw included.



18054

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
18054	24" Span Box to T-Bar Fastener	EA	100

Box Stabilizer Support

This Stabilizer for electrical boxes is made of pre-galvanized steel. The box support is designed to be screwed to 2-1/2", 3-1/2" & 4" wood or metal studs.



18370

CATALOG NO.	STUD SIZE	UOM	ORDER MUL.
18370	2-1/2", 3-1/2"	EA	100
18052	2-1/2", 3-1/2", 4"	EA	100

STRUT CLIPS & CLAMPS CONT'D

T-Bar Scissor Clips

This 2-piece T-Bar Scissor Clip mounts fixtures or boxes to a 1" T-bar. Includes a wing nut washer. Static Load Limit of 100 lbs.



18387

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
18387	24" Span Box to T-Bar Fastener	EA	50

2 Hole PVC Pipe Straps

Designed to accommodate Schedule 40 PVC Conduit. The Heavy-Duty Polythene material resists deterioration from UV rays and breakage from extreme cold.



19490

CATALOG NO.	TRADE SIZE	UOM	ORDER MUL.
19490	1/2"	EA	100
19492	3/4"	EA	100
19494	1"	EA	100
19496	1-1/4"	EA	50
19498	1-1/2"	EA	50
19500	2"	EA	50
19501	2-1/2"	EA	25
19502	3"	EA	25
19503	4"	EA	25

1 Hole EMT Pipe Straps - Steel

Zinc Plated Steel Pipe Straps with a reinforced hole and rib for extra strength to secure EMT conduits. Easy Snap-On installation.



19400

CATALOG NO.	TRADE SIZE	UOM	ORDER MUL.
19400	1/2"	EA	100
19401	3/4"	EA	100
19402	1"	EA	100

BX 1 Hole Strap

These one-hole pipe straps are ideal for hanging tubing, pipe, conduit and BX cable. They are made of pre-galvanized zinc plated steel with a reinforced rib for extra strength.



19463

CATALOG NO.	CABLE SIZE	UOM	ORDER MUL.
19463	BX: 14 - 2 Thru 10 - 3	EA	100

1 Hole Rigid Pipe Straps - Heavy Duty – Steel

The 1 Hole Rigid Pipe Strap is made of zinc plated steel with a reinforced hole and rib for heavy duty applications. It can be easily Snap-On installed and is used to secure Rigid & IMC conduit.



19426

CATALOG NO.	TRADE SIZE	UOM	ORDER MUL.
19426	1"	EA	25

2 Hole Rigid Pipe Straps - Steel

The 2 Hole Rigid Zinc Plated Steel Pipe Straps with reinforced holes and rib for extra strength are used to secure Rigid & IMC conduit. Easy Snap-On installation.



19438

CATALOG NO.	TRADE SIZE	UOM	ORDER MUL.
19443	3"	EA	1
19444	4"	EA	1
19446	6"	EA	1

NOTE: Item numbers in **RED** indicate **Made in the U.S.A.**

CONDENSATE MANAGEMENT












CONDENSATE PUMPS

Tank Pumps 23-24
Ductless Mini-Split Pumps 24

CONDENSATE SWITCHES

Flood Switches 25
Inline Switches 25
Primary Drain Pan Switches 26
Secondary Drain Pan Switches 26

CONDENSATE DRAIN PANS

Plastic Drain Pans 27
Metal Drain Pans 27
High Rise Drain Pans 28
Furnace Pans 28
Water Heater Pans 29
Specialty Drain Pans 29

CONDENSATE TREATMENTS

Pan Treatments 30
Neutralization 30-31

INSTALLATION ACCESSORIES

Braided Vinyl Tubing 31
Clear Vinyl Tubing 32
Polyethylene Tubing 32
PVC Pipe 33
PVC Fittings 33-36
Pipe Cements, Primers, and Cleaners 36-38
Nylon Fittings 38-39
Drain Traps and Kits 39-40
Ductless Drain Line Tubing and Fittings 40

Asurity®

Providing best-in-class HVAC/R service and support is what you do, and relying on dependable product solutions is critical to getting the job done right — and to your customer's satisfaction.

Meet Asurity® — a DiversiTech® brand of condensate management products that provide a complete system of pumps, switches, drain pans, and treatments supported by highly trained technical support when you need it. At Asurity, we do more than create complete system solutions, we create peace of mind.











TANK PUMPS

ULTRACP-22

- Translucent Tank for Easy & Fast Inspection
- Removable Check Valve for Easy Cleaning
- LED Indicators Confirm Pump Status
- Built-in Safety Overflow Switch
- Handles Condensate up to 160° F
- 60 Hz, 22' Lift



ULTRACP-22

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
ULTRACP-22	Condensate Pump Ultra, 120 VAC	EA	6
ULTRACP-22-230	Condensate Pump Ultra, 230 VAC	EA	6

ULTRAIQP

- TMR Sensor Technology
- Translucent Tank for Easy & Fast Inspection
- Removable Check Valve for Easy Cleaning
- LED Indicators Confirm Pump Status
- Built-in Safety Overflow Switch
- Handles Condensate up to 160° F
- 60 Hz, 22' Lift
- ULTRAIQP-T includes 20' Clear Vinyl 3/8" Tubing



ULTRAIQP

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
ULTRAIQP	ULTRAIQP Pump, 120 VAC	EA	6
ULTRAIQP-T	ULTRAIQP Pump w/Tubing, 120 VAC	EA	6

IQP-120T

- Includes 20' Clear Vinyl 3/8" Tubing
- Translucent Tank for Easy & Fast Inspection
- Variable Speed for Quieter Operation
- Senses Clog & Engages Pulse Mode for Cleaning
- Built-In Safety Overflow Switch with Alarm & Run Contacts
- LED Indicators & Audible Alarm Confirm Pump Status
- Floatless Sensor Technology
- 60 Hz, 22' Lift



IQP-120T

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
IQP-120T	Condensate Pump Specialty, 120 VAC	EA	6

CP-22LP-P

- Reduced Height for Restricted Spaces
- LED Indicators Confirm Pump Status
- Built-in Safety Overflow Switch
- Handles Condensate up to 160° F
- Sturdy Metal Hang Tabs
- 60 Hz, 22' Lift



CP-22LP-P

Plenum Rated

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CP-22LP-P	Condensate Pump Specialty, 120 VAC	EA	6
CP-22LP-230-P	Condensate Pump Specialty, 230 VAC	EA	6

PROCP-22S

- Handles Condensate up to 160° F
- Built-in Safety Overflow Switch
- Sturdy Metal Hang Tabs
- 60 Hz, 22' Lift



PROCP-22S

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PROCP-22S	Condensate Pump Pro, 120 VAC	EA	6
PROCP-22S-230	Condensate Pump Pro, 230 VAC	EA	6

ULTRACP-22T

- Includes 20' Clear Vinyl 3/8" Tubing
- Translucent Tank for Easy & Fast Inspection
- Removable Check Valve for Easy Cleaning
- LED Indicators Confirm Pump Status
- Built-in Safety Overflow Switch
- Handles Condensate up to 160° F
- 60 Hz, 22' Lift



ULTRACP-22T

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
ULTRACP-22T	Condensate Pump Ultra, 120 VAC	EA	6
ULTRACP-22T-230	Condensate Pump Ultra, 230 VAC	EA	6

IQP-120

- Translucent Tank for Easy & Fast Inspection
- Variable Speed for Quieter Operation
- Senses Clog & Engages Pulse Mode for Cleaning
- Built-In Safety Overflow Switch with Alarm & Run Contacts
- LED Indicators & Audible Alarm Confirm Pump Status
- Floatless Sensor Technology
- 60 Hz, 22' Lift



IQP-120

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
IQP-120	Condensate Pump Specialty, 120VAC	EA	6

CP-22LP

- Reduced Height for Restricted Spaces
- LED Indicators Confirm Pump Status
- Built-in Safety Overflow Switch
- Handles Condensate up to 160° F
- Sturdy Metal Hang Tabs
- 60 Hz, 22' Lift



CP-22LP

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CP-22LP	Condensate Pump Specialty, 120 VAC	EA	6
CP-22LP-230	Condensate Pump Specialty, 230 VAC	EA	6

PROCP-16

- Handles Condensate up to 160° F
- Sturdy Metal Hang Tabs
- 60 Hz, 16' Lift



PROCP-16

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PROCP-16	Condensate Pump Pro, 120 VAC	EA	6
PROCP-16	Condensate Pump Pro, 230 VAC	EA	6

NOTE: Item numbers in **RED** indicate **Made in the U.S.A.**

TANK PUMPS CONT'D

PROCP-22ST

- Includes 20' Clear Vinyl 3/8" Tubing
- Handles Condensate up to 160° F
- Built-in Safety Overflow Switch
- Sturdy Metal Hang Tabs
- 60 Hz, 22' Lift



PROCP-22ST

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PROCP-22ST	Condensate Pump Pro, 120 VAC	EA	6
PROCP-22ST-230	Condensate Pump Pro, 230 VAC	EA	6

CP-CV

Check valve installs easily and prevents water from travelling backwards into the pump and overflowing.



CP-CV

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CP-CV	Replacement Check Valve for CP-22 and PROCP Models	EA	1

PROCP-46

- Handles Acidic and Non-Acidic Condensate up to 212°F
- Large 1-Gallon Tank Instantly Reduces Temperature of Boiler & Steam Humidifier Discharge
- Flow Rate up to 190 Gallons Per Hour
- Quarter-Turn Removable Check Valve
- Built-In Safety Overflow Switch
- 60 Hz, 49' Lift



PROCP-46

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PROCP-46	Condensate Pump Pro, 120 VAC	EA	6
PROCP-46-230	Condensate Pump Pro, 230 VAC	EA	6

DUCTLESS MINI-SPLIT PUMPS

CP-M

- Quiet Operation (20.2 Decibels)
- Suction Lift 6.5'
- For Equipment up to 36K BTU/h
- Built-in Safety Overflow Switch with Alarm & Run Contacts
- For Wall Mounts & Ceiling Cassettes
- Includes Installation Accessories
- 60 Hz, 24' Lift



CP-M115

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CP-M115	Condensate Pump Ductless, 115 VAC	EA	10
CP-M230	Condensate Pump Ductless, 230 VAC	EA	10

QUIETMINI-I

- Ultra Quiet Piston Pump, (19 dBA)
- Compact Design for Mini-Splits
- Built-In Safety Overflow Switch
- Easy Installation & Maintenance
- Anti-Vibration Mounts
- Built-In Check Valve Preventing Backflow
- Max Output 24,000 BTU/h, 7 kW
- Max Unit Output 54,000 BTU/h, 16kW
- 60 Hz, 26' Lift



QUIETMINI-I

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QUIETMINI-I	Condensate Pump Ductless, 115-230 VAC	EA	10

CVMINI

- Variable Speed for Silent Operation (19.0 Decibels)
- Suction Lift 6.5'
- For Equipment up to 120K BTU/h
- Built-in Safety Overflow Switch with Alarm & Run Contacts
- LED Indicators Confirm Pump Status
- Includes Installation Accessories
- Floatless Sensor Technology
- 60 Hz, 35' Lift




CVMINI

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CVMINI	Condensate Pump Ductless, 120-240 VAC	EA	6

QUIETMINI-M

- Undermount Pump for Ductless System
- Ultra Quiet (21dBA)
- Removable Reservior for Easy Maintenance
- Built-in Safety Overflow Switch
- Max Unit Output 54,000 BTU/h, 16kW
- 60 Hz, 26' Lift



QUIETMINI-M

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QUIETMINI-M	Condensate Pump Ductless, 115-230 VAC	EA	10

FLOOD SWITCHES

Wet Switch® Flood Detector

- Turns Off with as Few as 1-2 Drops of Water Detection
- LED Indicators
- Connect Multiple Switches to Expand Protection Area



WS-1

Plenum Rated

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
WS-1	Wet Switch Flood Detector	EA	1

Wet Switch® Dual Voltage Flood Detector

- Turns Off with as Few as 1-2 Drops of Water Detection
- LED Indicators
- Connect Multiple Switches to Expand Protection Area
- Flexible Placement Options
- 12 Volt: Integrates into Building Automation Systems and Transmits Alarm Signal with as Few as 1-2 Drops of Water Detection
- 24 Volt: Works with All HVAC Systems



WS-2DV

Plenum Rated

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
WS-2DV	Dual Voltage Flood Detector	EA	1

INLINE SWITCHES

CS-1 Condensate Safety Overflow Switch

- LED Illuminates When Condensate Line is Blocked
- Built-In Protection Against Power Surges Provides Increased Reliability
- Three Installation Configurations for Increased Flexibility
- For Standard & Plenum Rated Installations in Primary or Auxiliary Lines



CS-1

Plenum Rated

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CS-1	Condensate Safety Overflow Switch	EA	10
CS-1-BULK50	Condensate Safety Overflow Switch	EA	50

CS-2 Condensate Safety Overflow Switch

- LED Illuminates When Condensate Line is Blocked
- Built-In Protection Against Power Surges Provides Increased Reliability
- For Standard & Plenum Rated Installations in Auxiliary Lines



CS-2

Plenum Rated

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CS-2	Condensate Safety Overflow Switch	EA	10
CS-2-BULK50	Condensate Safety Overflow Switch	EA	50

SOS-1 Condensate Safety Overflow Switch

- Fits Over 3/4" Standard Plastic Pipe without Cutting Drain Line
- Float Free Design, Ideal for Drier Environments
- Switch Orientation Adjusts Sensitivity
- Includes Easy to Attach Primary Drain Pan Fitting
- For Standard Rated Installations in Primary or Auxiliary Lines



SOS-1

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SOS-1	Condensate Safety Overflow Switch	EA	12

PRIMARY DRAIN PAN SWITCHES

CS-3 Condensate Safety Overflow Switch

- Adjustable Activation Height
- Position Anywhere Along the Drain Pan
- For Standard Rated Installations in Primary or Secondary Drain Pans



CS-3

Plenum Rated

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CS-3	Condensate Safety Overflow Switch	EA	10
CS-3-BULK50	Condensate Safety Overflow Switch Bulk Pack of 50	EA	50

BG 301+ Condensate Safety Overflow Switch

- Prevents Short Cycling that Can Lead to Equipment Damage
- Less Intermittent or False Tripping
- Float Latches When Tripped
- Checks and Measures Water Levels
- 2 Adapters Included



BG-301+

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
BG-301+	Condensate Safety Overflow Switch	EA	30
BG-301+T	Condensate Safety Overflow Switch with Trane Adapter	EA	30
BG-302P+T	Condensate Safety Overflow Switch with Trane Adapter Plenum Rated	EA	30

SECONDARY DRAIN PAN SWITCHES

BG-101 Condensate Safety Overflow Switch

- Trips in 50% less water than most standard switches
- Prevents Short Cycling that Can Lead to Equipment Damage
- Less Intermittent or False Tripping
- Float Latches When Tripped
- Variable Height Feature
- For Metal & Plastic Drain Pans



BG-101

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
BG-101	Condensate Safety Overflow Switch	EA	20

BG-110 Float Switch for Metal Drain Pans

- Trips in 50% less water than most standard switches
- Prevents Short Cycling that Can Lead to Equipment Damage
- Less Intermittent or False Tripping
- Float Latches When Tripped
- Variable Height Feature
- For Metal Drain Pans



BG-110

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
BG-110	Float Switch for Metal Drain Pans	EA	20

CS1200 Condensate Safety Overflow Switch

- Position Anywhere Along Drain Pan
- Clamps Easily Over the Edge of All Secondary Drain Pans
- Rotate Housing to Adjust to Pan Angle
- Translucent Design for Easy & Fast Inspection
- LED Indicator Illuminates when Switch is Activated
- For Standard Rated Installations in Secondary Drain Pans



CS1200

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CS1200	Condensate Safety Overflow Switch	EA	12

CC-1 Condensate Safety Overflow Switch

- Position Anywhere Along Drain Pan
- Adjustable Activation Height - Minimum 1.5"
- Sensor Assembly Swivels to Accommodate Drain Pans with Sloped Sides
- Clamps Easily Over the Edge of All Drain Pan Types, Including Formed Plastic and Galvanized Sheet Metal



CC-1

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CC-1	Condensate Safety Overflow Switch	EA	12

PLASTIC DRAIN PANS

Plastic Drain Pan

- Rolled Edges, Ribbed Bottom, Reinforced Corners
- PVC Fittings Included
- No Seams, No Rust, No Leakage

Complies with Southern Building Code



6-1838L

Asurity

CATALOG NO.	BOTTOM DIMENSION IN.	BOTTOM DIMENSION CM.	OVERALL DIMENSION IN.	OVERALL DIMENSION CM.	DEPTH IN.	DEPTH CM.	UOM	ORDER MULTIPLE
6-1838L	18" x 38"	46 x 97	20" x 40"	51 x 102	2"	5	EA	5
6-1838S	18" x 38"	46 x 97	20" x 40"	51 x 102	2"	5	EA	5
6-2424L	24" x 24"	61 x 61	26" x 26"	66 x 66	2"	5	EA	5
6-2626L	26" x 26"	66 x 66	28" x 28"	71 x 71	2"	5	EA	5
6-2739L	27" x 39"	69 x 99	29" x 41"	74 x 104	2"	5	EA	5
6-2748L	27" x 48"	69 x 122	29" x 50"	74 x 127	2"	5	EA	5
6-2763L	27" x 63"	69 x 160	29" x 65"	74 x 165	2"	5	EA	5
6-3030L	30" x 30"	76 x 76	32" x 32"	81 x 81	2"	5	EA	5
6-3050L	30" x 50"	76 x 127	32" x 52"	81 x 132	2"	5	EA	5
6-3060L	30" x 60"	76 x 152	32" x 62"	81 x 157	2"	5	EA	5
6-3060S	30" x 60"	76 x 152	32" x 62"	81 x 157	2"	5	EA	5
6-3263L	32" x 63"	81 x 160	34" x 65"	86 x 165	2"	5	EA	5
6-3263L-F	32" x 63"	81 x 160	34" x 65"	86 x 165	2"	5	EA	5
6-3636L	36" x 36"	91 x 91	38" x 38"	97 x 97	2"	5	EA	5
6-3660L	36" x 60"	91 x 152	38" x 62"	97 x 157	2"	5	EA	5
6-3660S	36" x 60"	91 x 152	38" x 62"	97 x 157	2"	5	EA	5

L = Drain Line Outlets in Long Side S = Drain Line Outlets in Short Side

METAL DRAIN PANS

Seamless Metal Drain Pan

- Single-Piece Design
- Rolled Edge
- Two Outlets
- Fittings Included



6-M2748

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-M2748	26 Gauge Metal Drain Pan – 27" x 48"	EA	5
6-M2763	26 Gauge Metal Drain Pan – 27" x 63"	EA	5
6-M3030	26 Gauge Metal Drain Pan – 30" x 30"	EA	5
6-M3050	26 Gauge Metal Drain Pan – 30" x 50"	EA	5
6-M3060	26 Gauge Metal Drain Pan – 30" x 60"	EA	5
6-M3263	26 Gauge Metal Drain Pan – 32" x 63"	EA	5

Corrugated Edge Metal Drain Pan

- Single-Piece Design
- Rolled Edge
- Two Outlets
- Fittings Included



6-M2460L

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-M2460L	26 Gauge Metal Drain Pan – 24" x 60"	EA	5
6-M2656L	26 Gauge Metal Drain Pan – 26" x 56"	EA	5
6-M3066L	26 Gauge Metal Drain Pan – 30" x 66"	EA	5
6-M3070L	26 Gauge Metal Drain Pan – 30" x 70"	EA	5
6-M3172L	26 Gauge Metal Drain Pan – 31" x 72"	EA	5
6-M3265L	26 Gauge Metal Drain Pan – 32" x 65"	EA	5
6-M3636L	26 Gauge Metal Drain Pan – 36" x 36"	EA	5
6-M3274L	26 Gauge Metal Drain Pan – 32" x 74"	EA	5
6-M3160L	26 Gauge Metal Drain Pan – 31" x 60"	EA	5

HIGH RISE DRAIN PANS

High Rise Pan™

- Position AV Pads Where You Want Them
- Full 5" Rise from Bottom of Pan
- Heavy Reinforcement Throughout
- Water Flows Towards Sides
- Installation Kit Provided
  (Condensate Safety Overflow Switch, Anti-Vibration Pads, Fitting)



6-HK2748

Asurity

Meets Requirements for Florida Building Code (307.23 Auxiliary and Secondary Drain Systems)

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-HK2748	High Rise Pan™ 27" x 48" with Installation Kit including: One CC-1, Six MP-2E 2" x 2" EVA™ Pads, One 6-1 3/4" PVC male adapter	EA	5
6-HK2748-1	Single Pack Kit – High Rise Pan™ 27" x 48" with Installation Kit including: One CC-1, Six MP-2E 2" x 2" EVA™ Pads, One 6-1 3/4" PVC male adapter	EA	1
6-HK2766	High Rise Pan™ 27" x 66" with Installation Kit including: One CC-1, Six MP-2E 2" x 2" EVA™ Pads, One 6-1 3/4" PVC male adapter	EA	5
6-HK2766-1	Single Pack Kit – High Rise Pan™ 27" x 66" with Installation Kit including: One CC-1, Six MP-2E 2" x 2" EVA™ Pads, One 6-1 3/4" PVC male adapter	EA	1
6-HK3050	High Rise Pan™ 30" x 50" with Installation Kit including: One CC-1, Six MP-2E 2" x 2" EVA™ Pads, One 6-1 3/4" PVC male adapter	EA	5
6-HK3050-1	Single Pack Kit – High Rise Pan™ 30" x 50" with Installation Kit including: One CC-1, Six MP-2E 2" x 2" EVA™ Pads, One 6-1 3/4" PVC male adapter	EA	1
6-HK3060	High Rise Pan™ 30" x 60" with Installation Kit including: One CC-1, Six MP-2E 2" x 2" EVA™ Pads, One 6-1 3/4" PVC male adapter	EA	5
6-HK3060-1	Single Pack Kit – High Rise Pan™ 30" x 60" with Installation Kit including: One CC-1, Six MP-2E 2" x 2" EVA™ Pads, One 6-1 3/4" PVC male adapter	EA	1

Heavy Duty High Rise Pan™

- Full 4.25" Rise from Bottom of Pan
- Heavy Reinforcement Throughout
- Suitable for Hanging Applications
- Water Flows Towards Sides
- Installation Kit Provided
  (Condensate Safety Overflow Switch, Anti-Vibration Pads, Fitting)



6-HK3060HD

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-HK3050HD	Heavy Duty High Rise Pan 30" x 50"	EA	5
6-HK3060HD	Heavy Duty High Rise Pan 30" x 60"	EA	5
6-HK3070HD	Heavy Duty High Rise Pan 30" x 70"	EA	5

Drain Pan Installation Kits

- Asurity® Installation Kits have everything needed to install our High Rise and Heavy Duty High Rise Drain Pans



6-HKIT



HRHD-KIT

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-HKIT	High Rise Drain Pan Installation Kit	EA	1
HRHD-KIT	High Rise Heavy Duty Pan Installation Kit	EA	1

FURNACE PANS

Furnace Pans

- Heavy Duty Construction
- Installation Kit Provided
  (Condensate Safety Overflow Switch, Heat Pump Risers, Fitting)



6-HK3378FUR

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-HK3364FUR	Furnace Pan – 33" x 64" w/installation kit	EA	5
6-HK3378FUR	Furnace Pan – 33" x 78" w/installation kit	EA	5

WATER HEATER PANS

Water Heater Pans

Aluminum water heater pans can be installed under gas or electric water heaters to protect from water damage. Includes a 1" PVC drain fittings to allow for connection to indirect drain. Each pan is manufactured from .032 in. prime aluminum with a pre-cut side opening to accommodate a drain fitting. Pan depth is a minimum 2.5 in.



6-M22

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-M22	Galvanized Steel Water Heater Pan - 22 in.	EA	6
6-M24	Galvanized Steel Water Heater Pan - 24 in.	EA	6
6-M26	Galvanized Steel Water Heater Pan - 26 in.	EA	6
6-M30	Galvanized Steel Water Heater Pan - 30 in.	EA	6

SPECIALTY DRAIN PANS

Mini-Split System Drain Pans

- UV-stabilized and Reinforced Polypropylene
- Powder-coated Steel
- Comes with Mounting Hardware and Drain Pan Outlet



230-DPPL



Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-DPPL	Poly Condensate Drain Pan (Large)	EA	1
230-DPPM	Poly Condensate Drain Pan (Medium)	EA	1

Condensate Pump Pan

- Provides Redundant Protection from Water Overflows
- Fits Condensate Pump with CS-3 Switch
- No Seams, No Rust, No Leakage
- Pump and CS-3 not included



CP-PAN

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CP-PAN	Condensate Pump Pan	EA	24

Humidifier Drain Pan

- Safely Capture Overflow & Debris
- CS-3 Condensate Safety Overflow Switch Included for Extra Protection
- Easy Installation with Included Hardware



HM-PAN

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
HM-PAN	Humidifier Drain Pan	EA	6

A/C Condensate Drain Pan Fittings

The Drain Pan Fittings are designed to be used with our Condensate Drain Pans.



6-5



6-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-1	3/4" Slip	EA	50
6-2	1" Slip	EA	50
6-3	3/4" Slip with Plastic Nut	EA	50
6-5	3/4" Female Pipe Thread	EA	50
MDPK	Metal Drain Pan Kit	PK	1

PAN TREATMENTS

Pro-Treat® Condensate Pan Treatment

- Controls Odor and Pan Overflows
- Combats Sludge, Slime, Fouling
- Helps Maintain Clean Drain Pan
- Approved for Computer Room Use



PRO-TREAT-151

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PROTREAT-151*	100 Tablets/Jar, 1 Tablet - 3 Tons/Mo.	EA	12
PROTREAT-152	12 King Size Tablets/Jar, 1 Tablet - 3 Tons/Mo.	EA	12
PROTREAT-161	100 Tablets/Jar, 2 Tablets - 3 Tons/Mo.	EA	12
PROTREAT-200	200 Tablets/Jar, 2 Tablets - 3 Tons/Mo.	EA	12
PROTREAT-217	200 Thin Tablets/Jar, 3 Tablets - 3 Tons/Mo.	EA	12

*EPA Registered

Pro-Treat® Pan Strips

- Kills Odor-Causing Bacteria
- Controls Odor and Pan Overflows
- Combats Sludge, Slime, Fouling, and Algae Growth



PS-01

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PS-01	For Equipment from 1 to 2 Tons, 10 App.	EA	12
PS-03	For Equipment from 3 to 5 Tons, 6 App.	EA	12
PS-07	For Equipment from 7 to 12 Tons, 2 App.	EA	24
PS-20	For Equipment from 10 to 25 Tons, 1 App.	EA	24
PS-40	For Equipment from 40 to 50 Tons, 1 App.	EA	12

EPA Registered
Each Pan Strip is a 6-Month Treatment.

Flow-Plus® Condensate Pan Treatment

- Maintains Condensate Flow and Prevents Drain Pan Overflow
- Activated When Condensate Flows Over Surface
- Deodorizes
- Stays in Place
- No Residue



FLOW-PLUS-25

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
FLOW-PLUS-200	200 Mini Tabs/Jar, For 1/3 to 3 Ton Units	EA	4
FLOW-PLUS-25	25 Mini Tabs/Jar, For 1/2 to 3 Ton Units	EA	12
FLOW-PLUS-6	Light Tonnage, For 3 to 5 Ton Units	EA	12
FLOW-PLUS-10	Medium Tonnage, For 5 to 20 Ton Units	EA	18
FLOW-PLUS-125	High Tonnage, For 20 to 50 Ton Units	EA	8
FLOW-PLUS-CP	6 Pump Treatment Tablets	EA	6
SCM-185-8	Flow-Plus® Polymer Pan Treatment, (1) - 8 lb. Tub	EA	1

NEUTRALIZATION

Horizontal Condensate Neutralizer

- Suitable for 400,000 BTU/h at 93% Efficiency
- Prevents Acidic Condensate from Corroding Drains and Sewer Systems
- Helps Maintain a Neutral Environment for Bacteria in Septic Systems
- Suitable for Use on All Types of Natural Gas and Propane Appliances
- Includes Initial Charge of Neutralization Media



CNHK-4K

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CNH-4K	Corrosion Resistant Capsule Two Base/Wall Mounting Clips Two 3" Fill/Access Openings 3/4" NPT Threaded Inlet and Outlet Two 3/4" MNPT To 3/4" FNPT Unions Two 3/4" MNPT To 3/4" FPVC Socket Adapter Neutralization Media	EA	1
CNHK-4K	Corrosion Resistant Capsule Two Base/Wall Mounting Clips Two 3" Fill/Access Openings 3/4" NPT Threaded Inlet and Outlet Two 3/4" MNPT To 3/4" FNPT Unions Three 3/4" NPT To 1/2" Hose Barb Fittings 6 Hose Clamps 10' of Tubing 1/2" Barbed Y Fitting Neutralization Media	EA	1

Vertical Condensate Neutralizer

- Suitable for 400,000 BTU/h at 93% Efficiency
- Prevents Acidic Condensate from Corroding Drains and Sewer Systems
- Helps Maintain a Neutral Environment for Bacteria in Septic Systems
- Suitable for Use on All Types of Natural Gas and Propane Appliances
- Float System Indicates if Unit has Become Plugged
- Integral Bypass Feature Prevents Condensate Backflow into Appliance
- 3/4" FNTP Inlet and Outlet Connections
- Includes Initial Charge of Neutralization Media



CNV-4K

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CNV-4K	Vertical Condensate Neutralizer	EA	1

NEUTRALIZATION CONT'D

Neutralization Media

Prevents Acidic Condensate from Corroding Drains and Sewer Systems



CNT-3M

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CNM-4K	Replacement for CNV-4K, CNH-4K, CNHK-4K	EA	1
CNM-BULK	Replacement for CNV-4K, CNH-4K, CNHK-4K	EA	1
CNM-3M	Replacement for CNT-3M	EA	1

Neutralization Tank

- Suitable for 3 Million BTU/h at 93% Efficiency
- Prevents Acidic Condensate from Corroding Drains and Sewer Systems
- Helps Maintain a Neutral Environment for Bacteria in Septic Systems
- Suitable for Use on All Types of Natural Gas and Propane Appliances



CNT-3M

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CNT-3M	Neutralization Tank	EA	1

BRAIDED VINYL TUBING

Braided Clear Vinyl Tubing

Braided clear vinyl offers better strength and sealing than regular clear vinyl tubing and is very kink-resistant.



7-14B

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
7-14B	1/4" ID Braided Clear Vinyl Tubing – 100' section	EA	1
7-38B	3/8" ID Braided Clear Vinyl Tubing – 100' section	EA	1
7-12B	1/2" ID Braided Clear Vinyl Tubing – 100' section	EA	1
7-58B	5/8" ID Braided Clear Vinyl Tubing – 100' section	EA	1
7-34B	3/4" ID Braided Clear Vinyl Tubing – 100' section	EA	1

CLEAR VINYL TUBING

Gorilla Tube® Clear Vinyl Tubing



7-14P

Applications include: air conditioning and refrigeration condensate drains, condensate pump discharge lines, and humidifier overflows.
Several sizes from 1/4" to 1" diameter.
Non-toxic clear vinyl chloride.
Select Gorilla Tube® over standard clear vinyl tube because:

- Extra rigid design resists crimping and kinking due to durometer value of 80 (Shore A) and thicker wall
- Maximum service temperature 140°F (60°C)
- Better performance in cold weather climates.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
7-14P	1/4", .250" I.D., .360" O.D., .055 wall thickness	EA	1
7-38P	3/8", .375" I.D., .495" O.D., .060 wall thickness	EA	1
7-12P	1/2", .500" I.D., .631" O.D., .066 wall thickness	EA	1
7-58P	5/8", .625" I.D., .771" O.D., .073 wall thickness	EA	1
7-34P	3/4", .750" I.D., .913" O.D., .082 wall thickness	EA	1
7-78P	7/8", .875" I.D., 1.050" O.D., .088 wall thickness	EA	1
7-10P	1", 1.000" I.D., 1.215" O.D., .108 wall thickness	EA	1

Clear Vinyl Tubing

Clear vinyl hose applications include: air conditioning and refrigeration condensate drains, condensate pump discharge lines and humidifier overflows.


7-14

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
7-316	3/16" ID Clear Vinyl Tubing – 100' section	EA	1
7-CVMINITUBE	3/16" ID CVMINI Tubing – 100' section	EA	1
7-14	1/4" ID Clear Vinyl Tubing – 100' section	EA	1
7-38	3/8" ID Clear Vinyl Tubing – 100' section	EA	1
7-12	1/2" ID Clear Vinyl Tubing – 100' section	EA	1
7-58	5/8" ID Clear Vinyl Tubing – 100' section	EA	1
7-34	3/4" ID Clear Vinyl Tubing – 100' section	EA	1
7-78	7/8" ID Clear Vinyl Tubing – 50' section	EA	1
7-10	1" ID Clear Vinyl Tubing – 50' section	EA	1

POLYETHYLENE TUBING

Polyethylene Tubing

F.D.A. approved, flexible, non-toxic tubing. Tasteless and odorless, lightweight, low density. Ideal for drinking water lines, evaporative coolers, and radiant heating.


PE-104

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PE-104	Polyethylene Tubing - 11/64ID, 1/4OD, 100FT	EA	1
PE-012	Polyethylene Tubing - 3/8ID, 1/2OD, 100FT	EA	1
PE-014	Polyethylene Tubing - 1/8ID, 1/4OD, 100FT	EA	1
PE-038	Polyethylene Tubing - 1/4ID, 3/8OD, 100FT	EA	1
PE-058	Polyethylene Tubing - 1/2ID, 5/8OD, 100FT	EA	1

PVC PIPE

ClearVue™ Tube

Clear, 3/4" schedule 40 PVC ideal for installing as condensate drain lines in other areas where seeing the inside of the tubing is helpful. ClearVue™ Tube makes it easy to quickly spot build up or obstructions in drain lines for faster troubleshooting. Available in 5' lengths.


CV-TUBE

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CV-TUBE	ClearVue™ Tube – 5' section	EA	50

PVC PIPE

CPVC-CTS Pipe by FlowGuard® Gold™

CTS = Copper Tube Size

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
4700-12	1/2" x 10' CPVC Pipe, 500'	EA	1
4700-34	3/4" x 10' CPVC Pipe, 250'	EA	1



4700-12

Polyvinyl Chloride, White PVC 1120

CATALOG NO.	DESCRIPTION	UOM	PIPES/PALLET	ORDER MUL./PALLET
5-401-P	PVC, 3/4" Pipe, Sch. 40, 10'	EA	240	2400'
5-404-P	PVC, 2" Pipe, Sch. 40, 10'	EA	210	2100'
5-405-P	PVC, 3" Pipe, Sch. 40, 10'	EA	92	920'
5-407-P	PVC, 3/4" Pipe, Sch. 40, 20'	EA	240	4800'
5-416-P	PVC 1" Pipe Sch. 40, 20'	EA	150	3000'
5-417-P	PVC, 1-1/4" Pipe, Sch. 40, 20'	EA	196	3920'
5-418-P	PVC, 1-1/2" Pipe, Sch. 40, 20'	EA	915	6300'
5-2002-P	PVC, 3/4" Pipe, 200 PSI, 10'	EA	120	2400'
5-2005-P	PVC, 3/4" Pipe, 200 PSI, 20'	EA	30	4800'



5-2002-P

PVC FITTINGS

CPVC-CTS Fittings by FlowGuard® Gold™

CTS = Copper Tube Size

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
4701-12	1/2" Coupling S x S	EA	20
4704-12	1/2" Adapter M x S	EA	20
4707-12	1/2" 90° Elbow S x S	EA	20
4711-12	1/2" Tee S x S x S	EA	20
47072-12	1/2" 90° Street Ell S x S	EA	10
4718-12	3/4" x 1/2" CPVC Bushing	EA	10
4701-34	3/4" Coupling S x S	EA	20
4703-34	3/4" Adapter F x S	EA	25
4704-34	3/4" Adapter M x S	EA	10
4706-34	3/4" 45° Elbow S x S	EA	20
4707-34	3/4" 90° Elbow S x S	EA	20
4711-34	3/4" Tee S x S x S	EA	20
47072-34	3/4" 90° Street Ell S x S	EA	10



4703-34

Couplings (Hub x Hub)



5-100020

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-100020	2" Couplings (Hub x Hub)	EA	100
5-100030	3" Couplings (Hub x Hub)	EA	60
510-D102338	3" x 2" Couplings (Hub x Hub)	EA	20

90 Elbow (Hub x Hub)



510-D304020

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-300020	2" 90 Elbow (Hub x Hub)	EA	50
5-300030	3" 90 Elbow (Hub x Hub)	EA	25
510-D304020	2" Long Sweep 90 Elbow (Hub x Hub)	EA	25
510-D304030	3" Long Sweep 90 Elbow (Hub x Hub)	EA	10

45 Elbows



5-321020

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-321020	2" 45 Elbow (Hub x Hub)	EA	50
5-321030	3" 45 Elbow (Hub x Hub)	EA	20
510-D323020	2" 45 Street Elbow (Hub x SPIG)	EA	50
510-D323030	3" 45 Street Elbow (Hub x SPIG)	EA	20

DWV Bend Fittings



510-D309030

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
510-D309020	2" Long Sweep (Hub x SPIG)	EA	25
510-D309030	3" Long Sweep (Hub x SPIG)	EA	20

PVC FITTINGS CONT'D

DWV Vent Tee



510-D441020

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
510-D441020	2" Vent Tee	EA	25

Tee (Slip x Slip x Slip)



5-401005

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-401005	1/2" Tee	EA	50
5-401007	3/4" Tee	EA	50
5-401010	1" Tee	EA	50
5-401020	2" Tee	EA	25
5-401030	3" Tee	EA	10

90 Ell (Slip x Slip)



5-406005

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-406005	1/2" 90 Ell	EA	50
5-406007	3/4" 90 Ell	EA	50
5-406010	1" 90 Ell	EA	50
5-406020	2" 90 Ell	EA	25
5-406030	3" 90 Ell	EA	10

90 Ell (Slip x FIPT)



5-407005

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-407005	1/2" 90 Ell	EA	50
5-407007	3/4" 90 Ell	EA	50

90 Street Ell (SPIG x Slip)



5-409005

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-409005	1/2" 90 Street Ell	EA	50
5-409007	3/4" 90 Street Ell	EA	50
5-409010	1" 90 Street Ell	EA	50

DWV Bushings



510-437338

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
510-437338	3" x 2" Reducing Bushing (SPIG x SLIP)	EA	10
510-438338	3" x 2" Bushing (SPIG x FIPT)	EA	10

Tee (Slip x FIPT x Slip)



5-402007

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-402007	3/4" Tee (S x S x FIPT)	EA	50

Traps



5-409



5-408

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-408	3/4" "P" Trap	EA	100
5-409	3/4" Running Trap	EA	100
5-410	3/4" Mini "P" Trap	EA	100
5-411	1" "P" Trap	EA	50
5-412	1/2" "P" Trap	EA	100
5-414	3/4" "J" Trap	EA	100

90 Ell Reducing (Slip x FIPT)



5-407131

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-407131	1" x 3/4" 90 Ell Reducing	EA	50

45 Ell (Slip x Slip)



5-417005

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-417005	1/2" 45 Ell	EA	50
5-417007	3/4" 45 Ell	EA	50
5-417010	1" 45 Ell	EA	50
5-417012	1-1/4" 45 Ell	EA	25
5-417020	2" 45 Ell	EA	25
5-417030	3" 45 Ell	EA	10

Plug (Slip)



5-449007

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-449030	3" Plug	EA	10

PVC FITTINGS CONT'D

90 Street Ell (MIPT x Slip)



5-410005

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-410005	1/2" 90 Street Ell	EA	50
5-410007	3/4" 90 Street Ell	EA	50
5-410010	1" 90 Street Ell	EA	50

Female Adapter (Slip x FIPT)



5-435005

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-435005	1/2" Female Adapter	EA	100
5-435007	3/4" Female Adapter	EA	50
5-435010	1" Female Adapter	EA	50

Female Adapter Reducing (Slip x FIPT)



5-435101

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-435101	3/4" x 1/2" Female Adapter Reducing	EA	50
5-435102	3/4" x 1" Female Adapter Reducing	EA	50

Male Adapter Reducing (MIPT x Slip)



5-436074

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-436074	1/2" x 3/4" Male Adapter Reducing	EA	50
5-436101	3/4" x 1/2" Male Adapter Reducing	EA	50
5-436102	3/4" x 1" Male Adapter Reducing	EA	50
5-436131	1" x 3/4" Male Adapter Reducing	EA	50

Reducer Bushing (SPIG x Slip)



5-437101

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-437101	3/4" x 1/2" Reducer Bushing	EA	100
5-437130	1" x 1/2" Reducer Bushing	EA	100
5-437131	1" x 3/4" Reducer Bushing	EA	100
5-437210	1-1/2" x 3/4" Reducer Bushing	EA	25

Coupling (Slip x Slip)



5-429005

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-429005	1/2" Coupling	EA	100
5-429007	3/4" Coupling	EA	50
5-429010	1" Coupling	EA	50
5-429015	1-1/2" Coupling	EA	25
5-429020	2" Coupling	EA	25
5-429030	3" Coupling	EA	10

Cap (Slip)



5-447007

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-447007	3/4" Cap	EA	100
5-447010	1" Cap	EA	100

Male Adapter (MIPT x Slip)



5-436005

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-436005	1/2" Male Adapter	EA	100
5-436007	3/4" Male Adapter	EA	50
5-436010	1" Male Adapter	EA	50

Plug (MIPT)



5-450007

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-450007	3/4" Plug	EA	50

Reducer Bushing (SPIG X FIPT)



5-438101

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-438101	3/4" x 1/2" Reducer Bushing	EA	100
5-438131	1" x 3/4" Reducer Bushing	EA	100

Adapter (Insert x Slip)



5-474007

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-474007	3/4" Adapter (Insert x Slip)	EA	50

NOTE: Item numbers in **RED** indicate **Made in the U.S.A.**

PVC FITTINGS CONT'D

Cap (FIPT)



5-448007

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-448007	3/4" Cap	EA	100

Plastic DWV J-Hooks



515-J2000

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
515-J2000	2" x 9" DWV Swiveling J-Hook	EA	25
515-J3000	3" x 7-1/2" DWV Swiveling J-Hook	EA	25

Clean Out Tee



510-3400

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
510-3400-10	3/4" Clean Out Tee	EA	10
510-3400	3/4" Clean Out Tee	EA	50

PIPE CEMENTS, PRIMERS, AND CLEANERS

PVC Cement – Clear

PVC Cement is clear. All cans have brushtop applicator.



5-12

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-14	Oatey #31012 – 1/4 Pint	EA	24
5-12	Oatey #31013 – 1/2 Pint	EA	24
5-10	Oatey #31014 – 1 Pint	EA	24
5-32	Oatey #31015 – 32 oz.	EA	12

Purple Primer for PVC Pipe and Fittings (Black Label)

Recommended for all PVC and CPVC installations – all sizes/schedules. Purple tinted primer formulated to remove surface dirt and grease as well as soften the pipe surface to allow for a fast, secure and permanent solvent weld. For use in areas where codes call for primer verification.



530-30756

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
530-30755	Purple Primer – 4 oz.	EA	24
530-30756	Purple Primer – 8 oz.	EA	24
530-30757	Purple Primer – 16 oz.	EA	24

NSF and UPC listed. Exceeds ASTM F-656.

PVC Primer – Clear

Recommended for all PVC and CPVC applications. Can be used on all sizes and schedules. Formulated to remove all surface dirt, grease, and grime as well as soften the pipe in preparation for solvent cement. This primer can be used when you want a cleaner installation. Meets ASTM F-656 and is NSF listed.



530-30752

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
530-30752	PVC Primer – Clear – 16 oz.	EA	24

Heavy Duty PVC Cement

Heavy-bodied clear cement recommended for use on PVC pipe and fittings up to 12" in diameter for Sch. 40 and Sch. 80 potable water pressure pipe, gas, conduit, drain waste and vent pipe. Exceeds ASTM D-2564.



530-30863

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
530-30850	Heavy Duty Cement – 4 oz.	EA	24
530-30863	Heavy Duty Cement – 8 oz.	EA	24
530-30876	Heavy Duty Cement – 16 oz.	EA	24

Rain-R-Shine Blue Cement

Medium-bodied blue colored cement for PVC pipe and fittings up to 6 inches in diameter. A very fast setting cement formulated for wet conditions and/or when quick pressurization and fast installation is needed. Exceeds ASTM D-2564.



530-30891

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
530-30890	Rain-R-Shine Cement – 4 oz.	EA	24
530-30891	Rain-R-Shine Cement – 8 oz.	EA	24
530-30893	Rain-R-Shine Cement – 16 oz.	EA	24

PIPE CEMENTS, PRIMERS, AND CLEANERS CONT'D

All-Purpose Clear Cement for ABS, PVC and CPVC Pipe and Fittings



530-30821

Heavy-bodied clear cement recommended for use on ABS, PVC, and CPVC pipe and fittings up to 12" in diameter. Flows freely and provides a thick layer of cement on the pipe. Apply at temperatures 40° to 90°F.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
530-30818	Clear Cement – 4 oz.	EA	24
530-30821	Clear Cement – 8 oz.	EA	24
530-30834	Clear Cement – 16 oz.	EA	24

PVC Gray Cement for High Efficiency Furnaces, Vent and Make-Up Air



530-30884

Medium-bodied gray colored cement for use on Sch. 40 conduit, drain waste, and vent pipe. Flows freely and covers with a thicker layer than regular PVC. Can be applied at temperatures 40° to 100°F.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
530-30884	Gray Cement – 8 oz.	EA	24
530-30885	Gray Cement – 16 oz.	EA	24

NSF and UPC listed. Exceeds ASTM D-2564.

All Weather PVC Cement



530-31132

Medium-bodied cement for PVC pipe and fittings up to 6". Formulated for fast initial set-up from -15°F to 100°F. Exceeds ASTM D-2564.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
530-31132	All Weather Cement – 16 oz.	EA	24

Clear Cleaner



530-10202

Clear Cleaner is a simple and effective cleaner formulated for ABS, PVC and CPVC pipe and fittings that flows freely and evaporates quickly.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
530-10202	Clear Cleaner – 16 oz.	EA	24
530-10203	Clear Cleaner – 8 oz.	EA	24

Pro-Prime™ Clear PVC Primer



PPC-8

Clear primer that removes dirt and oil from the surface of Type I and II PVC piping. Softens the piping to prepare for solvent welding. Pro-Prime Clear primer meets ASTM Standard F-656.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PPC-4	Pro-Prime™ Clear – 4 oz. Brush-Top Container	EA	24
PPC-8	Pro-Prime™ Clear – 8 oz. Brush-Top Container	EA	24
PPC-16	Pro-Prime™ Clear – 16 oz. Brush-Top Container	EA	24

Medium Orange CPVC Cement



530-11029

Medium Orange CPVC Cement is formulated for use on all schedules and classes of CPVC pipe and fittings up to 6" diameter with interference fit.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
530-11029	Medium Orange CPVC Cement – 4 oz.	EA	24

Pro-Weld™ PVC Cement (Regular Body)



PW-8

Pro-Weld™ PVC Cement is is a clear, regular-bodied solvent cement designed to be used on Type I and II PVC pipe and fittings up to and including 4 inch diameter. Pro-Weld™ meets ASTM Standard D-2564.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PW-4	Pro-Weld™ – 4 oz. Brush-Top Container – Regular Body	EA	24
PW-8	Pro-Weld™ – 8 oz. Brush-Top Container – Regular Body	EA	24
PW-16	Pro-Weld™ – 16 oz. Brush-Top Container – Regular Body	EA	24
PW-32	Pro-Weld™ – 32 oz. Brush-Top Container – Regular Body	EA	12

Pro-Weld™ PVC Cement (Universal – PVC/ABS/CPVC)



PWU-8

Pro-Weld™ Universal Cement is a clear, medium-bodied, high strength cement for use on PVC to PVC, CPVC to CPVC, and ABS to ABS connections. Pro-Weld Universal sets up fast and works with all rigid schedule 40 and 80 piping up to 6 inches in diameter. Complies with ASTM D2564, D2235, and F493.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PWU-4	Pro-Weld™ – 4 oz. Brush-Top Container – Universal – PVC/ABS/CPVC	EA	24
PWU-8	Pro-Weld™ – 8 oz. Brush-Top Container – Universal – PVC/ABS/CPVC	EA	24
PWU-16	Pro-Weld™ – 16 oz. Brush-Top Container – Universal – PVC/ABS/CPVC	EA	24

Pro-Prime™ PVC Primer (Purple)



PP-8

A purple-tinted primer formulated to remove dirt and oil from the surface of Type I and II PVC piping, as well as soften the piping in preparation for solvent welding. Pro-Prime™ contains purple pigment which provides verification that the primer has been applied to the pipe surface. Pro-Prime™ meets ASTM Standard F-656.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PP-4	Pro-Prime™ – 4 oz. Brush-Top Container	EA	24
PP-8	Pro-Prime™ – 8 oz. Brush-Top Container	EA	24
PP-16	Pro-Prime™ – 16 oz. Brush-Top Container	EA	24
PP-32	Pro-Prime™ – 32 oz. Can	EA	12

PIPE CEMENTS, PRIMERS, AND CLEANERS CONT'D

Pro-Weld™ PVC Cement (Heavy Body)

Pro-Weld™ Heavy Body is a clear, heavy-bodied, very high strength industrial grade PVC cement. It has a medium setting time and works with all rigid schedule 40 and 80 pipe diameters up to 12 inches. Complies with ASTM D2564 and NSF.



PWH-8

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PWH-4	Pro-Weld™ – 4 oz. Brush-Top Container – Heavy Body	EA	24
PWH-8	Pro-Weld™ – 8 oz. Brush-Top Container – Heavy Body	EA	24
PWH-16	Pro-Weld™ – 16 oz. Brush-Top Container – Heavy Body	EA	24

Pro-Weld™ PVC Cement (Pool and Turf – Blue)

Pro-Weld™ Blue Pool and Turf is a blue colored, medium-bodied, high strength PVC cement for welding rigid or flexible PVC in wet conditions where the system needs to be pressurized quickly. Pro-Weld Blue Pool and Turf sets up very fast and works with all rigid and flexible schedule 40 and 80 pipe diameters up to 6 inches. Complies with ASTM D2564 and NSF.



PWB-8

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PWB-4	Pro-Weld™ – 4 oz. Brush-Top Container – Pool and Turf – Blue	EA	24
PWB-8	Pro-Weld™ – 8 oz. Brush-Top Container – Pool and Turf – Blue	EA	24
PWB-16	Pro-Weld™ – 16 oz. Brush-Top Container – Pool and Turf – Blue	EA	24

Pro-Weld™ Weather-ALL

Pro-Weld™ PVC Cement is a clear, regular-bodied solvent cement designed to be used on Type I and II PVC pipe and fittings up to and including 4 inch diameter. Pro-Weld™ meets ASTM Standard D-2564 and is usable in cold weather to -15°F and hot weather to 110°F.



PWW-8

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PWW-4	Pro-Weld™ – 4 oz. Brush-Top Container – All Weather Regular Body	EA	24
PWW-8	Pro-Weld™ – 8 oz. Brush-Top Container – All Weather Regular Body	EA	24
PWW-16	Pro-Weld™ – 16 oz. Brush-Top Container – All Weather Regular Body	EA	24

Un-Purple Primer

Hercules® Un-Purple Primer is formulated for use on all schedules and classes of PVC pipe and fittings. It appears clear, but shows purple under UV light. It makes every installation clean and look professional.



530-60445

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
530-60445	Hercules® Un-Purple Primer, 16 oz.	EA	1

NYLON FITTINGS*

Male Adapter (Barb x MIPT)



701-001

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
701-001	Adapter – 1/2" Barb x 1/2" MIPT, pack of 2	PK	1
701-002	Adapter – 1/2" Barb x 3/4" MIPT, pack of 2	PK	1
701-003	Adapter – 1/2" Barb x 3/8" MIPT, pack of 2	PK	1
701-007	Adapter – 3/4" Barb x 3/4" MIPT, pack of 2	PK	1
701-012	Adapter – 3/8" Barb x 1/2" MIPT, pack of 2	PK	1
701-013	Adapter – 3/8" Barb x 3/8" MIPT, pack of 2	PK	1
701-014	Adapter – 5/8" Barb x 3/4" MIPT, pack of 2	PK	1
701-043	Adapter – 3/8" Barb x 3/4" MIPT, pack of 2	PK	1

Garden Hose Adapters



701-009

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
701-009	Adapter – 3/4" MGHT x 3/4" FIPT, pack of 2	PK	1
701-011	Adapter – 3/4" MIPT x 3/4" FGHT, pack of 2	PK	1

Female Adapter (Barb x FIPT)



701-006

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
701-006	Adapter – 3/4" Barb x 3/4" NPT, pack of 2	PK	1
701-041	Adapter – 1/2" Barb x 1/2" NPT, pack of 2	PK	1

Bushing (MIPT x FIPT)



701-015

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
701-015	Bushing – 1" MIPT x 3/4" FIPT, pack of 2	PK	1
701-017	Bushing – 3/4" MIPT x 1/2" FIPT, pack of 2	PK	1

*All fittings packaged with identification. To order nylon fittings in bulk, enter catalog number followed by the letter "B." For example, 701-001B is the bulk part number for 701-001. Bulk sold in packs of 100.

NYLON FITTINGS* CONT'D

Elbow (Barb x Barb)



701-018

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
701-018	Elbow – 1/2" Barb, pack of 2	PK	1
701-023	Elbow – 3/4" Barb, pack of 2	PK	1
701-040	Elbow – 5/8" Barb, pack of 2	PK	1
701-046	Elbow – 3/8" Barb, pack of 2	PK	1

Male Adapter Elbow (Barb x MIPT)



701-020

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
701-020	Elbow – 1/2" Barb x 3/4" MIPT, pack of 2	PK	1
701-025	Elbow – 3/4" Barb x 3/4" MIPT, pack of 2	PK	1
701-028	Elbow – 5/8" Barb x 3/4" MIPT, pack of 2	PK	1

Tee (Barb x Barb x Barb)



701-034

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
701-034	Tee – 1/2" Barb, pack of 2	PK	1
701-035	Tee – 1/2" x 3/4" x 1/2" Barb, pack of 2	PK	1
701-037	Tee – 3/4" Barb, pack of 2	PK	1
701-038	Tee – 3/8" Barb, pack of 2	PK	1
701-039	Tee – 5/8" Barb, pack of 2	PK	1

Female Adapter Elbow (Barb x FIPT)



701-019

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
701-019	Elbow – 1/2" Barb x 3/4" NPT, pack of 2	PK	1

Hose Mender (Barb x Barb)



701-029

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
701-029	Hose Mender – 1/2" Barb, pack of 2	PK	1
701-030	Hose Mender – 1/4" Barb, pack of 2	PK	1
701-031	Hose Mender – 3/4" Barb, pack of 2	PK	1
701-032	Hose Mender – 3/8" Barb, pack of 2	PK	1
701-033	Hose Mender – 5/8" Barb, pack of 2	PK	1

*All fittings packaged with identification. To order nylon fittings in bulk, enter catalog number followed by the letter "B." For example, 701-001B is the bulk part number for 701-001. Bulk sold in packs of 100.

DRAIN TRAPS AND KITS

Waterless Trap

- Prevents Unwanted Air Leakage from Condensate Line
- Will Not Freeze or Dry Out
- Eliminates Sludge Buildup
- For Negative Pressure Applications



WTRAP

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
WTRAP	Waterless Trap	EA	1

Universal Alarm

- Works with Asurity Float and Safety Switches on 24 VAC Control Circuits
- Two Wire Connections for Easy Hook Up
- Low Voltage Alarm



UA-1

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
UA-1	Universal Alarm	EA	1

A/C Easy Tee® & Service Tool

- Quickly Clear Condensate Lines
- Never Cut Condensate Lines Again
- Complies with Code 307.2.5
- ET75 packed in 20 piece counter display
- ST75 packed in 6 piece counter display



ET75



ST75

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
ET75	A/C Easy Tee® Cleanout Port	EA	1
ST75	A/C Easy Tee® Service Tool Set	EA	1

Drain Trap Kit

- Easy Installation and Troubleshooting
- Schedule 40 PVC Fittings
- Cleanout Tee
- Fits 3/4" PVC; 1" Drop



DTK113

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DTK113	Drain Trap Kit	EA	1

DRAIN TRAPS AND KITS CONT'D

Drain Trap Kit w/ Cleaning Brush

- Easy Installation and Troubleshooting
- Schedule 40 PVC Fittings
- Cleanout Tee
- Fits 3/4" PVC; 1" Drop



DTK113B

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DTK113B	Drain Trap Kit w/Cleaning Brush	EA	1

Drain Trap Kit w/Safety Overflow Switch

- Cleaning Brush
- Float Switch
- Cross
- Easy Installation and Troubleshooting
- Schedule 40 PVC Fittings
- Cleanout Tee
- Fits 3/4" PVC; 1" Drop



DTK207

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DTK207	Drain Trap Kit w/Safety Overflow Switch	EA	1

ClearVue™ Traps

These traps are made from smooth, clear PVC with no flat spots to restrict flow. With these ClearVue™ traps its easy to see directly into them to detect blockages and prevent problems before they become severe. Ideal for installation in condensate drain lines.



CV-PTRAP



CV-RTRAP

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CV-PTRAP	ClearVue™ 3/4" P trap	EA	25
CV-RTRAP	ClearVue™ 3/4" R trap	EA	25
CV-UTRAP	ClearVue™ 3/4" U trap	EA	100
CV-JTRAP	ClearVue™ 3/4" J trap	EA	100

Drain Trap Kit w/Safety Overflow Switch

- Cleaning Brush
- Float Switch
- Easy Installation and Troubleshooting
- Schedule 40 PVC Fittings
- Cleanout Tee
- Fits 3/4" PVC; 3" Drop



DTK205

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DTK205	Drain Trap Kit w/Safety Overflow Switch	EA	1

Drain Trap Kit w/Safety Overflow Switch

- Cleaning Brush
- Float Switch
- Easy Installation and Troubleshooting
- Schedule 40 PVC Fittings
- Cleanout Tee
- Fits 3/4" PVC; 1" Drop



DTK210

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DTK210	Drain Trap Kit w/Safety Overflow Switch	EA	1

DUCTLESS DRAIN LINE TUBING AND FITTINGS

Smooth Drain for Ductless Systems

The Asurity® Smooth Drain Line, 230-DL16-S for ductless systems is a unique non-kinking drain line for mini-split units, with a smooth internal surface. The smooth internal surface minimizes trapped water that can promote biological growth, minimizing the possibility of blockages and foul odor formation. This 16mm diameter drain line is used for mini-split installations. Available in 98 feet lengths.



230-DL16-S

Asurity

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-DL16-S	Smooth Drain Line - 98' section	EA	1

Mini-Split Drain Adapters

Mini-Split fan units — either ceiling cassettes or wall cassettes — typically have a unique (metric) drain line fitting. DiversiTech's adapters convert this metric fitting to standard drain line tubing sizes.



230-DLF16



230-DLFY

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-DLFY	Mini-Split Drain Line Y	EA	1
230-DLF16	16mm Mini-Split Drain Line Adapter	EA	1
230-DLF18	18mm Mini-Split Drain Line Adapter	EA	1
230-DLF20	20mm Mini-Split Drain Line Adapter	EA	1
230-DLF25	25mm Mini-Split Drain Line Adapter	EA	1
230-DLF32	32mm Mini-Split Drain Line Adapter	EA	1

Mini-Split Condensate Drain Line

A unique drain line for mini-split units. This large diameter drain line is typical for mini-split installations. Furnished in 160 feet lengths with cut marks every 3.28 feet. Accommodates 5/8" and 3/4" connections.



230-DL16

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-DL16	5/8" ID Mini-Split Drain Line - 160' section	EA	1
230-DL16-20	5/8" ID Mini-Split Drain Line - 20' section	EA	1

ELECTRICAL



HVAC MOTORS

Electronically Commutated Direct Drive Motors	52
Evergreen EM	52
Evergreen IM	53
Evergreen Belly Band Mounting Kit	53
Evergreen® CM EC Motors	54,56
Evergreen® PF EC Motors	53
Evergreen® OM EC Motors	54
Evergreen VS	55
3.3" Diameter Electronically Commutated Motors	56
Packard 3.3" Diameter Motors - Open Enclosure	56,58
Packard 3.3" Diameter Motors - Totally Enclosed	57
Packard 3.3" Diameter Motor Exhaust Fan Assembly	57
Packard 3.3" Diameter Motors	58
Fasco 3.3" Diameter Motors - Open Enclosure	59-60
Fasco 3.3" Diameter Motors - Totally Enclosed	61
3.3" Diameter Fan and Blower Duty Nutone Replacements	61-62
Direct Replacement for Krack	62
OEM Replacements - 3.3" Diam. Motor	63
Permanent Split Capacitor Replacements for Bohn, Emerson, GE and Heatcraft	63
Permanent Split Capacitor Replacements for Fasco	64
Packard 3.3" Diameter Motors - Open Enclosure Bracket Adapter Kit	64
4.4" Diameter Fan Coil Motors	65
42 Frame Fan Coil Motors	65-67
42 Frame Fan Coil Motors - Shaded Pole	66
42 Frame Fan Coil Motors - Permanent Split Capacitor	66
5" Diameter Unit Heater Motors	68-69
5" Diameter Shaded Pole Direct Drive Blower Motors	68-69
5" Diameter Motors For Sterling Motors	69
Fasco 5" Diameter Direct Drive Blower Motors	70
42 Frame Direct Drive Blower Motors	71
Direct Replacements for Loren Cook,Äôs Gemini Motors	72
Direct Replacements for Greenheck	72
Direct Replacements for Broan / Lomanco	73
Direct Replacement for L.L. Building Products	73
MultiFit® Condenser Fan Motors	74

ELECTRICAL









HVAC MOTORS CONT'D

Condenser Fan Motors 75-76

Permanent Split Capacitor Condenser Fan Motors 76-77

5-5/8" Diameter Multi-Horsepower Condenser Fan Motors 78

Multi-Horse Power High Temp Condenser Fan Motors 78

Vulcan High Temperature Outdoor Condenser Fan Motors 79

Vulcan High Temperature Outdoor Multi-Horsepower Condenser Fan Motors 79

Genteq Condenser Fan Motors - Shaft Up 80

Wagner® Direct Drive Furnace Blower Motors 81

Wagner® Multiple Horsepower Direct Drive Furnace Blower Motors 81

Wagner® Single Speed Condenser Fan Motors 82

Wagner® Multiple Horsepower Condenser Fan Motors 82

HeatMaster® Condenser Fan Motor 83

4-in-1® Fan Motors (Economy Models) - 60ºC Ambient 83

4-in-1® HeatMaster® Fan Motors (Deluxe Models) - 70ºC Ambient 84

HeatMaster® 4-in-1¬Æ and HeatMaster® Ultra Multi-horsepower Replacement Motors - 80ºC Ambient 84

5-5/8" Diameter Direct Drive Blower Motors 85

1/5 HP 1050 RPM/3 Speed 115 Volt Motor & Torsion Flex Bracket 85

Packard 1625 RPM Motors 86

5-5/8" Diameter Multi-Horsepower Direct Drive Blower Motors 86

Fan & Blower Motor 87

HeatMaster® Fan Canopy 87

5-5/8" Diam. Direct Drive Blower Motors 88

48 Frame PSC Motors 88

5-5/8" Diameter Torsion Flex Direct Drive Blower Motors 89

Direct Drive, PSC, Open Air Over, Torsion Flex Mount 89

Fan Coil / AC Motor 89

Split Phase and Capacitor Start, NEMA 48M and 48N Flange Mount 90

PSC, NEMA 48M Flange Mount 90

5-5/8" Diameter Unit Heater Motors 91

Split Phase Resilient Base Motors 92

48/56 Frame, Split Phase Belt Drive Fan and Blower Motors 92

HVAC MOTORS CONT'D

56 Frame Three Phase Commercial Condenser Fan Motors	93
Capacitor Start Resilient Base Motors	93
Nidec Evaporative Cooler Motors	94
Three Phase, Open Air Over, Shaft Up and Horizontal Rigid Base Mount	94
Three Phase, Open Air Over, Rigid Base, Shaft Up or Horizontal	95
Utility Fan Motors and Kits	96-98
Direct Replacements for Broan	96
C-Frame Utility Ventilator Fan Motor	98
Nidec Air Compressor Motors	99
Square Frame Condenser Fan Motors	99
JuggerNaut® Three Phase Inverter Duty Condenser Fan Motors	100
Oil Burner Motors	100
Hot Water Circulator Pump Motors	101
Square Flange Pool Pump Motors	101

REFRIGERATION MOTORS

EC Max® RM	102
Adapter Spacer	102
90° Plug Adapter	102
Unitronix Unit Bearing EC Motors	103
Solid State Commutated Unit Bearing Motors	103-104
ECR ONE Constant Torque Motor	104
ECR UltraSynch™ Constant Speed Motor	104
Kryo™ Fortress Motor and Fan Packs	105
Electronically Commutated Refrigeration Motors and Fan Kits	105
58MM ECM Fan Pack	105
Heatcraft BNE Air Cooled Condenser Fan Assembly Replacement Unit	106
EBM Energy Saving Motor (ESM) Axial Fan Assembly	106
EBM Unit Cooler Fan Assembly	106
Heatcraft Condenser Fan Assembly Unit	106
EBM Programmer	107
Drop In Replacements For Commercial Refrigeration Evaporator Fan Motors	107
ARKTIC™ 142 Motor	107
EBM Harness	107
EC Unit Bearing Motor	108
Packard Aluminum 2-16 Watts - Single and No Foot Pad	108
Packard Cast Iron 2-16 Watts - Single and Double Foot Pad	109
Packard Aluminum 2-9 Watts - Double Foot Pads	110
Direct Replacement Unit Bearing Motors	110
Morrill Motors - Cast Iron 2-16 Watts - Double Foot Pads	111
Aluminum - Double Foot Pads	111
Packard Unit Bearing Motors - Cast Iron 25-50 Watts	112
Direct Replacements for Oasis & Hussman	112-113
Electric Motors and Specialties Unit Bearing Motors - 15-50 Watts	113-114
Unit Bearing Motors - 50-75 Watts	114
Electric Motors and Specialties - Direct OEM Replacement	114
Direct Replacements for General Electric 11 Frame	115
Refrigeration Motor	115

OEM - MOTORS & INDUCERS

Aladdin Steel - Draft Inducers	116
Amana - Draft Inducers	116
Amana/Armstrong/Magic Chef - Draft Inducer Replacement Kit	116
Armstrong - Draft Inducers	116
Burnham - Draft Inducers	117
Carrier - Draft Inducers	117-119
Carrier - Blower Wheel	119
Coleman Evcon - Draft Inducers	119
Consolidated Industries/Universal - Draft Inducers	120
Dunkrik - Draft Inducer	120
Goodman - Draft Inducers	121-123
Heat n' Glow - Draft Inducer	123
Heil-Quaker - Draft Inducer	123
ICP - Draft Inducers	123-125

OEM - MOTORS & INDUCERS CONT'D

Johnson - Draft Inducers 125
Lennox - Draft Inducers 125-126
Nordyne - Draft Inducers 126
Rheem - Draft Inducers 127-128
Rheem-Ruud - Draft Inducers 128
Trane - Draft Inducers 129
Weil McClain - Draft Inducers 130
York - Draft Inducers 130-131
Fasco - Draft Inducers 131-134
Bradford White Replacements 134
State Ind. Replacements 134
Transflow Blowers 134

CAPACITORS

Titan HD® Motor Run Capacitors - Single Section - Oval 135
Titan HD® Motor Run Capacitors - Dual Section - Oval 136
Titan HD® Motor Run Capacitors - Single Section - Round 137
Titan HD® Motor Run Capacitors - Dual Section - Round 138
Titan Pro® Motor Run Capacitors - Round 139
Titan Pro® Motor Run Capacitors - Oval 140
Titan Pro® 370 Motor Run Capacitors - Oval 141
Titan Pro® 370 Motor Run Capacitors - Round 142
Motor Run Capacitors - 370VAC, Oval Metal Can 143
Motor Run Capacitors - 370VAC 143
Motor Run Capacitors - 440VAC 144
Made in the U.S.A. Capacitors Round Metal Can 145
Lighting Capacitors: Oil-Filled and Dry AC Film for HID Lighting Applications 145
Made in the U.S.A. Capacitors Oval Metal Can 145
Packard Dry AC Motor Run Capacitors 146

CAPACITORS CONT'D

Packard Dry AC Film Capacitors 146
Titan Pro Start Capacitors 148-149
Packard Start Capacitors With Resistors 150
Packard Mini-Split Dry Cell Capacitors 150

FUSES

Class RK5-FLNR Series 151
FLSR Series - Class RK5 Time Delay Fuses 152
Dual Element Fuses - 250V 153
JTD Class J - Fast Acting Fuses 154
JLLS/JLLN Class T - Fast Acting Fuses 154
Class CC - CCMR Series 155
KLDR Series - Class CC Fuses 156
Class CC - Fuse Holders 156
SLC Class G Fuses 157
NLN Series - Class K5 Fast Blow One Time Fuses 157
NLS Series - (One-Time) Fuse 157
FLQ Series - Time Delay Midget Fuses 158
KLKD/KLK Series - Fast Acting Midget Fuse 159
BLS/BLF Series - Special Midget Fast-Acting Fuses 159
FLM Series - Slow-Blo Midget Fuses 160
Plug Fuses 160
SOO Series - Dual-Element Time-Delay Edison Base Fuses 161
TOO Series - Dual-Element Time-Delay Edison Base Fuses 161
ACS Type S Plug Fuse Adapter 161
ATOF Blade Fuses 161
312 Series - 3AG Fast Acting Fuses 162
313 Series - 3AB Fast Acting Ceramic Body Fuses 163
314 Series - 3AB Fast Acting Ceramic Body Fuse 163
235 Series - Fast Acting Glass Fuse 164
Power Distribution Blocks 164
In-Line Fuse Holder 165
Box Cover Units 165

FUSES CONT'D

Fuse Pullers 165
Fuse Adapters 165

WHIPS, CONDUITS & FITTINGS

Mini-Split Kit 166
GFCI Whip Assembly for Furnace 166
Evaporator Cooler Whip 166
Two-Piece Liquid Tite Fittings 167
Romex Connectors - Metallic 167
BX Set Screw Connectors 167
Aluminum Armored MC Cable 167
EMT (Thinwall) Fittings 167
Cable Staples 167
DiversiTiteTM Flexible Conduit 168
Single Piece Liquid Tite Fittings 168
Liquid Tite Connectors 168
DiversiWhips 169
DiversiWhip - Up to 30 Amp 169
DiversiWhips Pallet Packs 169
DiversiWhips for the - Pool Industry 169
DiversiWhips w/Extended Length Wires 169

DISCONNECTS

Disconnects - Metallic 170
Disconnects - Non-Metallic Case 170
Disconnects - Non-Metallic 170
3 Pole Switch for Mini-Splits 170
Disconnects - Metal Case 171
Molded Case Switch Disconnect 171
Eaton Switch A/C Disconnect 171
Low Profile Disconnects - Metal Case 171
Eaton Three Phase Disconnects 171

CONTACTORS

Definite Purpose Contactors with Cross References 172
Packard Definite Purpose Contactors 173
DP Contactor 173
Magnetic Contactor 173

CONTACTORS CONT'D

3 Pole Contactor Replacement Coils 174
4 Pole Contactor Replacement Coils 174
Auxiliary Switches for Packard Contactors 174-175
Auxiliary Switches for TITAN MAX® Contactors 175
Microswitch Blocks for TITAN MAX® Contactors 175
Auxiliary Contacts for TITAN MAX® Contactors 175
Contact Blocks with Quick Connect 175
TITAN MAX¬Æ Contactors 175

TRANSFORMERS

Class II Foot Mount Transformers 176-178
Class II Multi-Mount Transformers 178

CONTROL BOARDS

Furnace Controls 179
Defrost Controls 179
Gas Ignition Controls 179
Fan Control Centers 180

RELAYS

Relay Overloads 180
Direct Replacement Relays for ICP and Nordyne 180
General Purpose Relays - 9400 Series 181
General Purpose Relays - 8400 Series 181
General Purpose Switching Relays 181
SPST and SPDT Fan Relays 182
Switching Relays 182
Potential Relays - TITAN ICE 183
Universal Relay 184
Heat Sequencers 184
Time Delay Relays 185
Delay on Make Timers 185
Manual - SPST - Limit Thermostats 186
Automatic Small Flush Mount - SPST - Limit Thermostats 186
Manual Reset Fire Stat 186

RELAYS CONT'D

Adjustable Thermostats 187
Thermostats - I3 Wi-Fi 187
Temp Stat 65F Heat Only Thermostat 187
Plenum Thermostats 188

SWITCHES

Remote Sensor 189
Transfer Cables 189
Cartridge Low Pressure Controls 190
Cartridge Fan Cycle Pressure Controls 190
Cartridge High Pressure Controls 190
Cartridge Manual High Pressure Controls 190
Air Pressure Sensing Switch Kits 191
Thermocouples 191

SURGE & VOLTAGE PROTECTION

Digital Three Phase Line Voltage Monitor 192
Digital Single Phase Line Voltage Monitor 192
Ditek Single Phase Surge Protectors 193
Ditek CMXPLUS 3 Phase Surge Protectors 193
Motor Protection Controls 194
Motor Protection and Surge Protectors 194

FANS / PROPELLERS

OEM Fan Blade Direct Replacements 195
KH/KC Fans 196
Swept Fans 196
Propellers With Fixed Hub - 3-Blade 197
Propellers With Fixed Hub - 2, 4 and 5-Blade 198
REVCOR Hubless Propellers - 3-Blade 199
Hubs With Set Screws and Mounting Screws 199
Hubless Propellers - 4 & 5-Blade 200
3-Blade Propellers Heavy Duty Condenser Style 201
4-Blade Propellers Heavy Duty Condenser Style 202
2-Blade Propellers OEM Style with Fixed Hub 203

FANS / PROPELLERS CONT'D

3-Blade and 4-Blade Propellers Free Air Style 203
5-Blade Propellers Heavy Duty Condenser Style 204
Small Aluminum Fan Blades with Hubs 205
Small Aluminum Fan Blades - Hubless 206
Plastic Fan Blades 206

BLOWER WHEELS

Universal Single Inlet Blower Wheels 207-210
Universal Double Inlet Blower Wheels 211
Circulation Double Inlet Blower Wheels 212
Double Inlet Blower Wheels 213
Galvanized Steel Blower Wheels 214
Galvanized Blower Wheels - Double Inlet 215
Direct OEM Replacement Blower Wheels 215
Plastic Blower Wheels 215
Plastic Impellers 215

BELTS

Hi-Power® II Belts - A Section 216
Hi-Power® II Belts - B Section 217
Tri-Power® Belts - AX Section 218
Tri-Power® Belts - BX Section 219
Truflex® V-Belts - 3L and 4L Section 220
Super HC® Molded Notch Belts - 5VX Section 221
Quick-Link® Emergency V-Belts 221

PULLEYS / BUSHINGS

Stock Bushings 222
P, H, Q and SH Style Bushings 222
QD Bushings 222
Stock PVP Variable Pitch 223
Single Groove Pulleys 223
Stock P2VP Variable Pitch Double Groove Pulleys 224
Two Groove Pulleys for 4L or A Belts 225

PULLEYS / BUSHINGS CONT'D

Two Groove Pulleys for 4L or A Belts and 5L or B Belts	225
Light Duty Bush Type Pulley	226
PVL Variable Pitch Pulleys	227
PAL Pulleys for 4L or A Belts	227
Single Groove Pulleys for 4L or A Belts	228-229
Single Groove Pulleys for 4L or A Belts and 5L or B Belts	230-231
Single Groove Pulleys	232-233

WIRE MANAGEMENT

Grommets - Vinyl (By Panel Hole Size)	234
Compressor Repair Kit	234
200 Piece Terminal Kit	234
Heat Shrink Tubing - Polyolefin 50% Shrink, Black Commercial Grade	234
Transparent Plastic Boxes with Terminal Assortments	234
Twist-On Wire Connectors Combo Kit	235
Wire Connectors-Contractor Packs, U.L. Listed, C.S.A Approved	235
Wire Connectors-Screw On, U.L. Listed, C.S.A Approved	235
Porcelain Wire Connectors	235
Wire Connectors-Screw On, U.L. Listed, C.S.A Approved	236
Wire Connectors-Winged, U.L. Listed, C.S.A Approved	236
Wire Connectors	236

WIRE & CABLE

Thermostat Wire	237
Plenum Thermostat Wire	237
Non-Metallic Sheathed Cable (Romex Wire)	237
Stranded Copper Wire on Spool	238
High Temperature Wire, 400°F (204°C), 600 V.	238
Wire for Mini-Split Installation	238

COMPRESSORS

Fractional Horsepower Compressors	239
Reciprocating Compressors	240,247
Refrigeration Compressors	241,243
Reciprocating A/C Compressors	244
Medium Temp Refrigeration Scrolls	245
Air Conditioning Scrolls	246

HEAT EXCHANGERS

Liquid Chillers/Evaporators	248
High Pressure Liquid Chillers/Evaporators	249
Subcoolers	250
Dual Circuit Refrigerant Liquid Chillers	250
Liquid Condensers	251
High Pressure Liquid Condensers	252
Hydronic Fluid-to-Fluid Plate Heat Exchangers	252
Brazed Liquid Heat Exchangers	253-254
VacInox Brazed Liquid Heat Exchanger	254
Low Pressure Drop Liquid Heat Exchangers	255
GBE Economy Brazed Liquid-to-Liquid Heat Exchangers	255
Double Wall Brazed Liquid-to-Liquid Heat Exchangers	256
Corrosion-Resistant Plate Heat Exchangers	256
All Stainless Steel, Nickel-Chrome Brazed Liquid Heat Exchangers	257
Mounting Brackets	257
Insulation Kits	257
Dual Pressure Control	258
Adjustable Pressure Control	258

LINE COMPONENTS

Sanhua Service Valves	259
Insulation for 1/4 - 5/8 Ball Valves	259
Sanhua 4 Way Reversing Valves	259
Packard Sight Glass/Moisture Indicators	259
NDL® Ball Valves	260
NDL® Sight Glasses	260
Liquid Line Filter Drier	261

LINE COMPONENTS CONT'D

NDL® Suction Line Filter Drier 262
NDL® Bi-Flow Line Filter Drier 262
Spun Copper Driers 263
Universal Self Regulating Crankcase Heater 263
Tutco Crankcase Heaters 263
3 Wire Compressor Terminal Repair Kits 264
LG Wiring Harnesses 264
Titan Force Wiring Harnesses 264
Replacement Compressor Leads 264
2 Wire Electro-Mechanical Voltage Sensing Relay 265

ELECTRICAL ACCESSORIES

All Purpose 3-N-1 Kit 265
Fin Comb 266
Heat Gun 266
Tube Fitting Brush - 1/4" thru 1-3/8" 266
Sand Screen 266
Contractor Brushes 266
Digital Capacitor Tester 266
The Old "Switcheroo" HVAC Door Switch Depressor 267
Pin Extractor Tool 267
Rhino Tank Carrier & Compressor Tote 267
Board Pin Removal Tool 267
Ratchet Wrench 267
Hex Bit 267
Core Gripper Tool 267
LI'L POPPER Control Circuit Breaker 268
Electric Water Heater Kit 268
Single Element Thermostat w/High Limit 268
Upper Thermostat with High Limit 268
Lower Thermostat 268
Outdoor Extension Cord 269
Metal Guard Trouble Lights 269
Power Blocks 269
Electrical Outlet Boxes, Extensions and Covers 269

ELECTRICAL ACCESSORIES CONT'D

Switch Covers 269
Plastic Wall Plates 270
Eaton Circuit Breakers - Type BR 270
Switch/Plug Combo 270
Eaton Circuit Breakers - Type CH 270
Eaton Circuit Breakers - Type CHF 270
UL Certified Universal Circuit Breakers 271
Plastic Thermostat Guards 271
Steel Thermostat Guards 271
Cable Clamp PRO 271
Toggle Switches 272
Replacement Power Supply Cord 272
Right Angle Tri-Tap Portable GFCI 272
Toggle Switch Cover 272
Dryer Cords 272
Power Supply Cord (Pigtails) 272
Generator Power Cord Sets 272
Range Cords 273
In-Line Tri-Tap Portable GFCI 273
4-Outlet GFCI Power Pack 273
Heavy Duty Tri-Tap Extension Cord - 3 Outlets 273
Single Portable GFCI Adapter 273
Right Angle GFCI Plug - Field Wired 273
5-Outlet GFCI Shock Buster 274
Hose Clamps 274
Electrical Toggle Switches 274
Electrical Duplex Receptacles 274
General Purpose 1-part Industrial/ Construction Grade Silicone Sealant 275
Speed Controls 275
Steel Shaft Adapter Bushing 275
Shaft Adapters 276
Special Mounting Kit for 3.3" Diameter to Replace Motor in Nutone Units 276
Staked Tie Rods 276
Rubber Mounting Brackets 276

ELECTRICAL ACCESSORIES CONT'D

Mounting Kit	276
Nuts and Washers	277
End Frame Length Adapter Kit	277
Case Studs Kit	277
Resilient Mounting Rings	277
Anti-Wind Brakes	277
Motor Mount ‚Äì Flex Bracket	278
Mounting Brackets	278
Flex Mount Bracket Adjustable Diameter	278
DiversiTech® Motors Bracket	278
Mounting Brackets	278
Universal Lug Mounting Bracket	278
Unit Bearing Mounting Bracket	279
Flex Mounting Bracket for Rheem	279
Three Leg Torsion Flex Mount Brackets	279
Motor Mounting Bracket for Rheem	279
Lug Mounting Bracket - Long	279
Four Leg Torsion Flex Mount Bracket	279
Fasco Bases	280
Direct Drive Blower Mounting Kit	280
Evergreen Belly Band Mounting Kit	280
Motor Bracket	280
Condenser Fan Rainshield	281
Rainshields - Plastic Deep Dish Style	281
Shafts	281
Condenser Fan Rainshield Deep Dish Style	281
Shaft Extension Kits	281
Rubber Grommet Kit	281
Rubber Vibration Insulators for Coleman Motors	282
Rubber Vibration Insulators	282
Conduit Box with Adjustable Bracket	282
Rheem Mounting Cables	282
Conduit Box	282
Adapter Ring	282
Conduit Kit	283
Fan Blade & Blower Wheel Puller	283

ELECTRICAL ACCESSORIES CONT'D

Straight Plug and Cord	283
Nuts	283
Pitch Gauge	283
90 Degree Plug and Cord	283
Mounting Kit	284
End Shield Kits	284
Adapter Plate	284
Motor Height Adapter for use w/EC MAX RM Series	284
Easy Levelers	285
Expanding Hose	285
24V Universal Humidifier Solenoid (1/4" x 1/4")	285
Gasket Book	285
Teflon O-rings	285
Capacitor Resistor with 1/4" Female Terminals	286
Rubber Boots	286
Capacitor Mounting Kit	286
Capacitor Resistor	286
Capacitor Jumpers	286
Capacitor Mounting Kit	286
Cap Guard	287
Capacitor Brackets - Round	287
Capacitor End Caps - Top Lead Hole	287
Capacitor Brackets - Oval	287
Capacitor End Caps - Bottom Lead Hole	287

OEM - SPECIAL REFERENCES

Aaon - OEM - Motors	288
Amana - OEM - Motors & Draft Inducers	288
Armstrong - OEM - Draft Inducers	288
Broan - OEM - Impellars and Motors	289
Burnham - OEM - Draft Inducers	289
Carrier - OEM - Draft Inducers, Motors and Blower Wheels	290-292

OEM - SPECIAL REFERENCES CONT'D

Coleman Evcon - OEM - Motors and Draft Inducers	293
Consolidated Ind. - OEM - Draft Inducers	293
Copeland - OEM - Motors	293-294
Delfield - OEM - Motor Kits	294
Dunkirk - OEM - Draft Inducers	295
Fedders - OEM - Motors	295
First Company - OEM - Motors and Blower Wheel	295
Franklin - OEM - Draft Inducers	295
General Electric - OEM - Motors	296
Goodman - OEM - Draft Inducers	296-298
Greenheck - OEM - Motors	298
Heatcraft - Bohn - Larkin - OEM - Motors	299-300
Heil-Quaker - OEM - Draft Inducer	300
Herman Nelson - OEM - Motors	300
Hill - OEM - Motors	301
Huebsch - OEM - Motors	301
Hussmann - OEM - Motors	301
Ice-O-Matic - OEM - Motors	301
ICP - OEM - Draft Inducers	302-303
IEC - OEM - Motors	304
IMI Cornelius - OEM - Motors	304
Johnson Furnace - OEM - Draft Inducers and Motors	304
Krack - OEM - Motors	305
L.L. Building - OEM - Motors	305
Lennox - OEM - Draft Inducers and Motors	305-307
Lomanco - OEM - Motors and Fan Blades	307
Loren Cook - OEM - Motors	308
Manitowoc - OEM - Motors	308
McQuay - OEM - Motors	308-309
Nordyne - OEM - Draft Inducers and Motors	309

OEM - SPECIAL REFERENCES CONT'D

Nutone - OEM - Motors	310
Oasis - OEM - Motors	311
Penn Ventilator - OEM - Motors	311
PennVent - OEM - Motors	311
Reznor - OEM - Motors and Blower Wheels	311
Rheem - OEM - Transformers, Draft Inducers and Motors	312-14
Scotsman - OEM - Motors	315
Skymark - OEM - Draft Inducers	315
State Ind. - OEM - Draft Inducers	315
Sterling - OEM - Motors	315
Sub Zero - OEM - Motors	315
Tappan - OEM - Draft Inducers	316
Tecumseh - OEM - Draft Inducers	316
Tradewinds -OEM - Motors	316
Trane - OEM - Draft Inducers and Motors	317-319
Ventline - OEM - Motors	320
Whirlpool - OEM - Motors	320
Williamson - OEM - Draft Inducers	320
York- OEM - Draft Inducers and Blower Wheels	320-321

EC MOTORS

Electronically Commutated Direct Drive Motors



46013

EC MAX®

Features

High Efficiency ECM: Up to 80% Efficient
Replaces either PSC or X13 model of equivalent HP
Dual Voltage Design: Replace 115 or 230V with one motor
Wiring harness and simple installation guide included
Rotation Sensing Technology
- Automatically selects rotation upon first start up
45" wiring harness
Easy to install
Internal MOV (Metal Oxide Varistors) surge protector

CATALOG NO.	HP	VOLTS	RPM	AMPS	HERTZ	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	MOTOR TYPE	CORD LENGTH	UOM	OM
46013	1/3	115/230	1075	5.0/3.0	60/50	1/2 x 5	6-3/8	ECM	45"	EA	1
46012	1/2	115/230	1075	6.7/4.0	60/50	1/2 x 5	6-3/8	ECM	45"	EA	1
46034	3/4	115/230	1075	8.2/4.9	60/50	1/2 x 5	7-5/8	ECM	45"	EA	1
46001	1	115/230	1075	11.0/6.7	60/50	1/2 x 5	7-5/8	ECM	45"	EA	1

EC Max is a constant torque motor and does not replace variable speed or programmable motors.

Evergreen EM

Replace 100s of Different OEM X13 ECM Models.

Evergreen EM is designed to replace direct-drive blower motors in residential and light commercial indoor furnaces, air handlers, and package systems that were designed with a standard EC motor, such as an X13 or equivalent competitor model.



6203E

genteq™

Features

Multi-speed, constant torque, brushless DC motor
Available in 1/3, 1/2, 3/4 and 1HP ratings
Automatically determines motor rotation direction
5 discrete speeds using 24VAC (3 using 18VDC)
Operating speed range of 600-1200 rpm
NEMA 48-frame (5.6 inch diameter) Belly Band Mount with 5-inch long ½ inch diameter shaft
UL recognized component
Standard ECM replacement (Does not replace premium ECM constant airflow products such as Eon, 3.0, 2.3, and 2.5)
Maintains ECM-level efficiency up to 80%
Soft Start and Off Ramp for quiet operation
Electronic overload protection

CATALOG NO.	HP	VOLTS	RPM	AMPS	ROTATION	DIM A (IN.)	DIM B (IN.)	UOM	OM
6103E	1/3	115	600-1200	4.8	Auto Sensing	10.17	5.25	EA	1
6203E	1/3	208/230	600-1200	2.8	Auto Sensing	10.17	5.25	EA	1
6105E	1/2	115	600-1200	6.8	Auto Sensing	10.67	5.75	EA	1
6205E	1/2	208/230	600-1200	4.1	Auto Sensing	10.67	5.75	EA	1
6107E	3/4	115	600-1200	8.4	Auto Sensing	11.42	6.5	EA	1
6207E	3/4	208/230	600-1200	6	Auto Sensing	11.42	6.5	EA	1
6110E	1	115	600-1200	10.9	Auto Sensing	12.17	7.25	EA	1
6210E	1	208/230	600-1200	7.6	Auto Sensing	12.17	7.25	EA	1

EC MOTORS CONT'D

Evergreen IM



6010

genteq™

Energy Savings. Quiet Operation Comfort. Indoor Air Quality.

Evergreen IM is a high-efficiency ECM replacement motor that is designed to replace factory PSC blower motors in HVAC systems including fossil fuels, electric heat, A/C, heat pump, dual fuel and geothermal; does not replace variable speed or X13 EC motors. Evergreen uses up to 25% fewer watts in operating mode and up to 74% fewer Watts than a PSC motor in constant fan.

Features

- Two Motors cover most applications
- Multi-volt 115/230VAC, 50/60 Hertz
- Integrated with HVAC system controls/operation
- Four speed selections for heating and cooling
- Optimized constant fan speed
- 1/2 inch diameter flat shaft
- Auto Sensing rotation
- 5.5 inch diameter
- Automatic overload protection
- Ball bearing
- Open Encl.
- Band mounting
- Continuous duty

CATALOG NO.	HP	VOLTS	RPM	AMPS	DIRECT REPLACEMENT FOR	UOM	OM
6005	1/5, 1/4, 1/3, 1/2	115/230	1070	6.70/4.00	GE 5SME39HXL110	EA	1
6010	1	115/230	1070	11.00/6.70	GE 5SME39SXL111	EA	1

Evergreen Belly Band Mounting Kit



5K003

genteq™

CATALOG NO.	MOUNTING I.D. (IN.)	UOM	OM
5K003	10	EA	1
5K004	11	EA	1
5K005	13	EA	1

Evergreen® PF EC Motors



6803

Evergreen®

The Evergreen PF is a drop-in replacement or proactive upgrade for pedestal and wall mount fan motors in warehouses, factory floors, amusement parks, institutional buildings and other similar applications. With a rated efficiency of up to 82% and three operating speeds, Evergreen PF makes is easy to provide energy savings and reduce operating noise. It is easy for retrofit as it comes with a power cord, switch and welded mount. The Evergreen PF also includes a pull chain for easy speed selection from 1160/970/650 operating speeds.

CATALOG NO.	HP	VOLT	SPEED	FLA	RPM	SHAFT	UOM	ORDER MULTIPLE
6803	1/3	115	3	5.8	1160/970/650	.5" x 3" (2.5" SF)	EA	1

EC MOTORS CONT'D

Evergreen® CM EC Motors

The Evergreen CM is made with the same field-proven, high-efficiency ECM technology that has been used for more than 20 years in new HVAC equipment. It features flexible control methods to help the installer balance airflow in HVAC systems such as VAV (Variable Air Volume) boxes and Packaged HVAC systems. The Evergreen CM is designed as a direct replacement for OEM (Original Equipment Manufacturer) Genteq model X13 (Constant Torque ECM) or as a field replacement for existing PSC (Permanent Split Capacitor) motors.



6707CM

Evergreen

CATALOG NO.	HP	VOLT	SPEED	FLA	RPM	SHAFT	UOM	ORDER MULTIPLE
6703CM	1/3	208-230/277	5/PWM	2.8	1075	.5"x4" (3.5" SF)	EA	1
6705CM	1/2	208-230/277	5/PWM	4.1	1075	.5"x4" (3.5" SF)	EA	1
6707CM	3/4	208-230/277	5/PWM	6.0	1075	.5"x4" (3.5" SF)	EA	1
6710CM	1	208-230/277	5/PWM	7.6	1075	.5"x4" (3.5" SF)	EA	1
6405CM	1/2	460	5/PWM	2.1	1075	.5"x4" (3.5" SF)	EA	1
6407CM	3/4	460	5/PWM	3.2	1075	.5"x4" (3.5" SF)	EA	1
6410CM	1	460	5/PWM	4.0	1075	.5"x4" (3.5" SF)	EA	1

Evergreen® OM EC Motors

The Evergreen Outdoor Motor, also known as Evergreen OM, is designed for direct-drive fan propeller applications in residential systems up to 5-tons. Easily replaces 6 Pole (1,100 rpm rated) and 8 pole (850 rpm rated) shaded pole or PSC motors.



6903

Evergreen

CATALOG NO.	HP	VOLT	SPEED	FLA	RPM	SHAFT	UOM	ORDER MULTIPLE
6301	1/5	208-240	2	2.8	850/1100	.5" x 3" (2.5" SF)	EA	1
6303	1/3	208-240	2	3.5	850/1100	.5" x 3" (2.5" SF)	EA	1
6903	1/3	460	2/PWM	1.6	850/1100	.5" x 6" (5.5" SF)	EA	1
6905	1/2	460	2/PWM	2.5	850/1100	.5" x 6" (5.5" SF)	EA	1
6907	3/4	460	2/PWM	3.1	850/1100	.5" x 6" (5.5" SF)	EA	1

EC MOTORS CONT'D

Evergreen VS



6503V

What if... you could replace MILLIONS of OEM variable speed motors with just 6 parts on your truck? The Evergreen® VS motor and Evergreen VS user interface are designed to replace Genteq® constant airflow (variable speed) ECM indoor blower motors. The Evergreen VS product line is designed specifically to replace GE® models 2.0 and 2.5, and Genteq models 2.3, 3.0 and Eon® motors (including models formerly branded GE or GE ECM by Regal Beloit).

Features

- Pre-programmed
- Plug-n-play
- Dual voltage
- Dual rotation
- Truck stock
- Two year warranty*
- Complete calls same day including after hours calls
- Reduce time on call using part on truck
- Built by same manufacturer as original motor
- Maintains system performance and efficiency

Applications

The Evergreen VS motor is designed for use in the following types of HVAC systems: Furnace, air handler and package units
Fossil fuel, electric strip heat, A/C, heat pump and geothermal units
When replacing 2.0, 2.3 or Eon® motors, Evergreen VS motors can only be used in single stage or two stage HVAC systems
When replacing 2.5 and 3.0 motors, Evergreen VS motors can be used in single stage, multi-stage, modulating and communicating HVAC systems

CATALOG NO.	HP	VOLTS	FLA	RPM	SHAFT (IN.)	ROTATION	DIM A (IN.)	DIM B (IN.)	UOM	OM
6503V	1/3	120/240	5.0/2.8	1050	0.5 x 5	Dual	10.71	5.71	EA	1
6505V	1/2	120/240	7.7/4.3	1050	0.5 x 5	Dual	11.21	6.21	EA	1
6507V	3/4	120/240	10.1/6.1	1050	0.5 x 5	Dual	11.96	6.96	EA	1
6510V	1	120/240	12.8/7.4	1050	0.5 x 5	Dual	12.71	7.71	EA	1

*This warranty shall expire twenty-four (24) months from first use of the Product or thirty (30) months from date of shipment of the Product, whichever occurs first. Except as stated here, Regal standard limited warranty applies. See Terms and Conditions of Sale.

EVERGREEN VS USER INTERFACE	UOM	OM
5K010V	EA	1

The Evergreen® VS motor and Evergreen VS user interface are designed to replace Genteq® constant airflow (variable speed) ECM indoor blower motors. The Evergreen VS product line is designed specifically to replace GE® models 2.0 and 2.5, and Genteq models 2.3, 3.0 and Eon® motors (including models formerly branded GE or GE ECM by Regal Beloit).



5K010V

Evergreen CM



6710

ECM Replacement for Commercial VAV Boxes.

Evergreen CM Direct Replacement For standard 48 frame motors in VAV systems enhancing the ability of energy efficient systems to qualify for government rebate programs. With slow ramp up and ramp down there is less system noise and greater occupant comfort.

Features

- Variable speed, constant torque, brushless DC motor
- 277V AC single-phase input, 50/60Hz
- Designed for direct-drive blower replacement applications in commercial building systems
- Standard CCW Rotation (CW Rotation option available)
- 5 discrete speeds using 24VAC (3 using 18VDC); 600-1200 RPM
- Efficiency up to 80%
- Ready for building automation system
- Control interface using a PWM speed controller
- Constant torque with better external static pressure Control than standard PSC motors
- Soft start and off ramp for quieter operation

CATALOG NO.	HP	VOLTS	RPM	AMPS	ROTATION	DIM A (IN.)	DIM B (IN.)	UOM	OM
6703	1/3	208-230/277	600-1200	2.8	Auto Sensing	9.17	5.25	EA	1
6705	1/2	208-230/277	600-1200	4.1	Auto Sensing	9.67	5.75	EA	1
6710	1	208-230/277	600-1200	7.6	Auto Sensing	11.17	7.25	EA	1

3.3" DIAMETER MOTORS

3.3 Inch Diam. Electronically Commutated Motors



35101

morrillmotors

Applications


Commercial refrigeration walk-in coolers and freezers, air-moving applications demanding high efficiency and dependability

Features

Commercial refrigeration walk-in coolers and freezers, air-moving applications demanding high efficiency and dependability
Efficiencies up to three times higher than shaded pole motors and 40% higher than PSC
Ball bearing with low temperature grease
Standard thru-bolt configuration
All angle mount
Totally enclosed, air over
Rotation viewed opposite shaft end (OSE)
Water Slinger
Automatic overload
50/60 Hertz
Single phase
Single speed

CATALOG NO.	HP	VOLTS	RPM	AMPS	OSE ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	ENCL.	MOUNTING	DIRECT REPLACEMENT FOR	UOM	OM
Arktic 59 Model												
35100	1/15	115	1550	1.30	CW	5/16 x 2-5/8	4-1/8	Totally Enclosed	Front or Rear Thru-Bolt	Larkin 253-1194	EA	1
35101	1/15	115	1550	1.30	CCW	5/16 x 2-5/8	4-1/8	Totally Enclosed	Front or Rear Thru-Bolt	Bohn 5008S	EA	1
35201	1/15	208-230	1550	0.80	CCW	5/16 x 2-5/8	4-1/8	Totally Enclosed	Front or Rear Thru-Bolt	Bohn 5008T	EA	1

Packard 3.3 Inch Diam. Motors - Open Enclosure



82584

Packard

Features

Shaded pole
Automatic overload
Open Encl.
60 Hertz
Single phase
Rotation is determined by viewing the shaft end

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	BRG	MOUNTING	DIRECT REPLACEMENT FOR	NOTES	UOM	OM
Single Shaft														
40030	1/25	115	1550	1.70	1	CW	5/16 x 2-1/2	2-11/16	Sleeve	Stud	UE 30		EA	1
40031	1/25	115	1550	1.70	1	CCW	5/16 x 2-1/2	2-3/4	Sleeve	Stud	UE 31		EA	1
40514	1/30	115	1550	1.30	1	CW	5/16 x 2-3/8	2-5/8	Sleeve	Stud	Emerson 9628, UE 28	329	EA	1
40515	1/30	115	1550	1.30	1	CCW	5/16 x 2-3/8	2-5/8	Sleeve	Stud	UE 29	329	EA	1
82584	1/30	120	1550	1.3	1	CCW	5/16 x 1-7/8	2-1/2	Sleeve	Resilient Hubs	Broan 97008584	513	EA	1
40126	1/40	115	1550	1.10	1	CWSE	5/16 x 2-1/4	2-7/16	Sleeve	Stud	UE 26	329	EA	1
40127	1/40	115	1500	1.10	1	CCW	5/16 x 2-1/4	2-7/16	Sleeve	Stud	Trane MOT-6227, UE 27	329	EA	1
40752	1/40	120	1500	1.30	1	CCW	1/4 x 1-7/16	2-1/8	Sleeve	Stud	Broan 97009752, Broan 99080096 Broan 99080345, UE 632	512 482	EA	1
Double Shaft														
82973	1/15	120	1600	2.6	1	CCWLE	2-1/2 x 5/16 x 2-1/2	3-1/2	Sleeve	Stud	Broan 99080359		EA	1

Notes: **329.** Motor has 4 studs on both ends **482.** Two prong plug and cord attached **512.** With cord and 2 prong 90 degree plug
513. Special plug and cord attached

3.3" DIAMETER MOTORS CONT'D

Packard 3.3 Inch Diam. Motors - Totally Enclosed



40124

Packard

Applications

Ideal replacement for many range hoods

Features

Shaded pole
Totally enclosed
Stud mounting
Automatic overload
Single phase
60 Hertz
Rotation is determined by viewing the shaft end

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	BEARINGS	MOUNTING	NOTES	UOM	OM
40122	1/80	115	1550	0.65	1	CW	1/4 x 2-1/4	2-1/16	Sleeve	Stud	329	EA	1
40123	1/80	115	1550	0.65	1	CCW	1/4 x 2-1/4	2-1/16	Sleeve	Stud	329	EA	1
50500	1/70	115	3000	0.85	1	CCW	1/4 x 1	2-3/8	Sleeve	Stud	—	EA	1
41402	1/60	115	3000	0.80	1	CW	1/4 x 1-3/4	2-3/8	Sleeve	Stud	—	EA	1
40124	1/50	115	1500	0.88	1	CW	1/4 x 2-1/4	2-3/8	Sleeve	Stud	329	EA	1
40125	1/50	115	1550	0.80	1	CCW	1/4 x 2-1/4	2-3/8	Sleeve	Stud	329	EA	1
41105	1/50	115	1550	1.0	1	CW	1/4 x 2-1/2	2-3/8	Sleeve	Stud	431	EA	1

Notes: **329.** Motor has 4 studs on both ends **431.** Mechanically Reversible

Packard 3.3 Inch Diam. Motor Exhaust Fan Assembly



50695

Packard

Features

Also Includes 2 prong plug and cord
Includes motor, mounting bracket and blower wheel
50695 - For Use on Nutone QT80
50696 - For Use on Nutone QT100 & QT110

CATALOG NO.	HP	VOLTAGE	RPM	AMPS	ROTATION	BEARING	HERTZ	MOTOR TYPE	DIRECT REPLACEMENT FOR	UOM	OM
50695	1/100	120	1500	0.63	CWSE	Ball	60	Shaded Pole	40695, Nutone 0695B000	EA	1
50696	1/50	120	1630	0.73	CWSE	Ball	60	Shaded Pole	40696, Nutone 0696B000	EA	1

3.3" DIAMETER MOTORS CONT'D

Packard 3.3 Inch Diam. Motors - Open Enclosure



50073

Packard

Features

Automatic overload
Open Encl.
Shaded pole
60 Hertz
Single phase
Rotation is determined by viewing the shaft end

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	BRG	MOUNTING	DIRECT REPLACEMENT FOR	NOTES	UOM	OM
41107	1/20	115	1550	1.5	1	CW	5/16 x 2-1/2	3	Sleeve	Stud	RMR 1107	431	EA	1
44107	1/20	208-230	1550	1.1	1	CW	5/16 x 2-1/2	3	Sleeve	Stud	RMR 4107	431	EA	1
50933	1/50	120	1550	0.95	1	CCW	1/4 x 1	2-1/4	Sleeve	Stud	Nutone 86933 Nutone 86933000 Universal JA2B104N	482	EA	1
82761	1/100	115	1550	0.70	1	CCW	1/4 x 1-1/8	2-1/16	Sleeve	Stud	Nutone 26950 Nutone 26761	482	EA	1
82583	1/100	120	1550	0.55	1	CCW	5/16 x 1-3/4	2-9/16	Sleeve	1-1/8" Hex Hubs	Broan 97008583	45 513	EA	1
82633	1/50	120	1400	0.78	1	CW	5/16 x 1-3/8	2-1/2	Sleeve	1-1/8" Hex Hubs	BROAN 99080273 BROAN 99080274 BROAN 99080633 UE 633	513	EA	1
40120	1/70	115	1550	0.70	1	CW	1/4 x 2-1/4	2-1/16	Sleeve	Stud	Emerson 9621, UE 14	329	EA	1
40121	1/70	115	1550	0.70	1	CCW	1/4 x 2 1/4	2-1/16	Sleeve	Stud	Trane MOT-6225, UE 15	329	EA	1
50073	1/70	115	1320	0.85	1	CW	1/4 x 1-1/8	2-1/4	Sleeve	1-1/8" Hex Hubs	Nutone C65073	41 482	EA	1

Notes: **41.** 1-1/8" Hubs **45.** Impedence Protected **329.** Motor has 4 studs on both ends **431.** Mechanically Reversible
482. Two prong plugs and cord attached **513.** Special plug and cord attached

Packard 3.3 Inch Diam. Motors



65300

Packard

Features

Shaded Pole
Sleeve Bearing
Includes 2 Prong Plug & Cord
Stud Mount
60 HZ

CATALOG NO.	VOLTAGE	RPM	AMPS	SHAFT DIM (IN.)	ROTATION	DIRECT REPLACEMENT FOR	UOM	OM
65200	120	1500	0.63	1/4 x 1-1/4	CWSE	Nutone 86322000	EA	1
65300	120	1630	0.73	1/4 x 1-1/4	CWSE	Nutone 86323000	EA	1

3.3" DIAMETER MOTORS CONT'D

Fasco 3.3 Inch Diam. Motors - Open Encl.



D126

Features

Shaded pole	Single phase
Automatic overload	Rotation is determined by viewing the shaft end
Open Encl.	4 studs on each end
60 Hertz	

CATALOG NO.	HP	VOLTS	RPM	AMPS	ROTATION	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	BEARINGS	MOUNTING	NOTES	UOM	OM
Fasco - Single Shaft												
D202	1/85	115	3000	0.62	CW	1/4 x 2-1/4	2-3/8	Sleeve	Stud	496	EA	1
D120	1/70	115	1500	0.70	CW	1/4 x 2-1/4	2-1/8	Sleeve	Stud	496	EA	1
D121	1/70	115	1500	0.70	CCW	1/4 x 2-1/4	2-1/8	Sleeve	Stud	496	EA	1
D126	1/40	115	1500	1.10	CW	5/16 x 2-1/4	2-1/2	Sleeve	Stud	496	EA	1
D127	1/40	115	1500	1.00	CCW	5/16 x 2-1/4	2-1/2	Sleeve	Stud	496	EA	1
D131	1/40	115	1500	1.00	CCW	5/16 x 2-1/4	3-1/3	Sleeve	Stud	496	EA	1
D203	1/40	115	3000	1.00	CCW	1/4 x 2-1/4	2-3/4	Sleeve	Stud	496	EA	1

Fasco 3.3 Inch Diam. Motors - Open Encl.



D130

Features

Shaded pole	Single phase
Automatic overload	Rotation is determined by viewing the shaft end
Open Encl.	4 studs on each end
60 Hertz	

CATALOG NO.	HP	VOLTS	RPM	AMPS	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	BEARINGS	MOUNTING	DIRECT REPLACEMENT FOR	NOTES	UOM	OM
Fasco - Single Shaft													
D130	1/40	115	1500	1.00	CW	5/16 x 4-1/8	3-1/3	Sleeve	Stud	Emerson 3803 Trane MOT-6221	496	EA	1

Notes: **496.** 4 studs on each end

3.3" DIAMETER MOTORS CONT'D

Fasco 3.3 Inch Diam. Motors - Open Encl.



D210

FASCO

Features

Shaded pole
Automatic overload
Single phase
Open Shaft End and Lead End End-Frame, Enclosed Shell, Air Over
60 Hertz
Rotation is determined by viewing the shaft end
4 studs on each end
Class B Insulation, 40°C Ambient
Thermally Protected
12" Leads

CATALOG NO.	HP	VOLTS	RPM	AMPS	ROTATION	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	BEARINGS	MOUNTING	UOM	OM
Single Shaft											
D206	1/30	115	3000	1.20	CW	1/4 x 2-1/4	2-3/4	Sleeve	Stud	EA	1
D210	1/25	115	3000	1.30	CW	1/4 x 2-1/4	3-1/4	Sleeve	Stud	EA	1
D188	1/20	230	1500	0.90	CW	5/16 x 2-1/4	2-7/8	Sleeve	Stud	EA	1
D189	1/20	230	1500	0.90	CCW	5/16 x 2-1/4	2-7/8	Sleeve	Stud	EA	1
D133	1/20	115	1500	1.80	CCW	5/16 x 2-1/4	2-3/4	Sleeve	Stud	EA	1
D132	1/20	115	1500	1.80	CW	5/16 x 2-1/4	2-3/4	Sleeve	Stud	EA	1

Fasco 3.3 Inch Diam. Motors - Open Encl.



D211

FASCO

Features

Shaded pole
Automatic overload
Single phase
Open Shaft End and Lead End End-Frame, Enclosed Shell, Air Over
60 Hertz
Rotation is determined by viewing the shaft end
4 studs on each end
Class B Insulation, 40°C Ambient
Thermally Protected
12" Leads

CATALOG NO.	HP	VOLTS	RPM	AMPS	ROT	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	BRG	MOUNTING	NOTES	UOM	OM
Double Shaft												
D128	1/40-1/50-1/80	115	1500	1.30-0.90-0.60	DS	4 x 5/16 x 4	2-1/2	Sleeve	Stud	**	EA	1
D213	1/15	115	3000	2.10	DS	2-3/4 x 1/4 x 2-3/4	3-7/8	Sleeve	Stud	—	EA	1
D211	1/15	230	3000	1.10	DS	2-1/2 x 1/4 x 2-1/2	3-7/8	Sleeve	Stud	—	EA	1

Notes: **45.** Impedence Protected *21" Leads **Belly Band Mount

3.3" DIAMETER MOTORS CONT'D

Fasco 3.3 Inch Diam. Motors - Totally Enclosed



D123

Features

Shaded Pole
Totally Enclosed
12" Leads
Automatic Overload
Class B Insulation, 40°C Ambient
Single Phase
Rotation is determined by viewing the shaft end
60 HZ

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	SHAFT DIMENSION (IN.)	LENGTH LEVS SHAFT (IN.)	BEARINGS	MOUNTING	UOM	OM
D122	1/80	115	1500	0.60	1	CW	1/4 x 2-1/4	2-1/8	Sleeve	Stud	EA	1
D123	1/80	115	1500	0.60	1	CCW	1/4 x 2-1/4	2-1/8	Sleeve	Stud	EA	1
D124	1/50	115	1500	0.75	1	CW	1/4 x 2-1/4	2-1/2	Sleeve	Stud	EA	1
D214	1/20	115/230	3000	1.70-0.80	1	CW	5/16 x 6-1/2	4-5/8	Sleeve	Stud	EA	1

3.3 Inch Diam. Fan and Blower Duty Nutone Replacements



82513

Features

Direct replacements for Nutone and many other popular range hoods
Rotation is determined by viewing the shaft end
6" Chord & 2 Prong Plug
Shaded pole
Stud and ring mounting
Automatic overload
60 Hertz

CATALOG NO.	HP	VOLTS	RPM	AMPS	ROTATION	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	BRG	ENCLOSURE	DIRECT REPLACEMENT FOR	NOTES	UOM	OM
82761	1/100	115	1550	0.70	CCW	1/4 x 1-1/8	2-1/16	Sleeve	Totally Enclosed	Nutone 26750 Nutone 26761	42	EA	1
82513	1/100	115	1550	0.70	CCW	1/4 x 1-1/4	2-1/16	Sleeve	Totally Enclosed	Nutone 23388 Nutone 23405	41, 42	EA	1

Notes: **41.** 1-1/8" Hubs **42.** Includes cord and plug

3.3" DIAMETER MOTORS CONT'D

3.3 Inch Diam. - Fan and Blower Duty Nutone Replacements (Cont.)



50381

Packard

Applications

Direct replacements for Nutone and many other popular range hoods

Features

Rotation is determined by viewing the shaft end
Shaded pole
Stud and ring mounting
60 Hertz
Automatic overload

CATALOG NO.	HP	VOLTS	RPM	AMPS	ROT	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR	NOTES	UOM	OM
52514	1/100	115	1550	0.60	CW	1/4 x 1-1/8	2-1/16	Sleeve	Totally Enclosed	UE 692	42	EA	1
82514	1/100	115	1550	0.70	CW	1/4 x 1-1/8	2-1/16	Sleeve	Totally Enclosed	UE 692	42	EA	1
82635	1/91	115	1550	0.45	CCW	1/4 x 1-1/8	2.09	Sleeve	Totally Enclosed	Nutone 54123 Nutone 54257	42	EA	1
50381	1/75	115	1550	0.7	CCW	1/4 x 1-1/8	2	Sleeve	Totally Enclosed	Nutone 53581	42	EA	1
82694K	1/70	115	3000	1.04	CCW	1/4 x 1	2-3/8	Sleeve	Totally Enclosed	Emerson 2694	42	EA	1
82733	1/50-1/80	115	3000	1.00-0.60	CW	1/4 x 1-1/4	2.59	Sleeve	Totally Enclosed	Nutone C26733	42	EA	1
82621	1/10	115	1550	3.80	CCW	5/16 x 1-1/2	3-5/8	Ball	Open	Nutone 67176 Nutone 32997	—	EA	1

Notes: **42.** Includes cord and plug

Direct Replacement for Krack



41189

Packard

Features

Shaded pole
Totally enclosed
Automatic overload
50/60 Hertz
Rotation is determined by viewing the shaft end
Low Temp Oil

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	BRG	MOUNTING	DIRECT REPLACEMENT FOR	UOM	OM
41189	1/20	115/ 208-230	1350/1550	1.60/0.80	1	CW	5/16 x 1-5/8	3-1/16	Ball	Lug	Franklin 8254111030 8354110940 Krack 11528 11529 Universal JA2P216N JA2P217N JB2P046N JB2P047N	EA	1

3.3" DIAMETER MOTORS CONT'D

OEM Replacements - 3.3 Inch Diam. Motor



41124B

Packard

Features

Stud mounting
Single speed, single phase
Special Lyall plug and cord included
Open Encl.
Automatic overload
60 Hertz
All copper windings
Low temp oil

CATALOG NO.	HP	VOLTS	RPM	AMPS	ROTATION	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	BEARINGS	MOTOR TYPE	DIRECT REPLACEMENT FOR	UOM	OM
41124B	1/15	120	1550	2.00	CWSE	5/16 x 1-1/8	2-1/16	Ball	Shaded Pole	Keeprite - 1043336 Bohn - 5008S Magnetek - 572	EA	1
41125B	1/12	208-230	1550/1400	0.50	CCWSE	5/16 x 2-5/8	3-5/8	Ball	PSC	Bohn - 25305101 Bohn - 7071061	EA	1
41126B	1/15	208-230	1550	1.10	CWSE	5/16 x 3.05	3.56	Ball	Shaded Pole	Packard - 82507 FASCO - D1126 FASCO - 7163-7216	EA	1
45008SB	1/15	115	1550	1.80	CWSE	5/16 x 3.209	3.17	Ball	Shaded Pole	Mars - 09930 Bohn - 5008S Bohn - 5008SS	EA	1
41101B	1/20	115	1500	1.90	CCWSE	5/16 x 2.26	2.81	Ball	Shaded Pole	Heatcraft 253-1194 Larkin - 253-1194 Magnetek - 574	EA	1
41103B	1/20	208-230	1500	0.93	CCWSE	5/16 x 2.26	3.05	Ball	Shaded Pole	Heatcraft 253-1195 Larkin - 253-1195 Magnetek - 575	EA	1
45008TB	1/15	208-230	1550	1.20-1.00	CWSE	5/16 x 3.09	3.56	Ball	Shaded Pole	Bohn - 5008T Bohn - 5034MS Heatcraft - 5008T	EA	1

Permanent Split Capacitor Replacements for Bohn, Emerson, GE and Heatcraft



9721

FASCO

Features

Permanent split capacitor
Capacitor Required: 4 Mfd-370 Volts (Supplied with Motor)
Multi-Horsepower

Electrically reversible, includes reversing plug
Open Encl.
Single phase
50/60 Hertz

All angle mounting
UL recognized
Low temp oil
Ball bearing

CATALOG NO.	HP	VOLTS	RPM	AMPS	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	MOUNTING	DIRECT REPLACEMENT FOR	UOM	OM
9721	1/12	115/208-230	1550	1.10/0.50	5/16 x 3-1/4	3-5/8	Stud	Bohn 25309101 Emerson 9656, 9664 Heatcraft 7071061	EA	1

3.3" DIAMETER MOTORS CONT'D

Permanent Split Capacitor Replacements for Fasco

Features

Packard PSC Motor
Multi-Horsepower
Open Encl.
Single phase
50/60 HZ
All angle mounting
Capacitor mounted on motor
Electrically reversible, includes reversing plug
Low temp oil, UL recognized



49101

Packard

CATALOG NO.	HP	VOLTS	RPM	AMPS	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	BEARINGS	MOUNTING	DIRECT REPLACEMENT FOR	UOM	OM
49101*	1/12-1/15-1/20	115/208-230	1550/1400	1.10/0.50	5/16 x 3-1/8	3-5/8	Ball	Stud	GE 5KSM59JSK1435 GE 5KSM59LS2262AS Heatcraft 25309101 Heatcraft 7071061 Interlink 25309501S Interlink 25309801S Fasco 9721	EA	1

Notes: *Has all copper windings

Packard 3.3 Inch Diam. Motors - Open Encl.

Features

Shaded pole
Automatic overload
Open Encl.
Single phase
Rotation is determined by viewing the shaft end
60 Hertz



40132

Packard

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	BRG	MOUNTING	DIRECT REPLACEMENT FOR	NOTES	UOM	OM
82621	1/10	115	1550	3.80	1	CCW	5/16 x 1-1/2	3-5/8	Ball	Stud	Nutone 67176 Nutone 32997 UE 621		EA	1
40188	1/20	208-230	1500	0.90	1	CW	5/16 x 2-5/16	2-3/4	Sleeve	Stud	Emerson 9648 Fedders S196-00047-002	329	EA	1
40189	1/20	208-230	1500	0.90	1	CCW	5/16 x 2-5/16	2-3/4	Sleeve	Stud	Emerson 9647	329	EA	1
40132	1/20	115	1550	1.80	1	CW	5/16 x 2-1/4	2-3/4	Sleeve	Stud	Heatcraft/Bohn	329	EA	1
40133	1/20	115	1550	1.80	1	CCW	5/16 x 2-1/4	2-3/4	Sleeve	Stud	Heatcraft/Bohn	329	EA	1

Notes: **329**. Motor has 4 studs on both ends

Bracket Adapter Kit

Features

This kit allows mounting “American style” ELCO motors (NU Series) on “European style” U-type or V-type brackets

CATALOG NO.	CONTAINS	UOM	OM
EUBKT01	Plastic Bracket, M4x16 Screw (4 pcs.), Serrated M4 Hex nut (6 pcs.)	EA	1



EUBKT01

ELCO

42 FRAME MOTORS

4.4 Inch Diam. Fan Coil Motors

Features

Sleeve bearings
Automatic overload
Open Encl.
60 Hertz
Shaded pole
Single phase



D337

FASCO

CATALOG NO.	HP	VOLTS	RPM	AMPS	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	MOUNTING	UOM	OM
D236	1/10-1/15-1/25	115	1550	3.50-2.40-1.80	7-1/2 x 1/2 x 7-1/2	3 3/8	Resilient Base	EA	1
D336	1/10-1/15-1/25	115	1550	3.50-2.40-1.80	7-1/2 x 3/8 x 7-1/2	3 1/2	Resilient Rings	EA	1
D337	1/8-1/10-1/12-1/15	115	1550	4.10-2.70-2.30-1.90	7-1/2 x 1/2 x 7-1/2	3 5/8	Resilient Rings	EA	1
D339	1/8-1/12	230	1550	2.00-1.40	6-1/2 x 1/2 x 6-1/2	4 1/8	Resilient Rings	EA	1
D338	1/6-1/10-1/12-1/15	115	1550	5.40-3.20-2.50-2.10	7-1/4 x 1/2 x 7-1/4	4 1/8	Resilient Rings	EA	1

42 Frame Fan Coil Motors

Features

Sleeve bearings
Automatic overload
Open Encl.
Single phase
Models without a base fit existing bases on most fan coil units
Shaded pole and PSC
60 Hertz



40347

Packard

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	MOUNTING	DIRECT REPLACEMENT FOR	NOTES	UOM	OM
Shaded Pole													
40089	1/10	115	1050	3.60	5	Double Shaft	10-5/8 x 1/2 x 10-5/8	3-5/8	Base	Century 89	—	EA	1
40093	1/10	115	1050	3.60	5	Double Shaft	10-5/8 x 3/8 x 10-5/8	3-5/8	Base	Century 93	—	EA	1
40320	1/10	208-230	1050	2.40	3	Double Shaft	10.18 x 1/2 x 10.18	3-3/8	Base	Century 320	—	EA	1
40389	1/10	115	1050	3.60	5	Double Shaft	10-3/4 x 1/2 x 10-3/4	3-3/8	Base	Century 389	28	EA	1
40347	1/8-1/12-1/15-1/20	115	1550	3.60-2.40-2.10-1.80	4	Double Shaft	10 x 1/2 x 10	4	Hex Hubs	Universal 347	9, 28	EA	1
Permanent Split Capacitor													
82456*	1/25	115	1075	0.80	5	Double Shaft	10-5/8 x 1/2 x 10-5/8	3-3/8	Resilient Base	Trane	471	EA	1

*Ball Bearing Motor **Notes:** **9.** No mounting rings **28.** No base **471.** Capacitor mounted on motor

42 FRAME MOTORS CONT'D

42 Frame Fan Coil Motors - Shaded Pole

Features

Sleeve bearings 60 Hertz Single phase Automatic overload



D291

FASCO

CATALOG NO.	HP	VOLTS	RPM	AMPS	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	ENCL.	MOUNTING	UOM	OM
D252	1/20-1/40-1/70	115	1050	1.60-0.80-0.50	7-1/2 x 3/8 x 7-1/2	2-5/8	Open	Resilient Rings	EA	1
D253	1/20-1/40-1/50	115	1050	2.20-1.40-0.80	7-1/2 x 1/2 x 7-1/2	2-5/8	Open	Resilient Rings	EA	1
D254	1/15-1/30-1/50	115	1050	2.10-1.30-0.80	8 x 3/8 x 8	3-1/4	Open	Resilient Rings	EA	1
D389	1/15-1/20-1/30-1/50	115	1050	2.40-1.60-1.10-0.80	10-1/4 x 1/2 x 10-1/4	3-1/8	Open	Resilient Rings	EA	1
D289*	1/10-1/30-1/40-1/45-1/50	115	1050	3.60-1.60-1.20-0.80-0.60	10-3/4 x 1/2 x 10-3/4	3-1/4	Open	Resilient Base	EA	1
D293*	1/10-1/30-1/40-1/45-1/50	115	1050	3.60-1.60-1.20-0.80-0.60	10-3/4 x 3/8 x 10-3/4	3-1/4	Open	Resilient Base	EA	1
D256	1/10-1/20-1/30	115	1050	3.40-1.70-1.00	8 x 1/2 x 8	3-7/8	Open	Resilient Rings	EA	1

Notes: *3 1/2" shaft height

42 Frame Fan Coil Motors - Permanent Split Capacitor

Features

Sleeve bearings 60 Hertz Single phase Automatic overload



D291

FASCO

CATALOG NO.	HP	VOLTS	RPM	AMPS	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	ENCL.	MOUNTING	NOTES	UOM	OM
D294	1/10-1/20-1/25-1/35-1/50	115	1050	1.30-1.00-0.70-0.60-0.50	10-3/4 x 3/8 x 10-3/4	3-1/4	Open	Resilient Base	—	EA	1
D291	1/10-1/15-1/25-1/40	115	1050	2.20-1.40-1.00-0.70	10-3/4 x 1/2 x 10-3/4	3-1/4	Open	Resilient Base	514	EA	1
D290	1/10-1/15-1/25-1/40	115	1050	2.20-1.40-1.00-0.70	1/2 x 8-1/2	3-1/4	Open	Resilient Rings	514 517	EA	1

Notes: **514.** 4MFD 370V capacitor included **517.** Electrically reversible

42 FRAME MOTORS CONT'D

42 Frame Fan Coil Motors

Features

Sleeve bearings 60 Hertz Single phase Automatic overload



D354

FASCO

CATALOG NO.	HP	VOLTS	RPM	AMPS	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	ENCL.	MOUNTING	NOTES	UOM	OM
D277	1/10-1/12-1/20	277	1050	0.70-0.50-0.40	8-1/2 x 1/2 x 8-1/2	3-7/8	Open	Resilient Rings	514	EA	1
D347	1/8-1/10-1/15-1/20	115	1550	2.30-1.60-1.20-0.70	10-1/2 x 1/2 x 10-1/2	3	Open	Resilient Rings	250, 514	EA	1
D354	1/6-1/10-1/20	115	1050	3.10-1.50-1.10	8-1/2 x 1/2 x 8-1/2	3-7/8	Open	Resilient Rings	514	EA	1
D247	1/6-1/8-1/12	230	1550	1.00-0.70-0.50	8 x 1/2 x 8	3-7/8	Open	Resilient Rings	514	EA	1
D1092	1/3	115	1675	3.4	7-15/16 x 1/2 x 3-1/2	3-1/2	Open	Belly Band	—	EA	1

Notes: **250.** Mounting rings not included **514.** 4MFD/370V capacitor included

42 Frame Fan Coil Motors

Features

Sleeve bearings 60 Hertz Single phase Automatic overload



DB4505

Century®

CATALOG NO.	HP	VOLTS	RPM	AMPS	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	CAP. REQ.	ENCL.	MOUNTING	UOM	OM
DBL6409	1/10-1/15-1/20-1/25-1/30	115	1050	3.50	10-5/16 x 1/2 x 10-5/16	3-3/8	—	Open	Resilient Base	EA	1
DBL4500V1	1/10-1/12-1/15	115	1625	1.30-1.00-0.70	9-5/16 x 1/2 x 9-5/16	3-3/8	5MFD/370V	Open	Resilient Base	EA	1
DB6502V1	1/10-1/15-1/20-1/25	208-230	1075	0.70-0.50-0.40-0.30	9-5/16 x 1/2 x 9-5/16	3-3/8	5MFD/370V	Open	Resilient Base	EA	1
DB4505	1/5-1/10-1/20	230	1500	1.50	9-5/16 x 1/2 x 9-5/16	3-3/8	5MFD/370V	Open	Resilient Base	EA	1

42 FRAME MOTORS CONT'D

5 Inch Diam. Unit Heater Motors

Features

Shaded Pole
Thermally Protected
40°C Ambient
Sleeve bearings
Totally enclosed
Class B Insulation
Conduit Box
Extended studs shaft end
1/2" Diameter Shaft with Flat



U6520

Century®

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	CAP. REQ	TYPE	MOUNTING	NOTES	UOM	OM
U6520	1/8	115	1075	2.60	1	Reversible	1/2 x 3	3-7/8	5MFD/ 370V	PSC	Resilient Rings	201, 504	EA	1
U6521	1/8	115	1075	2.60	1	Reversible	1/2 x 2-7/8	3-7/8	5MFD/ 370V	PSC	Resilient Base	201, 504 505	EA	1

Notes: **201.** 3 thru bolts, 4.42 dia. bolt circle **504.** 60" leads **505.** 2.6" shaft height **555.** 3.5" shaft height

5 Inch Diam. Shaded Pole Direct Drive Blower Motors

Features

U6520 and U6521 have capacitor mounted on motors
Permanent split capacitor and shaded pole
Reznor replacements
Sleeve bearings
Totally enclosed
Automatic overload
60 Hertz
Single phase



40317

Packard

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BRG	ENCL.	MOUNTING	DIRECT REPLACEMENT FOR	UOM	OM
40140	1/15	115	1050	2.7	1	3/8 x 2 3/8	2-5/8	SP	Sleeve	Open	Stud	7151-0033	EA	1
40096	1/15-1/30	115	1050	2.65	2	3/8 x 2 3/8	2-5/8	SP	Sleeve	Open	Stud		EA	1
40180	1/8-1/11	115	1050	4.5-3.4	2	1/2 x 4	3-3/16	SP	Sleeve	Open	Belly Band	Coleman	EA	1
40317	1/8-1/10	230	1050	2.1-1.8	2	1/2 x 3-1/2	3-3/16	SP	Sleeve	Open	Resilient Hub/Stud	—	EA	1
40099	1/8-1/10-1/12	115	1050	4.30-3.5-3.0	3	1/2 x 3-1/2	4.19	SP	Sleeve	Open	Stud	GE 3541 GE 3931 Century 98	EA	1
40166	1/6	115	1050	6.60	2	1/2 x 4-1/2	3-7/8	SP	Sleeve	Open	Resilient Rings	—	EA	1
40849	1/6	115	1050	5.50	1	1/2 x 3-3/4	3-7/8	SP	Sleeve	Open	Resilient Rings	—	EA	1
40850	1/5	115	1050	6.50	1	1/2 x 5-1/2	3-3/8	SP	Sleeve	Open	Resilient Rings	—	EA	1
40851	1/5	115	1050	6.30	2	1/2 x 4-1/4	3-7/8	SP	Sleeve	Open	Resilient Rings	—	EA	1
40852	1/5-1/8-1/10	115	1050	7.3-4.8-3.8	3	1/2 x 5	3-7/8	SP	Sleeve	Open	Resilient Rings	—	EA	1
40853	1/5	208-230	1050	3.20	3	1/2 x 5-1/2	3-7/8	SP	Sleeve	Open	Resilient Rings	—	EA	1

CATALOG NO.	HP	VOLTS	RPM	AMPS	ROT	DIAM	SHAFT DIM (IN.)	LENGTH LESS SHAFT (IN.)	BEARINGS	MOUNTING	DIRECT REPLACEMENT FOR	UOM	OM
92201	1/25-1/40	115	1550	2.20-1.10	CCWSE	5-1/8	1/2 x 2	2.65	Sleeve	Studs	Williams Furnace 77-1004 Holly Furnace RI2201	EA	1

NOTE: Item numbers in **RED** indicate **Made in the U.S.A.**

42 FRAME MOTORS CONT'D

5 Inch Diameter Unit Heater Motors



40387

Features

U6520 and U6521 have capacitor mounted on motors
Permanent split capacitor and shaded pole
Reznor replacements
Sleeve bearings
Totally enclosed
Automatic overload
60 Hertz
Single phase

Direct Replacement For

Brownell MTG3206
Emerson 9034
GE 3206
Marathon X302
Packard 70066
Reznor 55682
Rotom R12834
Trane MOT6195

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	MOUNTING	NOTES	UOM	OM
70224	1/20	115	1050	2.30	1	CWSE	1/2 x 3	3-7/8	Shaded Pole	Stud	9	EA	1
40387	1/15	115	1050	3.10	1	CWSE	1/2 x 2-5/8	3-5/8	Shaded Pole	Stud and Mounting Rings	—	EA	1

Notes: **9.** No mounting rings **201.** 3 thru bolts, 4.42 dia. bolt circle **504.** 60" leads **505.** 2.6" shaft height **555.** 3.5" shaft height

5 Inch Diam. Motors For Sterling Motors



90091

Features

42 Frame
60 Hertz
Single phase
Automatic overload

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	BEARINGS	MOUNTING	UOM	OM
90091	1/10	120	1000	2.60	1	CW	3/8 x 3	2.58	Sleeve	Studs	EA	1
90766	1/20	115	1650	1.90	1	CWSE	5/16 x 3	2.68	Sleeve	Studs	EA	1
90871	1/20	120	1000	1.40	1	CWSE	3/8 x 3-1/2	2.58	Sleeve	Studs	EA	1
90872	1/12	120	1000	2.20	1	CWSE	3/8 x 3-1/2	3.08	Sleeve	Studs	EA	1

5 Inch Diam. Shaded Pole Direct Drive Blower Motors



D143

Features

Shaded pole
1050 RPM
Single phase
60 Hertz
Automatic overload

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	ENCL.	BEARINGS	MOUNTING	UOM	OM
D340	1/40	115	1050	1.1	1	CWSE	3/8 x 2-5/8	2-5/8	TE	Sleeve	Stud	EA	1
D143	1/30-1/40	115	1050	1.5-1	2	CCWSE	1/2 x 1-5/8	2-1/4	Open	Sleeve	Belly Band	EA	1

42 FRAME MOTORS CONT'D

Fasco 5 Inch Diam. Direct Drive Blower Motors



D156

Features

Shaded pole or permanent split capacitor
Single phase
Automatic overload
60 Hertz

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	ENCL.	BRG	MOUNTING	NOTES	UOM	OM
D176	1/10-1/20	115	1050	3.9-1.7	2	CWSE	3/8 x 3	2-5/8	Open	Sleeve	Resilient Rings	—	EA	1
D180	1/8	115	1050	4.50	2	CWSE	1/2 x 4	3-1/4	Open	Sleeve	Resilient Rings	9,19,20	EA	1
D156	1/6	115	1050	6.60	1	CWSE	1/2 x 3-7/8	3-7/8	Open	Sleeve	Resilient Rings	—	EA	1
D166	1/6-1/9	115	1050	7.20	2	CWSE	1/2 x 3-1/2	3-7/8	Open	Sleeve	Resilient Rings	—	EA	1
D318	1/6-1/8	230	1050	3.10	2	CWSE	1/2 x 3-1/2	4	Open	Sleeve	Stud	9	EA	1
D158	1/5-1/6-1/7	115	1050	6.70	3	CWSE	1/2 x 4-1/8	3-7/8	Open	Sleeve	Resilient Rings	—	EA	1
D356	1/8-1/10-1/12	115	1050	4.70-3.70-3.20	3	CWSE	1/2 x 3-1/2	3-1/8	SP	Sleeve	Stud	—	EA	1

Notes: **9.** No mounting rings **19.** Drilled and tapped for Coleman mounting **20.** For International Oil Burner Co.

Fasco 5 Inch Diam. Direct Drive Blower Motors



D150

Features

Permanent Split Capacitor (PSC)
Capacitor Not Supplied with Motor
Thermally Protected
Open Air Over
Class B Insulation, 40°C Ambient
30" Leads
Extended Studs Shaft End, Belly Band

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	CAP. REQUIRED	BRG	MOUNTING	UOM	OM
D151	1/4-1/5-1/6	230	1050	2.00-1.40-1.10	3	Rev.	1/2 x 6	4-1/8	PSC	5MFD/370V	Sleeve	Stud	EA	1
D150	1/4-1/5-1/6	115	1050	4.10-3.20-2.50	3	Rev.	1/2 x 6	4-1/8	PSC	5MFD/370V	Sleeve	Stud	EA	1
D152	1/4-1/5-1/6-1/8	277	1050	1.50-1.10-0.80-0.70	4	Rev.	1/2 x 6	4-1/8	PSC	5MFD/370V	Sleeve	Stud	EA	1

42 FRAME MOTORS CONT'D

42 Frame Direct Drive Blower Motors

Features

Shaded Pole	Class B Insulation, 40°C Ambient
Thermally Protected	60 Hertz
Open Air Over	Single Phase



BL6407

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	BRG	TYPE	MOUNTING	NOTES	UOM	OM
BL6410	1/8	115	1050	5.20	1	CWSE	1/2 x 5-1/2	3-3/8	Sleeve	SP	Resilient Rings	187, 201, 205	EA	1
BL6407	1/6	115	1000	7.80	1	CCWLE	1/2 x 3	3-7/8	Sleeve	SP	Resilient Rings	—	EA	1
BL6412	1/6	115	1050	5.50	1	CWSE	1/2 x 3-5/8	3-7/8	Sleeve	SP	Resilient Rings	187, 201, 205	EA	1
9640	1/6	115	1550	6.40	1	CWLE	1/2 x 3-5/16	4	Sleeve	SP	Resilient Base	256	EA	1

42 Frame Direct Drive Blower Motors

Features

Shaded Pole	Class B Insulation, 40°C Ambient
Thermally Protected	60 Hertz
Open Air Over	Single Phase



B6507

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	BRG	TYPE	CAP REQ	MOUNTING	NOTES	UOM	OM
BL6420	1/6-1/9	115	1050	5.60	2	CWSE	1/2 x 4-1/2	3-7/8	Sleeve	SP	—	Resilient Rings	187, 201 205	EA	1
BL6413	1/5	115	1050	6.00	1	CWSE	1/2 x 5-1/2	3-3/8	Sleeve	SP	—	Resilient Rings	187, 201 205	EA	1
BL6414	1/5-1/8-1/10	115	1050	6.50	3	CWSE	1/2 x 5-1/2	3-7/8	Sleeve	SP	—	Resilient Rings	187, 201 205	EA	1
BL6416	1/5-1/8-1/10-1/15	115	1050	7.10	4	CWSE	1/2 x 2-5/8	3-7/8	Sleeve	SP	—	Resilient Rings	187, 201 205	EA	1
B6507	1/5-1/6-1/10	230	1075	1.3-.9 -.7	3	Rev.	1/2 x 3	3.5	Sleeve	PSC	7.5MFD/ 370V	Resilient Rings	187, 201 205	EA	1
B6520	1/4-1/5-1/6	230	1075	2.0	3	Rev.	1/2 x 4-5/8	4-1/16	Sleeve	PSC	7.5MFD/ 370V	Resilient Rings	201	EA	1

Notes: **187.** Resilient mounting rings included **201.** 3 thru bolts, 4.42 dia. bolt circle **205.** Extended thru bolts, shaft end only **256.** Includes base

42 FRAME MOTORS CONT'D

Direct Replacements For Loren Cook's Gemini Motors



90420

Packard

Features

Permanently lubricated sealed sleeve bearings
Open Encl.
Automatic overload
60 Hertz

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	DIA. (IN.)	MOUNTING	DIRECT REPLACEMENT FOR	UOM	OM
90220	1/114	115	1500	0.75	2	CWSE	3/8 x 2-3/4	2-3/8	Shaded Pole	4.4	Thru Bolt	Gemini Loren Cook 220/240	EA	1
90420	1/23	115	1500	1.50	1	CWSE	3/8 x 2-3/4	2-5/8	Shaded Pole	4.4	Thru Bolt	Gemini Loren Cook 420	EA	1
90320	1/16	115	1550	2.20	2	CWSE	3/8 x 2-1/2	2-5/8	Shaded Pole	4.4	Thru Bolt	Gemini Loren Cook 320/340	EA	1
90520	1/16	115	1200	1.50	1	CWSE	3/8 x 2-1/4	3	PSC Cap Included	5.12	Thru Bolt	Gemini Loren Cook 520	EA	1
90620	1/11	115	1500	4.60	2	CWSE	1/2 x 6-1/4	3	Shaded Pole	4.4	Lug Mount	Gemini Loren Cook 620/640	EA	1
90720	1/4	115	1625	3.90	2	CWSE	1/2 x 6-1/4	3-3/8	PSC Cap Included	5.12	Lug Mount	Gemini Loren Cook 720/740	EA	1

Direct Replacements For Greenheck



90038

Packard

Features

Includes Capacitor
Totally Enclosed
Automatic overload
Stud Mount
60 Hertz

CATALOG NO.	WATT	HP	VOLTS	RPM	AMPS	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	BRG	DIA.	ENCL.	MOUNTING	TYPE	DIRECT REPLACEMENT FOR	UOM	OM
90145	—	1/90	115	950	1.15	CWSE	5/16 x 2-5/8	2-3/4	Sleeve	3.3"	OAO	Stud	SP	Greenheck 310145	EA	1
90198	—	1/40	115	1050	1.80	CWSE	5/16 x 2-5/8	3	Sleeve	3.3"	OAO	Stud	SP	Greenheck 310198	EA	1
90318*	—	1/8	115	1550 /1300 /1050	2.60	CCWSE	1/2 x 2-3/4	3-5/8	Ball	—	—	Thru Bolt	PSC Cap Included	Greenheck 308318	EA	1
90153	—	1/4	115	1725	4.60	CCWSE	1/2 x 2-3/4	3-5/8	Ball	5.69"	ODP	Resilient Base	Split Phase	Greenheck 309153	EA	1
90955	5	—	115	700	0.19	CWSE	5/16 x 2-3/4	2-1/2	Ball	3.3"	TEAO	Stud	PSC	Greenheck 314955	EA	1
90038	3	—	115	675	0.15	CWSE	5/16 x 2-3/4	2-1/2	Ball	3.3"	TEAO	Stud	PSC	Greenheck 315038	EA	1

*3 Speeds

42 FRAME MOTORS CONT'D

Direct Replacements For Broan / Lomanco

Features

Open Encl.
Automatic overload
Single phase
Made in the USA
60 Hertz
42 Frame



69317

Packard

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BRG	MOUNTING	DIRECT REPLACEMENT FOR	UOM	OM
69316	1/12	120	1100	3.40	1	CWSE	1/2 x 3-1/16	2-1/4	SP	Sleeve	Stud	Broan 97009316	EA	1
69317	1/7	120	1100	4.30	1	CWSE	1/2 x 2-5/8	2-5/8	SP	Sleeve	Stud	Broan 97009317 Broan 99080267	EA	1
70059	1/10	120	1100	3.40	1	CWSE	1/2 x 1-5/8	2-1/4	SP	Sleeve	Lug	Lomanco AO510B2497 Lomanco AO416B2059 Lomanco AO510B2389	EA	1

Direct Replacement For L.L. Building Products

Features

Open Encl.
Single phase
60 Hertz
Direct replacements for Leslie Locke
Automatic overload



99371

Packard

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	DIAM. (IN.)	CAPACITOR INCLUDED	DIRECT REPLACEMENT FOR	UOM	OM
99320	1/14	120	900	3.40	1	CWSE	1/2 x 2.05	2.25	SP	5.12	—	V909320	EA	1
99319	1/5	120	1050	3.30	1	CWSE	1/2 x 2.30	3.33	PSC	5.12	10MFD/250V	V909319	EA	1
99321	1/5	120	1050	3.30	1	CWSE	1/2 x 2.30	3.33	PSC	5.12	10MFD/250V	V909321 V909337	EA	1
99371	1/7	120	1050	2.80	1	CWSE	1/2 x 2.30	3.08	PSC	5.12	8MFD/250V	V909371 V909336	EA	1

42 FRAME MOTORS CONT'D

MultiFit® Condenser Fan Motors

Features

All angle mount
Class B insulation
Reversing plug
Totally enclosed
36 inch leads
60°C ambient
Single speed
Multi-mounting system
Double sealed ball bearings
Energy efficient PSC design
One simple connection eliminates the need to select various horsepower or change capacitor sizes
Direct Replacement For hundreds of 1/4 - 1/12 horsepower applications



9722

Century®

CATALOG NO.	HP	VOLTS	RPM	AMPS	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	BEARINGS	CAPACITOR REQUIRED	HERTZ	DIRECT REPLACEMENT FOR	UOM	OM
9712	1/8,1/15 1/40	115	1625	1.90, 0.94 0.56	1/2 x 5-3/4	4-1/2	Sleeve	5MFD/370V	60	—	EA	1
9715	1/6,1/8 1/12	115	1075	3.10, 2.00 1.40	1/2 x 5-3/4	4-1/2	Sleeve	5MFD/370V	60	—	EA	1
9722	1/8 1/10 1/12	208-230	1075 1135 1155	0.90 0.60 0.50	1/2 x 3	4	Ball	5MFD/370V	60	GE 2243 GE 2248 GE 2249 GE 2251	EA	1
9723	1/4 1/5 1/6	208-230	1075 1145 1165	2.00 1.20 1.00	1/2 x 3	4-1/2	Ball	7.5MFD/370V	60	GE 2244 GE 2245 GE 2246 GE 2247 GE 2250	EA	1
9724	1/4,1/5 1/6	208-230	1625 1715 1759	1.60, 1.00 0.70	1/2 x 3	4-1/2	Ball	5MFD/370V	60	—	EA	1


3-in-1 Design

Approximate Speeds and Amps in Application

CATALOG NO. 9722		
HP	Approximate RPMs	Approximate Amps
1/8	1075	0.9
1/10	1135	0.6
1/12	1155	0.5

CATALOG NO. 9723		
HP	Approximate RPMs	Approximate Amps
1/4	1075	2.0
1/5	1145	1.2
1/6	1165	1.0

CATALOG NO. 9724		
HP	Approximate RPMs	Approximate Amps
1/4	1625	1.6
1/5	1715	1.0
1/6	1759	0.7

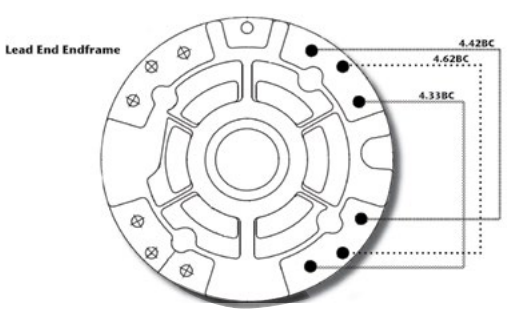

NOTE: Item numbers in **RED** indicate **Made in the U.S.A.**

DIVERSITECH®

48 FRAME MOTORS CONT'D

Condenser Fan Motors

Features

Efficiency levels meet EISA requirements
UL recognized



3082

genteq

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	BEARINGS	MOUNTING	UOM	OM
3082	1/3	115	1075	6	4	CCWLE	1/2 x 2-1/2	5-3/8	Sleeve	Ring	EA	1
3229	1/3	208-230	1075	2.4	2	Reversible	1/2 x 6	5	Sleeve	Thru Bolts Both Ends	EA	1

Condenser Fan Motor

Features
Efficiency up to 80%
2-speed taps, one for 1100RPM one for 850RPM,
which means it Direct Replacement For a 6-pole PSC and an 8-pole PSC in one motor
Horizontal and vertical shaft-down mounting
Quiet start and operation
Constant speed brushless DC motor
Designed for residential use up to 5 tons
6kV surge protection
54-inch leads
Drop-in replacement for induction motors
Easy Retrofit – line voltage connections
Dual rotation (CW/CCW)
Diam. (In.) - 5-5/8
Encl. - TEAO
Overload Protection - Automatic
Phast - 1
Hertz - 60/50



6301

genteq

Evergreen

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEED	ROTATION	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	BEARING	MOUNTING	UOM	OM
6301	1/5	208-230	1100/850	2.8	2	Reversible	1/2 x 3	5.45	Ball	Thru Bolt/Belly Band	EA	1
6303	1/3	208-230	1100	3.5	2	Reversible	1/2 x 3	5.95	Ball	Thru Bolt/Belly Band	EA	1
6903	1/3	460	1100/850	1.6	2	Reversible	1/2 x 6	6.82	Ball	Thru-bolt/Belly band	EA	1
6905	1/2	460	1100/850	2.5	2	Reversible	1/2 x 6	7.57	Ball	Thru-bolt/Belly band	EA	1

48 FRAME MOTORS CONT'D

Permanent Split Capacitor Condenser Fan Motors

Features

Permanent split capacitor
Single speed
Reversible rotation
Totally enclosed
Automatic overload
48 Frame
60 Hertz
Single phase
Rheem Mounting



30825

Packard

CATALOG NO.	HP	VOLTS	RPM	AMPS	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	BEARINGS	CAPACITOR REQUIRED	DIRECT REPLACEMENT FOR	UOM	OM
80825	1/8	208-230	825	1.00	1/2 x 6-1/2	3-7/8	Ball	5MFD/370V	Emerson 1872	EA	1
43727B	1/6	208-230	1075	1.0-1.1	1/2 x 6-1/2	3-7/8	Ball	5MFD/370V	Emerson 1859	EA	1
60825	1/6	208-230	825	1.0-1.1	1/2 x 6-1/2	4-1/8	Ball	5MFD/370V	Emerson 1873	EA	1
40825	1/4	208-230	825	1.3-1.4	1/2 x 6-1/2	4-5/8	Ball	5MFD/370V	Emerson 1874	EA	1
43732	1/4	208-230	1075	1.8-2.0	1/2 x 6-1/2	4-1/8	Ball	5MFD/370V	Emerson 1860 & 1876	EA	1
30825	1/3	208-230	825	1.6-1.8	1/2 x 6-1/2	5-1/8	Ball	7.5MFD/370V	Emerson 1875	EA	1
43733	1/3	208-230	1075	2.2-2.5	1/2 x 6-1/2	4-5/8	Ball	7.5MFD/370V	Emerson 1861 & 1877	EA	1
43734	1/2	208-230	1075	3.0-3.5	1/2 x 6-1/2	5-1/8	Ball	10MFD/370V	Emerson 1862 & 1878	EA	1
43735	3/4	208-230	1075	4.6-5.3	1/2 x 6-1/2	5-3/8	Ball	10MFD/370V	Emerson 1868 & 1879	EA	1

Notes: 4 drilled and tapped holes in shell for Rheem applications

Condenser Fan Motors

Features

Permanent Split Capacitor
Requires 4MFD/370V Capacitor
CCW Shaft End
Shaded Pole
UL recognized
Totally enclosed
Automatic overload
Ball Bearing
60 Hertz
Class B Insulation



43405

Packard

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	BRG	MOUNTING	DIRECT REPLACEMENT FOR	UOM	OM
43405	1/6	208-230	1500	0.9	1	CCWSE	1/2 x 1-3/8	4	Ball	Bracket	Emerson 3405 US Motors 3405 Carrier 5KCP39BGR201BS Carrier HC33GE208 GE 5KCP39BGR201BS Century OCA1014	EA	1

NOTE: Item numbers in **RED** indicate **Made in the U.S.A.**

48 FRAME MOTORS CONT'D

Permanent Split Capacitor Condenser Fan Motors



FSE1016SV1

Features

Permanent split capacitor
Single speed
Reversible rotation
Totally enclosed
Automatic overload
48 Frame
60 Hertz
Single phase
Rheem Mounting

CATALOG NO.	HP	VOLTS	RPM	AMPS	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	BRG	CAPACITOR REQUIRED	NOTES	UOM	OM
Century											
FSE1016SV1	1/6	208-230	1075	0.90	1/2 x 6-1/2	4	Sleeve	5MFD/370V	189, 422	EA	1
FSE1026SV1	1/4	208-230	1075	2.00	1/2 x 6-1/2	4-3/8	Sleeve	5MFD/370V	189, 422	EA	1
FE1026SC	1/4	208-230	1075	1.30	1/2 x 6	4-5/8	Ball	5MFD/370V	189, 246	EA	1
FSE1056SV1	1/2	208-230	1075	2.80	1/2 x 6-1/2	5-3/8	Sleeve	10MFD/370V	189, 422	EA	1
FSE1076SV1	3/4	208-230	1075	4.20	1/2 x 6-1/2	5-5/8	Sleeve	15MFD/370V	189, 422	EA	1
Fasco											
D799	1/8	208-230	825	0.90	1/2 x 6	4	Sleeve	5MFD/370V	126, 138, 208, 517	EA	1
D919	1/8	208-230	1075	0.90	1/2 x 6-1/2	3-3/4	Sleeve	5MFD/370V	126, 135, 208, 517	EA	1
D917	1/6	208-230	1075	1.00	1/2 x 6-1/2	3-3/4	Sleeve	5MFD/370V	126, 135, 208, 517	EA	1
D794	1/5	208-230	825	1.30	1/2 x 6	4-1/3	Sleeve	5MFD/370V	126, 138, 208, 517	EA	1
D906	1/5	208-230	1075	1.20	1/2 x 6-1/2	4	Sleeve	5MFD/370V	126, 135, 208, 517	EA	1
D934	1/4	208-230	825	1.90	1/2 x 6	4-1/3	Sleeve	5MFD/370V	126, 138, 208, 517	EA	1
D909	1/4	208-230	1075	1.80	1/2 x 6-1/2	4	Sleeve	5MFD/370V	126, 135, 208, 517	EA	1
D7909	1/4	208-230	1075	1.80	1/2 x 6-1/2	4	Ball	5MFD/370V	126, 135, 208, 517	EA	1
D908	1/3	208-230	1075	2.40	1/2 x 6-1/2	4-1/2	Sleeve	7.5MFD/370V	126, 135, 208, 517	EA	1
D7908	1/3	208-230	1075	2.60	1/2 x 6-1/2	4-1/2	Ball	7.5MFD/370V	126, 135, 208, 517	EA	1
D7907	1/2	208-230	1075	3.70	1/2 x 6-1/2	5	Ball	10MFD/370V	135, 208, 517	EA	1
D913	1/4	460	1075	1.10	1/2 x 6-3/8	4	Ball	5MFD/370V	135, 208, 517	EA	1
D915	3/4-1/2	460	1075	2.5-1.6	5/8 x 4-1/2	5-1/3	Ball	15MFD/370V	145, 146, 208, 517	EA	1

Notes: **126.** 4 drilled and tapped holes in shell for Rheem applications **135.** All angle mount bearings **138.** All angle mount bearings. Use rain shield when necessary **145.** Special wiring configuration. Cannot be used with SPDT switching. **146.** Keyed Shaft **189.** Reversing plug **208.** 60°C ambient **246.** No hubs on either end **422.** 1/2" hub on shaft end frame with slinger. Grommet on lead exits. **517.** Electrically reversible

48 FRAME MOTORS CONT'D

5-5/8 Inch Diam. Multi-Horsepower Condenser Fan Motors



45458B

Packard

Features

Permanent split capacitor
UL recognized
Mounts by belly band, thru bolts or Rheem mounting holes with screws
Direct Replacement For Rheem and Hundreds of Other Condenser Motors!
Single speed
Totally enclosed
Single phase
48 Frame
60 Hertz
Ball bearings
Electrically reversible
All angle mounting
Automatic overload

CATALOG NO.	HP	VOLTS	RPM	AMPS	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	BEARINGS	CAP. REQUIRED	DIRECT REPLACEMENT FOR	UOM	OM
45488B	1/4-1/5-1/6-1/8	208-230	825	1.8-2.0	1/2 x 6-1/2	4-1/8	Ball	7.5MFD 370V	Emerson 5464 Rheem 51-20760-11 Rheem 51-21276-01 Rheem 51-23054-13 Rheem 51-23055-12	EA	1
45458B	1/3-1/4-1/5-1/6	208-230	1075	1.8-2.0	1/2 x 6-1/2	4-1/8	Ball	7.5MFD 370V	Emerson 5458 Emerson 5462 Rheem 51-20354-11 Rheem 51-20668-11 Rheem 51-23053-11 Rheem 51-23055-11	EA	1

Multi-Horse Power High Temp Condenser Fan Motors



45464F

Vulcan70°C

Features

Permanent split capacitor
UL recognized
Mounts by belly band, thru bolts or Rheem mounting holes with screws
Totally enclosed
Single Phase
48 Frame
60 Hertz
Electrically reversible
All angle mounting
Automatic overload
70°C ambient

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	BEARINGS	UOM	OM
45462F	1/3-1/5	208-230	1075	2.6-1.4	2	Rev	1/2 x 6	4.86	Ball	EA	1
45464F	1/3-1/5	208-230	825	1.9-1.2	2	Rev	1/2 x 6	5.24	Ball	EA	1
45465F	1/2-1/4	208-230	1075	3.6-1.7	2	Rev	1/2 x 6	5.24	Ball	EA	1

48 FRAME MOTORS CONT'D

Vulcan High Temperature Outdoor Condenser Fan Motors

Features

Class F Insulation
70°C Ambient
Ball bearing
Single speed
Drilled and tapped holes in the shell for Rheem mounting
Reversible
All angle mounting
Extended thru bolts
36" leads
Energy efficient PSC design
UL recognized

68% EFFICIENT!

70° Max Ambient Temp



43727BF

Packard

Vulcan70°C

CATALOG NO.	HP	VOLTS	RPM	AMPS	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	BRG	CAPACITOR REQUIRED	DIRECT REPLACEMENT FOR	UOM	OM
60825F	1/6	208-230	825	1.0-1.1	1/2 x 6-1/2	4-1/8	Ball	5MFD/370V	20403, Rheem 51-20760-11 US Motors 1873H	EA	1
40825F	1/4	208-230	825	1.3-1.4	1/2 x 6-1/2	4-5/8	Ball	5MFD/370V	20404, Rheem 51-23054-13 US Motors 1874H	EA	1
30825F	1/3	208-230	825	1.6-1.8	1/2 x 6-1/2	5-1/8	Ball	7.5MFD/370V	20405, Rheem 51-21853-83, US Motors 1875H	EA	1
43727BF	1/6	208-230	1075	1.0-1.1	1/2 x 6-1/2	3-7/8	Ball	5MFD/370V	20727, Rheem 51-21854-17, US Motors 1859H	EA	1
43732F	1/4	208-230	1075	1.8-2.0	1/2 x 6-1/2	4-1/8	Ball	5MFD/370V	20728, Rheem 51-23054-11, US Motors 1860H	EA	1
43737F	1/3	460	1075	1.3	1/2 x 6-1/2	5-1/4	Ball	7.5MFD/370V	US Motors 3737H	EA	1
43734F	1/2	208-230	1075	3.0-3.5	1/2 x 6-1/2	5-1/8	Ball	10MFD/370V	20730, US Motors 1862H	EA	1

Vulcan High Temperature Outdoor Multi-Horsepower Condenser Fan Motors

Features

Permanent split capacitor
UL recognized
Mounts by belly band, thru bolts or Rheem mounting holes with screws
Single speed
Direct Replacement For Rheem and Hundreds of Other Condenser Motors
70°C Ambient
Single phase
60 Hertz
Electrically reversible
All angle mounting
Automatic overload
Totally enclosed

70° Max Ambient Temp



45488BF

Packard

Vulcan70°C

CATALOG NO.	HP	VOLTS	RPM	AMPS	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	FRAME	BRG	CAPACITOR REQUIRED	ROTATION	UOM	OM
45458BF	1/3-1/4-1/5-1/6	208-230	1075	1.8-2.0	1/2 x 6-1/2	4-1/8	48	Ball	7.5MFD 370V	Reversible	EA	1
45488BF	1/4-1/5-1/6-1/8	208-230	825	1.8-2.0	1/2 x 6-1/2	4-1/8	48	Ball	7.5MFD 370V	Reversible	EA	1

48 FRAME MOTORS CONT'D

Genteq Condenser Fan Motors - Shaft Up



3201

genteq™

Applications

Designed for condenser fan and heat pump units requiring vertical shaft up or vertical shaft down positioning with “belly band” or extended clamp screw mounting.

Features

Permanent split capacitor
Standard efficiency designs
Single phase

Designed for 370 Volt capacitor, not included
Mounting holes in shell for capacitor bracket
48 Frame

Water slinger on shaft
26 inch motor leads
Sleeve or ball bearings

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	BEARINGS	CAP. REQUIRED	NOTES	UOM	OM
Down Application											
3201	1/10	208-230	825	0.80	1	Reversible	Ball	5MFD 370V	1, 5	EA	1
3727	1/6	208-230	1075	1.00	1	Reversible	Sleeve	5MFD 370V	—	EA	1
3403	1/6	208-230	825	1.00	1	Reversible	Sleeve	5MFD 370V	—	EA	1
3728	1/4	208-230	1075	1.80	1	Reversible	Sleeve	5MFD 370V	1	EA	1
3732	1/4	208-230	1075	1.80	1	Reversible	Ball	5MFD 370V	2	EA	1
3404	1/4	208-230	825	1.50	1	Reversible	Sleeve	5MFD 370V	—	EA	1
3729	1/3	208-230	1075	2.30	1	Reversible	Sleeve	7. 5MFD 370V	1, 4	EA	1
3733	1/3	208-230	1075	2.30	1	Reversible	Ball	7. 5MFD 370V	1	EA	1
3205	1/3	208-230	825	2.20	1	Reversible	Ball	7. 5MFD 370V	—	EA	1
3405	1/3	208-230	825	2.20	1	Reversible	Sleeve	7. 5MFD 370V	—	EA	1
3730	1/2	208-230	1075	3.50	1	Reversible	Sleeve	10MFD 370V	1	EA	1
3734	1/2	208-230	1075	3.50	1	Reversible	Ball	10MFD 370V	—	EA	1
3735	3/4	208-230	1075	4.70	1	Reversible	Ball	15MFD 370V	—	EA	1
Horizontal Application											
3327	1/6	208-230	1075	0.90	1	Reversible	Sleeve	7. 5MFD 370V	1, 3, 6	EA	1
3328	1/4	208-230	1075	1.80	1	Reversible	Sleeve	5MFD 370V	1, 3	EA	1
3329	1/3	208-230	1075	2.40	1	Reversible	Sleeve	7. 5MFD 370V	1, 3, 6	EA	1
3330	1/2	208-230	1075	3.60	1	Reversible	Sleeve	10MFD 370V	1, 3, 6	EA	1

Notes:
1. Designed for 60°C ambient **2.** Designed for 65°C ambient **3.** Opposite shaft-end endshield is open **4.** TENV construction
5. Designed for 50 or 60 Hertz operation **6.** 6" shaft extension with two flats 90° apart

48 FRAME MOTORS CONT'D

Wagner® Direct Drive Furnace Blower Motors



WG840587

WAGNER MOTORS

Features

- Installs with all Standard 48 Frame Mounting Brackets
- Standard Shaft Length, Diam., and Flats
- Uses 370V Capacitors
- Continuous Air Over
- Standard 48 Frame Motor Casing Size
- 2.5" Diam. Hub Rings included
- Low Power Consumption
- Class B Insulation
- Automatic Thermal Overload
- Electrically Reversible
- Protector
- Quiet Operation
- Speed: 1075/3
- 30" Leads
- 60 HZ

CATALOG NO.	HP	VOLT	SPEED	FLA	UOM	ORDER MULTIPLE
WG840583	1/4	115	1075/3	4.2	EA	1
WG840584	1/4	208-230	1075/3	2.0	EA	1
WG840585	1/3	115	1075/3	5.5	EA	1
WG840586	1/3	208-230	1075/3	2.8	EA	1
WG840587	1/2	115	1075/3	7.5	EA	1
WG840588	1/2	208-230	1075/3	3.6	EA	1
WG840589	3/4	115	1075/3	10.2	EA	1
WG840590	3/4	208-230	1075/3	5.5	EA	1
WG840595	1	115	1075/3	12.6	EA	1
WG840596	1	208-230	1075/3	5.59	EA	1

Wagner® Multiple Horsepower Direct Drive Furnace Blower Motors



WG840464

WAGNER MOTORS

The Multi-Horsepower motors are specially designed to cover a range of applications. The direct drive furnace blower motors range from 1⁄2 to 1/6 in both 115 and 230 volts and 3⁄4 to 1/5 in both 115 and 230 volts all at 1075rpm. These motors feature reversing plugs, extended thru bolts 36 inch leads and are designed for 370 volt capacitors. Installs with all 48 frame mounting brackets.

CATALOG NO.	VOLT	SPEED	(1) HP-FLA	(2) HP-FLA	(3) HP-FLA	(4) HP-FLA	(5) HP-FLA	UOM	ORDER MULTIPLE
WG840463	115	1075/4	1/2-7.0	1/3-6.7	1/4-4.4	1/5-3.2	1/6-2.4	EA	1
WG840464	208-230	1075/4	1/2-3.9	1/3-3.6	1/4-2.5	1/5-1.8	1/6-1.3	EA	1
WG840466	115	1075/4	3/4-8.1	1/2-6.6	1/3-4.6	1/4-3.8	1/5-3.1	EA	1
WG840467	208-230	1075/4	3/4-3.8	1/2-3.7	1/3-2.5	1/4-1.8	1/5-1.7	EA	1

48 FRAME MOTORS CONT'D

Wagner® Single Speed Condenser Fan Motors



WG840729

WAGNER MOTORS



BALL BEARINGS NOW STANDARD

Features

- Installs with all Standard 48 Frame Mounting Brackets
- Standard Shaft Length, Diam., and Flats
- Extended Studs
- Drain Holes with Plugs in both end plates
- Automatic Thermal Overload Protector
- 60 HZ
- Low Power Consumption
- 60 C Ambient Design
- Electrically Reversible
- Continuous Air Over Class B Insulation
- Quiet Operation
- 30" Leads
- Standard 48 Frame Motor Casing Size


CATALOG NO.	HP	VOLT	SPEED	FLA	UOM	ORDER MULTIPLE
WG840727	1/6	208-230	1075/1	1.3	EA	1
WG840728	1/4	208-230	1075/1	2.2	EA	1
WG840729	1/3	208-230	1075/1	2.8	EA	1
WG840730	1/2	208-230	1075/1	4.2	EA	1
WG840731	3/4	208-230	1075/1	4.5	EA	1
WG840203	1/6	208-230	825/1	1.3	EA	1
WG840204	1/4	208-230	825/1	1.5	EA	1
WG840205	1/3	208-230	825/1	2.2	EA	1
WG840746	1/2	208-230	825/1	2.9	EA	1

Wagner® Multiple Horsepower Condenser Fan Motors

The Multi-Horsepower motors are specially designed to cover a range of applications. The condenser fan motors range from 1/2 to 1/5; 1/3 to 1/6 both at 1075 rpm; 1/3 to 1/6 at 825rpm. These motors feature reversing plugs, extended thru bolts 36 inch leads and are designed for 370 volt capacitors. Installs with all 48 frame mounting brackets.



BALL BEARINGS NOW STANDARD



WG840468

WAGNER MOTORS

CATALOG NO.	VOLT	SPEED	(1) HP-FLA	(2) HP-FLA	(3) HP-FLA	(4) HP-FLA	(5) HP-FLA	UOM	ORDER MULTIPLE
WG840458	208-230	1075/1	1/3-2.8	1/4-1.8	1/5-1.7	1/6-1.6	—	EA	1
WG840459	208-230	825/1	1/3-2.1	1/4-1.55	1/5-1.4	1/6-1.34	1/8-1.3	EA	1
WG840465	208-230	1075/2	1/3-2.8	1/4-2.0	1/5-1.7	1/6-1.5	—	EA	1
WG840468	208-230	1075/2	1/2-3.0	1/3-2.5	1/4-2.0	1/5-1.3	—	EA	1
WG840469	208-230	825/2	1/3-2.1	1/4-1.7	1/5-1.5	1/6-1.2	—	EA	1

48 FRAME MOTORS CONT'D

HeatMaster® Condenser Fan Motor



FE1018SF

Century®

Features

70°C (158°F) max ambient
UL recognized Class F insulation
High-temperature UL recognized overload protector
Energy-efficient PSC design
All-angle mount
Mounts by belly band, adjustable extended thru-bolts, or Rheem mounting holes, with screws supplied
Lead length 26 to 48 inch
Water-resistant reversing plug
Double sealed ball bearing, or dependable all-angle sleeve bearings
60 Hertz
48 Frame
Class F insulation
Totally enclosed
Single speed
Continuous duty, air over
UL recognized

CATALOG NO.	HP	VOLTS	RPM	AMPS	ROTATION	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	BEARINGS	CAPACITOR REQUIRED	DIRECT REPLACEMENT FOR	UOM	OM
Sleeve Bearing - 825 RPM												
FSE1008SF	1/8	208-230	825	1.00	Reversible	1/2 x 6-1/2	4-1/4	Sleeve	5MFD/370V	Emerson 1872	EA	1
FSE1018SF	1/6	208-230	825	1.10	Reversible	1/2 x 6-1/2	4-1/8	Sleeve	5MFD/370V	Emerson 1873, GE 3403	EA	1
FSE1038SF	1/3	208-230	825	2.10	Reversible	1/2 x 6-1/2	5-1/8	Sleeve	7.5MFD/370V	Emerson 1875, GE 3405	EA	1
Ball Bearing - 825 RPM												
FE1028SF	1/4	208-230	825	1.50	Reversible	1/2 x 6-1/2	4-5/8	Ball	5MFD/370V	GE 3204	EA	1
Ball Bearing - 1075 RPM												
FE1016SF	1/6	208-230	1075	1.40	Reversible	1/2 x 6-1/2	4	Ball	5MFD/370V	—	EA	1
FE1026SF	1/4	208-230	1075	2.00	Reversible	1/2 x 6-1/2	4-3/8	Ball	5MFD/370V	Emerson 1876, GE 3732	EA	1

4-in-1® Fan Motors (Economy Models) - 60°C Ambient



ORM5488B

Century®

Features

Class B insulation
Energy-efficient PSC design
Reversing connectors
Durable ball bearings or dependable all-angle sleeve bearings
Mounts by belly band, adjustable extended thru-bolts or Rheem mounting holes with supplied screws
All-angle mount
Lead length 36 inch to 48 inch
Single speed
Totally enclosed
Continuous duty, air over
UL recognized
48 Frame
60 Hertz
60°C ambient

CATALOG NO.	HP	VOLTS	RPM	AMPS	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	BEARINGS	CAPACITOR REQUIRED	DIRECT REPLACEMENT FOR	UOM	OM
ORM5488B	1/3-1/8	208-230	825	2.10	1/2 x 6-1/2	4-7/8	Ball	7.5MFD/370V	Rheem 51-20761-11	EA	1
ORM5458B	1/3-1/6	208-230	1075	2.00	1/2 x 6-1/2	4	Ball	7.5MFD/370V	Rheem 51-20672-01 Rheem 51-20668-11 Rheem 51-23053-11 Rheem 51-23055-11	EA	1

48 FRAME MOTORS CONT'D

4-in-1® HeatMaster® Fan Motors (Deluxe Models) - 70ºC Ambient

Features

Energy-efficient PSC design
Reversing connectors
Water-resistant reversing plug
Double sealed ball bearings or dependable all-angle sleeve bearings
Mounts by belly band, adjustable extended thru-bolts or Rheem mounting holes with supplied screws
All-angle mount
Lead length 36 inch to 48 inch
Single speed
Totally enclosed
Continuous duty, air over
UL recognized
48 Frame
Class F insulation
60 Hertz
70ºC ambient
High-temperature UL approved overload protector



ORM5488F

Century®

CATALOG NO.	HP	VOLTS	RPM	AMPS	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	BEARINGS	CAPACITOR REQUIRED	DIRECT REPLACEMENT FOR	UOM	OM
ORM5484F	1/8-1/15	208-230	825	0.80	1/2 x 6-1/2	4-1/4	Sleeve	5MFD/370V	Emerson 5456 Rheem 51-20761-01 Trane MOT6314	EA	1
ORM5484BF	1/8-1/15	208-230	825	0.80	1/2 x 6-1/2	4-1/4	Ball	5MFD/370V	Rheem 51-20760-01 Trane MOT6314	EA	1
ORM5454F	1/8-1/15	208-230	1075	0.80	1/2 x 6-1/2	4	Sleeve	5MFD/370V	Emerson 5459	EA	1
ORM5454BF	1/8-1/15	208-230	1075	0.80	1/2 x 6-1/2	4	Ball	5MFD/370V	—	EA	1
ORM5488F	1/3-1/8	208-230	825	2.10	1/2 x 6-1/2	4-7/8	Sleeve	7.5MFD/370V	Emerson 1875H Marathon X072	EA	1
ORM5458F	1/3-1/6	208-230	1075	2.00	1/2 x 6-1/2	4	Sleeve	7.5MFD/370V	Emerson 1860H	EA	1
ORM5489BF	1/2-1/5	208-230	825	2.50	1/2 x 6-1/2	5-5/8	Ball	10MFD/370V	—	EA	1
ORM5459BF	1/2-1/5	208-230	1075	3.60	1/2 x 6-1/2	5-3/8	Ball	10MFD/370V	—	EA	1

HeatMaster® 4-in-1® and HeatMaster® Ultra Multi-horsepower Replacement Motors - 80ºC Ambient

Features

80ºC (176ºF) max ambient
Double sealed ball bearings with high temperature synthetic grease
Energy-efficient PSC design
Mounts by belly band, adjustable extended thru-bolts, or Rheem/Trane mounting holes, with screws supplied
Works with Johnson Controls Speed controls
Reversible rotation

NEW 80º Ambient

68% EFFICIENT!



FE1076SU

Century®

CATALOG NO.	HP	VOLTS	RPM	AMPS	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BEARINGS	CAPACITOR REQUIRED	UOM	OM
Century HeatMaster® Ultra											
FE1056SU	1/2	208-230	1075	3.8	1/2 x 6-1/2	5.36	PSC	Double Sealed Ball	10MFD/370V	EA	1
FE1076SU	3/4	208-230	1075	5.1	1/2 x 6-1/2	5.61	PSC	Double Sealed Ball	15MFD/370V	EA	1
FEH1026SU	1/4	460	1075	0.9	1/2 x 6-1/2	4.74	PSC	Double Sealed Ball	7.5MFD/370V	EA	1
FEH1036SU	1/3	460	1075	1.2	1/2 x 6-1/2	5.24	PSC	Double Sealed Ball	7.5MFD/370V	EA	1
FEH1056SU	1/2	460	1075	1.5	1/2 x 6-1/2	5.61	PSC	Double Sealed Ball	10MFD/370V	EA	1

NOTE: Item numbers in **RED** indicate **Made in the U.S.A.**

48 FRAME MOTORS CONT'D

5-5/8 Inch Diam. Direct Drive Blower Motors



43583

Features

Permanent split capacitor
Continuous air over
2 1/2 inch mounting rings
Class B insulation
40°C ambient
Electrically reversible
Open Encl.
Automatic overload
48 Frame
60 Hertz
Single phase
3 Speeds

CATALOG NO.	HP	VOLTS	RPM	AMPS	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	BEARINGS	CAPACITOR REQUIRED	DIRECT REPLACEMENT FOR	UOM	OM
43581	1/6	115	1075	2.50	1/2 x 5-1/2	4	Sleeve	5MFD/370V	GE 3581 Emerson 8891	EA	1
43582	1/6	208-230	1075	1.40	1/2 x 7	4	Sleeve	5MFD/370V	GE 3582 Emerson 8896	EA	1
43583	1/4	115	1075	4.40	1/2 x 4-1/2	4	Sleeve	5MFD/370V	GE 3583 Emerson 1863	EA	1
43584	1/4	208-230	1075	1.70	1/2 x 4-1/2	4	Sleeve	5MFD/370V	GE 3584 Emerson 1971	EA	1
43585	1/3	115	1075	6.00	1/2 x 4-1/2	4-1/4	Sleeve	5MFD/370V	GE 3585 Emerson 1864	EA	1
43586	1/3	208-230	1075	2.60	1/2 x 4-1/2	4-1/4	Sleeve	5MFD/370V	GE 3586 Emerson 1972	EA	1
43587	1/2	115	1075	7.80	1/2 x 4-1/2	5-1/8	Sleeve	5MFD/370V	GE 3587 Emerson 1865	EA	1
43588	1/2	208-230	1075	3.60	1/2 x 4-1/2	5-1/8	Sleeve	5MFD/370V	GE 3588 Emerson 1973	EA	1
43589	3/4	115	1075	10.50	1/2 x 4-1/2	5-1/8	Sleeve	15MFD/370V	GE 3589 Emerson 8904	EA	1
43590	3/4	208-230	1075	4.60	1/2 x 4-1/2	5-1/8	Sleeve	10MFD/370V	GE 3590 Emerson 8905	EA	1
43595	1	115	1075	9.70	1/2 x 6-1/2	5-7/8	Ball	20MFD/370V	GE 3595 Emerson 8906	EA	1
43596	1	208-230	1075	4.4-5.4	1/2 x 6-1/2	5-7/8	Ball	20MFD/370V	GE3596 Emerson 8907	EA	1

1/5 HP 1050 RPM/3 Speed 115 Volt Motor & Torsion Flex Bracket



48937K

Features

Direct Replacement For Lennox 89C3701PR
Kit includes Motor & Torsion Flex Bracket
Automatic Overload
Shaded Pole
CW Shaft End
42 Frame
60 Hz

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BEARINGS	DIRECT REPLACEMENT FOR	UOM	OM
48937K	1/5	115	1050	6.50	3	CCWLE	5-1/2 x 1/2	5	SP	Sleeve	Lennox 89C37 Lennox 89C3701PR	EA	1

48 FRAME MOTORS CONT'D

Packard 1625 RPM Motors



43993

Packard

Features

48 Frame / 5.6" Diam.
Direct Drive Fan & Blower
Permanent Split Capacitor
Ball Bearing
Hub Ring Mount (2.5")
Open Encl.
3-Speed
Single Phase
Stud Mounting
Reversible Motor Rotation
60 Hertz

CATALOG NO.	HP	VOLTS	RPM	AMPS	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	CAPACITOR REQUIRED	DIRECT REPLACEMENT FOR	UOM	OM
43992	1/4	115	1625	2.90	1/2 x 4-1/2	4-3/16	7.5MFD/370V	1690, 5KCP39FGE211S	EA	1
43993	1/4	208-230	1625	1.50	1/2 x 4-1/2	4-3/16	7.5MFD/370V	1691, 5KCP39FGE212S	EA	1
43994	1/3	115	1625	3.70	1/2 x 4-1/2	4-5/8	10MFD/370V	1692, 5KCP39HGE213S	EA	1
43995	1/3	208-230	1625	1.80	1/2 x 4-1/2	4-5/8	7.5MFD/370V	1693, 5KCP39HGE214S	EA	1
43996	1/2	115	1625	5.20	1/2 x 4-1/2	4-7/8	15MFD/370v	1694, 5KCP39MGE215S	EA	1
43997	1/2	208-230	1625	2.40	1/2 x 4-1/2	4-7/8	7.5MFD/370V	1695, 5KCP39LGE216S	EA	1
43998	3/4	115	1625	8.00	1/2 x 4-1/2	5-7/16	15MFD/370V	1696, 5KCP39PGE415S	EA	1
43999	3/4	208-230	1625	4.00	1/2 x 4-1/2	5-7/16	10MFD/370V	1697, 5KCP39PGE416S	EA	1

5-5/8 Inch Diam. Multi-Horsepower Direct Drive Blower Motors



45461

Packard

Features

Permanent split capacitor
Multiple capacitor/speed combinations
Continuous duty, air over
Mounting rings, thru bolts and holes in shell
Class B insulation
Reversible rotation
Automatic overload
48 Frame
60 Hertz
Single phase
5 Speed

CATALOG NO.	HP	VOLTS	RPM	AMPS	ROT	TYPE	BEARINGS	ENCL.	DIRECT REPLACEMENT FOR	UOM	OM
45460	1/2-1/3-1/4-1/5-1/6	115	1075	5.80-5.10-3.50-3.20-2.20	Rev	PSC	Sleeve	Open	Emerson 5460 Rheem 51-23012-41	EA	1
45461	1/2-1/3-1/4-1/5-1/6	208-230	1075	2.90-2.50-1.80-1.40-1.30	Rev	PSC	Sleeve	Open	Emerson 5461 Rheem 51-23022-41	EA	1
45470	3/4-1/2-1/3-1/4-1/5	115	1075	9.10-6.50-5.50-4.00-2.30	Rev	PSC	Sleeve	Open	Emerson 5470 Rheem 51-23017-41	EA	1
45471	3/4-1/2-1/3-1/4-1/5	208-230	1075	4.60-3.30-3.40-2.30-1.70	Rev	PSC	Sleeve	Open	Emerson 5471 Rheem 51-21898-01	EA	1

FRAME 48 MOTORS CONT'D

Fan & Blower Motor



FD6000

Century®

Features

Permanent Split Capacitor (PSC);
Capacitor Required: 10 Mfd-370 Volts
(Not Supplied with Motor)
Thermally Protected
Open Air Over
Class B Insulation, 40°C Ambient

1/2" Diam. Shaft with Flat
36" Leads with Quick Connect Terminals
Extended Studs Shaft End, Resilient Ring Mounting,
Mounting Holes in Shell, Belly Band
Sleeve Bearing

CATALOG NO.	HP	VOLTS	RPM	AMPS	ROTATION	TYPE	BEARINGS	ENCL.	DIRECT REPLACEMENT FOR	UOM	OM
FDL6001A	1/2, 1/3, 1/4, 1/5, 1/6	115	1075	7.00, 6.70, 4.40, 3.20, 2.40	Reversible	PSC	Sleeve	Open	Emerson 5460 Rheem 51-23012-41	EA	1
FD6000A	1/2, 1/3, 1/4, 1/5, 1/6	208-230	1075	3.90, 3.60, 2.50, 1.80, 1.30	Reversible	PSC	Sleeve	Open	Emerson 5461 Rheem 51-23022-41	EA	1
FDL6002A	3/4, 1/2, 1/3, 1/4, 1/5	115	1075	9.10, 6.60, 5.50, 3.00, 2.30	Reversible	PSC	Ball	Open	Emerson 5470	EA	1
FD6001A	3/4, 1/2, 1/3, 1/4, 1/5	208-230	1075	3.90, 3.60, 3.00, 2.30, 2.00	Reversible	PSC	Ball	Open	Emerson 5471	EA	1

HeatMaster® Fan Canopy



FC1086F

Century®

Features

70°C (158°F) max ambient
UL recognized Class F insulation
Energy-efficient PSC and three phase designs
Patented fan canopy
Vertical shaft up only
Double sealed ball bearing

Open, air over
Reversible
60 Hertz
Totally enclosed
Single speed
48 Frame
UL recognized

CATALOG NO.	HP	VOLTS	RPM	AMPS @ 230V	AMPS @ 460V	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	CAPACITOR REQUIRED	DIRECT REPLACEMENT FOR	NOTES	UOM	OM
Single Phase													
FC1086F	0.8	200-230/460	1075	4.60	2.30	Rev	1/2" Flat x 3-9/16	8-13/16	20MFD/370V	GE 03197	352, 511	EA	1
FC1106F	1	200-230/460	1075	6.40	3.20	Rev	5/8" Flat & Key x 4-1/16	9-9/16	25MFD/370V	GE 03199	403, 511	EA	1
Three Phase													
FC3106F	1	200-230/460	1140	5.60	2.80	Rev	5/8" Flat & Key x 4-1/16	9-9/16	—	—	—	EA	1

Notes: **352.** Includes 5/8" adapter and key **403.** All 1 HP and 1-1/2 HP Motor supplied with conversion kit allowing motor to be used in most 56 frame applications **511.** Suitable for use with some solid state speed control devices

48 FRAME MOTORS CONT'D

5-5/8 Inch Diam. Direct Drive Blower Motors



D923

Features

Permanent split capacitor
Continuous air over
2-1/2 inch mounting rings

Class B insulation
40ºC ambient
Electrically reversible

Open Encl.
Automatic overload
48 Frame

60 Hertz
Single phase
3 Speeds

CATALOG NO.	HP	VOLTS	RPM	AMPS	SHAFT DIM.(IN.)	LENGTH LESS SHAFT (IN.)	BEARINGS	CAPACITOR REQ.	NOTES	UOM	OM
D721	1/4-1/5-1/6	115	1075	4.80	1/2 x 6	4	Sleeve	15MFD/370V	138, 148	EA	1
D725	1/4-1/6-1/8	208/230	1075	2.20	1/2 x 6	4	Sleeve	15MFD/370V	138, 148	EA	1
D727	1/3-1/4-1/5	115	1075	5.90	1/2 x 6	4-1/4	Sleeve	5MFD/370V	138, 148	EA	1
D923	1/3-1/4-1/5	208-230	1075	2.90	1/2 x 6	4-1/4	Sleeve	5MFD/370V	138, 148	EA	1
D701	1/2-1/3-1/4-1/5	115	1075	7.70	1/2 x 5-1/2	5-1/4	Sleeve	10MFD/370V	138, 148	EA	1
D703	1/2-1/3-1/4	208-230	1075	4.00	1/2 x 6	5	Sleeve	7.5MFD/370V	138, 148	EA	1
D974	1/2-1/3-1/4	277	825	2.3-1.6-1.3	1/2 x 5	5-1/3	Sleeve	15MFD/370V	138, 148	EA	1
D728	3/4-1/2-1/3	115	1075	10.50	1/2 x 6	5-1/2	Sleeve	10MFD/370V	138, 148	EA	1
D729	3/4-1/2-1/3	208-230	1075	5.40	1/2 x 6	5-1/2	Sleeve	10MFD/370V	138, 148	EA	1

48 Frame PSC Motors



D1056AO

Features

Fan Coils - Dual Wheel Blower Motor
Permanent Split Capacitor (PSC); Capacitor Required:
5 Mfd-370 Volts (Not Supplied with Motor)
Class B Insulation, 40°C Ambient
1/2" Diam. Shaft with Flat
Extended Studs Shaft End, Resilient Ring Mounting,

Thermally Protected
26" Leads
Open Air Over
Sleeve Bearing
Belly Band Mount

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	BEARINGS	CAPACITOR REQ.	NOTES	UOM	OM
D1036AO	1/3	208-230	1075	2.60	3	1/2 x 4-1/2	4-3/8	Sleeve	5MFD/370V	—	EA	1
DL1056	1/2	115	1075	6.50	3	1/2 x 4-1/2	5	Sleeve	10MFD/370V	—	EA	1
D1056AO	1/2	208-230	1075	3.20	3	1/2 x 4-1/2	4-7/8	Sleeve	7.5MFD/370V	—	EA	1
DL1076	3/4	115	1075	8.90	3	1/2 x 4-1/2	5-5/8	Sleeve	15MFD/370V	264	EA	1
BDL1106	1	115	1075	12.30	3	1/2 x 6	6	Ball	20MFD/370V	—	EA	1

Notes: **138.** All angle mount bearings. Use rain shield when necessary
148. Ideal for blowers and fans used in furnaces and air-conditioners
264. 50°C ambient

48 FRAME MOTORS CONT'D

5-5/8 Inch Diam. Torsion Flex Direct Drive Blower Motors



43783

Packard

Features

Permanent split capacitor
Continuous air over
Energy efficient

Electrically reversible
Automatic overload
Open Encl.

Single phase
48 Frame
60 Hertz

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BEARINGS	CAPACITOR REQUIRED	DIRECT REPLACEMENT FOR	UOM	OM
43782	1/6	115	1075	2.50	3	Rev	1/2 x 5	4	PSC	Sleeve	5MFD/370V	3782	EA	1
43783	1/4	115	1075	3.60	4	Rev	1/2 x 6	4	PSC	Sleeve	5MFD/370V	3783	EA	1
43784	1/4	208-230	1075	1.80-2.00	4	Rev	1/2 x 6	4	PSC	Sleeve	5MFD/370V	3784	EA	1
43785	1/3	115	1075	4.80	4	Rev	1/2 x 6	4-1/4	PSC	Sleeve	10MFD/370V	3785, 9377	EA	1
43786	1/3	208-230	1075	2.30-2.60	4	Rev	1/2 x 6	4-1/4	PSC	Sleeve	10MFD/370V	3786	EA	1
43787	1/2	115	1075	8.00	4	Rev	1/2 x 6	4-7/8	PSC	Sleeve	10MFD/370V	3787	EA	1
43788	1/2	208-230	1075	3.30-4.00	4	Rev	1/2 x 6	4-7/8	PSC	Sleeve	10MFD/370V	3788	EA	1
43789	3/4	115	1075	9.00	3	Rev	1/2 x 5	5.41	PSC	Sleeve	15MFD/370V	3789	EA	1
43790	3/4	208-230	1075	4.50	3	Rev	1/2 x 5	5.41	PSC	Sleeve	10MFD/370V	3790	EA	1

Direct Drive, PSC, Open Air Over, Torsion Flex Mount



X034

marathon™ Motors

Application

Residential and commercial furnaces, air conditioners, exhaust fans, and other air handling equipment installed in clean and dry environments.

Features

Open frames and brackets
Three lug mount fits 9" or 10" bolt circle.
Mounting holes on lugs are .435" dia., with gromets and sleeves for .26" dia. option.

Multi-speed capacity
Weather resistant reversing plug
30" long leads
Automatic reset thermal protector

Ball bearings
UL recognized and CSA certified
Capacitor not included

CATALOG NO.	HP	RPM	VOLTS	FRAME	MODEL NO.	CAP. REQUIRED	F.L. AMPS	WEIGHT (LBS.)	FRAME LENGTH (IN.)	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	UOM	OM
X035	1/3	1075/4	115	48Y	48A11O1774	10MFD / 370V	4.15	15	4 1/2	1/2 x 6	4.56	EA	1

Fan Coil / AC Motor



FM1026

Century®

Features

Permanent Split Capacitor (PSC)
Thermally Protected
Flex Mount

Open Air Over
Class B Insulation, 50°C Ambient
1/2" Diam. Shaft with Flat

Sleeve Bearing
26" Leads

CATALOG NO.	HP	RPM	VOLTS	FRAME	CAP. REQ.	F.L. AMPS	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	UOM	OM
FM1036	1/3	1075	208-230	48Y	7.5MFD-370V	3.7	1/2 x 6	4.36	EA	1

48 FRAME MOTORS CONT'D

Split Phase and Capacitor Start, NEMA 48M and 48N Flange Mount



O011

marathon™ Motors

Application

Direct replacement motors for residential and commercial oil burners and hot water pressure/steam cleaners.

Features

Ball bearings (except as noted)
Semi- or totally enclosed steel frame
20" Long leads from a 1/2" NPT opening (totally enclosed footnoted with N)
Split phase and capacitor start designs
Two-bolt, NEMA N- or M-Flange direct
Catalog numbers O010 and O011 have drip proof enclosure
1.0 Service Factor
Reversible rotation

CATALOG NO.	HP	RPM	VOLTS	FRAME	OVERLOAD	MODEL NO.	F.L. AMPS	WEIGHT (LBS.)	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	NOTES	UOM	OM
O600	1/8	1725	115	48N	Manual	48S17T286	2.8	11	1/2 x 1-7/8	5.71	CF, N, 3	EA	1
O601	1/6	1725	115	48N	Manual	48S17T290	2.7	12	1/2 x 2	5.6	CF, N, 3	EA	1
O004	1/4	3450	115	48N	Manual	48S34S2003	4.2	13	1/2 x 2	6.13	CF, 3	EA	1
O011	1/2	3450	115/208-230	48N	Manual	48C34D2028	7.4/3.5-3.7	17	1/2 x 1-3/4	9.09	2	EA	1

Notes: **2.** Capacitor Start Induction Run design **3.** Split Phase design **61.** 24" long #18 SO 2-conductor cord out shell at 11 o'clock position
CF - Consult factory for Accessory Kit and/or Modification Selection **N** - Totally enclosed, non-ventilated

Split Phase and Capacitor Start, NEMA 48M and 48N Flange Mount



O102

marathon™ Motors

Application

Direct replacement motors for residential and commercial oil burners and hot water pressure/steam cleaners.

Features

Ball bearings (except as noted)
Semi- or totally enclosed steel frame
20" Long leads from a 1/2" NPT opening (totally enclosed footnoted with N)
Split phase and capacitor start designs
Two-bolt, NEMA N- or M-Flange direct
Catalog numbers O010 and O011 have drip proof enclosure
1.0 Service Factor
Reversible rotation

CATALOG NO.	HP	RPM	VOLTS	FRAME	OVERLOAD	MODEL NO.	F.L. AMPS	WEIGHT (LBS.)	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	NOTES	UOM	OM
O100	1/7	3450	115	48M	Manual	48S34S361	2.8	11	1-7/8 x 1/2 x 1	5.49	CF, 3	EA	1
O102	1/6	3450	115	48M	Manual	48S34S2005	3	11	1/2 x 1-7/8	5.37	3	EA	1

Notes: **3.** Split Phase design **CF** - Consult factory for Accessory Kit and/or Modification Selection

PSC, NEMA 48M Flange Mount



O701

marathon™ Motors

Application

Replacement motors for mini pumps in residential or light commercial furnaces.

Features

High efficiency design
14" cord for easy connection
Ultra quiet performance
UL recognized and CSA certified

CATALOG NO.	HP	RPM	VOLTS	FRAME	OVERLOAD	MODEL NO.	F.L. AMPS	WEIGHT (LBS.)	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	NOTES	UOM	OM
O701	1/7	3450	115	48M	Auto	48A34SU1001	1.7	8	1/2 x 2	4.29	3, 61	EA	1

Notes: **3.** Split Phase design **61.** 24" long #18 SO 2-conductor cord out shell at 11 o'clock position

48 FRAME MOTORS CONT'D

5-5/8 Inch Diam. Unit Heater Motors

Features

Totally enclosed
60 Hertz
Permanent split capacitor
Single phase
Automatic overload



US1016

Century®

CATALOG NO.	HP	VOLTS	RPM	AMPS	ROTATION	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	BEARINGS	CAP. REQUIRED	FRAME	MOUNTING	NOTES	UOM	OM
UH1016V1	1/6	115	1075	2.20	Rev	1/2 x 3-1/4	4-1/4	Ball	4MFD/370V	48	Resilient Base	27, 208, 411, 504	EA	1
US1016	1/6	115	1075	2.80	Rev	1/2 x 2-1/2	4-3/8	Sleeve	4MFD/370V	48	Resilient Base	27, 210, 411, 504	EA	1
UH1026	1/4	115	1075	4.90	Rev	1/2 x 2-1/2	4-3/8	Ball	4MFD/370V	48	Resilient Base	27, 210, 411, 504	EA	1

Notes: **27.** Has a 3" shaft height28. No base **208.** 60° C ambient **210.** 40° C ambient
411. 4 thru bolts and 4 dummy studs on a 5.15" diameter bolt circle **504.** 60" leads

5-5/8 Inch Diam. Unit Heater Motors

Motors come with strong ball bearing construction. Utilize motor in unit heaters, blower equipment and other shaft-mounted fans.



40025

Packard

Features

Permanent Split Capacitor
Totally enclosed
Class B insulation
Dual bolt circle applications (30° - 60° & 45°)
Continuous duty air over
Single phase
Includes capacitor mounted on motor
Horizontal or vertical mounting
1" extended studs
Automatic overload
UL recognized
Mounting clamps included

Direct Replacement For -
Brownell MTG3206, Emerson 9034, GE 3206, Marathon X302, Packard 70066, Reznor 55682, Rotom R12834, Trane MOT6195

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEED	ROTATION	BRG	ENCL.	HERTZ	SHAFT DIMENSION (IN.)	MOUNTING	FRAME	UOM	OM
40066*	1/6	115	1075	2.4	1	Rev	Ball	Enclosed	60	1/2 x 3-3/8	Stud & Resilient	48	EA	1
40025	1/4	115	1075	3.4	1	Rev	Ball	Enclosed	60	1/2 x 2-1/2	Stud & Mounting Rings	48	EA	1
40033	1/3	115	1075	5.3	1	Rev	Ball	Enclosed	60	1/2 x 2-1/2	Resilient Base	48	EA	1

***Base not included.**

48 FRAME MOTORS CONT'D

Split Phase Resilient Base Motors



GF2024

Century®

Features

Continuous duty
Single phase
40°C ambient
Sleeve Bearing
Resilient base mounting
Open and open drip proof Encl.
Reversible rotation
Split phase
60 Hertz
Automatic overload

CATALOG NO.	HP	VOLTS	RPM	FULL LOAD AMPS	SERVICE FACTOR	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	ENCL.	DIA. (IN.)	FRAME	NOTES	UOM	OM
Single Voltage													
GF2024	1/4	115	1725	5.40	1.35	1/2 x 1-5/8	7.50	Open Drip Proof	5-5/8	48/56	3, 266	EA	1
GF2054	1/2	115	1725	8.00	1.25	1/2 x 1-5/8	8.30	Open Drip Proof	5-5/8	48/56	3, 266	EA	1
Dual Voltage													
GF2024D	1/4	115/208-230	1725	5.20/2.60	1.35	1/2 x 1-5/8	7 1/2	Open	5-5/8	48/56	266	EA	1
F681	3/4	230/115	1725	5.20/10.40	1.25	5/8 x 1-7/8	9.50	Open Drip Proof	6-1/2	56	—	EA	1
GK2104DV1	1	115/230	1725	15.60/7.80	1.25	5/8 x 1-7/8	10.30	Open	6-1/2	56	—	EA	1

Notes: **3.** 5/8" Shaft adapter and key Included **196**. Suitable for 208 volts @ 1.0 service factor
266. 48/56 FR = 1/2" x 1-1/2" shaft with 5/8" shaft adapte - 48/56 slotted 3" height base

56 FRAME MOTORS

48/56 Frame, Split Phase Belt Drive Fan and Blower Motors



45013

Packard

Applications

Centrifugal pumps, belt drive furnace blowers, fans

Features

40°C ambient
Continuous duty
5/8 inch shaft adapter and key included
Resilient base has 48 and 56 Frame mounting holes
Class B insulation
Electrically reversible
Open drip proof Encl.
5 5/8 inch diameter
Full service factor ratings
Split phase
Automatic overload
60 Hertz
Single speed

CATALOG NO.	HP	VOLTS	RPM	AMPS	ROT	SERVICE FACTOR	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	FRAME	BRG	DIRECT REPLACEMENT FOR		UOM	OM
Single Voltage														
45016	1/6	115	1725	3.60	Rev.	1.35	1/2 x 1-7/8	7-1/2	48/56	Sleeve	Mars 10301	US Motors 3615	EA	1
45014	1/4	115	1725	4.80	Rev.	1.35	1/2 x 1-7/8	7-3/4	48/56	Sleeve	Emerson 8000 GE 4701	Marathon B206	EA	1
45013	1/3	115	1725	6.60	Rev.	1.35	1/2 x 1-1/2	7-7/16	48/56	Sleeve	Emerson 8100 GE 4706	Marathon B207	EA	1
45012	1/2	115	1725	8.30	Rev.	1.25	1/2 x 1-1/2	8-1/2	48/56	Sleeve	Emerson 8200 GE 4708	Marathon B208	EA	1
Dual Voltage														
45014D	1/4	115/208-230	1725	4.60/ 2.20-2.10	Rev.	1.35	1/2 x 1-7/8	6.75	48/56	Ball	—	Marathon B303	EA	1
45013D	1/3	115/208-230	1725	6.60/ 3.40-3.10	Rev.	1.35	1/2 x 1-7/8	6.75	48/56	Ball	—	Marathon B305	EA	1
45012D	1/2	115/208-230	1725	7.60/ 3.70-3.80	Rev.	1.25	1/2 x 1-7/8	8.58	48/56	Ball	—	Marathon B307	EA	1
45230D	3/4	115/208-230	1725	11.60/ 5.90-5.80	Rev.	1.25	5/8 x 1-7/8	10.55	56H	Ball	—	Marathon 56S17D2060	EA	1

56 FRAME MOTORS CONT'D

56 Frame Three Phase Commercial Condenser Fan Motors



H686

Features

Class B moisture resistant insulation
5/8 inch diameter shaft with keyway and flat
Double sealed ball bearings
1.0 service factor
Automatic overload
Reversible Rotation
60°C ambient
Single speed
60 Hertz
Three phase
Air over
Belly Band Mounting

CATALOG NO.	HP	VOLTS	RPM	AMPS	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	FRAME	ENCL.	NOTES	UOM	OM
H686	1	460/200-230	850	2.00/4.40-4.00	5/8 x 4-7/8	9-3/8	56	Open Shaft End	319	EA	1
H667V1	1	460/200-230	1140	2.60/5.30-5.20	5/8 x 6	10-7/8	56	Open Shaft End	—	EA	1
H767V1	1-1/2	460/200-230	1140	3.00/5.80-6.00	5/8 x 6	10-7/8	56	Open Shaft End	407, 520	EA	1

Notes: **319.** No keyway, double flat **407.** 70°C ambient **520.** 1.15 service factor

Capacitor Start Resilient Base Motors



RB1104AV1

Features

Capacitor start, dual voltage
Single speed
Reversible rotation
Automatic overload
56 Frame
60 Hertz
Resilient base mounting
Single phase
Class B insulation

CATALOG NO.	HP	VOLTS	RPM	FULL LOAD AMPS	SERVICE FACTOR	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	BRG	DIA. (IN.)	ENCL.	NOTES	UOM	OM
C412V2	1/2	115/208-230	1725	9.00/4.00-4.50	1.25	5/8 x 2	9-1/8	Ball	6-1/2	Open Drip Proof	205	EA	1
C426V2	3/4	115/208-230	1725	11.00/5.40-5.50	1.25	5/8 x 2	9-1/8	Ball	6-1/2	Open Drip Proof	205	EA	1
C621V1	1-1/2	115/208-230	1725	7.8-7.5/15.0	1.2	5/8 Keyed x 1-7/8	10.8	Ball	6-1/2	Open Drip Proof	—	EA	1
RB1104AV1	1	115/208-230	1725/1425	14.4/6.6-7.2	1.25	5/8 Keyed x 1-7/8	9.8	Sleeve	—	Open	—	EA	1

Notes: **205.** Extended thru bolts, shaft end only **510.** 5/8" keyed shaft - 2.31" long

56 FRAME MOTORS CONT'D

Nidec Evaporative Cooler Motors



6765

Features

56Z Frame
Ball Bearing
60 Hz
2 1/2" Mtg Rings
Automatic Overload

CATALOG NO.	HP	RPM	VOLT	SPEED	AMPS	CENTER RING TO CENTER RING (IN)	EXTENDED DESCRIPTION	DIRECT REPLACEMENT FOR	UOM	OM
6767	1/3	1725/1140	115	2	5.5/3.9	7.44	Split Phase, CW Shaft End, No Base	2202	EA	1
6768	1/2	1725	115	1	8.2	7.44	Split Phase, CW Shaft End, No Base	2203	EA	1
6765	1/2	1725/1140	115	2	7.5/4.0	7.44	Split Phase, CW Shaft End, No Base, Class F Insulation	2204	EA	1
6766	1/2	1725	230	1	4.8	7.44	Split Phase, CW Shaft End, No Base	2172	EA	1
6795	1/2	1725/1140	230	2	4.5	7.44	Split Phase, CW Shaft End, No Base, Class F Insulation	2176	EA	1
6769	3/4	1725	115	1	10.7	7.44	Split Phase, CW Shaft End, No Base, Class F Insulation	2205	EA	1
6770	3/4	1725/1140	115	2	10.5/4.7	7.44	Split Phase, CW Shaft End, No Base, Class F Insulation	2206	EA	1
6771	3/4	1725	230	1	5.4	7.44	Split Phase, CW Shaft End, No Base	2184	EA	1
6796	3/4	1725/1140	230	2	5.0/2.2	7.44	Split Phase, CW Shaft End, No Base, Class F Insulation	2189	EA	1
2574	1	1725/1140	115	2	12.4/6.1	9.5	Capacitor Start, Reversible, Resilient Base	2395	EA	1
2423	1	1725/1140	230	2	7.0	9.5	Capacitor Start, Reversible, Resilient Base	2396	EA	1
5149	1	1725/1140	115/230	1	15.1/7.5	9.5	Capacitor Start, Reversible, Resilient Base	2397	EA	1

Three Phase, Open Air Over, Shaft Up and Horizontal Rigid Base Mount



X523

Application

Replacement motor for refrigeration equipment.

Features

70°C ambient
Enclosed shaft end bracket, vented frame
Continuous duty
Automatic reset thermal protector
Shaft slinger
Threaded lead exit
Double sealed Ball bearings
Nameplated 60/50 hertz 190/380 Volts, at next lower HP
Flat and keyway on shaft
Patented VCD, Voltage Change Device
Ball bearings
UL recognized and CSA certified

CATALOG NO.	HP	RPM	VOLTS	FRAME	MODEL NO.	F.L. AMPS	WEIGHT (LBS.)	FRAME LENGTH (IN.)	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	NOTES	UOM	OM
X523	1.5	1140	208-230/460	56HZ	56T11O5306	5.45-5.4/2.7	36	15.68	5/8 x 5	10.68	VC, 5	EA	1

Notes: **5.** 56H, 143T, and 145T Combination Base with 12 mounting holes **VC** Voltage Change Device for quick voltage changes

56 FRAME MOTORS CONT'D

Three Phase, Open Air Over, Rigid Base, Shaft Up or Horizontal



X532

marathon™ Motors

Application

Commercial condenser fans may be installed outdoors. These motors need to be mounted within the airflow of the fan for proper cooling. Used on Trane, Carrier, Climtrol and York units, 5 tons and larger.

As Noted

Features

- 70°C ambient (except as noted)
- Enclosed shaft end bracket, vented frame
- Continuous duty, air over
- Automatic reset thermal protector
- Shaft slinger
- Threaded lead exit
- Nameplated 60/50 hertz 190/380 Volts, at next lower HP
- Double sealed Ball bearings
- Flat and keyway on shaft
- Patented VCD™ - Voltage Change Device (as noted)
- Ball bearings
- UL recognized and CSA certified

CATALOG NO.	HP	RPM	VOLTS	FRAME	MODEL NO.	F.L. AMPS	WEIGHT (LBS.)	FRAME LENGTH (IN.)	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	NOTES	UOM	OM
X532	1/3	1140	208-230/460	56Z	056T11O11001	1.8-1.8/0.9	22	8-1/4	1/2 x 5	8.37	45, 50	EA	1
X531	1-1/2	850	208-230/460	56Z	056T8O15504	7.0-7.0/3.5	47	11-1/2	5/8 x 5	11.68	VC, 5	EA	1

Notes: **5.** 56H, 143T, and 145T Combination Base with 12 mounting holes **45.** 60°C ambient **50.** Designed for 50Hz operation
VC Voltage Change Device for quick voltage changes

C-FRAME MOTORS

Utility Fan Motors and Kits



65691

Applications

Evaporators, refrigerators, range hoods, ventilators,exhaust fans and unit heaters

Packard

Features


- Shaded pole
- Sleeve bearings
- Stud mounting
- Rotation is determined by viewing the shaft end
- Direct Replacements for Delfield, Bohn, Gemline and Nutone

CATALOG NO.	STACK SIZE (IN.)	VOLTS	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIMENSION (IN.)	HERTZ	DIRECT REPLACEMENT FOR	NOTES	UOM	OM
65100	1/2	120	3000	0.60	1	CCW	7/32 x 1-5/8	60	Gemline EM550 Nutone C65878 Robertshaw VFM100	105, 485	EA	1
65249	1/2	120	3000	0.45	1	CW	1/8 x 2-1/2	60	Gemline EM241 EM242, EM244 EM245,EM247 EM248,EM249	—	EA	1
82423K	5/8	120	3000	0.50	1	CW	7/32 x 1-1/2	60	Nutone 89423-000	106, 485	EA	1
65112	5/8	120	3000	0.76	1	CCW	7/32 x 1-3/4	60	Broan-Nutone 99080245 Broan-Nutone 97012041	104, 105, 485	EA	1
65514**	5/8	120	3000	0.44	1	CW	3/16 x 3/4	60	Delfield 1175-10-4439		EA	1
65691	5/8	120	3000	0.64	1	CW	0.181 x 1-5/16	60	Bohn 5007S, 5018S Bohn 5036F, Gemline EM691 UPPCO 85	354 472 474	EA	1
65692	5/8	240	3000	0.32	1	CW	0.181 x 1-5/16	60	Bohn 5007T, 5018T Bohn 5036G, Gemline EM692 UPPCO 86	354 472 474	EA	1
65709	5/8	120	3000	0.80	1	CCW	7/32 x 2-1/4	60	Nutone C53709	108, 485	EA	1
65106	3/4	115	3000	0.70	1	CCW	7/32 x 2-3/8	60	Gemline EM555 Nutone C68627	485	EA	1

Notes: **104.** Same as 65100 except mounting screws are on the shaft end **105.** Includes A65100FB impeller **106.** Assembled with bracket as illustrated **108.** Has a one shot overload **354.** Impedence protected **464.** Same as 65100 except motor only **472.** Includes stand offs for other Bohn applications **474.** Used in Bohn commercial evaporators **485.** Includes two prong plug **5" fan blade included

C-FRAME MOTORS CONT'D

Utility Fan Motors and Kits

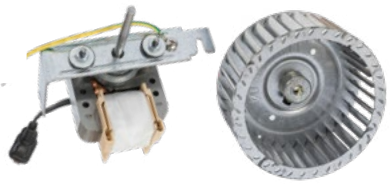

65894K

Features

Replaces Nutone K5894 & K5895
Kit Includes Motor, Mounting Bracket & Blower Wheel
CCW Rotation is Determined by Viewing the Shaft End
Includes two prong plug and blower wheel
60 Hz
Shaded Pole
Sleeve Bearings
Assembled with bracket as illustrated

Packard

CATALOG NO.	STACK SIZE (IN.)	VOLTS	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIMENSION (IN.)	HERTZ	DIRECT REPLACEMENT FOR	NOTES	UOM	OM
67154	3/4	120	3000	0.55	1	CCW	1/4 x 5/8	60	Russell Coil 102249-005	—	EA	1
65104	3/4	120	3000	0.74	1	CCW	7/32 x 1-3/4	60	Gemline EM553 Nutone C66582	107	EA	1
65894K	3/4	120	3000	0.90	1	CCW	7/32 x 2-3/8	60	Nutone 82229 Nutone K5894	106, 555	EA	1
65101	7/8	120	3000	0.86	2	CW	7/32 x 1-5/16	60	Gemline EM551 Nutone C52367 Robertshaw VFM101	110	EA	1
65105	7/8	120	3000	0.88	2	CCW	7/32 x 1-7/16	60	Gemline EM554 Nutone C27987	110	EA	1
65103	7/8	120	3000	0.71	1	CCW	7/32 x 1-3/16	60	Gemline EM552 Nutone C63675	485	EA	1
65272	1	120	3000	1.00	1	CCW	7/32 x 1-1/2	60	Nutone C23272	485	EA	1

Notes: **106.** Assembled with bracket as illustrated **107.** Has eyelet terminals on leads **110.** Includes Two Speed Plug
485. Includes two prong plug **555.** Includes two prong plug and blower wheel

Direct Replacements for Broan



65216

Features

Shaded Pole
Sleeve Bearing
Automatic Overload
Rotation is determined by viewing the shaft end

Packard

CATALOG NO.	STACK SIZE (IN.)	VOLTS	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIMENSION (IN.)	HERTZ	DIRECT REPLACEMENT FOR	NOTES	UOM	OM
65216	5/8	120	3000	0.51	1	CCW	0.181 x 1-1/2	60	Broan 99080090 Broan 99080216	485, 491	EA	1
65366	5/8	120	3000	0.50	2	CCW	0.185 splined x 1-1/4	60	Broan 99080365	110, 491	EA	1
65094	7/8	120	3000	0.75	1	CCW	7/32 x 1-1/4	60	Broan 99080094 Broan 99080099 Broan 99080166	485, 491	EA	1
65159	7/8	120	3000	0.71	1	CCW	1/4 x 2-3/4	60	Broan 99080159	485, 491	EA	1
65176	1-1/8	120	3000	1.00	1	CW	7/32 x 1-1/2	60	Broan 99080176	485, 491	EA	1

Notes: **110.** Includes Two Speed Plug **485.** Includes two prong plug **491.** Has a flatted shaft

C-FRAME MOTORS CONT'D

Utility Fan Motors and Kits



65670

Packard

Applications

Evaporators, refrigerators, range hoods, ventilators, exhaust fans and unit heaters

Features

Shaded pole
60 Hertz
Mechanically reversible
Rotation is determined by viewing the shaft end

CATALOG NO.	STACK SIZE (IN.)	VOLTS	RPM	AMPS	SPEEDS	ROT	SHAFT DIM. (IN.)	TYPE	BEARINGS	DIRECT REPLACEMENT FOR	UOM	OM
Sleeve Bearings												
65670	5/8	115	3000	0.40	1	CW	3/16 x 1-1/4	SP	Sleeve	Acme 600, Acme 700 Acme 710 Gemline EM670 Robertshaw 14001	EA	1
65690	5/8	120	3000	0.50	1	CW	3/16 x 1-3/8	SP	Sleeve	Gemline EM690	EA	1
65673	5/8	115	3000/1550	0.60/0.40	2	CW	3/16 x 1-3/8	SP	Sleeve	Gemline EM673 Robertshaw 14007	EA	1

Utility Fan Motors and Kits



65345

Packard

Applications

Evaporators, refrigerators, range hoods, ventilators, exhaust fans and unit heaters

Features

Shaded pole
60 Hertz
Mechanically reversible
Rotation is determined by viewing the shaft end

CATALOG NO.	STACK SIZE (IN.)	VOLTS	RPM	AMPS	SPEEDS	ROT	SHAFT DIM. (IN.)	TYPE	BEARINGS	DIRECT REPLACEMENT FOR	UOM	OM
Ball Bearings												
65686	5/8	120	3000	0.41	1	CW	3/16 x 1-1/4	SP	Ball	Acme BB700 Gemline EM686	EA	1
65688	1-1/8	120	3000	0.43	1	CW	3/16 x 1-5/8	SP	Ball	Acme BB750 Gemline EM688	EA	1
65345	1-3/8	120	3000	1.30	1	CCW	5/16 x 2-3/8	SP	Ball	Nutone 62345	EA	1

C-FRAME MOTORS CONT'D

Utility Fan Motors



65671

Packard

Applications

Evaporators, refrigerators, range hoods, ventilators, exhaust fans and unit heaters

Features

Shaded Pole, 60 Hertz
Mechanically reversible
Rotation is determined by viewing the shaft end

CATALOG NO.	STACK SIZE (IN.)	VOLTS	RPM	AMPS	SPEEDS	ROT	SHAFT DIMENSION (IN.)	TYPE	BEARINGS	DIRECT REPLACEMENT FOR	NOTES	UOM	OM
65210	3/8	120	3000	0.31	1	CW	0.181 x 1	SP	Sleeve	—	—	EA	1
65426	3/8	240	3000	0.17	1	CW	0.181 x 1	SP	Sleeve	—	—	EA	1
65533	1/2	120	3000	0.22	1	CW	Splined (3/16 Diam.)	SP	Sleeve	Choice Vending 863243	—	EA	1
65693	1/2	120	3000	0.32	1	CW	0.181 x 1	SP	Sleeve	—	—	EA	1
65280	1/2	240	3000	0.32	1	CW	3/16 x 1	SP	Sleeve	—	—	EA	1
65671	5/8	115	3000	0.50	1	CW	3/16 x 1-5/16	SP	Sleeve	Gemline EM671 Robertshaw 14003	—	EA	1
65102	5/8	120	3000	0.40	1	CW	7/32 x 2-1/4	SP	Sleeve	—	—	EA	1
65694	5/8	120	3000	0.45	1	CW	0.181 x 1-1/8	SP	Sleeve	—	—	EA	1
65467	7/8	120	3000/1550	1.00/0.60	2	CW	7/32 x 2-3/8	SP	Sleeve	—	103	EA	1
65427	7/8	220-240	3000	0.28	1	CW	3/16 x 1	SP	Sleeve	—	—	EA	1
65283	7/8	120	3000/1550	0.76	2	CW	3/16 x 1	SP	Sleeve	—	—	EA	1
65685	1	120	3000/1550	0.90	2	CW	3/16 x 1-5/8	SP	Sleeve	GE WB26X45 Gemline EM685	—	EA	1
65683	1	240	3000	0.25	1	CW	3/16 x 1-1/4	SP	Sleeve	Gemline EM683	—	EA	1
65680	1-1/8	120	3000	0.90	1	CW	3/16 x 1-1/2	SP	Sleeve	Acme 750 Gemline EM680 Robertshaw 14019	—	EA	1
65468	1-3/8	120	3000/1550	1.25	2	CW	7/32 x 2-3/8	SP	Sleeve	—	—	EA	1
65428	1-1/2	220-240	3000	0.55	1	CW	1/4 x 1	SP	Sleeve	—	—	EA	1

Notes: **103.** 2 speed plug for Nutone applications

C-Frame Utility Ventilator Fan Motor



60100PK

Packard

Features

60 Hertz
Rotation is determined by viewing the shaft end
Has extended studs at 1-7/8" center, two 5/32" mounting holes on each side of stack on 1-7/8" center and includes two prong plug
Mechanically reversible

CATALOG NO.	STACK SIZE (IN.)	VOLTS	RPM	AMPS	SPEEDS	ROT	SHAFT DIMENSION (IN.)	TYPE	BEARINGS	ENCL.	DIRECT REPLACEMENT FOR	UOM	OM
60100PK	5/8	115	2750	0.71	1	CW	3/16 x 1-1/8	SP	Sleeve	Open	Fasco 0648-0027	EA	1

OTHER MOTORS

Nidec Air Compressor Motors



EB384

Features

Rigid Welded Base
Continuous Duty
ODP Encl.
Class B Insulation
40°C Ambient
Ball Bearings
Ball Bearings
Capacitor Start, Capacitor Run
Rotation - CCWSE, Non-Reversible

CATALOG NO.	HP	FRAME	RPM	VOLT	SERVICE FACTOR	AMPS	"C" DIMENSIONS (IN.)	NOTES	UOM	OM
EB384	5	56HZ	3450	230	1.15	21.5	15.0	23	EA	1

*Rotation: Reversible **NOTES: 23.** Manual Reset Thermal Protector Overload **25.** Non-protected

Square Frame Condenser Fan Motors



PSQ9CW115

Applications

Industrial and commercial refrigeration fans for condensing, ventilating and evaporator units, walk-in and reach-in coolers, freezers, food and beverage chillers.

Features

All angle self-aligning sleeve bearings
Totally Enclosed
Class B insulation
Standard operating temperatures:
-40˚F to + 104˚F (-40˚C to +40˚C)
UL recognized
Rear mount: 6 tapped holes #8-36 thread
Foot mount: 4 holes, #8-36 thread
Continuous air over

CATALOG NO.	WATTS	VOLTS	RPM	AMPS	ROTATION	PROTECTION	UOM	OM
PSQ4CW115	4	115	1550	0.36	CW Lead End	Impedence	EA	1
PSQ5CW115	5	115	1550	0.40	CW Lead End	Thermal	EA	1
PSQ6CW115	6	115	1550	0.41	CW Lead End	Impedence	EA	1
PSQ9CW115	9	115	1550	0.58	CW Lead End	Thermal	EA	1
PSQ9CW230	9	230	1550	0.35	CW Lead End	Thermal	EA	1
PSQ18CW115	18	115	1550	1.00	CW Lead End	Thermal	EA	1
PSQ18CW230	18	230	1550	0.50	CW Lead End	Thermal	EA	1

OTHER MOTORS CONT'D

JuggerNaut® Three Phase Inverter Duty Condenser Fan Motors



H1050A

Features

Inverter duty
70°C (158°F) max ambient
Class F moisture resistant insulation
Automatic overload protector
Large water slinger
Double sealed ball bearings
Lugs for belly-band mounting
Removable 56H Base
Shaft up mounting
Quick connect design
Energy-efficient three phase design
Conductive bearing grease for inverter applications
50/60 Hertz
Three phase
Energy-efficient three phase design

							DIRECT REPLACEMENT FOR				
CATALOG NO.	HP	VOLTS	RPM	AMPS	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	BELLY BAND		RIGID BASE	UOM	OM
H1056AV1	3/4	460/200-230	1140	1.5/2.8-3.0	5/8 x 6	10.5	—		—	EA	1
H1052AV1	2	460/208-230	1140	3.70/7.40-7.00	5/8 x 6	12-5/8	Marathon X509	Emerson 8987	Marathon X525 Emerson 1822	EA	1
H1053AV1	1	460/208-230	850	2.60/5.20-5.00	5/8 x 6	12-5/8	Marathon X507 Emerson 1828	G.E. K1482 Mars 1482	Marathon X528	EA	1
H1054AV1	1-1/2	460/208-230	850	3.60/6.70-7.20	5/8 x 6	13-1/8	Marathon X530		Marathon X531	EA	1


Note: It is the responsibility of the installer to properly adjust the drive to the motor for the specific application. The correct volts/Hz settings are application specific and unique to each motor. Failure to perform proper set up can lead to substandard performance and/or premature failure of the system components. All other replacements are not inverter duty.

Oil Burner Motors

Features

40°C ambient
20″ Leads
1.0 service factor
Reversible rotation, except as noted
Manual reset thermal overload protector
56N Frame has 2 holes and screws for mounting outlet box
56N flange is enclosed, 48M and 48N flange are ventilated
Bearings have all angle thrust system

NEMA Frame	Bolt Circle AJ	Flange Dia. AK	Outside Dia. BD
48M	6.75"	5.500"	6.25" max
48N, 56N	7.25"	6.275"	7.00" max





3196

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIMENSION (IN.)	TYPE	FRAME	MOUNTING	FLANGE TYPE	DIRECT REPLACEMENT FOR	NOTES	UOM	OM
3196	1/8	115	1725	2.4	1	CCWSE	1/2 x 2	Split	48N	Flange	Ventilated	EI2005	85	EA	1
3274	1/7	115	3450	1.7	1	CCWSE	1/2 x 2	PSC	48M	Flange	Ventilated	OBK6002V1	84, 86, H46	EA	1
3252N	1/6	115	1725	3.1	1	Reversible	1/2 x 2	Split	48N	Flange	Ventilated	EL2014V1	—	EA	1
2302	1/4	115	3450	3.7	1	Reversible	1/2 x 2	Split	48N	Flange	Ventilated	EL2022	—	EA	1
2319	1/3	115	3450	4.8	1	Reversible	1/2 x 2	Split	48N	Flange	Ventilated	OL2032	78	EA	1

Notes: **78.** Class B insulation system **84.** Non-Reversible **85.** Removable face plate **86.** PSC motor, capacitor included **H46.** 3.7" body

OTHER MOTORS CONT'D

Hot Water Circulator Pump Motors



OBG2004

Features

Replacement motors for use on hot water circulator pumps by Bell and Gossett, Armstrong, Taco and others
Sleeve and ball bearings
Cushion rings and base included
For use with adjustable base
Special red paint
Open drip proof
Automatic overload
60 Hertz
Single phase
Capacitor included

CATALOG NO.	HP	VOLTS	RPM	FULL LOAD AMPS	SERVICE FACTOR	ROT	BRG	HUB TO HUB	SHAFT DIMENSION (IN.)	FRAME	MOUNTING TYPE	DIRECT REPLACEMENT FOR	UOM	OM
OBG2004*	1/8	115	1725	3.10	1.00	REV.	Sleeve	—	1/2 x 5/8 set screw	48Y	Base Included	Bell & Gossett	EA	1

Notes: * Suitable replacement for 1/12 HP and 1/10 HP



HW2014L

CATALOG NO.	HP	VOLTS	RPM	FULL LOAD AMPS	SERVICE FACTOR	ROT	BRG	HUB TO HUB	SHAFT DIMENSION (IN.)	FRAME	MOUNTING TYPE	DIRECT REPLACEMENT FOR	UOM	OM
HW2014L	1/6	115	1725	3.60	1.35	CWLE	Sleeve	7-5/8	1/2 x 5/8 flat	48YZ	Cushion Rings	Armstrong Bell & Gossett	EA	1

Square Flange Pool Pump Motors



SQ1152

Features

Used on many Sta-Rite, Red Jacket, Pac Fab, American Products and Sears jet and pool pumps
High and low service factors
Open drip proof enclosure
Sealed ball bearings
CCW pump end rotation
303 Stainless steel threaded shaft
50°C ambient
Square flange mounting
Capacitor start
3450 RPM
Automatic overload
60 Hertz
Single speed
Single phase

CATALOG NO.	HP	VOLTS	MAX AMPS	SERVICE FACTOR	FRAME	NOTES	UOM	OM
High Service Factor (Full Rated)								
QC1072	3/4	115/230	12.60/6.30	1.65	48Y	199	EA	1
SQ1152	1-1/2	230	10.40	1.47	48Y	199	EA	1
SQ1202	2	230	11.20	1.30	48Y	199	EA	1
SQ1302V1	3	230	15.40	1.15	56Y	199	EA	1

Notes: **199.** Energy efficient capacitor start, capacitor run Conservationist motor

EC MOTORS

EC Max® RM

The new EC Max® RM refrigeration motor is the newest member of the EC Max line - it is specifically designed with refrigeration contractors in mind. It covers a wide range of watts, thereby reducing your inventory. The back of the motor features 5 drilled & tapped holes for mounting on various OEM applications as well as double foot pad mounting options. The front of the motor features four threaded holes designed to easily adapt to various top-mount applications.



5411EC

Features

IP67 protection against dust and water
High efficiency & wide replacement capability
Mounting hardware included
Ball bearing design for all angle mounting
Double foot pad with threaded
mounting holes (Except 5408EC)

Watts: 4 to 25 (Part #s - 5411EC, 5412EC, 5412EC90, 5411EC2*, 5414EC)
Voltages: 115V-230V
Temperature Rating: -40° C to +55° C (-40° F to +130° F)
Hertz: 60/50 Hz
Plug Options: Straight Lyall, 90° Lyall, and 3-wire

CATALOG NO.	WATTS	VOLTS	RPM	AMPS	HERTZ	ROTATION	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	UOM	OM
5411EC	4 - 25	115-230	1550-1725	0.1-0.56/0.06-0.34	60/50	CWOSE	1/4 x 1/2	3	EA	1
5412EC	4 - 25	115-230	1550-1725	0.1-0.56/0.06-0.34	60/50	CCWOSE	1/4 x 1/2	3	EA	1
5411EC90*	4 - 25	115-230	1550-1725	0.1-0.56/0.06-0.34	60/50	CWOSE	1/4 x 1/2	3	EA	1
5411EC2**	4 - 25	115-230	1550/800	0.1-0.56/0.06-0.34	60/50	CWOSE	1/4 x 1/2	3	EA	1
5414EC	4 - 25	115-230	1550/1650	0.1-0.56/0.06-0.34	60/50	Reversible	1/4 x 1/2	3	EA	1
5408EC***	35 - 50@115V 35 - 60@230V	115-230	1550/800	0.8-1.0/0.52-0.8	60/50	Reversible	5/16 x 3	2-1/2	EA	1

*Includes 90 degree plug ** Plug not included ***4 extended studs on each end

Adapter Spacer

CATALOG NO.	SCREWS	SPACER DIAM. (IN.)	SPACER WIDTH (IN.)	UOM	OM
HA5411	(5) #8-36 x .750	3.188	.365	EA	1



HA5411

90° Plug Adapter

CATALOG NO.	UOM	OM
A60040	EA	1



A60040

EC MOTORS CONT'D

Unitronix Unit Bearing EC Motors



15621

EM &S

Features

Patented EMS electronically commutated motor technology
Drop in replacements for shaded pole and PSC unit bearing motors
Utilizes traditional cast iron unit bearing design for proven, trouble free long life
Up to 70% efficient
Low heat rise maximizes system efficiency
Maintains constant speed over a wide range of fan applications
Special patented water protection package
60/50 Hz
Includes Lyall plug
Rotation determined viewing lead end
13 mounting holes

CATALOG NO.	WATTS	RPM	VOLTS	AMPS	ROTATION	MOUNTING HOLES	DIRECT REPLACEMENT FOR	UOM	OM
15621	6-12	1550	115	0.2 - 0.3	CWLE	5 Rear holes	Hussman, Hill Phoenix, Kysor/Warren	EA	1
15624	14-16	1550	115	0.47 - 0.58	CWLE	5 Rear holes	Hussman, Hill Phoenix, Kysor/Warren	EA	1

Applications

Commercial refrigeration walk in coolers and freezers, air moving applications demanding high efficiency



15547

EM &S

Features

Electronically commutated motor
Drop in replacements for 3.3" Diam. Shaded Pole & PSC Motors
Includes Lyall plug
Standard thru bolt configuration
Rotation determined viewing the shaft end
Efficiencies up to 3 times higher than shaded pole motors and 40% higher than PSC
Totally enclosed, air over
Automatic overload
Unit Bearing

CATALOG NO.	WATTS	HP	RPM	VOLTS	AMPS	ROTATION	MOUNTING	DIRECT REPLACEMENT FOR	UOM	OM
15211	—	1/15-1/25	1550	115	1.25	CWSE	4 STUDS SE	Heatcraft, Bohn, and Krack	EA	1
15222	—	1/15-1/25	1550	230	0.77	CCWSE	4 STUDS SE	Heatcraft, Bohn, and Krack	EA	1
15546	12	—	1550	115	0.3	CWLE	5 Rear holes	Hussman 4410546	EA	1
15547	13	—	1725	115	0.3	CWLE	5 Rear holes	Hussman 4410547	EA	1

Solid State Commutated Unit Bearing Motors



10313

morrillmotors

Features

Direct drop-in replacements
Ultimate commutated technology
Unit bearing construction
100% performance tested
Includes Lyall plug
Peak efficiencies in excess of 80% means lower operating temperatures and extended motor life
Constant 1550 RPM operating speed is identical on either 50 or 60 Hertz
Constant 1550 RPM regardless of fluctuations in voltage
Rotation is determined by viewing opposite shaft end

CATALOG NO.	WATTS	VOLTS	RPM	AMPS	ROTATION	PLUG	HERTZ	FOOT PADS	MATERIAL	DIRECT REPLACEMENT FOR	UOM	OM
10313	16	115	1550	0.30	CWLE	90 Degree 2 Prong Plug	50/60	Double	Aluminum	12CSHEMV1	EA	1
10219	38	208-230	1550	0.45	CCWLE	Straight 2 Prong Plug	50/60	Double	Cast Iron	19AHMAR2	EA	1

EC MOTORS CONT'D

Solid State Commutated Unit Bearing Motors



20020

morrillmotors

Features

The next generation of ECM unit bearing motor with multi-watt range capability
Used for commercial refrigeration
IP65 Certified making it compatible for applications where the use of pressurized water for wash down is a standard procedure
ATEX Certified allowing its application where flammable refrigerants are used
66% Peak Efficiency = 45% higher than a PSC motor
Ball bearing with low temperature grease
Operating Temps: -40° C to 55° C ambient
5 drilled & tapped mounting holes on rear of the motor

CATALOG NO.	WATTS	VOLTS	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	HERTZ	MOUNTING	DIRECT REPLACEMENT FOR	NOTES	UOM	OM
10999	4 - 25	115	1550	0.60	1	CW	1/4 x 1/2	—	—	Universal 5-Hole Mount	—	—	EA	1
10022	16-25	115	1575	0.60	—	CCW	1/4 Threaded	—	60	—	—	554	EA	1
20020	16-25	208-230	1575	0.30	—	CW	1/4 Threaded	—	60	—	—	554	EA	1
20022	16-25	208-230	1575	0.20	—	CCW	1/4 Threaded	—	60	—	—	554	EA	1
10036	35-50	208-230	1550	0.45	—	CW	1/4 Threaded	—	50/60	—	—	—	EA	1
10040	35-50	115	1550	0.90	—	CCW	1/4 Threaded	—	50/60	—	—	—	EA	1
10042	35-50	208-230	1550	0.45	—	CCW	1/4 Threaded	—	50/60	—	—	—	EA	1

Notes: 554. Includes water shield to protect motor during coil cleaning

ECR ONE Constant Torque Motor



ECR01A0241

Wellington

Applications

Supermarket refrigeration, vending machines and other condenser and evaporator fan applications

Features

Drop in replacement for shaded pole and PSC motors
Electronically commutated motors with integrated electronic control
ECR up to 70% energy savings; UL recognized
IP55 moisture and dust protection
Totally enclosed, ball bearings,CCWSE rotation,can be mounted in any position
Operating temperature of ECR ONE motors: -22°F to +122°F
Operating temperature of ECR UltraSynch motors: -22°F to +104°F
Motors are built using 30% less copper and
80% less steel for a greener, more affordable solution
ECR UltraSynch motor includes Lyall plug
ECR ONE is a constant torque motor and will replace a shaded pole motor of matching wattage using the same fan blade
ECR UltraSynch is a constant speed motor operating at 1800 RPM over a wide range of voltage and load conditions. The correct fan blade must be specified to properly balance air flow.

CATALOG NO.	WATTS	VOLTS	RPM	AMPS	HERTZ	UOM	OM
ECR01A0241	9	115	1550	0.23	60	EA	1
ECR01A0102	12	115	1550	0.31	60	EA	1
ECR01A0243*	16	115	1550	0.41	60	EA	1

*7 Drilled and tapped inserts for mounting.

ECR UltraSynch™ Constant Speed Motor



ECR92PJA12

Wellington

Applications

Supermarket refrigeration, vending machines and other condenser and evaporator fan applications

Features

Drop in replacement for shaded pole and PSC motors
Electronically commutated motors with integrated electronic control
ECR up to 70% energy savings; UL recognized
IP55 moisture and dust protection
Totally enclosed, ball bearings,CCWSE rotation,can be mounted in any position
Operating temperature of ECR ONE motors: -22°F to +122°F
Operating temperature of ECR UltraSynch motors: -22°F to +104°F
Motors are built using 30% less copper and
80% less steel for a greener, more affordable solution
ECR UltraSynch motor includes Lyall plug
ECR ONE is a constant torque motor and will replace a shaded pole motor of matching wattage using the same fan blade
ECR UltraSynch is a constant speed motor operating at 1800 RPM over a wide range of voltage and load conditions. The correct fan blade must be specified to properly balance air flow.

CATALOG NO.	WATTS	VOLTS	RPM	AMPS	HERTZ	UOM	OM
ECR92PJA12	9-16	120	1800	0.34	60	EA	1

EC MOTORS CONT'D

Kryo™ Fortress Motor

A high-efficiency EC motor with a dust-tight, water-tight IP66 rating.

Features

Replace 28 different motor ratings
Dual voltage
Reversible
Multi-mount
Energy efficient

68% EFFICIENT!

genteq KRYO™ · SSC



MD5411S

CATALOG NO.	WATTS	VOLTAGE	RPM	AMPS	SPEED	ROTATION	BEARING	ENCL.	SHAFT	NOTE	UOM	OM
MD5411S	4-20	90-240	1550	.30-.55	1	Rev	Ball	IP66/IP67	1/4-20	A	EA	1

Note: A - Stock No. 2117 - 90° cord adapter available separately

*Energy Savings EC Design - Comparison 16 Watt Motors @ 1550 RPM

Kryo™ Fortress Fan Packs

An energy-efficient, unit bearing style EC fan pack built to withstand harsh commercial refrigeration environments and cleaning practices.

68% EFFICIENT!

genteq KRYO™ · SSC



MD5469

Features

Dual voltage
Easy to install
IP66 Enclosure
Can operate in temperatures between -40°C & 55°C

CATALOG NO.	CFM	WATTS	VOLTAGE	RPM	AMPS	SPEED	ROTATION	BEARING	MOUNTING B. C.	NOTE	UOM	OM
MD5469	355	4-20	90-240	1550	.55-.20	1	CCWSE	Ball	9.532"	1,3	EA	1
MD5470	355	4-20	90-240	1550	.55-.20	1	CCWSE	Ball	9.800"	2,3	EA	1

Notes: 1- Right Angle Plug, 2- Straight Plug, 3-Fan Pack

*Energy Savings EC Design - Comparison 16 Watt Motors @ 1550 RPM

Electronically Commutated Refrigeration Motors and Fan Kits

Assembled in the USA

Wellington



ECR921200

CATALOG NO.	INCLUDES	DIRECT REPLACEMENT FOR	UOM	OM
ECR92950	• ECR92PJA12 Motor • Mounting Shroud • 8 Inch 15 Degree Fan Blade	GE FAN PACK 5SME58AAF1430 900 & 950 RPM	EA	1
ECR921200	• ECR92PJA12 Motor • Mounting Shroud • 8 Inch 25 Degree Fan Blade	GE FAN PACK 5SME58AAF1430 1100 & 1200 RPM	EA	1
ECR921400	• ECR92PJA12 Motor • Mounting Shroud • 8 Inch 28 Degree Fan Blade	GE FAN PACK 5SME58AAF1430 1300 & 1400 RPM	EA	1

9-16 Watt, 120 Volt, 0.34 Amps

58MM ECM Fan Pack

Features

Includes basket w/9.8 inch bolt circle mounting and fan blade
Variable torque, constant speed EC motors
40° to 55°C ambient operating temperature
Class B Insulation
Lyall plug

morrillmotors



5R028

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	HERTZ	ROTATION	BEARING	PHASE	CFM AT 0.05" STATIC PRESSURE	DIRECT REPLACEMENT FOR	UOM	OM
5R028	Replaces up to 12W	115	1550	0.4	1	60	CWLE	Unit Bearing	1	400	3428B, SSC2B13CSHEMA1	EA	1

3.3" DIAMETER MOTORS

Heatcraft BNE Air Cooled Condenser Fan Assembly Replacement Unit



25318801

ebmpapst

Features

Fans can be wired to work as 0-10V or 10-0V control input using a jumper wire, no programming needed
Fans can be installed as lead fans or downstream fans on a condenser layout
Includes components and instructions for fan assembly replacement to OEM specs

HEATCRAFT PART NUMBER	EBM-PAPST PART NUMBER	VOLTS	UOM	OM
25318801	S3G800-CY24-16A	200-240	EA	1
25318901	S3G800-CY27-06A	380-480	EA	1
25318803	S3G800-BY24-16A	200-240V/3 CW	EA	1
25318903	S3G800-BY27-06A	380-480V/3 CW	EA	1

Note: Metal venturi wall ring not included

Heatcraft Condenser Fan Assembly Unit



ebmpapst

HEATCRAFT Worldwide Refrigeration

Features

30″ blade
No minimum order quantity
– maximum number of motors per pallet is 3
Fan Assembly weighs about 75 pounds

PACKAGE INCLUDES

Detailed replacement instructions with photographs to guide you through each step of the fan replacement

Factory installed conduit on the motor to prevent any water entry

Cork tape to seal the wire entry point under the wall panel to prevent any moisture intrusion and new pressure washer warning label

Heatcraft's specific wiring diagrams showing exactly how to wire this replacement fan into the variety of existing condenser applications

Instructions and materials to return units under warranty.

Includes a reusable shipping box, return label and bill of lading.

EBM Energy Saving Motor (ESM) Axial Fan Assembly



EBM9137

ebmpapst

Features

Can be programmed with Nano programmer
Program two-speeds between available range
50/60 Hertz
115 & 230 VAC models available

CATALOG NO.	DIAM. FAN (IN.)	WATTS	VOLTS	RPM	AMPS	SPEEDS	ROTATION	BEARING	UOM	OM
EBM9122	7	21	230	1700-2500	0.18	2	CCWSE	Ball	EA	1
EBM9137	8	31	230	800-2100	0.24	2	CCWSE	Ball	EA	1
EBM9523	7	22	115	1700-2500	0.3	2	CCWSE	Ball	EA	1
EBM9538	8	31	115	800-2100	0.46	2	CCWSE	Ball	EA	1

- **Three wiring harness termination options, sold separately**

EBM Unit Cooler Fan Assembly



EBM0207

ebmpapst

Features

High efficiency ECM design
Plug included
Voltage sensing

CATALOG NO.	WATTS	VOLTS	RPM	AMPS	SPEEDS	ROTATION	BEARINGS	UOM	OM
EBM0207	63	100-240	1590	0.55	1	CWSE	Ball	EA	1
EBM0210	70	100-240	900-1650	0.5	10	CWSE	Ball	EA	1

Two options available:

EBM0207 – Fixed RPM suitable for use in Heatcraft unit coolers
EBM0210 – RPM adjustable rotary switch

3.3" DIAMETER MOTORS CONT'D

EBM Programmer



EBM600003

ebmpapst

Features

Allows for effortless programming of the two ESM speeds
Inserts directly into fan's programming port
Battery operated, no cables required
Easy to read LCD display

CATALOG NO.	DESCRIPTION	UOM	OM
EBM600003	EBM Nano Programmer	EA	1

EBM Harness



EBM10910

ebmpapst

Features

Interchangeable cord sets for 8 in (200mm) EBM fan basket

CATALOG NO.	CONNECTION	LENGTH (IN.)	UOM	OM
EBM10637	3 wire connection without plug	17.7	EA	1
EBM10847	Two Pin Right Angle Lyall Plug	17.7	EA	1
EBM10901	2 wire connection without plug	17.7	EA	1
EBM10910	Three Pin Straight Lyall Plug	11	EA	1

42 FRAME

Drop In Replacements For Commercial Refrigeration Evaporator Fan Motors



97901

Packard

Features

Energy savings ECM design
Ball bearings
60 Hertz
Direct Replacement For Heatcraft, Bohn, Chandler, Climate Control and Larkin
42 Frame
Class B insulation
Four mounting studs on each end
Includes Lyall plug
Direct Replacement For 1/15, 1/20, 1/25 HP PSC and lower efficient shaded pole designs

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	BEARINGS	MOUNTING	DIRECT REPLACEMENT FOR	UOM	OM
97801	1/15, 1/20, 1/25	120	1625	1.20	1	CWSE	5/16 x 2.95	2.85	Ball	Stud	Heatcraft 22617801 Heatcraft 22618001 Heatcraft 25307801 Heatcraft 25308001 Interlink 25317801S	EA	1

48 FRAME

ARKTIC™ 142 Motor



5R007

morrillmotors

Applications

Designed primarily for use in the evaporator of commercial refrigeration and walk-in coolers and freezers as well as outdoor condensers can also be used in many applications demanding high efficiency and dependability with output ratings between 1/5 - 1 HP including parallel rack fan motors.

Features

Shaft water slinger
26 inch cord set attached to motor
Horizontal - vertical down orientation desired
Totally enclosed, Non-vented (air-over ECM required)
Designed for 50 or 60 Hertz operation
RoHS compliant NEMA 48 Frame electronically commutated motor

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	BEARINGS	UOM	OM
5R007	1/3	230	1075	2.60-3.50	1	CCW	1/2 x 4	10	Ball	EA	1

OTHER MOTORS

EC Unit Bearing Motor

Features

60/50 Hz
IP65 Certified
Shaded pole
Water Shield
Stud mounting
Includes speed nut and 4 screws
5 - tapped and drilled mounting holes in rear
61312 has a straight lyall plug, 61313 has a 90 degree lyall plug
Rotation is determined by viewing the shaft end
Direct Replacements for Delfield, Bohn, Gemline and Nutone

70% EFFICIENT!



90° Lyall plug



61313



Straight Lyall plug



61312

Packard

CATALOG NO.	WATTS	VOLTS	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	BEARING	MOUNTING	UOM	OM
61312	4-16	115	1550	0.16-0.42	1	CWLE	1/4 x 1/2	3-1/8	Ball	Double Foot Pad	EA	1
61313	4-16	115	1550	0.16-0.42	1	CWLE	1/4 x 1/2	3-1/8	Ball	Double Foot Pad	EA	1

Packard Aluminum 2-16 Watts - Single and No Foot Pad

Features

Rotation is determined by viewing the lead (opposite shaft) end
Totally enclosed



65109

Packard

CATALOG NO.	WATTS	VOLTS	RPM	AMPS	ROTATION	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	HERTZ	MOUNTING	DIRECT REPLACEMENT FOR	NOTES	UOM	OM
65109	2	115	1550	0.22	CW	1/4 x 1/2	2-3/8	50/60	No Foot Pad	GE 5109	530	EA	1
65213	4	115	1550	0.29	CW	1/4 x 1/2	2-3/8	50/60	Single Foot Pad	GE 5213	—	EA	1
65214	4	115	1550	0.29	CCW	1/4 x 1/2	2-3/8	50/60	Single Foot Pad	GE 5214	—	EA	1
65313	6	115	1550	0.40	CW	1/4 x 1/2	2-7/8	50/60	Single Foot Pad	GE 5313	—	EA	1
65413	9	115	1550	0.50	CW	1/4 x 1/2	2-7/8	50/60	Single Foot Pad	GE 5413	—	EA	1
65813	16	115	1550	1.0	CW	1/4 x 1/2	3-3/16	50/60	Single Foot Pad	—	—	EA	1

Notes: **87**. Includes straight Lyall plug **530**. No foot pad **551**. Low temp. oil

OTHER MOTORS CONT'D

Packard Cast Iron 2-16 Watts - Single and Double Foot Pad



61004

Packard

Features

Shaded pole
Rotation is determined by viewing the lead (opposite shaft) end

CATALOG NO.	WATTS	VOLTS	RPM	AMPS	ROTATION	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	ENCL.	HERTZ	MOUNTING	DIRECT REPLACEMENT FOR	UOM	OM
Single Foot Pad													
61021*	2	115	1550	0.22	CW	1/4 x 1/2	2-1/4	Totally Enclosed	50/60	No Foot Pad	GE 5109	EA	1
65111	2.5	115	1000	0.26	CW	1/4 x 1/2	2-1/4	Totally Enclosed	50/60	Single Foot Pad	GE 5111	EA	1
65211	4	115	1550	0.29	CW	1/4 x 1/2	2-3/8	Totally Enclosed	50/60	Single Foot Pad	GE 5211	EA	1
65212	4	115	1550	0.29	CCW	1/4 x 1/2	2-3/8	Totally Enclosed	50/60	Single Foot Pad	GE 5212	EA	1
65311	6	115	1550	0.40	CW	1/4 x 1/2	2-7/8	Totally Enclosed	50/60	Single Foot Pad	GE 5311	EA	1
65312	6	115	1550	0.40	CCW	1/4 x 1/2	2-7/8	Totally Enclosed	50/60	Single Foot Pad	GE 5312	EA	1
65411	9	115	1550	0.55	CW	1/4 x 1/2	2-7/8	Totally Enclosed	50/60	Single Foot Pad	GE 5411	EA	1
65412	9	115	1550	0.55	CCW	1/4 x 1/2	2-7/8	Totally Enclosed	50/60	Single Foot Pad	GE 5412	EA	1
65421	9	230	1550	0.27	CW	1/4 x 1/2	2-7/8	Totally Enclosed	50/60	Single Foot Pad	GE 5421	EA	1
65422	9	230	1550	0.27	CCW	1/4 x 1/2	2-3/4	Totally Enclosed	50/60	Single Foot Pad	GE 5422	EA	1
65811	16	115	1550	1.00	CW	1/4 x 1/2	3-1/4	Totally Enclosed	50/60	Single Foot Pad	GE 5811	EA	1
65812	16	115	1550	1.00	CCW	1/4 x 1/2	3-1/4	Totally Enclosed	50/60	Single Foot Pad	GE 5812	EA	1
65821	16	230	1550	0.50	CW	1/4 x 1/2	3-1/4	Totally Enclosed	50/60	Single Foot Pad	GE 5821	EA	1
65822	16	230	1550	0.50	CCW	1/4 x 1/2	3-1/4	Totally Enclosed	50/60	Single Foot Pad	GE 5822	EA	1
Double Foot Pad													
61002	2	115	1550	0.22	CW	1/4 x 1/2	2-3/8	Totally Enclosed	50/60	Dbl Foot Pads	—	EA	1
61004	4	115	1550	0.29	CW	1/4 x 1/2	2-3/8	Totally Enclosed	50/60	Dbl Foot Pads	—	EA	1
65119**	5	115	1550	0.34	CW	1/4 x 1/2	2-3/8	Totally Enclosed	50/60	Dbl Foot Pads	—	EA	1
61006	6	115	1550	0.40	CW	1/4 x 1/2	2-3/8	Totally Enclosed	50/60	Dbl Foot Pads	—	EA	1
61029	9	230	1550	0.27	CW	1/4 x 1/2	2-1/2	Totally Enclosed	50/60	Dbl Foot Pads	—	EA	1
61009	9	115	1550	0.55	CW	1/4 x 1/2	2-1/2	Totally Enclosed	50/60	Dbl Foot Pads	—	EA	1
61099	9	115	1550	0.55	CCW	1/4 x 1/2	2-1/2	Totally Enclosed	50/60	Dbl Foot Pads	—	EA	1
61059	9	230	1550	0.29	CCW	1/4 x 1/2	2-1/2	Totally Enclosed	50/60	Dbl Foot Pads	—	EA	1
61015	16	115	1550	1.00	CW	1/4 x 1/2	3-1/32	Totally Enclosed	50/60	Dbl Foot Pads	—	EA	1
61016	16	115	1550	1.00	CCW	1/4 x 1/2	3-1/32	Totally Enclosed	50/60	Dbl Foot Pads	—	EA	1
61017	16	230	1550	0.50	CW	1/4 x 1/2	3-1/32	Totally Enclosed	50/60	Dbl Foot Pads	—	EA	1
61018	16	230	1550	0.50	CCW	1/4 x 1/2	3-1/32	Totally Enclosed	50/60	Dbl Foot Pads	—	EA	1

Note: *61021 has no foot pad **65119 Includes straight Lyell plug / Low Temp. Oil

OTHER MOTORS CONT'D

Packard Aluminum 2-9 Watts - Double Foot Pads

Features

Rotation is determined by viewing the lead (opposite shaft) end



64108

Packard

CATALOG NO.	WATTS	VOLTS	RPM	AMPS	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	ENCL.	HERTZ	MOUNTING	DIRECT REPLACEMENT FOR	NOTES	UOM	OM
64102	2	115	1550	0.25	CW	1/4 x 1/2	2-3/8	Totally Enclosed	50/60	Double Foot Pads	Emerson 102	557	EA	1
64115	4	115	1450	0.29	CW	1/4 x 1/2	2-1/2	Totally Enclosed	50/60	Double Foot Pads	—	557	EA	1
64117	6	115	1550	0.40	CW	1/4 x 1/2	2-3/8	Totally Enclosed	50/60	Double Foot Pads	Emerson 117	557	EA	1
64277	6	277	1550	0.17	CW	1/4 x 1/2	2-1/2	Totally Enclosed	50/60	Double Foot Pads	—	557	EA	1
64108	9	115	1550	0.50	CW	1/4 x 1/2	2-1/2	Totally Enclosed	50/60	Double Foot Pads	Emerson 108	557	EA	1

Notes: **557.** 5 mounting holes opposite the shaft end

Direct Replacement Unit Bearing Motors

Features

Rotation is determined by viewing the lead (opposite shaft) end
Totally enclosed



65740

Packard

CATALOG NO.	WATTS	VOLTS	RPM	AMPS	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	MATERIAL	HERTZ	MOUNTING	DIRECT REPLACEMENT FOR	NOTES	UOM	OM
65740	2.3	115	1300	0.15	CW	1/4 x 1/2	2.48	Aluminum	60/50	Double Foot Pads	Sub Zero 4200740	Pin Term.	EA	1
65119	5	115	1550	0.34	CW	1/4 x 1/2	2-3/8	Cast Iron	50/60	Double Foot Pads	Hill PP7577M	87, 551	EA	1
65018	5	115	1550	0.34	CW	1/4 x 1/2	2-1/2	Cast Iron	50/60	Single Foot Pad	GE 5KSM81FFL18	550, 551	EA	1
65017	9	115	1550	0.55	CW	1/4 x 1/2	2-3/4	Cast Iron	50/60	Single Foot Pad	GE 5KSM81FFL17	550, 551	EA	1
65133	9	115	1550	0.50	CW	1/4 x 1/2	2-1/2	Cast Iron	50/60	Single Foot Pad	GE 5KSM51ECG5133 Hussmann 58698	87 551	EA	1

Notes: **87.** Includes straight Lyall plug **550.** Includes 90 degree Lyall plug **551.** Low temp. oil

Direct Replacement Unit Bearing Motor



10101

morrillmotors

CATALOG NO.	WATTS	VOLTS	RPM	AMPS	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	MATERIAL	HERTZ	MOUNTING	DIRECT REPLACEMENT FOR	NOTES	UOM	OM
10101	9	115	1550	0.53	CW	1/4 x 1/2	2-1/2	Aluminum	60	No Foot Pad	Hussmann SPB9HUBGV101	87, 530	EA	1

Notes: **87.** Includes straight Lyall plug **530.** No foot pad

OTHER MOTORS CONT'D

Morrill Motors - Cast Iron 2-16 Watts - Double Foot Pads



10018

morrillmotors

Features

Rotation is determined by viewing the lead (opposite shaft) end Totally enclosed 60 Hertz

CATALOG NO.	WATTS	VOLTS	RPM	AMPS	ROTATION	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	MOUNTING	DIRECT REPLACEMENT FOR	UOM	OM
10002	2	115	1550	0.22	CW	1/4 x 1/2	2-3/8	SP	Double Foot Pads	Morrill SPB2EM1	EA	1
10004	4	115	1550	0.29	CW	1/4 x 1/2	2-3/8	SP	Double Foot Pads	Morrill SPB4EM1 GE 5211	EA	1
10005	5	115	1550	0.34	CW	1/4 x 1/2	2-3/8	SP	Double Foot Pads	Morrill SPB5EM1	EA	1
10287*	5	115	1550	0.34	CW	1/4 x 1/2	2-3/8	SP	Double Foot Pads	Morrill PB5SEV11 Hill PP7577M	EA	1
10006	6	115	1550	0.36	CW	1/4 x 1/2	2-1/2	SP	Double Foot Pads	Morrill SPB6EM1 GE 5311	EA	1
10009	9	115	1550	0.53	CW	1/4 x 1/2	2-1/2	SP	Double Foot Pads	Morrill SPB9EM1 GE 5411	EA	1
10099	9	115	1550	0.53	CCW	1/4 x 1/2	2-1/2	SP	Double Foot Pads	Morrill SPB9EMR1	EA	1
10029	9	230	1550	0.27	CW	1/4 x 1/2	2-1/2	SP	Double Foot Pads	Morrill SPB9EM2 GE 5421	EA	1
10015	16	115	1550	0.80	CW	1/4 x 1/2	3-1/32	SP	Double Foot Pads	Morrill SPBEP16EM1 GE 5811	EA	1
10017	16	115	1550	0.80	CCW	1/4 x 1/2	3-1/32	SP	Double Foot Pads	Morrill SPBEP16EMR1 GE 5812	EA	1

*Low temp. oil

Aluminum - Double Foot Pads



UB554

morrillmotors

Features

Rotation is determined by viewing the lead (opposite shaft) end
Totally enclosed
60 Hertz

CATALOG NO.	WATTS	VOLTS	RPM	AMPS	ROTATION	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	MOUNTING	DIRECT REPLACEMENT FOR	UOM	OM
UB554	4	115	1550	.34	CW	1/4 x 20	2.42	SP	Double Foot Pads	D554	EA	1
13006	6	115	1550	0.50	CW	1/4 x 1/2	2-3/8	SP	Double Foot Pads	Morrill SPB6HUEM1	EA	1

OTHER MOTORS CONT'D

Packard Unit Bearing Motors - Cast Iron 25-50 Watts



65045

Features

Double foot pad
50/60 Hertz
Shaded pole

Rotation is determined by viewing the lead (opposite shaft) end
Horizontal or shaft up mounting

CATALOG NO.	WATTS	VOLTS	RPM	AMPS	ROTATION	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	ENCLOSURE	DIRECT REPLACEMENT FOR	UOM	OM
65020	35	115	1500	1.40	CW	1/4 x 1/2	3-3/8	Totally Enclosed	Tecumseh 810M035A29	EA	1
65022	35	115	1500	1.40	CCW	1/4 x 1/2	3-3/8	Totally Enclosed	GE 3352	EA	1
65021	35	230	1500	0.70	CW	1/4 x 1/2	3-3/8	Totally Enclosed	Tecumseh 810M035A21	EA	1
65023	35	230	1500	0.70	CCW	1/4 x 1/2	3-3/8	Totally Enclosed	GE 3354	EA	1
65040	50	115	1500	1.70	CW	3/8 x 1-1/2	3-5/8	Semi Enclosed	Copeland 050-0244-00	EA	1
65042	50	115	1500	1.70	CCW	3/8 x 1-1/2	3-5/8	Semi Enclosed	GE 3502	EA	1
65041	50	230	1500	0.85	CW	3/8 x 1-1/2	3-5/8	Semi Enclosed	Copeland 050-0244-00	EA	1
65043	50	230	1500	0.85	CCW	3/8 x 1-1/2	3-5/8	Semi Enclosed	GE 3504	EA	1
65045	50	230	1500	0.85	CCW	5/16 x 2-1/2	3-3/4	Open	Tecumseh 810M050A62	EA	1

Direct Replacements for Oasis and Hussman



10037

Features

Totally enclosed
Rotation is determined by viewing the lead (opposite shaft) end

CATALOG NO.	WATTS	VOLTS	RPM	AMPS	ROTATION	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	HERTZ	MOUNTING	DIRECT REPLACEMENT FOR	UOM	OM
10037	5	115	1550	0.34	CW	1/4 x 1/2	2-3/8	SP	60	Double Foot Pads	Oasis 027354-026 027354-037	EA	1

NOTE: Item numbers in **RED** indicate **Made in the U.S.A.**

OTHER MOTORS CONT'D

Electric Motors and Specialties Unit Bearing Motors - 15-50 Watts



15010

EM &S

Features

Double foot pad mounting
Mounting hardware included
UL recognized

Rotation is determined by viewing the lead (opposite shaft) end
Cast iron
Shaded pole

CATALOG NO.	WATTS	VOLTS	RPM	AMPS	ROT	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	ENCL	HERTZ	DIRECT REPLACEMENT FOR	UOM	OM
15009*	15	115	1500	0.6	CCW	5/16 x 7-1/2	3-1/8	Totally Enclosed	60	ESPL15EMJR11	EA	1
15005	16	115	1500	1.1	CW	1/4 x 1/2	3-3/8	Totally Enclosed	60	ESPL16EM1	EA	1
15006	16	230	1500	0.6	CW	1/4 x 1/2	3-3/8	Totally Enclosed	60	ESPL16EM2	EA	1
15008	16	230	1500	0.6	CCW	1/4 x 1/2	3-3/8	Totally Enclosed	60	ESPL16EMR2	EA	1
15001	25	115	1500	1.1	CW	1/4 x 1/2	3-3/8	Totally Enclosed	60	Manitowoc 002412283	EA	1
15003	25	115	1500	1.1	CCW	1/4 x 1/2	3-3/8	Totally Enclosed	60	GE 3352 ESPL25EMR1	EA	1
15004	25	230	1500	0.6	CCW	1/4 x 1/2	3-3/8	Totally Enclosed	60	ESPL25EMR2	EA	1
15010*	25	115	1500	1.1	CCW	5/16 x 3-1/2	3-1/16	Totally Enclosed	60	ESPL25ERD1	EA	1
15020	35	115	1500	1.40	CW	1/4 x 1/2	3-3/8	Totally Enclosed	60	Tecumseh 810M035A29 EMS ESPL35EM1	EA	1
15022	35	115	1500	1.40	CCW	1/4 x 1/2	3-3/8	Totally Enclosed	60	EMS ESPL35EMR1	EA	1
15021	35	230	1500	0.70	CW	1/4 x 1/2	3-3/8	Totally Enclosed	60	Tecumseh 810M035A21 Tecumseh 810M035A28 EMS ESPL35EM2	EA	1
15023	35	230	1500	0.70	CCW	1/4 x 1/2	3-3/8	Totally Enclosed	60	EMS ESPL35EMR2	EA	1
15040	50	115	1500	1.70	CW	3/8 x 1-1/2	3-5/8	Open	60	Copeland 050-0244-01 EMS ESPOL50EM1	EA	1
15041	50	230	1500	0.85	CW	3/8 x 1-1/2	3-5/8	Open	60	Copeland 050-0244-00 EMS ESPOL50EM2	EA	1

*Lead end and shaft end are the same.

Direct Replacements for Oasis and Hussman



61103

Packard

Features

Totally enclosed
Rotation is determined by viewing the lead (opposite shaft) end

CATALOG NO.	WATTS	VOLTS	RPM	AMPS	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	HERTZ	MOUNTING	DIRECT REPLACEMENT FOR	UOM	OM
61103	12	115	1550	0.62	CW	1/4 x 1/2	2-11/16	SP	50/60	No Foot Pad	Hussmann 0047000, 441-103, 4410311, 0440421, 125-01-0615A LRC Coil 1602	EA	1

OTHER MOTORS CONT'D

Electric Motors and Specialties
Unit Bearing Motors - 50-75 Watts



15045

EM &S

Features

Double foot pad mounting
Mounting hardware included
UL recognized
Rotation is determined by viewing the lead (opposite shaft) end
Cast iron
Shaded pole

CATALOG NO.	WATTS	VOLTS	RPM	AMPS	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	ENCL.	HERTZ	DIRECT REPLACEMENT FOR	NOTES	UOM	OM
15045**	50	230	1500	0.85	CCW	5/16 x 2-1/2	3-5/8	Open	60	Tecumseh 810M050A62, EMS ESPOL50EMJR21	479	EA	1
15049	50	208-230	1500	0.85	CW	3/8 x 1-1/2	3-5/8	Open	50/60	Copeland 050-0241-01, EMS ESPOL50EM13	96, 97	EA	1
15460	50	460	1500	0.44	CW	3/8 x 1-1/2	3-5/8	Open	60	Copeland 050-0244-02 , EMS ESPOL50EM461	96	EA	1
15461**	50	460	1500	0.44	CCW	5/16 x 2	3-5/8	Open	60	Copeland 050-0264-03, ESPOL50EMJR41	—	EA	1
15042	50	115	1500	1.7	CCW	3/8 x 1-1/2	3-5/8	Open	60	ESPOL50EMR1	—	EA	1
15043	50	230	1500	0.85	CCW	3/8 x 1-1/2	3-5/8	Open	60	ESPOL50EMR2	—	EA	1
15044	50	230	1500	0.85	CW	5/16 x 1-1/2	3-5/8	Open	60	ESPOL50EM2B	—	EA	1
15046	50	208-230	1500	1.20	CW	3/8 x 1-1/2	3-5/8	Open	60	ESPOL60EM2	97	EA	1
15050**	50	115	1500	1.70	CW	5/16 x 3	3-7/8	Open	60	ESPOL50EM1B1, IMI Cornelius 134350000	—	EA	1
15051	50	115	1500	1.70	CW	3/8 x 1-1/2	3-5/8	Open	60	Copeland 998-1008-00	—	EA	1
15116	50	115	1500	1.7	CW	1/4 - 20 Thread	4.18	Open	60	Copeland 050-0344-01	—	EA	1
15126	50	208-230	1500	0.85	CW	1/4 - 20 Thread	4.18	Open	60	Copeland 050-0344-00	—	EA	1
15146	50	460	1500	0.44	CW	1/4 - 20 Thread	4.18	Open	60	Copeland 050-0344-03	—	EA	1
15075	75	208-230	1500	1.50	CW	3/8 x 1-1/2	4.18	Open	60	EMS ESP0L75EM2	97	EA	1

Notes: **96.** Copeland replacement **97.** May be used on 208 Volt applications **479.** Tecumseh replacement

** Lead end and shaft end are the same.

Electric Motors and Specialties - Direct OEM Replacement



15060

EM &S

Features

Double foot pad mounting
Mounting hardware included
UL recognized
Includes molex plug
Rear mounting holes
Shaded pole

CATALOG NO.	WATTS	VOLTS	RPM	AMPS	ROT	SHAFT DIM.(IN.)	LENGTH LESS SHAFT (IN.)	ENCL.	HERTZ	DIRECT REPLACEMENT FOR	UOM	OM
15060	60	208-230	1550	1.2	CCWLE	3/8 x 1-1/2	4	Open	60	Scotsman 18-8927-01 EMS ESPOL60EMR2	EA	1

OTHER MOTORS CONT'D

Direct Replacements for General Electric 11 Frame



61432

Packard

Features

All angle unit bearings
Automatic overload
Stud and resilient mounting
Rotation determined by viewing the shaft end, leads are on shaft end
1.83 inch resilient rings
Single speed / single phase
60 Hertz
4 Holes #8-32 UNF-2B on 2.84" bolt circle
Low temp oil rated for -40° C

CATALOG NO.	HP	VOLTS	RPM	AMPS	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BRG	ENCL.	DIRECT REPLACEMENT FOR	UOM	OM
61331	1/20	115	1550	2.20	CWLE	5/16 x 2	4.82	Shaded Pole	Sleeve	Open	GE 1331	EA	1
61431	35 MHP	115	1550	1.70	CCWLE	5/16 x 1-1/4	4.82	Shaded Pole	Sleeve	Open	GE1431	EA	1
61441	35 MHP	115	1550	1.70	CWLE	5/16 x 1-1/4	4.82	Shaded Pole	Sleeve	Open	GE1441	EA	1
61442	35 MHP	208-230	1550	0.87	CWLE	5/16 x 1-1/4	4.82	Shaded Pole	Sleeve	Open	GE1442	EA	1

Direct Replacements for General Electric 11 Frame



81672

Packard

Features

Shaded pole
Bolt circle 2.84"
60 Hertz
Single phase
Rotation is determined by viewing the shaft end; leads are on shaft end
Automatic overload
Stud mounting

CATALOG NO.	HP	VOLTS	RPM	AMPS	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	BRG	ENCL.	DIRECT REPLACEMENT FOR	NOTES	UOM	OM
81671	1/15	115/230	1550	2.10-1.10	CCW	5/16 x 1-5/8	4-1/4	Ball	Totally Enclosed	GE 1331 GE 1332	486, 487 488, 489	EA	1
81672	1/15	115/230	1550	2.10-1.10	CW	5/16 x 1-5/8	4-1/4	Ball	Totally Enclosed	GE 1341 GE 1342	486, 487 488, 489	EA	1

Notes: **486.** Drilled and tapped holes for mounting **487.** Includes 1-7/8" diameter mounting rings
488. 8/32 mounting studs included **489.** Rotation is determined by viewing the lead end

Refrigeration Motor



D472

FASCO

Features

Shaded pole
Sleeve and ball bearing
12" Leads
60 Hertz
Open Encl.
Class B Insulation, 40°C Ambient
Automatic overload
Bolt circle 2.84"

CATALOG NO.	HP	VOLTS	RPM	AMPS	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	BRG	ENCL.	DIRECT REPLACEMENT FOR	NOTES	UOM	OM
D477	1/35	208-230	1550	0.75	CCWSE	5/16 x 1-5/8	4-1/4	Sleeve	Open	GE 1432	40, 43, 44, 46	EA	1
D472	1/20	115	1550	1.90	CWSE	5/16 x 2-5/8	4-1/4	Sleeve	Open	GE 1341	47	EA	1
D470	1/20	208-230	1550	0.94	CWSE	5/16 x 2-5/8	4-1/4	Sleeve	Open	GE 1342	47	EA	1

Notes: **40.** Mounting bracket designed to match the original motor (four 8-36 drilled and tapped holes) **43.** Mounting hardware included
44. Has 22" leads with 1/16" thick insulation **46.** Three studs opposite shaft end are 8-32 on a standard 2.84" bolt circle, 120° apart
47. Includes 1/2" studs for mounting

DIRECT REPLACEMENT FOR - ALADDIN STEEL | AMANA | ARMSTRONG

Aladdin Steel - Draft Inducers



A120

Features

Overload is automatic
60 Hertz

Carefully sourced based on the original equipment specifications
Cross reference information aides in draft inducer selection

Applications

Direct Replacements for OEM Gas Furnace Inducers

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
A120	120	1.10	2	Shaded Pole	Ball	Open	Automatic	7002-2983 230-1460	EA	1

Amana - Draft Inducers



A158

Features

Overload is automatic
60 Hertz

Carefully sourced based on the original equipment specifications
Cross reference information aides in draft inducer selection

Applications

Direct Replacements for OEM Gas Furnace Inducers

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
A158	115	0.70	1	PSC	Sleeve	Open	Automatic	D98686-7 7062-3151	EA	1
A180	115	1.80	1	Shaded Pole	Ball	Open	Automatic	20190601 7021-9625	EA	1

Amana/Armstrong/Magic Chef - Draft Inducer Replacement Kit



66426K

Features

Overload is automatic
60 Hertz

Carefully sourced based on the original equipment specifications
Cross reference information aides in draft inducer selection

Applications

Direct Replacements for OEM Gas Furnace Inducers

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
66426K	208-230	0.2	1	PSC	Ball	Open	Automatic	35HWC, 48HWC 60 HWC, 66HWC	EA	1

Notes: Includes Pressure switch and leads

Armstrong - Draft Inducers



80280

Features

Overload is automatic
60 Hertz

Carefully sourced based on the original equipment specifications
Cross reference information aides in draft inducer selection

Applications

Direct Replacements for OEM Gas Furnace Inducers

CATALOG NO.	VOLTS	AMPS	ROTATION	SPEEDS	TYPE	BEARINGS	ENCL.	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
80280	208-230	0.55	–	1	Shaded Pole	Ball	Open	Automatic	35035B001	EA	1
66404	115	0.53	–	1	PSC	Ball	Open	Automatic	40404-003 117521-00	EA	1
D9430	208-230	0.65	CCWSE	1	Shaded Pole	Ball	Open	Thermally	42250-1 JA1N110	EA	1

DIRECT REPLACEMENT FOR - BURNHAM | CARRIER

Burnham - Draft Inducers

Features

Overload is automatic
60 Hertz

Carefully sourced based on the original equipment specifications
Cross reference information aides in draft inducer selection

Applications

Direct Replacements for OEM Gas Furnace Inducers



66056

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
66056	115	0.48	1	PSC	Ball	Open	Automatic	6116056	EA	1

Notes: Includes Gasket & Capacitor

Carrier - Draft Inducers

Features

Overload is automatic
60 Hertz

Carefully sourced based on the original equipment specifications
Cross reference information aides in draft inducer selection

Applications

Direct Replacements for OEM Gas Furnace Inducers



65123

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ROTATION	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
65123	115	1.50	1	Shaded Pole	Ball	CCWLE	Automatic	HC21ZE123A	EA	1

CATALOG NO.	VOLTS	AMPS	SPEEDS	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BEARINGS	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
65570	230	0.80	1	1 x 5/16 x 1-7/8	3-5/8	Shaded Pole	Ball	Automatic	HC24HE230 J238-15161	EA	1
65569	115	1.80	1	1 x 5/16 x 1-7/8	3-3/8	Shaded Pole	Ball	Automatic	HC21ZE117B J238-150220	EA	1



65570

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ROTATION	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
65118	115	1.80/0.60	2	Shaded Pole	Ball	CCWLE	Automatic	HC21ZE118	EA	1



65118

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
65230	208-230	0.80	1	Shaded Pole	Ball	Open	Automatic	J238-150-15103 HC24HE230	EA	1



65230

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ROTATION	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
66756	115	0.85	1	PSC	Ball	CWSE	Automatic	320725-756	EA	1
66757	115	0.85	1	PSC	Ball	CWSE	Automatic	320725-757	EA	1
66758	115	1.15	1	PSC	Ball	CWSE	Automatic	320725-758	EA	1



66756

DIRECT REPLACEMENT FOR - CARRIER CONT'D

Carrier (cont'd) - Draft Inducers

Features

Overload is automatic
60 Hertz
Carefully sourced based on the original equipment specifications
Cross reference information aides in draft inducer selection

Applications

Direct Replacements for OEM Gas Furnace Inducers



66761

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ROTATION	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
66761	115	0.63/0.3	2	Shaded Pole	Ball	CWSE	Automatic	326628-761	EA	1
66762	115	1.06/0.28	2	Shaded Pole	Ball	CWSE	Automatic	326628-762	EA	1
66763	115	1.32/0.39	2	Shaded Pole	Ball	CWSE	Automatic	326628-762	EA	1

Notes: Includes Motor, 2 Speed Plug, Cooling Fan, Blower Wheel, Mounting Bracket, Screws & Grommets



82520

CATALOG NO.	VOLTS	AMPS	SPEED	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BEAR.	ENCL.	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
82520	115/230	2.00/1.00	1	CWSE	1/4 x 2	5-5/8	Shaded Pole	Ball	Open	Automatic	HC24AU600 HC24AU600B HC24AO701	EA	1
82521	115/230	2.00/1.00	1	CCWSE	1/4 x 2	6-3/16	Shaded Pole	Ball	Open	Automatic	HC24AU700 HC24AU710	EA	1

Notes: Includes 5/16" Shaft Adapter



66649

CATALOG NO.	VOLTS	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR	UOM	OM
66649	208-230	0.5	1	CCWSE	PSC	Ball	Open	48GS400106 48GS400649	EA	1



66755

CATALOG NO.	VOLTS	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	DIRECT REPLACEMENT FOR	UOM	OM
66755	115	0.86	1	CWSE	PSC	Ball	309868-755	EA	1



66815

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR	UOM	OM
66815	208-230	0.48	1	PSC	Ball	Open	48SS400380 48SS400606 50DK406181	EA	1

Notes: 4 MFD/370 Capacitor Required

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR	UOM	OM
66816	460	0.25	1	PSC	Ball	Open	48SS400381 48SS400607 50DK406182	EA	1

Notes: Includes Gasket



66752

CATALOG NO.	VOLTS	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	DIRECT REPLACEMENT FOR	UOM	OM
66752	115	1.80	1	CWOTE	Shaded Pole	Ball	310371-752	EA	1

DIRECT REPLACEMENT FOR - CARRIER CONT'D | COLEMAN EVCON

Carrier (cont'd) - Draft Inducers

Features

Overload is automatic
60 Hertz

Carefully sourced based on the original equipment specifications
Cross reference information aides in draft inducer selection

Applications

Direct Replacements for OEM Gas Furnace Inducers



82121

CATALOG NO.	VOLTS	AMPS	SPEEDS	ROTATION	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BEARINGS	ENCL.	DIRECT REPLACEMENT FOR	UOM	OM
82121	115	1.10	1	CCWLE	5/16 x 2-1/8	3-3/8	Shaded Pole	Sleeve	Open	8251510431 JA1M086 JA1M147 JA1M147N P251-2916	EA	1
82180	115	1.54	1	CWSE	5/16 x 2-1/8	3-5/8	Shaded Pole	Sleeve	Open	HC24AU725B JA1P053 P251-2307	EA	1



66753

CATALOG NO.	VOLTS	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR	UOM	OM
66753	115	1.7	1	CWSE	Shaded Pole	Ball	Open	318984-753	EA	1

Notes: Assembly Includes Mounting Bracket, Blower Wheel and Motor. Includes 3 Prong Molex Plug



66765

CATALOG NO.	VOLTS	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR	UOM	OM
66765	115	0.9/0.48	2	CWSE	PSC	Ball	Open	326628-765	EA	1

Notes: Assembly Includes Mounting Bracket, Blower Wheel and Motor. Includes 3 Prong Molex Plug

Carrier - Blower Wheel



BW16548

CATALOG NO.	DIAMETER	WIDTH	ROTATION	BORE	DIRECT REPLACEMENT FOR	UOM	OM
BW16548	5-3/4	1	CW	5/16	LA21RB548	EA	1
A65569BW	4	1-1/2	CCW	5/16	LA11AA005	EA	1
BW16549	5-1/4	1	CW	5/16	LA21RB549	EA	1
BW16549	4-1/2	1-5/8	CCW	1/4	LAXA046	EA	1

Coleman Evcon - Draft Inducers

Features

Overload is automatic
60 Hertz

Carefully sourced based on the original equipment specifications
Cross reference information aides in draft inducer selection

Applications

Direct Replacements for OEM Gas Furnace Inducers



65475

CATALOG NO.	VOLTS	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
65475	115	0.4	1	CCWSE	Shaded Pole	Ball	Automatic	373-19801-820 373-19801-8	EA	1

DIRECT REPLACEMENTS FOR: CONSOLIDATED INDUSTRIES | DUNKIRK

Consolidated Industries/Universal - Draft Inducers

Features

Overload is automatic
60 Hertz
Carefully sourced based on the original equipment specifications
Cross reference information aides in draft inducer selection

Applications

Direct Replacements for OEM Gas Furnace Inducers



825700

CATALOG NO.	VOLTS	AMPS	ROTATION	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
82570	115	0.9	CWSE	Shaded Pole	Sleeve	Open	Automatic	401570 JA1P082	EA	1

Notes: C-Frame motor with centrifugal switch



D0960

CATALOG NO.	VOLTS	AMPS	ROTATION	TYPE	BEARINGS	ENCL.	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
D0960	115	1.5	CWSE	Shaded Pole	Sleeve	Open	Automatic	401450 JA1P090	EA	1

Notes: Includes Gasket



D9620

CATALOG NO.	VOLTS	AMPS	ROTATION	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
D9620	115	1.6	CWSE	Shaded Pole	Sleeve	Open	Thermally	422030 JA1N114	EA	1



D959

CATALOG NO.	VOLTS	AMPS	ROTATION	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
D959	115	1.05	CWSE	Shaded Pole	Sleeve	Open	Thermally	401570 JA1P082	EA	1

Dunkrik - Draft Inducer

Features

Overload is automatic
60 Hertz
Carefully sourced based on the original equipment specifications
Cross reference information aides in draft inducer selection

Applications

Direct Replacements for OEM Gas Furnace Inducers



82052

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
82052	115	0.4	1	PSC	Ball	Automatic	433-00-510	EA	1

DIRECT REPLACEMENTS FOR: GOODMAN

Goodman - Draft Inducers

Features

Overload is automatic
60 Hertz
Carefully sourced based on the original equipment specifications
Cross reference information aides in draft inducer selection

Applications

Direct Replacements for OEM Gas Furnace Inducers



66007

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
66007	230	.24	1	Shaded Pole	Ball	Open	Automatic	0131G00007 0131G00093S	EA	1



66009

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
66009	230	0.24	3	PSC	Ball	Open	Automatic	0131G00009	EA	1



48332

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCL.	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
48331	115	1.80	1	Shaded Pole	Ball	Open	Automatic	5KSB46GF0001S B4833000	EA	1
48332	115	1.80/1.10	2	Shaded Pole	Ball	Open	Automatic	5KSB46GF0003S B48330001	EA	1

Notes: Includes Rubber Boot



66002

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
66002	115	1.20	1	Shaded Pole	Ball	Open	Automatic	0131M00002P 0131M00002S	EA	1

Notes: Includes Gasket



66071

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
66071	120	2.8	1	Shaded Pole	Ball	Open	Automatic	071M00000	EA	1



66000

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
66000	230	1.4	1	Shaded Pole	Ball	Open	Automatic	0271F00126 702112495	EA	1



66202

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
66202	115	1.13/0.56	2	PSC	Ball	Open	Automatic	0131M00003 0131M00003P	EA	1

DIRECT REPLACEMENTS FOR: GOODMAN CONT'D

Goodman (cont'd) - Draft Inducers

Features

Overload is automatic
60 Hertz
Carefully sourced based on the original equipment specifications
Cross reference information aides in draft inducer selection

Applications

Direct Replacements for OEM Gas Furnace Inducers

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
66003	115	0.92	1	PSC	Ball	Open	Automatic	11009001, 11009002 11009003	EA	1



66003

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCL.	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
66743	115	1.13/0.56	1	Shaded Pole	Sleeve	Open	Automatic	D9868602	EA	1



66743

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCL.	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
66590	115	1.50	1	Shaded Pole	Ball	Open	Automatic	B4059000, J238-112-11195 7002-3036, J238-11195	EA	1



66590

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
66005	115	1.60	1	Shaded Pole	Ball	Open	Automatic	B1859005 J238-11128	EA	1



66005

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCL	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
66959	208/230	0.60/0.56	1	Shaded Pole	Ball	Open	Automatic	B2959000S	EA	1



66959

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
A182	115	1.20	1	Shaded Pole	Sleeve	Open	Automatic	B4059000 7002-3036	EA	1



A182

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
82483	115	0.9	1	Shaded Pole	Ball	Open	Automatic	B1859000, B1859000S	EA	1



82483

NOTE: Item numbers in **RED** indicate **Made in the U.S.A.**

DIRECT REPLACEMENTS FOR: GOODMAN CONT'D | HEAT N' GLOW | HEIL-QUAKER | ICP

Goodman (cont'd) - Draft Inducers

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
A140	115	1.40	1	Shaded Pole	Sleeve	Open	Automatic	B2833001S, B2833001 7021-9000, 7021-9087 FB-RFB140	EA	1



A140

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
A162	208-230	0.50	1	Shaded Pole	Sleeve	Open	Automatic	B295900, 7021-8656	EA	1



A162

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
66121	230	0.22	1	PSC	Ball	Open	Automatic	0131M00121P 0131M00121S	EA	1



66121

Heat n' Glow - Draft Inducer

Features

Overload is automatic
60 Hertz

Carefully sourced based on the original equipment specifications
Cross reference information aides in draft inducer selection

Applications

Direct Replacements for OEM Gas Furnace Inducers

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	ENCLOSURE	DIRECT REPLACEMENT FOR	UOM	OM
A133	115	0.70	1	Shaded Pole	Open	7002-1241	EA	1



A133

Heil-Quaker - Draft Inducer

Features

Overload is automatic
60 Hertz

Carefully sourced based on the original equipment specifications
Cross reference information aides in draft inducer selection

Applications

Direct Replacements for OEM Gas Furnace Inducers

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
A064	115	0.70	1	Shaded Pole	Sleeve	Open	Automatic	608971	EA	1



A064

ICP - Draft Inducers

Features

Overload is automatic
60 Hertz

Carefully sourced based on the original equipment specifications
Cross reference information aides in draft inducer selection

Applications

Direct Replacements for OEM Gas Furnace Inducers

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCL.	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
66338	115	2.40	1	Shaded Pole	Ball	Totally Enclosed	Automatic	1012002, 1013388A 1014338	EA	1



66338

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
A173	115	0.80	1	PSC	Open	Ball	Automatic	1011350, HQ1011350 HQ1011350FA, R7-RFB350	EA	1



A173

DIRECT REPLACEMENTS FOR: ICP CONT'D

ICP (cont'd) - Draft Inducers

Features

Overload is automatic
60 Hertz
Carefully sourced based on the original equipment specifications
Cross reference information aides in draft inducer selection

Applications

Direct Replacements for OEM Gas Furnace Inducers



A307

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
A307	115	0.70	1	PSC	Sleeve	Open	Automatic	1149097 1008416P	EA	1



A134

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCL.	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
A134	115	1.50	1	Shaded Pole	Sleeve	Open	Automatic	1010238P, 1010324, 1708-607 1708-607P, R7-RFB134, 7021-7700, 7021-8735, 7021-8736, 7021-9335	EA	1



66350

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCL.	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
66350	115	0.92	1	PSC	Ball	Open	Automatic	1000814, 1001371, 1001609, 1002543, 1007360, 1011350 1150474, HQ1011350	EA	1

Notes: 5MFD Capacitor



A170

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCL.	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
A170	115	2.30	1	Shaded Pole	Ball	Open	Automatic	1010312, 1010526, 1010928 1011095, 1011097, 1011409 1164280	EA	1
A171	115	0.70	1	PSC	Ball	Open	Automatic	1010491, 1010527P 1011096, 1011410	EA	1



82148

CATALOG NO.	VOLTS	AMPS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
82148	208-230	0.16	PSC	Ball	Open	Automatic	1054268P	EA	1



A172

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCL.	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
A172	115	1.60	1	Shaded Pole	Ball	Open	Automatic	1010975, 1010975P	EA	1



66833

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
66833	115	1.60	1	Shaded Pole	Ball	Open	Automatic	1010324,1010238P 1013833	EA	1

DIRECT REPLACEMENTS FOR: ICP CONT'D | JOHNSON | LENNOX

ICP (cont'd) - Draft Inducers

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCL.	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
A148	208-230	0.50	1	Shaded Pole	Sleeve	Open	Automatic	1054268P, 7021-7617 7021-9237, HQ1054268FA	EA	1



A148

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ROTATION	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
66420	208-230	0.46	1	PSC	Ball	CCWSE	Automatic	1178420	EA	1
66421	208-230	0.68	1	PSC	Ball	CCWSE	Automatic	1178421	EA	1



66421

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
66254	230	0.30	1	PSC	Ball	Open	Automatic	1110008, 1085571 1085571P, 7021-10048 7021-10580	EA	1



66254

CATALOG NO.	VOLTS	AMPS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
82672	115	0.90	Shaded Pole	Ball	Open	Automatic	1006168	EA	1



82672

Johnson - Draft Inducers

Features

1 Speed
60 Hertz

Carefully sourced based on the original equipment specifications
Cross reference information aides in draft inducer selection

Applications

Direct Replacements for OEM Gas Furnace Inducers



80280

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
80280	230	0.55	1	Shaded Pole	Ball	Open	Automatic	8973C 66HWC301	EA	1



66093

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
66093	120	0.43	1	Shaded Pole	Ball	Open	Automatic	80C93	EA	1

Lennox - Draft Inducers

Features

1 Speed
60 Hertz

Carefully sourced based on the original equipment specifications
Cross reference information aides in draft inducer selection

Applications

Direct Replacements for OEM Gas Furnace Inducers



66300

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ROTATION	ENCL.	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
66300	120	0.5	1	PSC	Ball	CWSE	Open	Automatic	7021-8473, 20J89, 76714300	EA	1

DIRECT REPLACEMENTS FOR: LENNOX CONT'D | NORDYNE

Lennox (cont'd) - Draft Inducers

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
A163	115	1.80	1	Shaded Pole	Ball	Open	Automatic	67K0401, 67K0401P 7021-9450, FB-RFB547	EA	1


A163

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCL.	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
66501	115	1.20	1	Shaded Pole	Ball	Open	Automatic	31L5501, 101202-01, 24W95 7002-2975, 102359-01	EA	1


66501

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
A200	115	1.35	1	Shaded Pole	Sleeve	Open	Automatic	313L5501, 7002-2975	EA	1


A200

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
A155	115	1.40	1	Shaded Pole	Ball	Open	Automatic	7021-10046	EA	1


A155

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
66401	120	1.30	1	Shaded Pole	Ball	Open	Automatic	88K8401, J238-087-8171	EA	1


66401

Nordyne - Draft Inducers

Features

1 Speed
60 Hertz
Carefully sourced based on the original equipment specifications
Cross reference information aides in draft inducer selection

Applications

Direct Replacements for OEM Gas Furnace Inducers



CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
65404	120	0.3	1	Shaded Pole	Sleeve	Open	Automatic	903404	EA	1

CATALOG NO.	VOLTS	AMPS	ROTATION	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR	UOM	OM
66567	115	0.43	CCWSE	PSC	Ball	Open	622567	EA	1


66567

CATALOG NO.	VOLTS	AMPS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
66798	115	2.35	PSC	Ball	Open	Automatic	100344	EA	1


66798

DIRECT REPLACEMENTS FOR: RHEEM

Rheem - Draft Inducers

Features

1 Speed
60 Hertz
Carefully sourced based on the original equipment specifications
Cross reference information aides in draft inducer selection

Applications

Direct Replacements for
OEM Gas Furnace Inducers

CATALOG NO.	VOLTS	AMPS	ROTATION	SHAFT DIMENSION (IN.)	TYPE	BEARINGS	ENCL.	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
K628	208-230	0.25	CW	1/4 x 1-1/2	Shaded Pole	Sleeve	Open	Automatic	51-21964-01 51-21964-11	EA	1

Notes: C-Frame motor with centrifugal switch



K628

CATALOG NO.	VOLTS	AMPS	ROT	SHAFT DIMENSION (IN.)	TYPE	BEARINGS	ENCL.	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
21964K	208-230	0.25	CW	1/4 x 1-1/2	Shaded Pole	Sleeve	Open	Automatic	51-21964-11	EA	1

Notes: C-Frame motor with centrifugal switch. This Kit contains one motor and three fan blades each with 10 blades and ¼" diameter bore, in diameters of 3", 3 ½", and 4"



21964K

CATALOG NO.	VOLTS	AMPS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
A241	208-230	0.62	Shaded Pole	Sleeve	Open	Automatic	70-23641-81	EA	1



A241

CATALOG NO.	VOLTS	AMPS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
66847	120	1.70	Shaded Pole	Ball	Open	Automatic	117104-01, 117847-07 70-22838-82, 70-24157-03	EA	1



66847

CATALOG NO.	VOLTS	AMPS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
82182	120	1.70	Shaded Pole	Ball	Open	Automatic	70-23641-82	EA	1

Notes: Includes Gasket



82182

DIRECT REPLACEMENTS FOR: RHEEM CONT'D | RHEEM-RUUD

Rheem (cont'd) - Draft Inducers

Features

1 Speed
60 Hertz
Carefully sourced based on the original equipment specifications
Cross reference information aides in draft inducer selection

Applications

Direct Replacements for
OEM Gas Furnace Inducers

CATALOG NO.	VOLTS	AMPS	TYPE	BEARINGS	ROT	ENCL.	DIAM.	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
82641	460	0.35	Shaded Pole	Sleeve	CWSE	Open	3.3"	Automatic	70-23641-81	EA	1

Notes: Includes Gasket and Cap



82641

CATALOG NO.	VOLTS	AMPS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
66781	115	0.60	PSC	Ball	Open	Automatic	70-101087-81 7021-11559	EA	1



66781

CATALOG NO.	VOLTS	AMPS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
A090	115	1.10	Shaded Pole	Sleeve	Open	Automatic	70-21496-01, 7021-5239 JAIM102	EA	1



A090

CATALOG NO.	VOLTS	AMPS	ROTATION	TYPE	BEARINGS	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
66181	115	0.92	CWSE	PSC	Ball	Automatic	70-102691-81 7062-6268	EA	1

Notes: Includes Gasket, 4MFD/250V Cap Required



66181

Rheem-Ruud - Draft Inducers

CATALOG NO.	VOLTS	AMPS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
D673	115	0.95	Shaded Pole	Sleeve	Open	Thermally	51-21496-01	EA	1



D673

DIRECT REPLACEMENTS FOR: TRANE

Trane - Draft Inducers

Features

Overload is automatic
60 Hertz

Carefully sourced based on the original equipment specifications
Cross reference information aides in draft inducer selection

Applications

Direct Replacements for OEM Gas Furnace Inducers



66128

CATALOG NO.	VOLTS	AMPS	TYPE	BEARINGS	ROTATION	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
66128	208-230	0.19	PSC	Ball	CCWSE	Open	Automatic	7021-7833 BLW01310	EA	1

Notes: Capacitor and Gasket Included



66311

CATALOG NO.	VOLTS	AMPS	ROTATION	SPEEDS	TYPE	BEARINGS	DIRECT REPLACEMENT FOR	UOM	OM
66311	208/230	0.21/0.16	CCWSE	2	PSC	Ball	BLW01311 D965130P01	EA	1

Notes: Includes 1.5MFD/450VAC Capacitor, 2 Speed Molex Plug and Gasket



66787

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR	UOM	OM
66787	120	1.3	1	Shaded Pole	Ball	Open	D330787P01, D330809P01 BLW473, X38040305010 X38040305017	EA	1

Notes: Includes Special Plug



A150

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR	UOM	OM
A150	208-230	0.50	1	Shaded Pole	Sleeve	Open	C661452P01 X38080029010	EA	1



A192

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR	UOM	OM
A192	115	1.00	1	Shaded Pole	Ball	Open	X38040253057, 7021-8569	EA	1



82057

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR	UOM	OM
82057	115	1.00	1	Shaded Pole	Ball	Open	X38040253057	EA	1



A143

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR	UOM	OM
A143	115	0.95	1	Shaded Pole	Sleeve	Open	210330673, 210340125 X38040305017, 7021-8428 D330809P01, R7-RFB143	EA	1



66362

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ROTATION	ENCL.	DIRECT REPLACEMENT FOR	UOM	OM
66362	115	1/0.35	2	Shaded Pole	Sleeve	CWSE	Open	7021-8925, BLW00362	EA	1

DIRECT REPLACEMENTS FOR: WEIL McCLAIN | YORK

Weil McClain - Draft Inducers

Features

Overload is automatic
60 Hertz

Carefully sourced based on the original equipment specifications
Cross reference information aides in draft inducer selection

Applications

Direct Replacements for OEM Gas Furnace Inducers



66312

CATALOG NO.	VOLTS	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR	UOM	OM
66312	115	1.8	1	CWSE	PSC	Ball	Open	510-312-312	EA	1

York - Draft Inducers

Features

1 Speed
60 Hertz

Carefully sourced based on the original equipment specifications
Cross reference information aides in draft inducer selection

Applications

Direct Replacements for OEM Gas Furnace Inducers



A225

CATALOG NO.	VOLTS	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
A225	115	2.25	1	Shaded Pole	Ball	Open	Automatic	7021-11577, 17503 7021-11577S, 7021-11830 024-34558-000	EA	1



A137

CATALOG NO.	VOLTS	AMPS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
A137	115	0.70	PSC	Sleeve	Open	Automatic	7062-2442, 7062-3342 7062-3484	EA	1



A165

CATALOG NO.	VOLTS	AMPS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
A165	115	0.70	PSC	Ball	Open	Automatic	024-25960-000, 7062-3958	EA	1



A223

CATALOG NO.	VOLTS	AMPS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
A223	208-230	0.64	Shaded Pole	Sleeve	Open	Automatic	026-33999-001	EA	1
A225	115	2.25	Shaded Pole	Ball	Open	Automatic	7021-11577, 17503 7021-11577S, 7021-11830 024-34558-000	EA	1



82999

CATALOG NO.	VOLTS	AMPS	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
82999	208-230	0.64	Shaded Pole	Sleeve	Open	Automatic	026-33999-001	EA	1

Notes: Includes Gasket



66067

CATALOG NO.	VOLTS	AMPS	ROTATION	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
66067	115	1.13	CCWSE	Shaded Pole	Ball	Open	Automatic	326-32067-000	EA	1

DIRECT REPLACEMENTS FOR: YORK CONT'D | FASCO

York (cont'd) - Draft Inducers

Features

1 Speed
60 Hertz
Carefully sourced based on the original equipment specifications
Cross reference information aides in draft inducer selection

Applications

Direct Replacements for OEM Gas Furnace Inducers

CATALOG NO.	VOLTS	AMPS	ROTATION	TYPE	BEARINGS	ENCL.	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
A984	115	2.63	CCWOSE	Shaded Pole	Ball	Enclosed	Automatic	341449 7058-1023	EA	1



A984

CATALOG NO.	VOLTS	AMPS	ROTATION	TYPE	BEARINGS	ENCL.	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
82702	115	1.2	CCWSE	Shaded Pole	Sleeve	Open	Automatic	373-10337-702 7021-8612	EA	1



82702

Fasco - Draft Inducers

Features

1 Speed
60 Hertz
Carefully sourced based on the original equipment specifications
Cross reference information aides in draft inducer selection

Applications

Direct Replacements for OEM Gas Furnace Inducers

CATALOG NO.	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	UOM	OM
A203	115	3400	1.80	1	CCW	Shaded Pole	Ball	EA	1



A203

CATALOG NO.	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	UOM	OM
A202	115	3400	1.80	1	CCW	Shaded Pole	Ball	EA	1



A202

CATALOG NO.	NAMEPLATE CFM	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	UOM	OM
50748D500	65	115	2900	0.81	1	CW/CCW	Shaded Pole	Sleeve	EA	1



50748D500

CATALOG NO.	NAMEPLATE CFM	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	UOM	OM
50746D500	120	115	3100	0.72	1	CW/CCW	Shaded Pole	Sleeve	EA	1



50746D500

CATALOG NO.	NAMEPLATE CFM	VOLTS	RPM	AMPS	SPEEDS	TYPE	BEARINGS	UOM	OM
50747D401	60	115	3200	0.49	1	Shaded Pole	Sleeve	EA	1



50747D401

DIRECT REPLACEMENTS FOR: FASCO CONT'D

Fasco - Draft Inducers

Features

1 Speed
60 Hertz
Carefully sourced based on the original equipment specifications
Cross reference information aides in draft inducer selection

Applications

Direct Replacements for
OEM Gas Furnace Inducers

CATALOG NO.	NAMEPLATE CFM	VOLTS	RPM	AMPS	SPEEDS	TYPE	BEARINGS	UOM	OM
50755D500	160	115	1600	1.00	1	Shaded Pole	Sleeve	EA	1



50755D500

CATALOG NO.	NAMEPLATE CFM	VOLTS	RPM	AMPS	SPEEDS	TYPE	BEARINGS	UOM	OM
50752D500	135	115	3100	1.1	1	Shaded Pole	Sleeve	EA	1



50752D500

CATALOG NO.	NAMEPLATE CFM	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	UOM	OM
A167	30	115	2900	0.4	1	CW	Shaded Pole	Sleeve	EA	1



A167

CATALOG NO.	NAMEPLATE CFM	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	UOM	OM
B30	45	115	3200	0.59	1	CW	Shaded Pole	Sleeve	EA	1



B30

CATALOG NO.	NAMEPLATE CFM	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	UOM	OM
A071	71	115	2850	0.7	1	CCW	Shaded Pole	Sleeve	EA	1



A071

CATALOG NO.	NAMEPLATE CFM	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	UOM	OM
A082	75	115	2800	0.95	1	CW	Shaded Pole	Sleeve	EA	1



A082

CATALOG NO.	NAMEPLATE CFM	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	UOM	OM
B75F	75	115	3200	0.59	1	CW	Shaded Pole	Sleeve	EA	1



B75F

CATALOG NO.	NAMEPLATE CFM	VOLTS	RPM AT FREE AIR	AMPS AT FREE AIR	HERTZ	UOM	OM
A166	115	115	3200	1.40	50/60	EA	1



A166

NOTE: Item numbers in **RED** indicate **Made in the U.S.A.**

DIRECT REPLACEMENTS FOR: FASCO CONT'D

Fasco (cont'd) - Draft Inducers

Features

1 Speed
60 Hertz
Carefully sourced based on the original equipment specifications
Cross reference information aides in draft inducer selection

Applications

Direct Replacements for
OEM Gas Furnace Inducers

CATALOG NO.	NAMEPLATE CFM	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	UOM	OM
A125	125	115	3200	1.1	1	CW/CCW	Shaded Pole	Sleeve	EA	1



A125

CATALOG NO.	NAMEPLATE CFM	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	UOM	OM
B24220	135	115	2600	1.3	1	CW	Shaded Pole	Sleeve	EA	1



B24220

CATALOG NO.	NAMEPLATE CFM	VOLTS	RPM AT FREE AIR	AMPS AT FREE AIR	SPEEDS	BEARINGS	HERTZ	UOM	OM
B47120	180	115	1360/1100/830	1.95	3	Sleeve	60	EA	1



B47120

CATALOG NO.	NAMEPLATE CFM	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	UOM	OM
A212	212	115	2500	1.25	1	CW/CCW	Shaded Pole	Sleeve	EA	1



A212

CATALOG NO.	NAMEPLATE CFM	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	UOM	OM
B45227	265	115	1650	1.86	1	CW	Shaded Pole	Sleeve	EA	1



B45227

CATALOG NO.	NAMEPLATE CFM	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	UOM	OM
B45227-2	265	230	1650	0.93	1	CW	Shaded Pole	Sleeve	EA	1



B45227-2

DIRECT REPLACEMENTS FOR: FASCO CONT'D

Fasco - Draft Inducers



Features

1 Speed
60 Hertz

Carefully sourced based on the original equipment specifications
Cross reference information aides in draft inducer selection

Applications

Direct Replacements for OEM Gas Furnace Inducers

CATALOG NO.	NAMEPLATE CFM	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	UOM	OM
B45230	460	208-230	1600/1400	1.2	2	CCW	Shaded Pole	Sleeve	EA	1



B45267

CATALOG NO.	NAMEPLATE CFM	VOLTS	RPM	AMPS	SPEEDS	BEARING	HERTZ	UOM	OM
B45267	460	115	1600/1400	2.90	2	Sleeve	60	EA	1

DIRECT REPLACEMENTS FOR: BRADFORD WHITE | STATE IND.

Bradford White Replacements



W5

Features

Overload is automatic
60 Hertz

Carefully sourced based on the original equipment specifications
Cross reference information aides in draft inducer selection

Applications

Direct Replacements for OEM Gas Furnace Inducers

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	ENCL.	DIRECT REPLACEMENT FOR	UOM	OM
W11	1/12	120	3000	3.1	1	CW	SP	Ball	Tot. Encl.	265-45584-00	EA	1

State Ind. Replacements



W9

Features

Overload is automatic
60 Hertz

Carefully sourced based on the original equipment specifications
Cross reference information aides in draft inducer selection

Applications

Direct Replacements for OEM Gas Furnace Inducers

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	ENCL.	DIRECT REPLACEMENT FOR	UOM	OM
W9	1/60	115	3000	0.95	1	CW	SP	Sleeve	OFC	0012400500	EA	1
W10	1/20	115	3400	1.80	1	CCW	SP	Sleeve	OFC	0012400540	EA	1

DIRECT REPLACEMENTS FOR: TRANSFLOW BLOWERS

Transflow Blowers



B22505

Features

Overload is automatic
60 Hertz

Carefully sourced based on the original equipment specifications
Cross reference information aides in draft inducer selection

Applications

Direct Replacements for OEM Gas Furnace Inducers

CATALOG NO.	NAMEPLATE CFM	VOLTS	RPM AT FREE AIR	AMPS AT FREE AIR	SPEEDS	TYPE	ENCL.	HERTZ.	OVERLOAD	PHASE	UOM	OM
B22505	80	115	3200	0.55	1	Shaded Pole	Open	50/60	Automatic	1	EA	1
B22507	115	115	3100	0.85	1	Shaded Pole	Open	50/60	Automatic	1	EA	1

RUN CAPACITORS

Titan HD® Motor Run Capacitors - Single Section - Oval

Features
Manufactured to EIA-456A standards
Soybean oil filled aluminum can
UL-801 fault current protection
RoHS compliant
Made in USA
Up to 60,000 hours operational life

Part Numbering System - Oval
P: Packard
O: Oval Case
C: Capacitor
F: AC Volt: Blank = 370 / F = 440/370
D: Section: Blank = Single / D = Dual
MFD: 105 = 10 + 5
A: American



POCF2A

TITAN HD®

CATALOG NO.	MFD	CAN SIZE	----------INDUSTRY NO.'S---------- USA MADE	NON-USA MADE	UOM	OM
Titan HD® 370 Volt - Single Section - Oval						
POC2A	2	1	—	14002	12002	EA	1
POC3A	3	1	—	14003	12003	EA	1
POC4A	4	1	—	14004	12004	EA	1
POC5A	5	1	—	14005	12005	EA	1
POC6A	6	1	—	14006	12006	EA	1
POC7.5A	7.5	1	—	14007	12007	EA	1
POC10A	10	2	USA2037	14008	12008	EA	1
POC12.5A	12.5	2	—	14009	12009	EA	1
POC15A	15	3	—	14010	12010	EA	1
POC17.5A	17.5	3	—	14012	12012	EA	1
POC20A	20	3	—	14014	12014	EA	1
POC25A	25	3	—	14015	12015	EA	1
POC30A	30	3	—	14017	12017	EA	1
POC35A	35	3	—	14018	12018	EA	1
POC40A	40	3	—	14021	12021	EA	1
POC45A	45	4	—	14023	12023	EA	1
POC50A	50	13	—	14025	12025	EA	1
POC55A	55	13	—	—	12024	EA	1
POC60A	60	13	—	—	12087	EA	1
POC70A	70	13	—	14089	12089	EA	1
POC80A	80	13	—	14090	12090	EA	1

CATALOG NO.	MFD	CAN SIZE	----------INDUSTRY NO.'S---------- USA MADE	NON-USA MADE	UOM	OM
Titan HD® 440/370 Volt - Single Section - Oval						
POCF2A	2	1	—	—	12026	EA	1
POCF2.5A	2.5	1	—	—	12019	EA	1
POCF3A	3	1	USA2027	14027	12027	EA	1
POCF4A	4	1	USA2028	14028	12028	EA	1
POCF5A	5	1	USA2029	14029	12029	EA	1
POCF6A	6	1	USA2030	14030	12030	EA	1
POCF7.5A	7.5	2	USA2031	14031	12031	EA	1
POCF10A	10	3	USA2035	14032	12032	EA	1
POCF12.5A	12.5	3	USA2037	14033	12033	EA	1
POCF15A	15	3	—	14034	12034	EA	1
POCF17.5A	17.5	3	—	—	12036	EA	1
POCF20A	20	3	USA2260	14037	12037	EA	1
POCF25B	25	3	USA2040	14040	12040	EA	1
POCF30A	30	4	—	14041	12041	EA	1
POCF35A	35	4	—	14043	12043	EA	1
POCF40A	40	13	—	14045	12045	EA	1
POCF45A	45	13	—	14048	12048	EA	1
POCF50A	50	13	—	14049	12049	EA	1
POCF55A	55	13	—	14050	12050	EA	1
POCF60A	60	14	—	14051	12051	EA	1
POCF70A	70	14	—	—	12130	EA	1
POCF80A	80	14	—	14140	—	EA	1

Notes: Height dimension does not include terminals. Add 1/2" for terminals. Dimensions are subject to change. When dimensions are critical, please call.

RUN CAPACITORS CONT'D

Titan HD® Motor Run Capacitors - Dual Section - Oval

Features
Manufactured to EIA-456A standards
Soybean oil filled aluminum can
UL-801 fault current protection
RoHS compliant
Made in USA
Up to 60,000 hours operational life

Part Numbering System - Oval
P: Packard
O: Oval Case
C: Capacitor
F: AC Volt: Blank = 370 / F = 440/370
D: Section: Blank = Single / D = Dual
MFD: 105 = 10 + 5
A: American



POCD55A

TITAN HD®

CATALOG NO.	MFD	CAN SIZE	----INDUSTRY NO.'S---- USA MADE	NON-USA MADE	UOM	OM
Titan HD® 370 Volt - Dual Section - Oval						
POCD55A	5+5	5	—	—	EA	1
POCD1010A	10+10	5	—	—	EA	1
POCD153A	15+3	12	—	12141	EA	1
POCD154A	15+4	12	—	12056	EA	1
POCD155A	15+5	12	—	12057	EA	1
POCD1510A	15+10	12	—	12058	EA	1
POCD1755A	17.5+5	12	—	12060	EA	1
POCD203A	20+3	5	—	12061	EA	1
POCD204A	20+4	12	—	12062	EA	1
POCD205A	20+5	12	—	12063	EA	1
POCD2010A	20+10	12	—	12064	EA	1
POCD2015A	20+15	8	—	12164	EA	1
POCD253A	25+3	12	—	12142	EA	1
POCD254A	25+4	6	—	12065	EA	1
POCD255A	25+5	12	14066	12066	EA	1
POCD2575A	25+7.5	12	—	12143	EA	1
POCD258A	25+8	8	—	12131	EA	1
POCD2510A	25+10	12	—	12167	EA	1
POCD2515A	25+15	8	—	12133	EA	1
POCD303A	30+3	13	—	12144	EA	1
POCD305A	30+5	13	14069	12069	EA	1
POCD3075A	30+7.5	8	—	12146	EA	1
POCD3010A	30+10	13	—	12147	EA	1
POCD353A	35+3	13	—	12148	EA	1
POCD354A	35+4	13	—	12071	EA	1
POCD355A	35+5	13	14072	12072	EA	1
POCD3575A	35+7.5	13	—	12149	EA	1
POCD3510A	35+10	13	—	12150	EA	1
POCD403A	40+3	13	—	12151	EA	1
POCD404A	40+4	9	—	12158	EA	1
POCD405A	40+5	13	14171	12171	EA	1
POCD4075A	40+7.5	13	—	12152	EA	1
POCD4010A	40+10	13	—	12134	EA	1
POCD455A	45+5	13	14174	12174	EA	1
POCD4575A	45+7.5	13	—	12153	EA	1
POCD4510A	45+10	13	—	12136	EA	1
POCD4515A	45+15	13	—	12137	EA	1
POCD505A	50+5	13	—	12138	EA	1
POCD555A	55+5	14	—	12154	EA	1
POCD5575A	55+7.5	14	—	12155	EA	1
POCD605A	60+5	14	—	12139	EA	1
POCD6075A	60+7.5	14	—	12156	EA	1
POCD6010A	60+10	14	—	12157	EA	1

Notes:
Height dimension does not include terminals. Add 1/2" for terminals.
Dimensions are subject to change. When dimensions are critical, please call.

CATALOG NO.	MFD	CAN SIZE	------INDUSTRY NO.'S------ USA MADE	NON-USA MADE	UOM	OM
Titan HD® 440/370 Volt - Dual Section - Oval						
POCFD105A	10+5	5	—	12165	EA	1
POCFD154A	15+4	5	—	12270	EA	1
POCFD155A	15+5	12	—	12271	EA	1
POCFD1510A	15+10	6	—	12177	EA	1
POCFD205A	20+5	12	—	12180	EA	1
POCFD2015A	20+15	13	—	12083	EA	1
POCFD255A	25+5	13	14184	12184	EA	1
POCFD2575A	25+7.5	13	—	12182	EA	1
POCFD2510A	25+10	13	—	12183	EA	1
POCFD2515A	25+15	9	—	12186	EA	1
POCFD304A	30+4	13	—	12181	EA	1
POCFD305A	30+5	13	14187	12187	EA	1
POCFD3075A	30+7.5	13	—	12038	EA	1
POCFD3010A	30+10	13	—	12035	EA	1
POCFD353A	35+3	13	—	12085	EA	1
POCFD354A	35+4	9	—	12179	EA	1
POCFD355A	35+5	13	14185	12185	EA	1
POCFD3575A	35+7.5	13	14188	12188	EA	1
POCFD3510A	35+10	10	—	12272	EA	1
POCFD403A	40+3	12	—	12080	EA	1
POCFD405A	40+5	14	14086	12086	EA	1
POCFD4075A	40+7.5	14	14189	12189	EA	1
POCFD4010A	40+10	14	—	12273	EA	1
POCFD455A	45+5	14	14190	12190	EA	1
POCFD4575A	45+7.5	14	—	12274	EA	1
POCFD505A	50+5	15	—	12108	EA	1
POCFD5075A	50+7.5	15	—	12013	EA	1
POCFD555A	55+5	15	—	12275	EA	1
POCFD5510A	55+10	15	—	12276	EA	1
POCFD605A	60+5	15	—	12109	EA	1
POCFD6510A	65+10	15	—	12101	EA	1
POCFD805A	80+5	16	14297	12297	EA	1
POCFD8075A	80+7.5	16	14298	12298	EA	1

CAN SIZE	DEPTH (IN.)	WIDTH (IN.)	HEIGHT (IN.)
Can Dimensions			
1	1.25	2.00	1.56
2	1.25	2.00	2.19
3	1.25	2.00	2.88
4	1.25	2.00	3.88
5	1.75	2.75	2.38
6	1.75	2.75	2.75
8	1.75	2.75	3.25
9	1.75	2.75	3.75
12	1.75	2.75	2.38
13	1.75	2.75	2.91

CAN SIZE	DEPTH (IN.)	WIDTH (IN.)	HEIGHT (IN.)
Can Dimensions			
14	1.75	2.75	3.91
15	1.75	2.75	4.75
16	1.75	3.54	4.75

RUN CAPACITORS CONT'D

Titan HD® Motor Run Capacitors - Single Section - Round

Features
Manufactured to EIA-456A standards
Soybean oil filled aluminum can
UL-801 fault current protection
RoHS compliant
Made in USA
Up to 60,000 hours operational life

Part Numbering System - Oval
P: Packard
R: Round Case
C: Capacitor
F: AC Volt: Blank = 370 / F = 440/370
D: Section: Blank = Single / D = Dual
MFD: Ex. 4575 = 45+7.5
A: American



PRC7.5A

TITAN HD®

CATALOG NO.	MFD	CAN SIZE	------INDUSTRY NO.'S------ USA MADE	NON-USA MADE	UOM	OM
Titan HD 370 Volt						
PRC5A	5	1	—	12095	EA	1
PRC7.5A	7.5	1	—	12097	EA	1
PRC10A	10	1	14098	12098	EA	1
PRC12.5A	12.5	1	—	12099	EA	1
PRC15A	15	1	14210	12210	EA	1
PRC17.5A	17.5	1	14212	12212	EA	1
PRC20A	20	1	14214	12214	EA	1
PRC25A	25	1	14215	12215	EA	1
PRC30A	30	1	14217	12217	EA	1
PRC31.5A	31.5	5	—	—	EA	1
PRC35A	35	3	14218	12218	EA	1
PRC40A	40	3	14821	12221	EA	1
PRC45A	45	3	14823	12223	EA	1
PRC50A	50	4	14225	12225	EA	1
PRC55A	55	4	14226	12226	EA	1
PRC60A	60	4	14227	12227	EA	1
PRC70A	70	8	14229	12229	EA	1
PRC80A	80	8	14199	12199	EA	1
PRC100A	100	12	—	12116	EA	1

CATALOG NO.	MFD	CAN SIZE	---------INDUSTRY NO.'S--------- USA MADE		NON-USA MADE	UOM	OM
Titan HD 440/370 Volt							
PRCF5A	5	1	USA2204	14105	12105	EA	1
PRCF7.5A	7.5	1	USA2206	14107	12107	EA	1
PRCF10A	10	1	USA2207	14232	12232	EA	1
PRCF12.5A	12.5	1	USA2208	14833	12233	EA	1
PRCF15A	15	1	USA2209	14234	12234	EA	1
PRCF17.5A	17.5	1	—	—	12236	EA	1
PRCF20A	20	1	USA2211	14237	12237	EA	1
PRCF25A	25	3	USA2212	14240	12240	EA	1
PRCF30A	30	3	USA2213	14241	12241	EA	1
PRCF35A	35	4	USA2214	14243	12243	EA	1
PRCF40A	40	4	USA2215	14245	12245	EA	1
PRCF45A	45	4	USA2216	14248	12248	EA	1
PRCF50A	50	8	USA2217	14251	12251	EA	1
PRCF55A	55	8	USA2218	14252	12252	EA	1
PRCF60A	60	8	USA2219	14254	12254	EA	1
PRCF65A	65	10	USA2220	14256	—	EA	1
PRCF70A	70	10	USA2228	14258	12258	EA	1
PRCF75A	75	10	—	—	—	EA	1
PRCF80A	80	10	USA2229	14259	12259	EA	1
PRCF90A	90	15	—	—	12068	EA	1

RUN CAPACITORS CONT'D

Titan HD® Motor Run Capacitors - Dual Section - Round

Features
Manufactured to EIA-456A standards
Soybean oil filled aluminum can
UL-801 fault current protection
RoHS compliant
Made in USA
Up to 60,000 hours operational life

Part Numbering System - Oval
P: Packard
R: Round Case
C: Capacitor
F: AC Volt: Blank = 370 / F = 440/370
D: Section: Blank = Single / D = Dual
MFD: Ex. 4575 = 45+7.5
A: American



PRCD253A

TITAN HD®

CATALOG NO.	MFD	CAN SIZE	------INDUSTRY NO.'S------ USA MADE	NON-USA MADE	UOM	OM
Titan HD® 370 Volt - Dual Section - Oval						
PRCD253A	25+3	6	—	12242	EA	1
PRCD254A	25+4	6	—	12175	EA	1
PRCD255A	25+5	6	14261	12261	EA	1
PRCD303A	30+3	6	—	12244	EA	1
PRCD304A	30+4	6	—	12263	EA	1
PRCD305A	30+5	6	14264	12264	EA	1
PRCD3075A	30+7.5	6	—	12224	EA	1
PRCD3010A	30+10	6	—	12228	EA	1
PRCD353A	35+3	6	—	12082	EA	1
PRCD354A	35+4	6	—	12231	EA	1
PRCD355A	35+5	6	14266	12266	EA	1
PRCD3575A	35+7.5	6	—	12235	EA	1
PRCD3510A	35+10	6	—	12238	EA	1
PRCD403A	40+3	6	—	12074	EA	1
PRCD404A	40+4	6	—	12267	EA	1
PRCD405A	40+5	6	14178	12178	EA	1
PRCD4075A	40+7.5	6	14268	12268	EA	1
PRCD4010A	40+10	6	—	12246	EA	1
PRCD453A	45+3	6	—	12073	EA	1
PRCD455A	45+5	6	14269	12269	EA	1
PRCD4575A	45+7.5	6	14249	12249	EA	1
PRCD4510A	45+10	6	—	12250	EA	1
PRCD503A	50+3	6	—	12075	EA	1
PRCD505A	50+5	6	14191	12191	EA	1
PRCD5075A	50+7.5	6	14192	12192	EA	1
PRCD5010A	50+10	6	14239	12239	EA	1
PRCD555A	55+5	8	14193	12193	EA	1
PRCD5575A	55+7.5	8	14194	12194	EA	1
PRCD5510A	55+10	8	—	12067	EA	1
PRCD605A	60+5	8	14195	12195	EA	1
PRCD6075A	60+7.5	8	14196	12196	EA	1
PRCD6010A	60+10	8	—	12265	EA	1
PRCD805A	80+5	12	14197	12197	EA	1
PRCD8075A	80+7.5	12	14198	12198	EA	1
PRCD8010A	80+10	12	14201	12201	EA	1
PRCD80125A	80+12.5	16	—	12202	EA	1

Notes:
Height dimension does not include terminals. Add 1/2" for terminals.
Dimensions are subject to change. When dimensions are critical, please call.

CAN SIZE	DIA. (IN.)	HEIGHT (IN.)
Can Dimensions		
1	1.75	2.38
2	1.75	2.75
3	1.75	2.84
4	1.75	3.84
6	2	2.91
8	2	3.84
10	2	4.75
12	2.5	2.91
15	2.5	3.91
16	2.5	4.25

CATALOG NO.	MFD	CAN SIZE	----------INDUSTRY NO.'S---------- USA MADE		NON-USA MADE	UOM	OM
Titan HD® 440/370 Volt - Dual Section - Oval							
PRCFD105A	10+5	6	—	—	12111	EA	1
PRCFD205A	20+5	6	USA2222	—	12115	EA	1
PRCFD2015A	20+15	6	—	—	12112	EA	1
PRCFD253A	25+3	6	USA2224BA	14353	—	EA	1
PRCFD255A	25+5	6	USA2225	14278	12278	EA	1
PRCFD2575A	25+7.5	6	USA2225B	14279	12279	EA	1
PRCFD2510A	25+10	6	—	—	12113	EA	1
PRCFD2515A	25+15	6	—	—	12114	EA	1
PRCFD303A	30+3	6	USA2227BA	14126	12126	EA	1
PRCFD304A	30+4	6	—	—	12120	EA	1
PRCFD305A	30+5	6	USA2226	14281	12281	EA	1
PRCFD3075A	30+7.5	6	USA2272B	14282	12282	EA	1
PRCFD353A	35+3	8	USA2226BA	14077	12077	EA	1
PRCFD354A	35+4	8	—	14070	12070	EA	1
PRCFD355A	35+5	8	USA2227	14283	12283	EA	1
PRCFD356A	35+6	8	—	—	12119	EA	1
PRCFD3575A	35+7.5	8	USA2291	14284	12284	EA	1
PRCFD3510A	35+10	8	USA2227B	14091	—	EA	1
PRCFD403A	40+3	8	USA2274	14078	12078	EA	1
PRCFD404A	40+4	8	—	—	12285	EA	1
PRCFD405A	40+5	8	USA2235	14286	12286	EA	1
PRCFD406A	40+6	8	—	—	12220	EA	1
PRCFD4075A	40+7.5	8	USA2232	14287	12287	EA	1
PRCFD4010A	40+10	8	USA2232A	14088	—	EA	1
PRCFD453A	45+3	8	USA2236A	14079	12079	EA	1
PRCFD455A	45+5	8	USA2236	14288	12288	EA	1
PRCFD456A	45+6	8	—	—	12127	EA	1
PRCFD4575A	45+7.5	8	USA2233	14289	12289	EA	1
PRCFD4510A	45+10	8	USA2234	14172	—	EA	1
PRCFD505A	50+5	8	USA2237	14290	12290	EA	1
PRCFD5075A	50+7.5	8	USA2238	14291	12291	EA	1
PRCFD5010A	50+10	8	—	14124	—	EA	1
PRCFD555A	55+5	12	USA2240	14292	12292	EA	1
PRCFD5575A	55+7.5	12	USA2218A	14293	12293	EA	1
PRCFD5510A	55+10	12	USA2218BA	14299	12799	EA	1
PRCFD605A	60+5	12	USA2220B	14294	12294	EA	1
PRCFD6075A	60+7.5	12	USA2221B	14295	12295	EA	1
PRCFD6010A	60+10	12	USA2221BA	14296	12296	EA	1
PRCFD60125A	60+12.5	15	—	—	12161	EA	1
PRCFD6510A	65+10	15	—	14162	14162	EA	1
PRCFD705A	70+5	15	USA2221	14255	12255	EA	1
PRCFD7075A	70+7.5	15	USA2222A	14166	12166	EA	1
PRCFD7010A	70+10	15	USA2220BA	14169	12169	EA	1
PRCFD805A	80+5	15	USA2222BA	14257	12257	EA	1
PRCFD8075A	80+7.5	15	USA2223B	14216	12216	EA	1
PRCFD8010A	80+10	15	USA2223BA	14117	12117	EA	1

RUN CAPACITORS CONT'D

Titan Pro® Motor Run Capacitors - Round



TRCF3

TITAN PRO®

100% Tested. Every single Titan PRO® capacitor that comes off the line undergoes 100% electrical testing prior to shipping. Accelerated Life Test Data is generated from 2000 hours of testing at 125% voltage rating and 80°C.

Features
60,000 Hours of operating life
Single and dual ratings
Round and oval sizes
Voltage: 370 or 440 (VAC)

Part Numbering System - Oval
T: Titan
R: Round Case
C: Capacitor
F: AC Volt: Blank = 370 / F = 440/370
D: Section: Blank = Single / D = Dual
MFD: Ex. 4575 = 45+7.5

CATALOG NO.	MFD	DIA. (IN.)	HEIGHT (IN.)	INDUSTRY #S.		UOM	OM
Titan Pro® Round - 440/370 Volt - Single Section							
TRCF3	3	1.77	2.17	12103	12803	EA	1
TRCF5	5	1.77	2.17	12105	12095	EA	1
TRCF6	6	1.77	2.17	12106	12096	EA	1
TRCF7.5	7.5	1.77	2.17	12107	12097	EA	1
TRCF10	10	1.77	2.17	12232	12098	EA	1
TRCF12.5	12.5	1.77	2.17	12233	12099	EA	1
TRCF15	15	1.77	2.56	12234	12210	EA	1
TRCF17.5	17.5	1.77	2.76	12236	12212	EA	1
TRCF20	20	1.77	2.95	12237	12214	EA	1
TRCF25	25	1.97	2.95	12240	12215	EA	1
TRCF30	30	1.97	3.35	12241	12217	EA	1
TRCF35	35	1.97	3.54	12243	12218	EA	1
TRCF40	40	1.97	3.94	12245	12221	EA	1
TRCF45	45	1.97	4.33	12248	12223	EA	1
TRCF50	50	1.97	4.72	12251	12225	EA	1
TRCF50B*	50	1.97	4.72	12251	12225	EA	1
TRCF55	55	1.97	4.92	12252	12226	EA	1
TRCF60	60	2.17	4.53	12254	12227	EA	1
TRCF70	70	2.17	4.92	12258	12229	EA	1
TRCF70B*	70	2.17	4.92	12258	12229	EA	1
TRCF80	80	2.50	4.72	12259	12199	EA	1
TRCF80B*	80	2.50	4.72	12259	12199	EA	1
TRCF100	100	2.50	5.31	—	12116	EA	1

Notes:
Height dimension does not include terminals. Add 1/2" for terminals.
Dimensions are subject to change. When dimensions are critical, please call.

CATALOG NO.	MFD	DIA (IN.)	HEIGHT (IN.)	INDUSTRY #S.		UOM	OM
Titan Pro® Round - 440/370 Volt - Dual Section							
TRCFD205	20+5	1.97	3.74	12115	12260	EA	1
TRCFD2015	20+15	1.97	3.94	12112	12209	EA	1
TRCFD255	25+5	1.97	3.54	12278	12261	EA	1
TRCFD2575	25+7.5	1.97	3.74	12279	12262	EA	1
TRCFD2515	25+15	1.97	4.33	12114	—	EA	1
TRCFD303	30+3	1.97	4.33	12126	12244	EA	1
TRCFD305	30+5	1.97	3.94	12281	12264	EA	1
TRCFD3075	30+7.5	1.97	4.13	12282	12224	EA	1
TRCFD353	35+3	2.50	3.74	12077	12082	EA	1
TRCFD354	35+4	1.97	4.53	12070	12231	EA	1
TRCFD355	35+5	1.97	4.13	12283	12266	EA	1
TRCFD3575	35+7.5	2.36	3.54	12284	12235	EA	1
TRCFD403	40+3	2.50	3.74	12078	12074	EA	1
TRCFD405	40+5	2.36	3.54	12286	12178	EA	1
TRCFD4075	40+7.5	2.50	3.74	12287	12268	EA	1
TRCFD4510	45+10	2.50	3.74	12250	12172	EA	1
TRCFD453	45+3	2.50	3.74	12079	12073	EA	1
TRCFD455	45+5	2.50	3.74	12288	12269	EA	1
TRCFD4575	45+7.5	2.50	3.74	12289	12249	EA	1
TRCFD50125	50+12.5	2.50	3.74	—	12253	EA	1
TRCFD503	50+3	2.50	3.74	—	12075	EA	1
TRCFD505	50+5	2.50	3.94	12290	12191	EA	1
TRCFD5075	50+7.5	2.50	3.94	12291	12192	EA	1
TRCFD553	55+3	2.50	4.13	—	—	EA	1
TRCFD555	55+5	2.50	4.13	12292	12193	EA	1
TRCFD5575	55+7.5	2.36	4.33	12293	12194	EA	1
TRCFD603	60+3	2.50	4.33	12160	12076	EA	1
TRCFD605	60+5	2.36	4.33	12294	12195	EA	1
TRCFD6075	60+7.5	2.36	4.53	12295	12196	EA	1
TRCFD6010	60+10	2.50	4.53	12296	12265	EA	1
TRCFD705	70+5	2.50	4.92	12255	12053	EA	1
TRCFD7075	70+7.5	2.50	4.92	12166	12054	EA	1
TRCFD805	80+5	2.50	5.31	12257	12197	EA	1
TRCFD8075	80+7.5	2.50	5.12	12216	12198	EA	1
TRCFD8010	80+10	2.50	5.31	12117	12201	EA	1

RUN CAPACITORS CONT'D

Titan Pro® Motor Run Capacitors - Oval



TOCF2

TITAN PRO®

100% Tested. Every single Titan Pro® capacitor that comes off the line undergoes 100% electrical testing prior to shipping. Accelerated Life Test Data is generated from 2000 hours of testing at 125% voltage rating and 80°C.

Features
60,000 Hours of operating life
Single and dual ratings
Round and oval sizes
Voltage: 370 or 440 (VAC)

Part Numbering System - Oval
T: Titan
O: Oval Case
C: Capacitor
F: AC Volt: Blank = 370 / F = 440/370
D: Section: Blank = Single / D = Dual
MFD: Ex. 4575 = 45+7.5

CATALOG NO.	MFD	DEPTH (IN.)	WIDTH (IN.)	HEIGHT (IN.)	INDUSTRY #S		UOM	OM
Titan Pro® Oval - 440/370 Volt - Single Section								
TOCF2	2	1.24	2.03	2.17	12026	12002	EA	1
TOCF2.5	2.5	1.24	2.03	2.17	12019	—	EA	1
TOCF3	3	1.24	2.03	2.17	12027	12003	EA	1
TOCF4	4	1.24	2.03	2.17	12028	12004	EA	1
TOCF5	5	1.24	2.03	2.17	12029	12005	EA	1
TOCF6	6	1.24	2.03	2.56	12030	12006	EA	1
TOCF7.5	7.5	1.24	2.03	2.17	12031	12007	EA	1
TOCF10	10	1.24	2.03	2.56	12032	12008	EA	1
TOCF12.5	12.5	1.24	2.03	2.95	12033	12009	EA	1
TOCF15	15	1.24	2.03	2.95	12034	12010	EA	1
TOCF17.5	17.5	1.24	2.03	3.74	12036	12012	EA	1
TOCF20	20	1.77	2.80	2.68	12037	12014	EA	1
TOCF25	25	1.77	2.80	3.07	12040	12015	EA	1
TOCF30	30	1.77	2.80	3.46	12041	12017	EA	1
TOCF35	35	1.77	2.80	3.86	12043	12018	EA	1
TOCF40	40	1.77	2.80	4.06	12045	12021	EA	1
TOCF45	45	1.77	2.80	4.45	12048	12023	EA	1
TOCF50	50	1.77	2.80	4.84	12049	12025	EA	1
TOCF55	55	1.77	2.80	5.04	12050	12024	EA	1
TOCF60	60	1.87	3.54	3.78	12051	12087	EA	1
TOCF65	65	1.87	3.54	3.98	—	—	EA	1
Titan Pro® Oval - 480 Volt - Single Section								
TOCF25A	25	1.77	2.80	3.66	—	—	EA	1

CATALOG NO.	MFD	DEPTH (IN.)	WIDTH (IN.)	HEIGHT (IN.)	INDUSTRY #S		UOM	OM
Titan Pro® Oval - 440/370 Volt - Dual Section								
TOCFD154	15+4	1.77	2.68	2.68	12270	12056	EA	1
TOCFD155	15+5	1.77	2.68	2.68	12271	12057	EA	1
TOCFD2015	20+15	1.77	2.80	3.86	12083	12164	EA	1
TOCFD255	25+5	1.77	2.80	3.46	12184	12066	EA	1
TOCFD2575	25+7.5	1.77	2.80	3.46	12182	12143	EA	1
TOCFD2510	25+10	1.77	2.80	3.86	12183	12167	EA	1
TOCFD304	30+4	1.77	2.80	3.86	12181	12145	EA	1
TOCFD305	30+5	1.77	2.80	3.86	12187	12069	EA	1
TOCFD3075	30+7.5	1.77	2.80	3.86	12038	12146	EA	1
TOCFD353	35+3	1.77	2.80	4.25	12085	12148	EA	1
TOCFD354	35+4	1.77	2.80	4.25	12179	12071	EA	1
TOCFD355	35+5	1.77	2.80	4.25	12185	12072	EA	1
TOCFD3575	35+7.5	1.77	2.80	4.25	12188	12149	EA	1
TOCFD405	40+5	1.77	2.80	4.65	12086	12171	EA	1
TOCFD4075	40+7.5	1.87	3.54	3.78	12189	12152	EA	1
TOCFD455	45+5	1.77	2.80	5.04	12190	12174	EA	1
TOCFD505	50+5	1.87	3.54	4.37	12108	12138	EA	1
TOCFD555	55+5	1.87	3.54	4.57	12275	12154	EA	1
TOCFD5510	55+10	1.87	3.54	5.16	12276	—	EA	1
TOCFD605	60+5	1.87	3.54	5.55	12109	12139	EA	1

Notes:
Height dimension does not include terminals. Add 1/2" for terminals.
Dimensions are subject to change. When dimensions are critical, please call.

RUN CAPACITORS CONT'D

Titan Pro® 370 Motor Run Capacitors - Oval

Features
Tested to 60,000 hours
Built to EIA-465A industry standard for endurance
Meets UL 810 safety standards
100% electrical testing

Part Numbering System - Oval
T: Titan
O: Oval Case
C: Capacitor
F: AC Volt: Blank = 370 / F = 440/370
D: Section: Blank = Single / D = Dual
MFD: Ex. 4575 = 10+5



TOC12.5

TITAN PRO 370

CATALOG NO.	MFD	DEPTH (IN.)	WIDTH (IN.)	HEIGHT (IN.)	INDUSTRY #S	UOM	OM
Titan Pro 370® Oval - 370 Volt - Single Section							
TOC2	2	1.24	2.03	2.17	12902	EA	1
TOC3	3	1.24	2.03	2.17	12903	EA	1
TOC3B*	3	1.24	2.03	2.17	12903	EA	100
TOC4	4	1.24	2.03	2.17	12904	EA	1
TOC5	5	1.24	2.03	2.17	12905	EA	1
TOC5B*	5	1.24	2.03	2.17	12905	EA	100
TOC6	6	1.24	2.03	2.17	12906	EA	1
TOC7.5	7.5	1.24	2.03	2.17	12907	EA	1
TOC7.5B*	7.5	1.24	2.03	2.17	12907	EA	100
TOC10	10	1.24	2.03	2.56	12908	EA	1
TOC10B*	10	1.24	2.03	2.56	12908	EA	100
TOC12.5	12.5	1.24	2.03	2.95	12909	EA	1
TOC15	15	1.24	2.03	2.95	12910	EA	1
TOC17.5	17.5	1.24	2.03	3.35	12912	EA	1
TOC20	20	1.77	2.80	2.68	12914	EA	1
TOC25	25	1.77	2.80	2.68	12915	EA	1
TOC30	30	1.77	2.80	2.87	12917	EA	1
TOC35	35	1.77	2.80	3.27	12918	EA	1
TOC40	40	1.77	2.80	3.46	12921	EA	1
TOC45	45	1.77	2.80	3.66	12923	EA	1
TOC50	50	1.77	2.80	3.86	12925	EA	1
TOC55	55	1.87	3.54	2.99	12924	EA	1
TOC60	60	1.77	2.80	4.45	12987	EA	1
TOC70	70	1.87	3.54	3.39	12989	EA	1
TOC80	80	1.87	3.54	3.78	12990	EA	1

CATALOG NO.	MFD	DEPTH (IN.)	WIDTH (IN.)	HEIGHT (IN.)	INDUSTRY #S	UOM	OM
Titan Pro 370® Oval - 370 Volt - Dual Section							
TOCD55	5+5	1.77	2.80	2.09	—	EA	1
TOCD1010	10+10	1.77	2.80	2.87	—	EA	1
TOCD153	15+3	1.77	2.80	2.87	12841	EA	1
TOCD155	15+5	1.77	2.80	2.68	12957	EA	1
TOCD255	25+5	1.77	2.80	3.07	12966	EA	1
TOCD305	30+5	1.77	2.80	3.27	12969	EA	1
TOCD353	35+3	1.77	2.80	3.46	12848	EA	1
TOCD355	35+5	1.77	2.80	3.46	12972	EA	1
TOCD405	40+5	1.77	2.80	3.86	12871	EA	1
TOCD455	45+5	1.77	2.80	4.25	12874	EA	1

Notes:
- Height dimension does not include terminals. Add 1/2" for terminals.
- Please call when dimensions are critical.
- *Bulk - in multiples of 100

RUN CAPACITORS CONT'D

Titan Pro® 370 Motor Run Capacitors - Round

Features
Tested to 60,000 hours
Built to EIA-465A industry standard for endurance
Meets UL 810 safety standards
100% electrical testing

Part Numbering System - Round
T: Titan
R: Round Case
C: Capacitor
F: AC Volt: Blank = 370 / F = 440/370
D: Section: Blank = Single / D = Dual
MFD: Ex. 4575 = 10+5



TRCD1010

TITAN PRO 370

CATALOG NO.	MFD	DIA (IN.)	HEIGHT (IN.)	INDUSTRY #S.	UOM	OM
Titan Pro 370® Round - 370 Volt - Single Section						
TRC5	5	1.77	2.17	12995	EA	1
TRC7.5	7.5	1.77	2.17	12997	EA	1
TRC7.5B*	7.5	1.77	2.17	12997	EA	1
TRC10	10	1.77	2.17	12998	EA	1
TRC12.5	12.5	1.77	2.76	12999	EA	1
TRC15	15	1.77	2.76	12710	EA	1
TRC17.5	17.5	1.77	2.36	12712	EA	1
TRC20	20	1.77	2.95	12714	EA	1
TRC25	25	1.77	2.95	12715	EA	1
TRC30	30	1.97	2.76	12717	EA	1
TRC35	35	1.97	2.95	12718	EA	1
TRC40	40	1.97	3.35	12721	EA	1
TRC45	45	1.97	3.54	12723	EA	1
TRC50	50	1.97	3.74	12725	EA	1
TRC55	55	1.97	3.94	12726	EA	1
TRC60	60	1.97	4.33	12727	EA	1
TRC65	65	1.97	4.33	12128	EA	1
TRC70	70	2.50	3.74	12729	EA	1
TRC80	80	1.97	5.31	12899	EA	1
TRC100	100	2.50	4.33	12116	EA	1

CATALOG NO.	MFD	DIA (IN.)	HEIGHT (IN.)	INDUSTRY #S.	UOM	OM
Titan Pro 370® Round - 370 Volt - Dual Section						
TRCD1010	10+10	1.97	2.56	—	EA	1
TRCD154	15+4	1.97	2.95	12702	EA	1
TRCD155	15+5	1.97	2.95	12703	EA	1
TRCD205	20+5	1.97	3.35	12760	EA	1
TRCD253	25+3	1.97	2.95	12711	EA	1
TRCD254	25+4	1.97	2.95	12875	EA	1
TRCD255	25+5	1.97	3.35	12761	EA	1
TRCD303	30+3	1.97	3.54	12720	EA	1
TRCD304	30+4	1.97	3.15	12763	EA	1
TRCD305	30+5	1.97	3.54	12764	EA	1
TRCD3075	30+7.5	1.97	3.94	12724	EA	1
TRCD353	35+3	1.97	3.94	12730	EA	1
TRCD355	35+5	1.97	3.94	12766	EA	1
TRCD3575	35+7.5	1.97	4.33	12735	EA	1
TRCD403	40+3	1.97	4.13	12739	EA	1
TRCD405	40+5	1.97	4.13	12878	EA	1
TRCD4075	40+7.5	1.97	4.53	12768	EA	1
TRCD455	45+5	1.97	3.94	12769	EA	1
TRCD4575	45+7.5	1.97	4.33	12749	EA	1
TRCD505	50+5	1.97	4.72	12755	EA	1
TRCD5075	50+7.5	1.97	4.92	12192	EA	1
TRCD5010	50+10	1.97	4.53	12757	EA	1
TRCD555	55+5	2.50	3.74	12893	EA	1
TRCD5575	55+7.5	2.50	3.74	12894	EA	1
TRCD605	60+5	2.50	4.13	12895	EA	1
TRCD6075	60+7.5	2.50	4.13	12896	EA	1
TRCD705	70+5	2.50	4.33	12053	EA	1
TRCD7075	70+7.5	2.50	4.33	12054	EA	1
TRCD7010	70+10	2.50	4.72	12055	EA	1
TRCD805	80+5	2.50	4.72	12897	EA	1
TRCD8075	80+7.5	2.50	4.72	12198	EA	1
TRCD8010	80+10	2.50	4.92	12117	EA	1

RUN CAPACITORS CONT'D

Motor Run Capacitors - 370VAC, Metal, Oval Can

These single capacitance oval, metal can capacitors are designed for continuous run.



37030H

CATALOG NO.	UF	UOM	ORDER MULTIPLE
37030H	3	EA	1
37050H	5	EA	1
37030HB	5	EA	100*
37060H	6	EA	1
37075H	7.5	EA	1
37075HB	7.5	EA	100*
370100H	10	EA	1
370100HB	10	EA	100*
37125H	12.5	EA	1
37150H	15	EA	1
37175H	17.5	EA	1
37200H	20	EA	1
37250H	25	EA	1
37300H	30	EA	1
37350H	35	EA	1
37400H	40	EA	1
37450H	45	EA	1
37500H	50	EA	1
37600H	60	EA	1
37700H	70	EA	1
37800H	80	EA	1

*100 per pack

Motor Run Capacitors - 370VAC

This single capacitance round, metal can capacitors are designed for continuous run.



37050R

CATALOG NO.	UF	UOM	ORDER MULTIPLE
37050R	5	EA	1
37075R	7.5	EA	1
37125R	12.5	EA	1
37150R	15	EA	1
37175R	17.5	EA	1
37200R	20	EA	1
37250R	25	EA	1
37300R	30	EA	1
37350R	35	EA	1
37400R	40	EA	1
37450R	45	EA	1
37500R	50	EA	1
37550R	55	EA	1
37600R	60	EA	1
37800R	80	EA	1
37300R-SWP*	30	EA	1
37350R-SWP*	35	EA	1

*Compact size, ideal for swimming pool motors.

Motor Run Capacitors - 370VAC

Dual capacitance. Oval, metal can.



3GJ0515

CATALOG NO.	UF	UOM	ORDER MULTIPLE
3GJ0515	15+5	EA	1
3GJ0520	20+5	EA	1
3GJ0520	20+15	EA	1
3GJ0525	25+5	EA	1
3GJ1025	25+10	EA	1
3GJ0330	30+3	EA	1
3GJ0530	30+5	EA	1
3GJ7530	30+7.5	EA	1
3GJ0535	35+5	EA	1
3GJ7535	35+7.5	EA	1
3GJ7545	45+7.5	EA	1
3GJ0540	40+5	EA	1
3GJ0545	45+5	EA	1
3GJ0555	55+5	EA	1
3GJ7555	55+7.5	EA	1
3GJ1060	60+10	EA	1

*Compact size, ideal for swimming pool motors.

Motor Run Capacitors - 370VAC

This dual capacitance round metal can capacitors are designed for continuous run.



3GR0425

CATALOG NO.	UF	UOM	ORDER MULTIPLE
3GR0515	15+5	EA	1
3GR0520	20+5	EA	1
3GR0325	25+3	EA	1
3GR0425	25+4	EA	1
3GR0525	25+5	EA	1
3GR0330	30+3	EA	1
3GR0530	30+5	EA	1
3GR7530	30+7.5	EA	1
3GR0335	35+3	EA	1
3GR0435	35+4	EA	1
3GR0535	35+5	EA	1
3GR1035	35+10	EA	1
3GR0340	40+3	EA	1
3GR0540	40+5	EA	1
3GR7540	40+7.5	EA	1
3GR0545	45+5	EA	1
3GR0550	50+5	EA	1
3GR0555	55+5	EA	1
3GR7555	55+7.5	EA	1
3GR0560	60+5	EA	1
3GR7560	60+7.5	EA	1
3GR0570	70+5	EA	1
3GR0580	80+5	EA	1
3GR7580	80+7.5	EA	1
3GR1080	80+10	EA	1

*100 per pack

RUN CAPACITORS CONT'D

Motor Run Capacitors - 440VAC

These single capacitance oval, metal can capacitors are designed for continuous run.



45020H

CATALOG NO.	UF	UOM	ORDER MULTIPLE
45020H	2	EA	1
45030H	3	EA	1
45040H	4	EA	1
45050H	5	EA	1
45060H	6	EA	1
45075H	7.5	EA	1
45100H	10	EA	1
45125H	12.5	EA	1
45150H	15	EA	1
45175H	17.5	EA	1
45200H	20	EA	1
45250H	25	EA	1
45300H	30	EA	1
45350H	35	EA	1
45400H	40	EA	1
45450H	45	EA	1
45500H	50	EA	1
45550H	55	EA	1
45600H	60	EA	1
45700H	70	EA	1
45800H	80	EA	1

Motor Run Capacitor - 440VAC

Single capacitance. Round, metal can.



45150R

CATALOG NO.	UF	UOM	ORDER MULTIPLE
45100R	10	EA	1
45125R	12.5	EA	1
45150R	15	EA	1
45200R	20	EA	1
45250R	25	EA	1
45300R	30	EA	1
45350R	35	EA	1
45400R	40	EA	1
45450R	45	EA	1
45500R	50	EA	1
45550R	55	EA	1
45600R	60	EA	1
45800R	80	EA	1

Motor Run Capacitor - 440VAC

Dual capacitance. Oval, metal can.



4JJ0525

CATALOG NO.	UF	UOM	ORDER MULTIPLE
4JJ0525	25+5	EA	1
4JJ0530	30+5	EA	1
4JJ0535	35+5	EA	1
4JJ0540	40+5	EA	1
4JJ0545	45+5	EA	1
4JJ0555	55+5	EA	1
4JJ7535	35+7.5	EA	1
4JJ7540	40+7.5	EA	1
4JJ7545	45+7.5	EA	1
4JJ1055	55+10	EA	1
4JJ0560	60+5	EA	1

Motor Run Capacitor - 440VAC

Dual capacitance. Round, metal can.



4JR0525

CATALOG NO.	UF	UOM	ORDER MULTIPLE
4JR0520	20+5	EA	1
4JR0525	25+5	EA	1
4JR7525	25+7.5	EA	1
4JR0530	30+5	EA	1
4JR7530	30+7.5	EA	1
4JR0535	35+5	EA	1
4JR7535	35+7.5	EA	1
4JR0440	40+4	EA	1
4JR0540	40+5	EA	1
4JR7540	40+7.5	EA	1
4JR0545	45+5	EA	1
4JR7545	45+7.5	EA	1
4JR0550	50+5	EA	1
4JR7550	50+7.5	EA	1
4JR0555	55+5	EA	1
4JR1055	55+10	EA	1
4JR7555	55+7.5	EA	1
4JR0560	60+5	EA	1
4JR7560	60+7.5	EA	1
4JR1060	60+10	EA	1
4JR0570	70+5	EA	1
4JR7570	70+7.5	EA	1
4JR0580	80+5	EA	1
4JR7580	80+7.5	EA	1
4JR1080	80+10	EA	1

NOTE: Item numbers in **RED** indicate **Made in the U.S.A.**

RUN CAPACITORS CONT'D

Made in the U.S.A. Capacitors Round Metal Can

Line of made in the USA capacitors featuring dual voltage for both 370V and 440V applications. Designed specifically for the demands of aftermarket service parts.



4JR0535U

CATALOG NO.	VOLTAGE	UF	UOM	ORDER MULTIPLE
4JR0525U	370V/440V	25+5	EA	1
4JR0530U	370V/440V	30+5	EA	1
4JR7530U	370V/440V	30+7.5	EA	1
4JR0535U	370V/440V	35+5	EA	1
4JR7535U	370V/440V	35+7.5	EA	1
4JR0540U	370V/440V	40+5	EA	1
4JR7540U	370V/440V	40+7.5	EA	1
4JR0545U	370V/440V	45+5	EA	1
4JR7545U	370V/440V	45+7.5	EA	1
4JR0550U	370V/440V	50+5	EA	1
4JR7550U	370V/440V	50+7.5	EA	1
4JR0555U	370V/440V	55+5	EA	1
4JR7555U	370V/440V	55+7.5	EA	1
4JR0560U	370V/440V	60+5	EA	1
4JR7560U	370V/440V	60+7.5	EA	1
4JR0580U	370V/440V	80+5	EA	1

Made in the U.S.A. Capacitors Oval Metal Can

Line of made in the USA capacitors featuring dual voltage for both 370V and 440V applications. Designed specifically for the demands of aftermarket service parts.



45100HU

CATALOG NO.	VOLTAGE	UF	UOM	ORDER MULTIPLE
45050HU	370V/440V	5	EA	1
45075HU	370V/440V	7.5	EA	1
45100HU	370V/440V	10	EA	1
45200HU	370V/440V	20	EA	1
45250HU	370V/440V	25	EA	1
45300HU	370V/440V	30	EA	1
45350HU	370V/440V	35	EA	1
45450HU	370V/440V	45	EA	1
45125HU	370V/440V	12.5	EA	1
45500HU	370V/440V	50	EA	1
45600HU	370V/440V	60	EA	1
45700HU	370V/440V	70	EA	1
45800HU	370V/440V	80	EA	1

LIGHTING CAPACITORS

Lighting Capacitors: Oil-Filled and Dry AC Film For HID Lighting Applications



PLCO24400W

Applications
High Intensity Discharge (HID) lighting applications
Other high voltage ballast applications

Features
Constructed with specially formulated metallized polypropylene film
Designed to operate in the high temperature environments found in typical HID lighting fixtures
Endsprayed with zinc
Epoxidized Soybean Oil (ESO) filled
Round and oval metal case
Voltage ranges from 330 VAC to 525 VAC
Operating temperature to 90°C
Manufactured to EIA-456A
ROHS compliant

CATALOG NO.	MFD	VOLTS	HERTZ	SHAPE	DIAMETER (IN.)	HEIGHT (IN.)	WIDTH (IN.)	DEPTH (IN.)	UOM	OM
PLCO24400W	24	400	50/60	Oval	—	3.13	2.75	1.75	EA	1
PLCR24400W	24	400	50/60	Round	1.75	3.75	—	—	EA	1
PLCO24480W	24	480	50/60	Oval	—	3.88	2.75	1.75	EA	1
PLCO26525W	26	525	50/60	Oval	—	4.25	2.75	1.75	EA	1

DRY CELL CAPACITORS

Packard Dry AC Motor Run Capacitors



PDC10

Packard

Features

Commonly used on motors in fans, pumps and blowers
Constructed with Self-Healing Dielectric Metalized Polypropylene Film
1/4 inch blade quick connect terminals; Metal tab mounting bracket
Operating temperature range: -40ºC to85ºC (-40ºF to 185ºF)

Capacitance tolerance: +/-5%
Plastic ABS case
RoHS compliant

CATALOG NO.	MFD	VAC	HERTZ	SHAPE	HEIGHT (IN.)	LENGTH (IN.)	WIDTH (IN.)	WEIGHT (LBS)	TERMINALS	TEMP. RANGE (C)	CONSTRUCTION	FOR USE WITH	UOM	OM
PDC2	2	370	50/60	Rectangle	1.80	0.79	1.50	0.05	2 Blade Quick Connect	-40 to 85	Plastic ABS case	Electric Motors	EA	1
PDC3	3	370	50/60	Rectangle	1.80	0.79	1.50	0.06	2 Blade quick connect	-40 to 85	Plastic ABS case	Electric Motors	EA	1
PDC4	4	370	50/60	Rectangle	2.00	0.94	2.00	0.06	2 Blade Quick Connect	-40 to 85	Plastic ABS case	Electric Motors	EA	1
PDC5	5	370	50/60	Rectangle	2.00	0.94	2.00	0.06	2 Blade Quick Connect	-40 to 85	Plastic ABS case	Electric Motors	EA	1
PDC7.5	7.5	370	50/60	Rectangle	2.20	1.10	1.92	0.09	2 Blade Quick Connect	-40 to 85	Plastic ABS case	Electric Motors	EA	1
PDC8	8	370	50/60	Rectangle	2.20	1.10	1.92	0.09	2 Blade Quick Connect	-40 to 85	Plastic ABS case	Electric Motors	EA	1
PDC10	10	370	50/60	Rectangle	2.44	1.25	2.36	0.10	2 Blade Quick Connect	-40 to 85	Plastic ABS case	Electric Motors	EA	1
PDC12.5	12.5	370	50/60	Rectangle	2.44	1.25	2.36	0.12	2 Blade Quick Connect	-40 to 85	Plastic ABS case	Electric Motors	EA	1
PDC15	15	370	50/60	Rectangle	2.44	1.25	2.36	0.13	2 Blade Quick Connect	-40 to 85	Plastic ABS case	Electric Motors	EA	1
PDCF2	2	440	50/60	Rectangle	1.80	0.79	1.50	0.05	2 Blade Quick Connect	-40 to 85	Plastic ABS case	Electric Motors	EA	1
PDCF3	3	440	50/60	Rectangle	1.80	0.79	1.50	0.06	2 Blade Quick Connect	-40 to 85	Plastic ABS case	Electric Motors	EA	1
PDCF4	4	440	50/60	Rectangle	2.00	0.94	2.00	0.06	2 Blade Quick Connect	-40 to 85	Plastic ABS case	Electric Motors	EA	1
PDCF5	5	440	50/60	Rectangle	2.00	0.94	2.00	0.06	2 Blade Quick Connect	-40 to 85	Plastic ABS case	Electric Motors	EA	1
PDCF7.5	7.5	440	50/60	Rectangle	2.20	1.10	1.92	0.09	2 Blade Quick Connect	-40 to 85	Plastic ABS case	Electric Motors	EA	1
PDCF8	8	440	50/60	Rectangle	2.20	1.10	1.92	0.09	2 Blade Quick Connect	-40 to 85	Plastic ABS case	Electric Motors	EA	1
PDCF10	10	440	50/60	Rectangle	2.44	1.25	2.36	0.11	2 Blade Quick Connect	-40 to 85	Plastic ABS case	Electric Motors	EA	1
PDCF12.5	12.5	440	50/60	Rectangle	2.44	1.25	2.36	0.12	2 Blade Quick Connect	-40 to 85	Plastic ABS case	Electric Motors	EA	1
PDCF15	15	440	50/60	Rectangle	2.44	1.25	2.36	0.14	2 Blade Quick Connect	-40 to 85	Plastic ABS case	Electric Motors	EA	1

Packard Dry AC Film Capacitors



PLCR10330D

Packard

Applications

High Intensity Discharge (HID) lighting applications
Other high voltage ballast applications

Features

Constructed with specially formulated metallized polypropylene film

Designed to operate in the high temperature environments found in typical HID lighting fixtures

Endsprayed with zinc
Manufactured to EIA-456A
Filled with epoxy

Round plastic case
Voltage ranges from 240 VAC to 400 VAC
Operating temperature to 105°C
8 inch, 18 AWG standard copper wire leads
ROHS compliant

CATALOG NO.	MFD	VOLTS	HERTZ	SHAPE	DIA. (IN.)	HEIGHT (IN.)	WIDTH (IN.)	DEPTH (IN.)	UOM	OM
PLCR10330D	10	330	50/60	Round	1.58	2.68	—	—	EA	1
PLCR10400D	10	400	50/60	Round	1.58	3.62	—	—	EA	1
PLCR15400D	15	400	50/60	Round	1.58	3.62	—	—	EA	1
PLCR24400D	24	400	50/60	Round	1.77	4.61	—	—	EA	1

START CAPACITORS

Motor Start Capacitors – 110/125 VAC

Variable capacitance. Round, plastic can.



56-72

CATALOG NO.	UF	UOM	ORDER MULTIPLE
56-72	56-72	EA	1
88-108	88-108	EA	1
108-130	108-130	EA	1
124-156	124-156	EA	1
145-175	145-175	EA	1
161-193	161-193	EA	1
189-227	189-227	EA	1
200-240	200-240	EA	1
216-259	216-259	EA	1
233-292	233-292	EA	1
270-324	270-324	EA	1
324-388	324-388	EA	1
340-408	340-408	EA	1
378-440	378-440	EA	1
400-480	400-480	EA	1
460-552	460-552	EA	1
540-648	540-648	EA	1
590-708	590-708	EA	1
708-850	708-850	EA	1
829-995	829-995	EA	1
1000-1200	1000-1200	EA	1

Motor Start Capacitors – 220/250 VAC

Variable capacitance. Round, plastic can.



88-108220

CATALOG NO.	UF	UOM	ORDER MULTIPLE
43-53220	43-53	EA	1
72-88220	72-88	EA	1
88-108220	88-108	EA	1
108-130220	108-130	EA	1
124-156220	124-156	EA	1
145-175220	145-175	EA	1
161-193220	161-193	EA	1
189-227220	189-227	EA	1
216-259220	216-259	EA	1
233-292220	233-292	EA	1
270-324220	270-324	EA	1

Motor Start Capacitors – 330 VAC

Variable capacitance. Round, plastic can.



88-108330

CATALOG NO.	UF	UOM	ORDER MULTIPLE
72-88330	72-88	EA	1
124-156330	124-156	EA	1
145-175330	145-175	EA	1
161-193330	161-193	EA	1
189-227330	189-227	EA	1
216-259330	216-259	EA	1
270-324330	270-324	EA	1

START CAPACITORS CONT'D

Titan Pro Start Capacitors

Features

Dry, electrolytic
Non-polarized capacitors for intermittent duty in AC motor starting circuits
Cases are made of moisture and oil resistant molded
Phenolic resin or plastic
Standard dual blade
Terminals

Operating temperature range:
-40°C to 65°C (-40°F to 149°F)
UL and cUL recognized
Rated 3-second start
20 Starts per hour
50/60 Hertz



TSMJ72

TITAN PRO®

CATALOG NO.	MFD	CASE SIZE	INDUSTRY NO.	UOM	OM
Titan Pro 110-125 VAC					
TMJ21	21-25	1	11002	EA	1
TMJ25	25-30	1	11003	EA	1
TMJ30	30-36	1	11004	EA	1
TMJ36	36-43	1	11005	EA	1
TMJ43	43-53	1	11006	EA	1
TMJ47	47-56	1	—	EA	1
TMJ56	56-75	1	11007	EA	1
TMJ64	64-77	1	—	EA	1
TMJ72	72-88	1	11008	EA	1
TMJ88	88-108	1	11009	EA	1
TMJ108	108-130	1	11010	EA	1
TMJ124	124-149	1	11112	EA	1
TMJ130	130-156	1	11112	EA	1
TMJ145	145-174	1	11013	EA	1
TMJ161	161-193	1	11014	EA	1
TMJ189	189-227	1	11015	EA	1
TMJ200	200-240	1	11016	EA	1
TMJ216	216-259	1	11017	EA	1
TMJ216A	216-259	2	11017	EA	1
TMJ233	233-280	1	10018	EA	1
TMJ233A	233-280	2	10018	EA	1
TMJ243	243-292	1	—	EA	1
TMJ243A	243-292	2	—	EA	1
TMJ270	270-324	1	11019	EA	1
TMJ270A	270-324	2	11019	EA	1
TMJ295	295-354	1	—	EA	1
TMJ300	300-360	3	11020	EA	1
TMJ324	324-388	1	11021	EA	1
TMJ324A	324-388	4	11021	EA	1
TMJ324B	324-388	2	11021	EA	1
TMJ340	340-408	2	11022	EA	1
TMJ340A	340-408	4	11022	EA	1
TMJ378	378-455	2	11023	EA	1
TMJ378A	378-455	4	11023	EA	1
TMJ400	400-480	2	11024	EA	1
TMJ400A	400-480	4	11024	EA	1
TMJ430	430-516	2	—	EA	1
TMJ430A	430-516	4	—	EA	1
TMJ430B	430-516	6	—	EA	1
TMJ460	460-552	2	11025	EA	1
TMJ460A	460-552	4	11025	EA	1
TMJ460B	460-552	5	11025	EA	1
TMJ540	540-648	5	11026	EA	1
TMJ540A	540-648	4	11026	EA	1
TMJ590	590-708	5	11027	EA	1
TMJ590A	590-708	4	11027	EA	1
TMJ645	645-774	5	—	EA	1
TMJ708	708-850	5	11028	EA	1
TMJ708A	708-850	7	11028	EA	1
TMJ708B	708-850	4	11028	EA	1
TMJ800	800-960	4	—	EA	1
TMJ815	815-978	5	—	EA	1
TMJ829	829-995	5	11029	EA	1
TMJ829A	829-995	7	11029	EA	1
TMJ850	850-1020	7	—	EA	1
TMJ860	860-1032	4	—	EA	1
TMJ1000	1000-1200	7	11030	EA	1
TMJ1290	1290-1548	7	—	EA	1

CATALOG NO.	MFD	CASE SIZE	INDUSTRY NO.	UOM	OM
Titan Pro 165 VAC					
TSMJ72	72-88	1	—	EA	1
TSMJ88	88-108	1	—	EA	1
TSMJ108	108-130	1	—	EA	1
TSMJ124	124-149	1	11031	EA	1
TSMJ130	130-156	2	—	EA	1
TSMJ145	145-174	2	11032	EA	1
TSMJ161	161-193	2	11033	EA	1
TSMJ189	189-227	2	11034	EA	1
TSMJ216	216-259	4	—	EA	1
TSMJ233	233-280	4	11035	EA	1
TSMJ243	243-292	4	—	EA	1
TSMJ270	270-324	4	11036	EA	1
TSMJ340	340-408	4	—	EA	1
TSMJ378A	378-455	5	—	EA	1
TSMJ400	400-480	4	11037	EA	1
TSMJ540	540-648	4	—	EA	1
TSMJ710	710-850	6	—	EA	1
TSMJ710A	710-850	7	—	EA	1
TSMJ810A	810-972	7	—	EA	1

CASE SIZE	DIAMETER (IN.)	HEIGHT (IN.)
Case Dimension		
1	1- 7/16	2-3/4
2	1- 7/16	3-3/8
3	1- 7/16	4-3/8
4	1-13/16	3-3/8
5	1-13/16	4-3/8
6	2 -1/16	3-3/8
7	2 -1/16	4-3/8
8	2- 9/16	4-3/8

START CAPACITORS CONT'D

Titan Pro Start Capacitors

Features

Dry, electrolytic
Non-polarized capacitors for intermittent duty in AC motor starting circuits
Cases are made of moisture and oil resistant molded
Phenolic resin or plastic
Standard dual blade
Terminals

Operating temperature range:
-40°C to 65°C (-40°F to 149°F)
UL and cUL recognized
Rated 3-second start
20 Starts per hour
50/60 Hertz



TRMJ21

TITAN PRO®

CATALOG NO.	MFD	CASE SIZE	INDUSTRY NO.	UOM	OM
Titan Pro 330 VAC					
TRMJ21	21-25	2	11055	EA	1
TRMJ25	25-30	2	11056	EA	1
TRMJ30	30-36	2	11057	EA	1
TRMJ36	36-43	2	11058	EA	1
TRMJ43	43-53	4	11059	EA	1
TRMJ47	47-56	4	—	EA	1
TRMJ56	53-64	4	11060	EA	1
TRMJ64	64-77	4	—	EA	1
TRMJ72	72-88	4	11061	EA	1
TRMJ72A	72-88	6	11061	EA	1
TRMJ72R	72-88	4	—	EA	1
TRMJ88	88-108	6	11062	EA	1
TRMJ108	108-130	7	11063	EA	1
TRMJ108A	108-130	6	11063	EA	1
TRMJ124	124-149	7	11165	EA	1
TRMJ130	130-158	7	11064	EA	1
TRMJ135	135-162	7	—	EA	1
TRMJ145	145-174	7	11066	EA	1
TRMJ145A	145-174	8	11066	EA	1
TRMJ161	161-193	7	10067	EA	1
TRMJ189	189-227	7	11068	EA	1
TRMJ189A	189-227	8	11068	EA	1
TRMJ216	216-259	8	11069	EA	1
TRMJ216A	216-259	7	11069	EA	1
TRMJ243	243-292	6	—	EA	1
TRMJ270	270-324	8	11070	EA	1
TRMJ300	300-360	8	—	EA	1

Notes:
Please call when dimensions are critical.

CATALOG NO.	MFD	CASE SIZE	INDUSTRY NO.	UOM	OM
Titan Pro 220-250 VAC					
TTMJ21	21-25	1	11038	EA	1
TTMJ25	25-30	1	11039	EA	1
TTMJ30	30-36	1	11040	EA	1
TTMJ36	36-43	1	11041	EA	1
TTMJ43	43-53	1	11042	EA	1
TTMJ43A	43-53	2	11042	EA	1
TTMJ47	47-56	1	—	EA	1
TTMJ53	53-64	2	—	EA	1
TTMJ56	53-64	1	11043	EA	1
TTMJ56A	56-72	1	11043	EA	1
TTMJ59	59-71	6	—	EA	1
TTMJ64	64-77	1	—	EA	1
TTMJ64A	64-77	2	—	EA	1
TTMJ72	72-88	4	11044	EA	1
TTMJ86	86-108	6	—	EA	1
TTMJ88	88-108	4	11045	EA	1
TTMJ105	105-126	6	—	EA	1
TTMJ108	108-130	4	11046	EA	1
TTMJ124	124-149	5	11148	EA	1
TTMJ124A	124-149	4	11148	EA	1
TTMJ130	130-158	4	—	EA	1
TTMJ130A	130-158	5	—	EA	1
TTMJ145	145-174	4	11049	EA	1
TTMJ145A	145-174	6	11049	EA	1
TTMJ161	161-193	6	11050	EA	1
TTMJ161A	161-193	5	11050	EA	1
TTMJ189	189-227	6	11051	EA	1
TTMJ189A	189-227	7	11051	EA	1
TTMJ216	216-259	6	11052	EA	1
TTMJ216A	216-259	7	11052	EA	1
TTMJ233	233-280	6	11053	EA	1
TTMJ233A	233-280	7	10053	EA	1
TTMJ243	243-292	6	—	EA	1
TTMJ270	270-324	6	11054	EA	1
TTMJ270A	270-324	7	11054	EA	1
TTMJ280	280-336	7	—	EA	1
TTMJ284	284-333	8	—	EA	1
TTMJ320	320-384	7	—	EA	1
TTMJ340	340-408	7	—	EA	1
TTMJ378	378-455	8	—	EA	1
TTMJ400	400-480	7	—	EA	1
TTMJ400A	400-480	8	—	EA	1
TTMJ430	430-516	8	—	EA	1
TTMJ630	630-750	8	—	EA	1

START CAPACITORS CONT'D

Packard Start Capacitors With Resistors



PSMJ243R

TITAN PRO®

Features

Most popular Start Capacitor with resistors to use in compressor applications

Includes 15,000 OHM resistor

Dry, electrolytic, non-polarized capacitors for intermittent duty in AC motor starting circuits

Cases are made of moisture and oil resistant molded phenolic resin or plastic

Standard dual blade terminals
Operating temperature range:
-40°C to 65°C (-40°F to 149°F)
UL and cUL recognized
Rated 3-second start
20 Starts per hour
50/60 Hertz

CATALOG NO.	MFD	VOLTAGE	CASE SIZE	UOM	OM
TSMJ243R	243-292	165	4	EA	1
TSMJ270R	270-324	165	4	EA	1
TTMJ88R	88-108	220-250	4	EA	1
TTMJ145R	145-174	220-250	4	EA	1
TTMJ161R	161-193	220-250	6	EA	1
TTMJ189R	189-227	220-250	6	EA	1
TRMJ72R	72-88	330	4	EA	1
TRMJ88R	88-108	330	6	EA	1
TRMJ108R	108-130	330	4	EA	1
TRMJ145R	145-174	330	7	EA	1
TRMJ216R	216-259	330	8	EA	1
TRMJ270R	270-324	330	8	EA	1

Notes:
Please call when dimensions are critical.

DRY CELL CAPACITORS

Packard Mini-Split Dry Cell Capacitors



PMSCF1

Packard

Features

Specifically designed for Mini-Splits and other equipment with confined space
Constructed with Self-Healing Dielectric Metalized Polypropylene Film
2 - 1/4 inch QC terminals
Plastic mounting foot
Temperature range: -40°C to 85°C
(-40°F to 185°F)
Capacitance tolerance: +/- 5%
Protected 10,000 AFC
RoHS compliant

CATALOG NO.	MFD	VAC	HERTZ	HEIGHT (IN.)	LENGTH (IN.)	WIDTH (IN.)	WEIGHT (LBS.)	UOM	OM
PMSCF1	1	450	50/60	1.10	1.46	0.55	0.06	EA	1
PMSCF1.5	1.5	450	50/60	1.10	1.46	0.55	0.06	EA	1
PMSCF2	2	450	50/60	1.22	1.50	0.75	0.07	EA	1
PMSCF2.5	2.5	450	50/60	1.22	1.50	0.75	0.07	EA	1
PMSCF3	3	450	50/60	1.22	1.50	0.75	0.08	EA	1
PMSCF3.5	3.5	450	50/60	1.34	1.46	0.87	0.10	EA	1
PMSCF4	4	450	50/60	1.34	1.46	0.87	0.11	EA	1
PMSCF5	5	450	50/60	1.34	1.85	0.87	0.12	EA	1
PMSCF6	6	450	50/60	1.34	1.85	0.87	0.13	EA	1

CLASS RK5

Class RK5-FLNR Series

The FLNR series of fuses set the standard for general purpose fuses. The dual-element design provides advanced short circuit and overload protection.



FLNR001T

Applications
Service entrance switches
Transformers
Switchboard mains and feeders
Motor control central mains and motor branch circuits
All general purpose circuits

Features
Dual-element design
Current limiting

Product Specifications

Voltage Rating:	AC: 250 V (FLNR_ID); 600 V (FLSR_ID) DC: 125 V (FLNR 1/10 – 30 A); 125 V (FLNR_ID 35 – 600 A); 300 V (FLSR_ID)
Interrupting Rating:	AC: 200 kA rms symmetrical 300 kA rms symmetrical (Littelfuse self-certified) DC: 20kA
Amperage Range:	1/10 - 600 A
	Standard 248-12, Class RK5
	UL Listed (File: E81895)
Approvals:	CSA Certified (File: LR29862)
	Federal Specification WF-1814
	(QPL- W-F-1814)

CATALOG NO.	SUPPLIER PART ID	TYPE	VOLTS	AMPS	MARS NO. W/O INDICATOR	MERSEN-GOULD SHAWMUT	BUSSMAN-FUSETRON	BUSSMAN-EDISON	UOM	OM
FLNR001T	**FLNR001.T**	Class RK5 Time Delay Fuse	250V	1	—	TR1R	FRN-R-1	—	EA	10
FLNR002T	**FLNR002.T**	Class RK5 Time Delay Fuse	250V	2	—	TR2R	FRN-R-2	—	EA	10
FLNR03.2T	**FLNR03.2T**	Class RK5 Time Delay Fuse	250V	3.2	—	TR3-2/10R	FRN-R- 3-2/10	—	EA	10
FLNR005T	**FLNR005.T**	Class RK5 Time Delay Fuse	250V	5	—	TR5R	FRN-R-5	—	EA	10
FLNR006T	**FLNR006.T**	Class RK5 Time Delay Fuse	250V	6	—	TR6R	FRN-R-6	—	EA	10
FLNR6.25T	**FLNR6.25T**	Class RK5 Time Delay Fuse	250V	6.25	—	TR6-1/4R	FRN-R-6-1/4	—	EA	10
FLNR010T	**FLNR010.T**	Class RK5 Time Delay Fuse	250V	10	81032	TR10R	FRN-R-10	ECNR10	EA	10
FLNR012T	**FLNR012.T**	Class RK5 Time Delay Fuse	250V	12	—	TR12R	FRN-R-12	—	EA	10
FLNR015T	**FLNR015.T**	Class RK5 Time Delay Fuse	250V	15	81034	TR15R	FRN-R-15	ECNR15	EA	10
FLNR020T	**FLNR020.T**	Class RK5 Time Delay Fuse	250V	20	81036	TR20R	FRN-R-20	ECNR20	EA	10
FLNR025T	**FLNR025.T**	Class RK5 Time Delay Fuse	250V	25	81037	TR25R	FRN-R-25	ECNR25	EA	10
FLNR030T	**FLNR030.T**	Class RK5 Time Delay Fuse	250V	30	81038	TR30R	FRN-R-30	ECNR30	EA	10
FLNR035T	**FLNR035.T**	Class RK5 Time Delay Fuse	250V	35	81039	TR35R	FRN-R-35	ECNR35	EA	10
FLNR040T	**FLNR040.T**	Class RK5 Time Delay Fuse	250V	40	81040	TR40R	FRN-R-40	ECNR40	EA	10
FLNR045T	**FLNR045.T**	Class RK5 Time Delay Fuse	250V	45	81041	TR45R	FRN-R-45	ECNR45	EA	10
FLNR050T	**FLNR050.T**	Class RK5 Time Delay Fuse	250V	50	81042	TR50R	FRN-R-50	ECNR50	EA	10
FLNR060T	**FLNR060.T**	Class RK5 Time Delay Fuse	250V	60	81043	TR60R	FRN-R-60	ECNR60	EA	10
FLNR070V	**FLNR070.V**	Class RK5 Time Delay Fuse	250V	70	81043	TR70R	FRN-R-70	ECNR60	EA	5
FLNR080V	**FLNR080.V**	Class RK5 Time Delay Fuse	250V	80	81043	TR80R	FRN-R-80	ECNR60	EA	5
FLNR090V	**FLNR090.V**	Class RK5 Time Delay Fuse	250V	90	81043	TR90R	FRN-R-90	ECNR60	EA	5
FLNR100V	**FLNR100.V**	Class RK5 Time Delay Fuse	250V	100	81047	TR100R	FRN-R-100	ECNR100	EA	5

Fusible Links

Fusible Links are temperature sensitive, one time devices. Engineered as safety links, they open the circuit if the designed limit temperature is reached.



HFL-5257

CATALOG NO.	FUSIBLE TEMP °F	TYPE	PRONG TYPE	QTY/PACK	UOM	ORDER MULTIPLE
HFL-4257	257°	In-Line	—	pack of 4	PK	1
HFL-4300	300°	In-Line	—	pack of 4	PK	1
HFL-4333	333°	In-Line	—	pack of 4	PK	1
HFL-5257	257°	Face Plate	Straight	pack of 2	PK	1
HFL-5258	257°	Face Plate	Right Angle	pack of 2	PK	1
HFL-5300	300°	Face Plate	Straight	pack of 2	PK	1
HFL-5301	300°	Face Plate	Right Angle	pack of 2	PK	1
HFL-5333	333°	Face Plate	Straight	pack of 2	PK	1

CLASS RK5 CONT'D

FLSR Series • Class RK5 Time Delay Fuses

Littelfuse FLSR series fuses have been the superior UL Class RK5 dual-element time-delay fuses, and are the most widely used class of fuses. FLSR series fuses provide excellent protection for all types of circuits especially those containing motors. However, users and specifiers should consider the significant benefits offered by Indicator fuses.



FLSR005T

Littelfuse

CATALOG NO.	SUPPLIER PART ID	TYPE	VOLTS	AMPS	MARS NO. W/O INDICATOR	MERSEN-GOULD SHAWMUT	BUSSMAN-FUSETRON	BUSSMAN-EDISON	UOM	OM
FLSR01.5T	**FLSR01.5T**	Class RK5 Time Delay Fuse	600V	1.5	—	FRS-R-1-1/2	TRS-1-1/2R	—	EA	10
FLSR005T	**FLSR005.T**	Class RK5 Time Delay Fuse	600V	5	—	FRS-R-5	TRS-5R	—	EA	10
FLSR006T	**FLSR006.T**	Class RK5 Time Delay Fuse	600V	6	—	FRS-R-6	TRS6R	—	EA	10
FLSR008T	**FLSR008.T**	Class RK5 Time Delay Fuse	600V	8	—	FRS-R-8	TRS8R	—	EA	10
FLSR010T	**FLSR010.T**	Class RK5 Time Delay Fuse	600V	10	81132	TRS10R	FRS-R-10	ECSR10	EA	10
FLSR012T	**FLSR012.T**	Class RK5 Time Delay Fuse	600V	12	—	FRS-R-12	TRS12R	—	EA	10
FLSR015T	**FLSR015.T**	Class RK5 Time Delay Fuse	600V	15	81134	TRS15R	FRS-R-15	ECSR15	EA	10
FLSR020T	**FLSR020.T**	Class RK5 Time Delay Fuse	600V	20	81136	TRS20R	FRS-R-20	ECSR20	EA	10
FLSR025T	**FLSR025.T**	Class RK5 Time Delay Fuse	600V	25	81137	TRS25R	FRS-R-25	ECSR25	EA	10
FLSR030T	**FLSR030.T**	Class RK5 Time Delay Fuse	600V	30	81138	TRS30R	FRS-R-30	ECSR30	EA	10
FLSR035T	**FLSR035.T**	Class RK5 Time Delay Fuse	600V	35	81139	TRS35R	FRS-R-35	ECSR35	EA	10
FLSR040T	**FLSR040.T**	Class RK5 Time Delay Fuse	600V	40	81140	TRS40R	FRS-R-40	ECSR40	EA	10
FLSR045T	**FLSR045.T**	Class RK5 Time Delay Fuse	600V	45	81147	TRS45R	FRS-R-45	ECSR45	EA	10
FLSR050T	**FLSR050.T**	Class RK5 Time Delay Fuse	600V	50	81141	TRS50R	FRS-R-50	ECSR50	EA	10
FLSR060T	**FLSR060.T**	Class RK5 Time Delay Fuse	600V	60	81142	TRS60R	FRS-R-60	ECSR60	EA	10
FLSR070V	**FLSR070.V**	Class RK5 Time Delay Fuse	600V	70	81143	TRS70R	FRS-R-70	ECSR70	EA	5
FLSR080V	**FLSR080.V**	Class RK5 Time Delay Fuse	600V	80	81144	TRS80R	FRS-R-80	ECSR80	EA	5
FLSR090V	**FLSR090.V**	Class RK5 Time Delay Fuse	600V	90	81145	TRS90R	FRS-R-90	ECSR90	EA	5
FLSR100V	**FLSR100.V**	Class RK5 Time Delay Fuse	600V	100	81146	TRS100R	FRS-R-100	ECSR100	EA	5

CATALOG NO.	SUPPLIER PART ID	TYPE	VOLTS	AMPS	MARS NO. W/O INDICATOR	MERSEN-GOULD SHAWMUT	BUSSMAN-FUSETRON	BUSSMAN-EDISON	UOM	OM
FLSR005TXID	**FLSR005.TXID**	Class RK5 10PK	600V	5	—	FRS-R-5	TRS5R	—	EA	10
FLSR010TXID	**FLSR010.TXID**	Class RK5 10PK	600V	10	—	FRS-R-10	TRS10R	—	EA	10
FLSR015TXID	**FLSR015.TXID**	Class RK5 10PK	600V	15	—	FRS-R-15	TRS15R	—	EA	10
FLSR020TXID	**FLSR020.TXID**	Class RK5 10PK	600V	20	—	FRS-R-20	TRS20R	—	EA	10
FLSR025TXID	**FLSR025.TXID**	Class RK5 10PK	600V	25	—	FRS-R-25	TRS25R	—	EA	10
FLSR030TXID	**FLSR030.TXID**	Class RK5 10PK	600V	30	—	FRS-R-30	TRS30R	—	EA	10
FLSR035TXID	**FLSR035.TXID**	Class RK5 10PK	600V	35	—	FRS-R-35	TRS35R	—	EA	10
FLSR040TXID	**FLSR040.TXID**	Class RK5 10PK	600V	40	—	FRS-R-40	TRS40R	—	EA	10
FLSR045TXID	**FLSR045.TXID**	Class RK5 10PK	600V	45	—	FRS-R-45	TRS45R	—	EA	10
FLSR050TXID	**FLSR050.TXID**	Class RK5 10PK	600V	50	—	FRS-R-50	TRS50R	—	EA	10
FLSR060TXID	**FLSR060.TXID**	Class RK5 5PK	600V	60	—	FRS-R-60	TRS60R	—	EA	5
FLSR070VXID	**FLSR070.VXID**	Class RK5 5PK	600V	70	—	FRS-R-70	TRS70R	—	EA	5
FLSR080VXID	**FLSR080.VXID**	Class RK5 5PK	600V	80	—	FRS-R-80	TRS80R	—	EA	5
FLSR090VXID	**FLSR090.VXID**	Class RK5 5PK	600V	90	—	TRS90R	FRS-R-90	—	EA	5
FLSR100VXID	**FLSR100.VXID**	Class RK5 5PK	600V	100	—	TRS100R	FRS-R-100	—	EA	5
FLSR125XXID	**FLSR125.XXID**	Class RK5 1PK	600V	125	—	TRS125R	FRS-R-125	—	EA	1

CATALOG NO.	SUPPLIER PART ID	TYPE	VOLTS	AMPS	MARS NO. W/O INDICATOR	MERSEN-GOULD SHAWMUT	BUSSMAN-FUSETRON	BUSSMAN-EDISON	UOM	OM
FLSR125X	**FLSR125.X**	Class RK5 Time Delay Fuse	600V	125	—	TRS125R	FRS-R-125	—	EA	1
FLSR150X	**FLSR150.X**	Class RK5 Time Delay Fuse	600V	150	—	TRS150R	FRS-R-150	—	EA	1
FLSR175X	**FLSR175.X**	Class RK5 Time Delay Fuse	600V	175	—	TRS175R	FRS-R-175	—	EA	1
FLSR400X	**FLSR400.X**	Class RK5 Time Delay Fuse	600V	400	—	TRS400R	FRS-R-400	—	EA	1

CLASS RK5 CONT'D

Dual Element Fuses – 250V



ED-CR40

Provides time delay for temporary over-current conditions and motor running protection for heating and air conditioning equipment. Eliminates unnecessary maintenance from harmless overloads.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ED-CR15	Dual Element Fuse – 15 Amps, pack of 2	PK	1
ED-CR20	Dual Element Fuse – 20 Amps, pack of 2	PK	1
ED-CR25	Dual Element Fuse – 25 Amps, pack of 2	PK	1
ED-CR30	Dual Element Fuse – 30 Amps, pack of 2	PK	1
ED-CR35	Dual Element Fuse – 35 Amps, pack of 2	PK	1
ED-CR40	Dual Element Fuse – 40 Amps, pack of 2	PK	1
ED-CR45	Dual Element Fuse – 45 Amps, pack of 2	PK	1
ED-CR50	Dual Element Fuse – 50 Amps, pack of 2	PK	1
ED-CR60	Dual Element Fuse – 60 Amps, pack of 2	PK	1

U.L. Class RK-5, Standard for Safety 198E, Current Limiting Fuses, Interrupting Rating 200,000 Amps. rms. A.C.

Dual Element Fuses – 250V



7-CRNR40

Provides time delay for temporary over current conditions and motor running protection for heating and air conditioning equipment. Eliminates unnecessary maintenance from harmless overloads. U.L. Class RK 5, Standard for Safety 198E, Current Limiting Fuses, Interrupting Rating 200,000 Amps. rms. A.C.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-CRNR15	15 Amps	EA	10
7-CRNR20	20 Amps	EA	10
7-CRNR25	25 Amps	EA	10
7-CRNR30	30 Amps	EA	10
7-CRNR35	35 Amps	EA	10
7-CRNR40	40 Amps	EA	10
7-CRNR45	45 Amps	EA	10
7-CRNR50	50 Amps	EA	10
7-CRNR60	60 Amps	EA	10
7-CRNR70	70 Amps	EA	5
7-CRNR80	80 Amps	EA	5
7-CRNR90	90 Amps	EA	5
7-CRNR100	100 Amps	EA	5

U.L. Class RK-5, Standard for Safety 198E, Current Limiting Fuses, Interrupting Rating 200,000 Amps. rms. A.C.

Time Delay Fuses – 600V



626-HASR15

These plugs offer safe protection during momentary overload. No adapter necessary. U.L. Listed., Class RK5

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
626-HASR10	10 Amp	EA	10
626-HASR15	15 Amp	EA	10
626-HASR20	20 Amp	EA	10
626-HASR25	25 Amp	EA	10
626-HASR30	30 Amp	EA	10
626-HASR40	40 Amp	EA	10
626-HASR60	60 Amp	EA	10

CLASS J

JTD Class J • Fast Acting Fuses

The Littelfuse POWR-PRO® JTD_ID Indicator Class J fuse provides visual blown fuse indication and maximum protection in a compact package. The current-limiting time delay JTD_ID offers a patented design which reduces nuisance fuse openings.

Applications
Fused combination motor controllers and motor control centers

Transformer protection
Protection for series rated molded case circuit-breaker panels

General purpose circuits

Features
POWR-PRO® Performance
Current-Limiting IEC Type 2 Protection
Indication and non-indication version available
Indicating and din mount holders available
Dual-element design



JTD012T

Littelfuse

CATALOG NO.	SUPPLIER PART ID	AMPS	VOLTS	VDC	INTERRUPTING RATING	OPENING	SIZE	MERSEN-GOULD SHAWMUT	BUSSMAN-FUSETRON	UOM	OM
JTD012T	**0JTD012.T**	12	600	300	20000A@300VDC	Slo-Blo/Time Lag (T)/Time Delay	Industrial Cartridge	AJT12	LPJ12SP	EA	10
JTD015T	**0JTD015.T**	15	600	300	20000A@300VDC	Slo-Blo/Time Lag (T)/Time Delay	Industrial Cartridge	AJT15	LPJ15SP	EA	10
JTD060T	**0JTD060.T**	60	600	300	20000A@300VDC	Slo-Blo/Time Lag (T)/Time Delay	Industrial Cartridge	AJT60	LPJ60SP	EA	10
JTD080V	**0JTD080.V**	80	600	300	20000A@300VDC	Slo-Blo/Time Lag (T)/Time Delay	Industrial Cartridge	AJT80	LPJ80SP	EA	5

CLASS T

JLLS/JLLN Class T • Fast Acting Fuses

JLLN / JLLS series fuses are less than 1/3 the size of comparable Class R fuses and are typically used for short circuit protection of drives and surge sensitive components. When rated in accordance with the NEC*, JLLN / JLLS fuses provide fast-acting overload and short circuit protection for non-inductive circuits and equipment.

Applications
Variable speed drive protection
Power conversion devices (inverters, rectifiers, UPS)
Power supplies and power distribution units
Compact mains switches

Features
Extremely current-limiting
Compact design
200 kA interrupting rating
JLLN 35–60 amperes available with PCB mounts



JLLS060T

Littelfuse

CATALOG NO.	SUPPLIER PART ID	TYPE	VOLTS	AMPS	MERSEN-GOULD SHAWMUT	BUSSMAN-FUSETRON	UOM	OM
JLLS060T	**JLLS060.T**	Class T	600V	60	A6T60	JJS-60	EA	10
JLLS600X	**JLLS600.X**	Class T	600V	600	A6T600	JJS-600	EA	1
JLLS025TXP	**JLLS025.TXP**	Class T	600V	25	A6T25	JJS-25	EA	10
JLLS030TXP	**JLLS030.TXP**	Class T	600V	30	A6T30	JJS-30	EA	10
JLLS080T	**JLLS080.V**	Class T	600V	80	A6T80	JJS-80	EA	5
JLLN060T	**JLLN060.T**	Class T	300V	60	A3T60	JJN-60	EA	10
JLLN200P	**JLLN200.XXP**	Class T	300V	200	A3T200	JJN-200	EA	10
JLLN100V	**JLLN100.V**	Class T	300V	100	A3T100	JJN-100	EA	10

CLASS CC

Class CC - CCMR Series

The CCMR series is ideal for space saving protection of motors up to 40 hp*. It was designed specifically to withstand sustained starting currents of small motors. The CCMR 60 fuse is the smallest 60 A fuse available rated at 600 V. Compared to other UL Listed fuses, Class CC fuses are the most current-limiting, rating for rating.



CCMR001TXP

Applications
Motor and motor branch circuit protection

Features
POWR-PRO® Performance
Extremely current-limiting
Ratings up to 60 Amps
300 kA interrupting rating (self-certified)

Product Specifications

Voltage Rating: AC:600 V
DC: 250 V (CCMR 2/10 - 2 A)
(CCMR 4 1/2 – 10 A)
(CCMR 35– 60 A)
300 V (CCMR 2 1/4 – 4 A)
500 V (CCMR 12– 30 A)

Interrupting Rating: AC: 200 kA rms symmetrical
300 kA Littelfuse self-certified
DC: 20kA

Amperage Range: 2/10 - 60 A

Approvals: AC: Standard 248-4, Class CC
UL Listed 2/10-30 A (File: E81895)
Standard 248, Class CD
UL Listed 35-60 A (File: E81895)
CSA Certified (File: LR29862)
DC: Littelfuse self-certified

Environmental: RoHS compliant (except 35-60 A)

CATALOG NO.	SUPPLIER PART ID	TYPE	VOLTS	AMPS	MERSEN-GOULD SHAWMUT	BUSSMAN-FUSETRON	BUSSMAN-EDISON	UOM	OM
CCMR.250TXP	**CCMR.250TXP**	Class CC Time Delay Fuse	600V	0.25	ATDR.25	LP-CC-.25	EDCC-.25	EA	10
CCMR.500TXP	**CCMR030.TXP**	Class CC Time Delay Fuse	600V	0.5	ATDR.50	LP-CC-.50	EDCC.50	EA	10
CCMR001TXP	**CCMR001.TXP**	Class CC Time Delay Fuse	600V	1	ATDR1	LP-CC-1	EDCC1	EA	10
CCMR1.25TXP	**CCMR01.25.TXP**	Class CC Time Delay Fuse	600V	1.25	ATDR1.25	LP-CC-1.25	EDCC1.25	EA	10
CCMR002TXP	**CCMR002.TXP**	Class CC Time Delay Fuse	600V	2	ATDR2	LP-CC-2	EDCC2	EA	10
CCMR2.25TXP	**CCMR02.25.TXP**	Class CC Time Delay Fuse	600V	2.25	ATDR2.25	LP-CC-2.25	EDCC2.25	EA	10
CCMR003TXP	**CCMR003.TXP**	Class CC Time Delay Fuse	600V	3	ATDR3	LP-CC-3	EDCC3	EA	10
CCMR005TXP	**CCMR005.TXP**	Class CC Time Delay Fuse	600V	5	ATDR5	LP-CC-5	EDCC5	EA	10
CCMR006TXP	**CCMR006.TXP**	Class CC Time Delay Fuse	600V	6	ATDR6	LP-CC-6-1/4	EDCC6	EA	10
CCMR6.25TXP	**CCMR6.25TXP**	Class CC Time Delay Fuse	600V	6.25	ATDR6.25	LP-CC-6-.25	EDCC-6-.25	EA	10
CCMR007TXP	**CCMR007.TXP**	Class CC Time Delay Fuse	600V	7	ATDR7	LP-CC-7	EDCC7	EA	10
CCMR010TXP	**CCMR010.TXP**	Class CC Time Delay Fuse	600V	10	ATDR10	LP-CC-10	EDCC10	EA	10
CCMR012TXP	**CCMR012.TXP**	Class CC Time Delay Fuse	600V	12	ATDR12	LP-CC-12	EDCC12	EA	10
CCMR015TXP	**CCMR015.TXP**	Class CC Time Delay Fuse	600V	15	ATDR15	LP-CC-15	EDCC15	EA	10
CCMR020TXP	**CCMR020.TXP**	Class CC Time Delay Fuse	600V	20	ATDR20	LP-CC-20	EDCC20	EA	10
CCMR025TXP	**CCMR025.TXP**	Class CC Time Delay Fuse	600V	25	ATDR25	LP-CC-25	EDCC-25	EA	10
CCMR030TXP	**CCMR030.TXP**	Class CC Time Delay Fuse	600V	30	ATDR30	LP-CC-30	EDCC30	EA	10
CCMR050TXP	**CCMR050.TXP**	Class CC Time Delay Fuse	600V	50	ATDR50	LP-CC-50	EDCC50	EA	10
CCMR035T	**CCMR035.TXP**	Class CC Time Delay Fuse	600V	35	ATDR35	LP-CC-35	EDCC35	EA	10
CCMR040T	**CCMR040.TXP**	Class CC Time Delay Fuse	600V	40	ATDR40	LP-CC-40	EDCC40	EA	10

CLASS CC CONT'D

KLDR Series • Class CC Fuses



KLDR005TXP

Littelfuse

KLDR fuses are time-delay fuses designed to protect control transformers, solenoids and similar inductive components with high magnetizing currents during the first half-cycle. They provide excellent protection of motor branch circuits containing IEC or NEMA rated motor controllers or contactors.

Applications
Transformer Protection

Features
Meets UL and CSA standards
Class CC fuses are the smallest 600 V, 200,000 A.I.R.fuses approved for branch circuit protection
Rejection feature prevents use of fuses with loweinterrupting ratings or voltage ratings when used with corresponding fuse holders

Extremely current limiting reduces damage caused by heating and magnetic effects of short-circuit currents

CATALOG NO.	SUPPLIER PART ID	TYPE	VOLTS	AMPS	MERSEN-GOULD SHAWMUT	BUSSMAN-FUSETRON	UOM	OM
KLDR.500TXP	**KLDR.500TXP**	Time Delay Fuse	600V	0.5	ATQR1/2	FNQ-R-1/2	EA	10
KLDR001TXP	**KLDR001.TXP**	Time Delay Fuse	600V	1	ATQR1	FNQ-R-1	EA	10
KLDR004TXP	**KLDR004.TXP**	Time Delay Fuse	600V	4	ATQR4	FNQ-R-4	EA	10
KLDR005TXP	**KLDR005.TXP**	Time Delay Fuse	600V	5	ATQR5	FNQ-R-5	EA	10
KLDR006TXP	**KLDR006.TXP**	Time Delay Fuse	600V	6	ATQR6	FNQ-R-6	EA	10
KLDR010TXP	**KLDR010.TXP**	Time Delay Fuse	600V	10	ATQR10	FNQ-R-10	EA	10
KLDR015TXP	**KLDR015.TXP**	Time Delay Fuse	600V	15	ATQR15	FNQ-R-15	EA	10
KLDR020TXP	**KLDR020.TXP**	Time Delay Fuse	600V	20	ATQR20	FNQ-R-20	EA	10
KLDR025TXP	**KLDR025.TXP**	Time Delay Fuse	600V	25	ATQR25	FNQ-R-25	EA	10
KLDR030TXP	**KLDR030.TXP**	Time Delay Fuse	600V	30	ATQR30	FNQ-R-30	EA	10

Class CC • Fuse Holders



L60030C2C

Littelfuse

The Littelfuse Class CC, CD and midget blocks offer generous space savings and enhanced value. DIN-rail mounting and universal mounting holes are available as well as an indication feature on all Class CD fuse blocks.

Features
Through hole PCB mounting
Robust and secure block design
All-in-one package offers easy installation
Space saving footprint
Touch Safe cover/puller available
3-pole configurations

CATALOG NO.	SUPPLIER PART ID	TYPE	VOLTS	AMPS	MERSEN-GOULD SHAWMUT	BUSSMAN-FUSETRON	UOM	OM
L60030C2PQDINR	**L60030C2PQDINR**	Fuse Holder	600V	30	30322R	BCM603-2PQ	EA	5
L60030C2C	**L60030C2C**	Fuse Block	600V	30	30352R	BCM603-2C	EA	5
L60030C3C	**L60030C3C**	Fuse Block	600V	30	30353R	BCM603-3C	EA	5

CLASS G

SLC Class G Fuses

Littelfuse SLC fuses provide cost effective branch circuit protection. Fuse length varies to prevent over-fusing. Compact Class G fuses were the first fuse series to approach midget fuse dimensions and meet NEC® requirements for branch-circuit protection.

Applications
Branch circuit protection

Features
Branch circuit rated
Current-limiting
100 kA interrupting rating
600 V ac rated 1/2-20 A



SLC002T

Littelfuse

CATALOG NO.	SUPPLIER PART ID	TYPE	VOLTS	AMPS	MERSEN-GOULD SHAWMUT	BUSSMAN-FUSETRON	UOM	OM
SLC002T	0SLC002.T	SLC Class G Fuses	600V	2	AG2	SC-2A	EA	10
SLC003T	0SLC003.T	SLC Class G Fuses	600V	3	AG3	SC-3A	EA	10
SLC005T	0SLC005.T	SLC Class G Fuses	600V	5	AG5	SC-5A	EA	10
SLC006T	0SLC006.T	SLC Class G Fuses	600V	6	AG6	SC-6A	EA	10
SLC010T	0SLC010.T	SLC Class G Fuses	600V	10	AG10	SC-10A	EA	10
SLC015T	0SLC015.T	SLC Class G Fuses	600V	15	AG15	SC-15A	EA	10
SLC020T	0SLC020.T	SLC Class G Fuses	600V	20	AG20	SC-20A	EA	10
SLC025T	0SLC025.T	SLC Class G Fuses	480V	25	AG25	SC-25A	EA	10
SLC030T	0SLC030.T	SLC Class G Fuses	480V	30	AG30	SC-30A	EA	10
SLC035T	0SLC035.T	SLC Class G Fuses	480V	35	AG35	SC-35A	EA	10
SLC040T	0SLC040.T	SLC Class G Fuses	480V	40	AG40	SC-40A	EA	10

CLASS K5

NLN Series • Class K5 Fast Blow One Time Fuses

NLN/NLS fuses provide low cost protection for general purpose feeder and branch circuits when available short circuit currents are less than 50 kA.

Applications
General purpose residential and commercial circuits with little or no motor load.

Features
Economical
50 kA interrupting rating
Indicating and DIN mount holders available



NLN040T

Littelfuse

CATALOG NO.	SUPPLIER PART ID	TYPE	VOLTS	AMPS	MERSEN-GOULD SHAWMUT	BUSSMAN-FUSETRON	UOM	OM
NLN040T	0NLN040.T	Fast Blow One Time Fuse	250V	40	OT40	NON-40	EA	5
NLN050T	0NLN050.T	Fast Blow One Time Fuse	250V	50	OT50	NON-50	EA	5
NLN060T	0NLN060.T	Fast Blow One Time Fuse	250V	60	OT60	NON-60	EA	5
NLN100V	0NLN100.V	Fast Blow One Time Fuse	250V	100	OT100	NON-100	EA	5

NLS Series • (One-Time) Fuse

CATALOG NO.	SUPPLIER PART ID	TYPE	POLE	VOLTS	AMPS	MERSEN-GOULD SHAWMUT	BUSSMAN-FUSETRON	UOM	OM
NLS015T	0NLS015.T	(One-Time) Fuse	1	600V	30	OTS15	NOS-15	EA	5

CLASS K5 CONT'D

One Time Fuses

Protection to lighting, heating, and other non transient circuits. U.L. Class K5, Standard for Safety 1988, One Time Fuse Interrupting Rating 10,000 Amps. rms. A.C., 250 VAC/VDC



7-10KOTN40

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-10KOTN30	30 Amps	EA	10
7-10KOTN35	35 Amps	EA	10
7-10KOTN40	40 Amps	EA	10
7-10KOTN45	45 Amps	EA	10
7-10KOTN50	50 Amps	EA	10
7-10KOTN60	60 Amps	EA	10
7-10KOTN70	70 Amps	EA	5
7-10KOTN80	80 Amps	EA	5
7-10KOTN90	90 Amps	EA	5
7-10KOTN100	100 Amps	EA	5

U.L. Class K5, Standard for Safety 1988,
One Time Fuse Interrupting Rating 10,000 Amps. rms. A.C.

MIDGET

FLQ Series • Time Delay Midget Fuses

The FLQ series 500 Vac time-delay fuses provide excellent supplemental protection of control power transformers, solenoids, and circuits with high inrush currents.

Applications
Control power transformers
Solenoids
Circuits with high inrush current

Features
These 500 volt time-delay fuses provide excellent supplemental protection of control power transformers, solenoids, and circuits with high inrush currents.

UL and CSA 500 volt ratings permit use on 480 volt circuits.
FLQ fuses also provide supplemental protection to small motors.
For motor branch-circuit protection, see Class CC fuses.



FLQ015T

Littelfuse

CATALOG NO.	SUPPLIER PART ID	TYPE	VOLTS	AMPS	MERSEN-GOULD SHAWMUT	BUSSMAN-FUSETRON	UOM	OM
FLQ030T	0FLQ030.T	Time Delay Midget Fuse	500V	30	ATQ30	FNQ-30	EA	10
FLQ001T	0FLQ001.T	Time Delay Midget Fuse	500V	1	ATQ1	FNQ-1	EA	10
FLQ003T	0FLQ003.T	Time Delay Midget Fuse	500V	3	ATQ3	FNQ-3	EA	10
FLQ010T	0FLQ010.T	Time Delay Midget Fuse	500V	10	ATQ10	FNQ-10	EA	10
FLQ015T	0FLQ015.T	Time Delay Midget Fuse	500V	15	ATQ15	FNQ-15	EA	10
FLQ020T	0FLQ020.T	Time Delay Midget Fuse	500V	20	ATQ20	FNQ-20	EA	10
FLQ004T	0FLQ004.T	Time Delay Midget Fuse	500V	4	ATQ4	FNQ-4	EA	10

MIDGET CONT'D

KLKD/KLK Series • Fast Acting Midget Fuse



KLKD.500T

The KLKD fuse series is fast-acting with a high DC voltage rating. This family of Midget style fuses (10 x 38 mm) is used in solar combiner boxes and in circuits with DC fault currents up to 50,000 amperes. KLKD fuses are available in standard and board-mount configurations.

Applications
Combiner boxes and Inverters
Power supplies
Desktop meters

Features
Designed to UL and IEC photovoltaic specifications
1/10 - 30 A ratings available
1-5 A meets UL1741 GFDI requirements

CATALOG NO.	SUPPLIER PART ID	TYPE	VOLTS	AMPS	MERSEN-GOULD SHAWMUT	BUSSMAN-FUSETRON	UOM	OM
KLKD.500T	**KLKD.500T**	Time Delay Fuse	600V	0.5	ATM1/2	DCM-1/2	EA	5
KLKR001T	**KLKR001.T**	Time Delay Fuse	600V	1	ATMR1	KTK-R-1	EA	5
KLKD01.5T	**KLKD01.5T**	Time Delay Fuse	600V	1.5	ATM1-1/2	DCM-1-1/2	EA	5
KLK002T	**0KLK002.T**	Time Delay Fuse	600V	2	ATM2	KTK-2	EA	5
KLK03.5T	**0KLK03.5T**	Time Delay Fuse	600V	3.5	ATM3-1/2	KTK-3-1/2	EA	5
KLKD005T	**KLKD005.T**	Time Delay Fuse	600V	5	ATM5	DCM-5	EA	5
KLKR005T	**KLKR005.T**	Time Delay Fuse	600V	5	ATMR5	KTK-R-5	EA	5
KLKD010T	**KLKD010.T**	Time Delay Fuse	600V	10	ATM10	DCM-10	EA	5
KLKD015T	**KLKD015.T**	Time Delay Fuse	600V	15	ATM15	DCM-15	EA	5
KLKR015T	**KLKR015.T**	Time Delay Fuse	600V	15	ATMR15	KTK-R-15	EA	5
KLK015T	**0KLK015.T**	Time Delay Fuse	600V	15	ATM15	KTK-15	EA	5
KLKD020T	**KLKD020.T**	Time Delay Fuse	600V	20	ATM20	DCM-20	EA	5
KLKD030T	**KLKD030.T**	Time Delay Fuse	600V	30	ATM30	DCM-30	EA	5

BLS/BLF Series • Special Midget Fast-Acting Fuses



BLS003T



BLF01.5T

BLF fuses offer safe and reliable protection at a low price for its size, type and features. They are suitable for control circuit and instrument protection in dry (little to no humidity) locations.

Features

BLS fuses are 1-3/8" long in contrast to other midget fuses which are 1-1/2".

They provide space saving, low-cost, protection to street lighting, metering, control and electronic circuits.

CATALOG NO.	SUPPLIER PART ID	AMPS	VOLTS	INTERUPTING RATING	OPENING	SIZE	MERSEN-GOULD SHAWMUT	BUSSMAN-FUSETRON	UOM	OM
BLS001T	0BLS001.T	1	600	10000A@600VAC	Fast-Acting (F)	Midget/5AG	SBS1	BBS-1	EA	10
BLF01.5T	0BLF01.5T	1.5	250V	10000A@600VAC	Fast-Acting (F)	Midget/5AG	OTM1-1/2	BAF-1-1/2	EA	10
BLS002T	0BLS002.T	2	600	10000A@600VAC	Fast-Acting (F)	Midget/5AG	SBS2	BBS-2	EA	10
BLS003T	0BLS003.T	3	600	10000A@600VAC	Fast-Acting (F)	Midget/5AG	SBS3	BBS-3	EA	10
BLS005T	0BLS005.T	5	600	10000A@600VAC	Fast-Acting (F)	Midget/5AG	SBS5	BBS-5	EA	10

MIDGET CONT'D

FLM Series • Slow-Blo Midget Fuses

Features
Use FLM 250 volt time-delay fuses to protect control circuit transformers, solenoids, and other circuits with high inrush currents.

Excellent for supplemental protection of small motors.
For motor branch-circuit protection, see Class CC fuses.



FLM020T

CATALOG NO.	SUPPLIER PART ID	AMPS	VOLTS	VDC	INTERUPTING RATING	OPENING	SIZE	MERSEN-GOULD SHAWMUT	BUSSMAN-FUSETRON	UOM	OM
FLM003T	0FLM003.T	3	250	125	10000A@250VAC	Slo-Blo/Time Lag (T) /Time Delay	Midget/5AG	TRM3	FNM-3	EA	10
FLM010T	0FLM010.T	10	250	125	10000A@250VAC	Slo-Blo/Time Lag (T) /Time Delay	Midget/5AG	TRM10	FNM-10	EA	10
FLM015T	0FLM015.T	15	250	125	10000A@250VAC	Slo-Blo/Time Lag (T) /Time Delay	Midget/5AG	TRM15	FNM-15	EA	10
FLM020T	0FLM020.T	20	250	125	10000A@250VAC	Slo-Blo/Time Lag (T) /Time Delay	Midget/5AG	TRM20	FNM-20	EA	10
FLM025T	0FLM025.T	25	250	125	10000A@250VAC	Slo-Blo/Time Lag (T) /Time Delay	Midget/5AG	TRM25	FNM-25	EA	10
FLM030T	0FLM030.T	30	250	125	10000A@250VAC	Slo-Blo/Time Lag (T) /Time Delay	Midget/5AG	TRM30	FNM-30	EA	10

PLUG

Plug Fuses

Expels gases caused by the blowing fuse, but doesn't allow flame to escape. Glass top for safety against shock. Positive visual indication of OK condition or blown condition. Distinguishes between overload and dead short conditions. Magnifying center of face. Shapes of face openings identify ratings. Meets Federal Specification WF 791E/Gen. Type 791/1. Base "W" fuses. U.L. Listed.



626-30

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
626-15	Plug Fuse Type TL – 15 Amp	EA	4
626-20	Plug Fuse Type TL – 20 Amp	EA	4
626-25	Plug Fuse Type TL – 25 Amp	EA	4
626-30	Plug Fuse Type TL – 30 Amp	EA	4

Type "S" Non-Tamper Fuses

Provides specific overcurrent protection. Time delay element protects against premature blowing from motors in air conditioners or compressors.
Visual indication of good or blown condition.
U.L. Listed. C.S.A. Approved.



626-30S

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
626-6S	Type "S" Fuse – 6.25 Amp	EA	4
626-10S	Type "S" Fuse – 10 Amp	EA	4
626-15S	Type "S" Fuse – 15 Amp	EA	4
626-20S	Type "S" Fuse – 20 Amp	EA	4
626-30S	Type "S" Fuse – 30 Amp	EA	4

Time Delay Plug Fuses

These plugs offer safe protection during momentary overload. No adapter necessary.
U.L. Listed.



626-30T

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
626-10T	Type "T" Plug Fuse – 10 Amp	EA	4
626-15T	Type "T" Plug Fuse – 15 Amp	EA	4
626-20T	Type "T" Plug Fuse – 20 Amp	EA	4
626-25T	Type "T" Plug Fuse – 25 Amp	EA	4
626-30T	Type "T" Plug Fuse – 30 Amp	EA	4

Plug Fuses

Littelfuse Plug fuses provide overcurrent protection to general purpose circuits and small motor loads. Edison-base Plug fuses (TOO and TLO series) feature metal threads similar to incandescent lamp bases.

Type S Plug fuses (SOO and SLO series) utilize a nonmetallic threaded base and must be used with Type S adapters (SAO series).



PLUG CONT'D

SOO Series • Dual-Element Time-Delay Edison Base Fuses

SOO Fuses are dual-element time delay Type S fuses designed for motor and motor branch-circuit protection; also suitable for all general purpose circuits.

CATALOG NO.	SUPPLIER PART ID	TYPE	VOLTS	AMPS	MERSEN-GOULD SHAWMUT	BUSSMAN-FUSETRON	UOM	OM
SOO008Z	0SOO008.Z	SOO Series Plug Fuses	125V	8	GSL8	S-8	EA	4
SOO010Z	0SOO010.Z	SOO Series Plug Fuses	125V	10	GSL10	S-10	EA	4
SOO015Z	0SOO015.Z	SOO Series Plug Fuses	125V	15	GSL15	S-15	EA	4
SOO025Z	0SOO025.Z	SOO Series Plug Fuses	125V	25	GSL25	S-25	EA	4
SOO030Z	0SOO030.Z	SOO Series Plug Fuses	125V	30	GSL30	S-30	EA	4



SOO030Z

Littelfuse

TOO Series • Dual-Element Time-Delay Edison Base Fuses

TOO Fuses are dual-element time delay Edison-base fuses designed for motor and motor branch-circuit protection; also suitable for all general purpose circuits. Use for replacement purposes only.

CATALOG NO.	SUPPLIER PART ID	TYPE	VOLTS	AMPS	MERSEN-GOULD SHAWMUT	BUSSMAN-FUSETRON	UOM	OM
TOO03.2Z	0TOO03.2Z	SOO Series Plug Fuses	125V	3.2	GT3.2	T-3.2	EA	4
TOO020Z	0TOO020.Z	SOO Series Plug Fuses	125V	20	GT20	T-20	EA	4
TOO025Z	0TOO025.Z	SOO Series Plug Fuses	125V	25	GT25	T-25	EA	4
TOO030Z	0TOO030.Z	SOO Series Plug Fuses	125V	30	GT30	T-30	EA	4



TOO020Z

Littelfuse

ACS Type S Plug Fuse Adapter

The National Electric Code now permits Edison-base fuses to be used only for replacements in existing installations, and then, only when there is no evidence of overfusing or tampering. All new Edison-based fuseholders must have Type S fuse adapters installed before they are placed in service. Designed to prevent installation of wrong size fuses, Type S Adapters (SAO series) screw into Edison-base fuseholders so they may accept Type S fuses. Once installed the adapters cannot be removed.

CATALOG NO.	SUPPLIER PART ID	TYPE	VOLTS	AMPS	MERSEN-GOULD SHAWMUT	BUSSMAN-FUSETRON	UOM	OM
SAO015Z	0SAO015.Z	S Plug Fuse Adapter	125V	15	SAG15	SA-15	EA	4



SAO015Z

Littelfuse

BLADE

ATOF Blade Fuses

Developed by Littelfuse for the automotive industry, the ATOF® fuse has become the original equipment circuit protection standard for foreign and domestic automobiles and trucks. Readily identifiable and easily replaced, this fuse can be specified for a variety of low voltage electronic applications.



ATO010V

Littelfuse

CATALOG NO.	SUPPLIER PART ID	TYPE	VOLTS	AMPS	MERSEN-GOULD SHAWMUT	BUSSMAN-FUSETRON	UOM	OM
ATO003V	0ATO003.V	Fast Acting Automotive Blade Fuse	32V	3	AF3	ATC-3	EA	5
ATO004V	0ATO004.V	Fast Acting Automotive Blade Fuse	32V	4	AF4	ATC-4	EA	5
ATO005V	0ATO005.V	Fast Acting Automotive Blade Fuse	32V	5	AF5	ATC-5	EA	5
ATO07.5V	0ATO07.5V	Fast Acting Automotive Blade Fuse	32V	7.5	AF7-1/2	ATC-7-1/2	EA	5
ATO010V	0ATO010.V	Fast Acting Automotive Blade Fuse	32V	10	AF10	ATC-10	EA	5
ATO15V	0ATO015.V	Fast Acting Automotive Blade Fuse	32V	15	AF15	ATC-15	EA	5
ATO020V	0ATO020.V	Fast Acting Automotive Blade Fuse	32V	20	AF20	ATC-20	EA	5
ATO030V	0ATO030.V	Fast Acting Automotive Blade Fuse	32V	30	AF30	ATC-30	EA	5

BLADE CONT'D

EasyID® Blade Fuses

The EasyID® series of illuminating blade fuses use Light Emitting Diode (LED) technology to indicate that a fuse has opened, making it easy to spot the opened fuse in a dark control panel. It makes it easy for a contractor to troubleshoot a problem and save time.



626-AT05LED

CATALOG NO.	DESCRIPTION	UOM	OM
626-AT03LED	EasyID® Blade Fuse – 3 Amp – Violet, pack of 5	EA	100
626-AT05LED	EasyID® Blade Fuse – 5 Amp – Tan, pack of 5	EA	100

Blade (Auto) Fuses

These fuses are used to protect circuits in the wiring harness that are usually found under the hood, in a fuse panel or supplementary panel near the battery. MAX fuses are used in domestic and import vehicles.



ED-AT3

CATALOG NO.	DESCRIPTION	UOM	OM
ED-AT3	Blade Fuse – 3 Amp – Purple, pack of 5	EA	1
ED-AT5	Blade Fuse – 5 Amp – Tan, pack of 5	EA	1

Blade (Auto) Fuses

These fuses are fast acting low voltage supplementary fuses, automotive blade style fuse.



626-AT0003

CATALOG NO.	DESCRIPTION	UOM	OM
626-AT0003	Blade Fuse – 3 Amp – Purple, pack of 5	EA	100
626-AT0005	Blade Fuse – 5 Amp – Tan, pack of 5	EA	100

GLASS AND ELECTRIC

312 Series • 3AG Fast Acting Fuses

The 312 Series are 3AG Fast-Acting fuses that solve a broad range of application requirements while offering reliable performance and cost-effective circuit protection.

Applications
Used as supplementary protection in appliance or utilization equipment to provide individual protection for components or internal circuits.

Features
In accordance with UL Standard 248-14
Available in cartridge and axial lead format and with various forming dimensions
RoHS compliant and Lead-free



0312001VXP

Littelfuse

CATALOG NO.	SUPPLIER PART ID	TYPE	VOLTS	AMPS	MERSEN-GOULD SHAWMUT	BUSSMAN-FUSETRON	UOM	OM
0312.125VXP	0312.125VXP	312 Series Lead Free 3AG Fast Acting	250V	0.125	GGC1/8	AGC-1/8-R	EA	5
0312.250VXP	0312.250VXP	312 Series Lead Free 3AG Fast Acting	250V	0.25	GGC1/4	AGC-1/4-R	EA	5
0312.500VXP	0312.500VXP	312 Series Lead Free 3AG Fast Acting	250V	0.5	GGC1/2	AGC-1/2-R	EA	5
0312.375VXP	0312.375VXP	312 Series Lead Free 3AG Fast Acting	250V	0.375	GGC3/8	AGC-3/8-R	EA	5
0312001VXP	0312001.VXP	312 Series Lead Free 3AG Fast Acting	250V	1	GGC1	AGC-1-R	EA	5
031201.5VXP	031201.5VXP	312 Series Lead Free 3AG Fast Acting	250V	1.5	GGC1-1/2	AGC-1-1/2-R	EA	5
0312002VXP	0312002.VXP	312 Series Lead Free 3AG Fast Acting	250V	2	GGC2	AGC-2-R	EA	5
031202.5VXP	031202.5VXP	312 Series Lead Free 3AG Fast Acting	250V	2.5	GGC2-1/2	AGC-2-1/2-R	EA	5
0312003VXP	0312003.VXP	312 Series Lead Free 3AG Fast Acting	250V	3	GGC3	AGC-3-R	EA	5
0312004VXP	0312004.VXP	312 Series Lead Free 3AG Fast Acting	250V	4	GGC4	AGC-4-R	EA	5
0312005VXP	0312005.VXP	312 Series Lead Free 3AG Fast Acting	250V	5	GGC5	AGC-5-R	EA	5
0312006VXP	0312006.VXP	312 Series Lead Free 3AG Fast Acting	250V	6	GGC6	AGC-6-R	EA	5
0312007VXP	0312007.VXP	312 Series Lead Free 3AG Fast Acting	250V	7	GGC7	AGC-7-R	EA	5
0312008VXP	0312008.VXP	312 Series Lead Free 3AG Fast Acting	250V	8	GGC8	AGC-8-R	EA	5
0312010VXP	0312010.VXP	312 Series Lead Free 3AG Fast Acting	250V	10	GGC10	AGC-10-R	EA	5
0312015VXP	0312015.VXP	312 Series Lead Free 3AG Fast Acting	32V	15	GGC15	AGC-15-R	EA	5
0312020VXP	0312020.VXP	312 Series Lead Free 3AG Fast Acting	32V	20	GGC20	AGC-20-R	EA	5
0312025VXP	0312025.VXP	312 Series Lead Free 3AG Fast Acting	32V	25	GGC25	AGC-25-R	EA	5
0312030VXP	0312030.VXP	312 Series Lead Free 3AG Fast Acting	32V	30	GGC30	AGC-30-R	EA	5

GLASS AND ELECTRIC CONT'D

313 Series • 3AB Fast Acting Ceramic Body Fuses



0313003VXP

Littelfuse

The 3AG Slo-Blo® fuse solves a broad range of application requirements while offering reliable performance and costeffective circuit protection.

Features

313 and 315 series fuses have time-delayed in the overload range, which provides superior protection inductive loads such as motors, transformers, and solenoids.

3AG indicating fuses instantly identify themselves upon opening by showing a discoloration of their glass bodies. Guesswork and time-consuming circuit testing is eliminated.

This unique design offers the same quality performance characteristics as the standard 3AG fuse design.

CATALOG NO.	SUPPLIER PART ID	TYPE	VOLTS	AMPS	MERSEN-GOULD SHAWMUT	BUSSMAN-FUSETRON	UOM	OM
0313.500VXP	0313.500VXP	313 Series Lead Free 3AG Fast Acting	250V	0.5	GDL-1/2	MDL-1/2-R	EA	5
0313002VXP	0313002.VXP	313 Series Lead Free 3AG Fast Acting	250V	2	GDL2	MDL-2-R	EA	5
0313003VXP	0313003.VXP	313 Series Lead Free 3AG Fast Acting	250V	3	GDL3	MDL-3-R	EA	5
0313004VXP	0313004.VXP	313 Series Lead Free 3AG Fast Acting	250V	4	GDL4	MDL-4-R	EA	5
0313005VXP	0313005.VXP	313 Series Lead Free 3AG Fast Acting	250V	5	GDL5	MDL-5-R	EA	5
0313007VXP	0313007.VXP	313 Series Lead Free 3AG Fast Acting	250V	7	GDL7	MDL-7-R	EA	5

314 Series • 3AB Fast Acting Ceramic Body Fuse



0314005VXP

Littelfuse

The 3AB Fast-Acting Fuse with ceramic body construction permits higher interrupting ratings and voltage ratings. Ideal for applications where high current loads are expected.

Applications

Used as supplementary protection in appliance or utilization equipment to provide individual protection for components or internal circuits.

Features

In accordance with UL Standard 248-14
Available in cartridge and axial lead format and with various forming dimensions
RoHS compliant and Lead-free

CATALOG NO.	SUPPLIER PART ID	TYPE	VOLTS	AMPS	MERSEN-GOULD SHAWMUT	BUSSMAN-FUSETRON	UOM	OM
0314002VXP	0314002.VXP	314 Series 3AB Fast Acting Ceramic Body Lead-free	250V	2	GAB2	ABC-2-R	EA	5
0314003VXP	0314003.VXP	314 Series 3AB Fast Acting Ceramic Body Lead-free	250V	3	GAB3	ABC-3-R	EA	5
0314005VXP	0314005.VXP	314 Series 3AB Fast Acting Ceramic Body Lead-free	250V	5	GAB5	ABC-5-R	EA	5
0314010VXP	0314010.VXP	314 Series 3AB Fast Acting Ceramic Body Lead-free	250V	10	GAB10	ABC-10-R	EA	5
0314012VXP	0314012.VXP	314 Series 3AB Fast Acting Ceramic Body Lead-free	250V	12	GAB12	ABC-12-R	EA	5
0314015VXP	0314015.VXP	314 Series 3AB Fast Acting Ceramic Body Lead-free	250V	15	GAB15	ABC-15-R	EA	5
0314020VXP	0314020.VXP	314 Series 3AB Fast Acting Ceramic Body Lead-free	250V	20	GAB20	ABC-20-R	EA	5
0314025VXP	0314025.VXP	314 Series 3AB Fast Acting Ceramic Body Lead-free	125V	25	GAB25	ABC-25-R	EA	5
0314030VXP	0314030.VXP	314 Series 3AB Fast Acting Ceramic Body Lead-free	125V	30	GAB30	ABC-30-R	EA	5

GLASS AND ELECTRIC CONT'D

235 Series • Fast Acting Glass Fuse

5×20mm fast-acting glass body cartridge fuse designed to UL specification.



0235001VXP

Littelfuse

CATALOG NO.	SUPPLIER PART ID	TYPE	VOLTS	AMPS	MERSEN-GOULD SHAWMUT	BUSSMAN-FUSETRON	UOM	OM
0235001VXP	**0235001.VXP**	Series 235 Fast Acting Glass Fuse 250V	250V	1	GGM1	GMA-1-R	EA	5
0235003VXP	**0235003.VXP**	Series 235 Fast Acting Glass Fuse 250V	250V	3	GGM3	GMA-3-R	EA	5
0235005VXP	**0235005.VXP**	Series 235 Fast Acting Glass Fuse 250V	125V	5	GGM5	GMA-5-R	EA	5
0235006VXP	**0235006.VXP**	Series 235 Fast Acting Glass Fuse 250V	125V	6	GGM6	GMA-6-R	EA	5

FUSE BLOCKS, HOLDERS AND ACCESSORIES

Power Distribution Blocks

The Littelfuse Class H/K5 and R blocks offer many benefits such as indication, snap-to-release DIN rail mounting and universal mounting holes. Class H and Class R fuse blocks are dimensionally the same, but Class R blocks incorporate a rejection feature, which only allows Class R fuses to be inserted.

Features
Added safety to personnel
Ventilated to avoid fuse derating
Reusable
UL listed and CSA certified
Available for Class H/R, Class J, Class T and Class CD
Convenient snap-on feature
Allows visibility of indicator fuse block light



LD14401Z

Littelfuse

CATALOG NO.	SUPPLIER PART ID	TYPE	POLE	VOLTS	AMPS	MERSEN-GOULD SHAWMUT	BUSSMAN-FUSETRON	UOM	OM
LD25701Z	**0LD25701Z**	Block	1	600V	30	63131	16220-1	EA	5
LD14401Z	**0LD14401Z**	Block	1	600V	30	NO CROSS	NO CROSS	EA	5
LFD25703Z	**LFD25703Z**	Block	3	600V	175	63133	16220-3	EA	5
LFD25703Z	**LFD25703Z**	Block	3	600V	175	63133	16220-3	EA	5
LFH250603CID	**LFH250603CID**	Block	3	250V, 600V	60	20608	HM25060-3CR	EA	5
LFR600303CID	**LFR600303CID**	Block	3	250V, 600V	30	60308R	RM60030-3CR	EA	5
LFR600302CID	**LFR600302CID**	Block	2	250V, 600V	30	60307R	RM60030-2CR	EA	5
LFR250303C	**LFR250303C**	Block	3	250V, 600V	30	20308R	RM25030-3CR	EA	5
LFR250603CID	**LFR250603CID**	Block	3	250V, 600V	60	20608R	RM25060-3CR	EA	5
LFR600603CID	**LFR600603CID**	Block	3	250V, 600V	60	60608R	RM60060-3CR	EA	5
LFR251003	**LFR251003C**	Block	3	250V, 600V	100	21038R	RM25100-3CR	EA	5
LFR250302C	**LFR250302C**	Block	2	250V, 600V	30	20307R	RM25030-2CR	EA	5
LFR601003CID	**LFR601003CID**	Block	3	250V, 600V	100	61038R	RM60100-3CR	EA	5

FUSE BLOCKS, HOLDERS AND ACCESSORIES CONT'D

In-Line Fuse Holder

For fusing all control circuits up to 30 amp. Features rigid plastic protective covering for each fuse. Used on AC and DC circuits. U.L. Listed.



FH-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
FH-1	In-Line Fuse Holder, Pack of 10	EA	1

U.L. Listed.

Fuse Pullers

Our fuse pullers are used to safely pull fuses.



626-38073

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
626-38071	Fuse Puller – For Fuse Sizes 1/4" to 1/2"	EA	1
626-38073	Fuse Puller – For Fuse Sizes 1" to 1-3/4"	EA	1

Box Cover Units

The maximum amps on this box cover unit are 15 and the maximum AC voltage of 125. These units are designed for use with the Type T plug fuses. U.L. Listed and C.S.A. Certified.




620-608

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
620-608	Switch/Fuse Combo (ESSU)	EA	1
620-6081	Plug Fuse Base Only (ESOU)	EA	1
620-6082	Receptacle/Fuse Combo (ESRU)	EA	1
620-6083	Switch/Fuse Combo Square (ESSY)	EA	1

U.L. Listed. C.S.A. Approved.

Fuse Adapters

Fuse adapters are used to retrofit fuses into existing installations.



626-38632

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
626-38632	Fuse Adapter – 60 to 30 Reducer for Class H, 250V	EA	100
626-38636	Fuse Adapter – 60 to 30 Reducer for Class H, 600V	EA	100

STANDARD WHIPS

Mini-Split Kit



MSK001-6

Applications

A/C disconnect, small electrical panels, pool/well pumps

Features

Non-metallic electrical whip 1/2"x 4' (MSK001 & MSK002)
Non-metallic electrical whip 1/2"x 6' (MSK001-6)
5/8" Drain Hose (MSK002)
Disconnect 60 Amp non-fused metallic
Non-fused pullout
Rated NEMA 3R for outdoor use
Line, load, and ground terminals aligned for easy hook up
with heavy wires
Rear, bottom and side entry knockouts
Heavy gauge steel case
Large internal wiring space
Ditek Surge protector PSP72KA
Weatherproof Encl.
Parallel connection for easy installation
Diagnostic LED provides positive indication of power,
ground presence and surge protection
Automatically resets to handle multiple surge events
Half the response time as similar models
Wall sleeve and fitting

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
MSK001	Mini Split Kit (Includes 4' Whip)	EA	1
MSK001-6	Mini Split Kit (Includes 6' Whip)	EA	1
MSK002	Mini Split Kit 2 (Includes 5/8" Drain Hose)	EA	1
MSK012-6	Mini-Split Installation Kit - 3/4 in. X 6 ft. Whip, DDS-60U, Surge Protection, Drain Line Fitting, and Wall Sleeve	EA	1
MSK013-6	Mini-Split Installation Kit - 3/4 in. X 6 ft. Whip, DDS-60, Surge Protection, Drain Line Fitting, and Wall Sleeve	EA	1
MSK013F-6	Mini-Split Installation Kit - 1/2 in. X 6 f. Whip, DDS-60U, Surge Protection, Drain Line Fitting, and Wall Sleeve	EA	1

GFCI Whip Assembly for Furnace



FKM-12-8GFCI

Applications

The DiversiTech® FKM-12-8GFCI Furnace Whip Assembly offers a quick and easy solution for furnace installations and replacements.

Each pre-assembled kit comes with a pre-wired GFCI outlet and switch and 8 feet of flexible metallic conduit between the GFCI outlet and the electrical box for flexible placement during installs.

Mounting hardware and electrical accessories are also included for an all-in-one solution.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
FKM-12-8GFCI	Metallic Whip Assembly for Furnaces - 8 Foot Long 1/2 inch Metal Conduit with Junction Box and Switched GFCI Outlet	EA	1

Evaporator Cooler Whip

A whip designed for labor saving convenience when hooking up an evaporative cooling unit. A 10 ft. whip with 5 distinctly colored wires. One straight and one 90 degree non-metallic connector included.



6-12-10NM-EVAP

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-12-6NMP	1/2" x 6' #12 THHN Wire – Non-Metallic Connectors, Up to 30 Amp	EA	6

CONDUIT, FITTINGS, CABLE

Two-Piece Liquid Tite Fittings

These 2-piece Liquid Tite compression fittings are for use with non-metallic Type B Liquid Tite conduit to terminate and seal conduit to Encl.s. Easy to use with no disassembly required, cULus listed.



750-2LTC50

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
750-2LTC50	1/2" Straight, 2-piece Compression, Non-Metallic, Liquid Tite Fitting	EA	25
750-2LTC9050	1/2" 90°, 2-piece Compression, Non-Metallic, Liquid Tite Fitting	EA	25
750-2LTC75	3/4" Straight, 2-piece Compression, Non-Metallic, Liquid Tite Fitting	EA	25
750-2LTC9075	3/4" 90°, 2-piece Compression, Non-Metallic, Liquid Tite Fitting	EA	25

Aluminum Armored MC Cable

90°, C Rated aluminum metal clad cable system. THHN solid copper with specially compounded heat-resistant U.L. Listed insulation and jacket. Flexible interlocked aluminum armor. Extremely durable – withstands severe handling. U.L. Listed #4. Conforms to NEC article 333.



640-122

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
640-122	12-2 Aluminum Armored MC Cable – 100' per roll	EA	1
640-142	14-2 Aluminum Armored MC Cable – 100' per roll	EA	1

Romex Connectors – Metallic

These Metallic Romex Connectors are made of zinc die cast are cable connectors for Romex wire. U.L. Listed C.S.A. Approved.



750-RC842

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
750-RC841	3/8" Romex Connector for 1/2" Knock-outs	EA	100
750-RC842	3/4" Romex Connector for 3/4" Knock-outs	EA	50

U.L. Listed and C.S.A. Approved.

EMT (Thinwall) Fittings

These are used to join EMT conduit to boxes on Encl.s.



625-800



625-810



625-304

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
625-800	Set Screw Connector – 1/2"	EA	50
625-801	Set Screw Connector – 3/4"	EA	25
625-304	Strap – One Hole – 1/2"	EA	100
625-305	Strap – One Hole – 3/4"	EA	100
625-810	Set Screw Coupling – 1/2"	EA	50
625-811	Set Screw Coupling – 3/4"	EA	25

BX Set Screw Connectors

These connectors are for BX cable range of .445 to .630 in diameter. This product is UL listed and CSA approved.



640-845

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
640-845	Trade Size – 3/8"	PK	100

Cable Staples

Cable Staples for NMB Cable (Romex) and Copper Insulated Staples for thermostat wire.



625-183

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
625-183	Romex Staples – 1/2", pack of 100	PK	1

CONDUIT, FITTINGS, CABLE CONT'D

DiversiTite™ Flexible Conduit

For electrical applications: outside, inside and industrial uses including transformer connections, air conditioning and heating. Joins with metallic or non-metallic connectors, easy to cut. Impact resistant, chemical resistant, and will not kink. U.L. and C.U.L. Listed. For use as indicated in Article 351 of the 1987 NEC.



750-12100

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
750-38100	3/8" x 100' Liquid Tite Conduit – Non-Metallic, 100' per roll	EA	1
750-12100	1/2" x 100' Liquid Tite Conduit – Non-Metallic, 100' per roll	EA	1
750-500	1/2" x 100' Liquid Tite Conduit – Metallic, 100' per roll	EA	1
750-34100	3/4" x 100' Liquid Tite Conduit – Non-Metallic, 100' per roll	EA	1
750-600	3/4" x 100' Liquid Tite Conduit – Metallic, 100' per roll	EA	1
750-10100	1" x 100' Liquid Tite Conduit – Non-Metallic, 100' per roll	EA	1
750-125100	1-1/4" x 100' Liquid Tite Conduit – Non-Metallic, 100' per roll	EA	1
750-1550	1-1/2" x 50' Liquid Tite Conduit – Non-Metallic, 50' per roll	EA	1
750-2050	2" x 50' Liquid Tite Conduit – Non-Metallic, 50' per roll	EA	1
750-10500	1" x 500' Liquid Tite Conduit – Non-Metallic, 500' per roll	EA	1
750-121000	1/2" x 1000' Liquid Tite Conduit – Non-Metallic, 1000' per roll	EA	1
750-34800	3/4" x 800' Liquid Tite Conduit – Non-Metallic, 800' per roll	EA	1

Single Piece Liquid Tite Fittings

Conduit threads onto ferrule and up inside the outer body. An inside taper squeezes down on the outside of conduit for a superior liquid tight seal. The cut portion of the conduit does not show, giving a more finished appearance. Easy to use at a lower cost than regular liquid tite fittings.



750-SLTC9050



750-SLTC50

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
750-SLTC50	1/2" Straight Screw-On Fitting	EA	25
750-SLTC9050	1/2" 90° Screw-On Fitting	EA	25
750-SLTC75	3/4" Straight Screw-On Fitting	EA	25
750-SLTC9075	3/4" 90° Screw-On Fitting	EA	25

Liquid Tite Connectors

For use with metallic and non metallic liquid tite conduit, Type B. Provides smooth connection, no sharp edges to strip wire. Wiring easily pulled through. U. L. Listed. C.U.L. Listed.



750-MLT50



750-NMLT50



750-NMLT9050

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
750-NMLT125	1-1/4" Non-Metallic Straight Connector	EA	1
750-NMLT150	1-1/2" Non-Metallic Straight Connector	EA	10
750-NMLT90125	1-1/4" Non-Metallic 90 Degree Elbow Connector	EA	1
750-NMLT5090-F	1/2" Non-Metallic Adjustable Connector	EA	10
750-TZNMLT200	2" NM Topaz	EA	2
750-TZNMLT150	1-1/2" NM Topaz	EA	5
750-TZNMLT90150	1-1/2" NM Topaz 90 Degree	EA	2
750-TZNMLT125	1-1/4" NM Topaz	EA	5
750-TZNMLT90125	1-1/4" NM Topaz 90 Degree	EA	2
750-TZNMLT100	1" NM Topaz	EA	5
750-TZNMLT90100	1" NM Topaz 90 Degree	EA	5
750-TZNMLT38	3/8" NM Topaz	EA	10
750-TZNMLT9038	3/8" NM Topaz 90 Degree	EA	25
750-TZNMLT9050	1/2" NM Topaz 90 Degree	EA	10
750-TZNMLT9075	3/4" NM Topaz 90 Degree	EA	10
750-NMLT50	1/2" Non-Metallic Straight Connector	EA	25
750-NMLT4550	1/2" Non-Metallic 45 Degree Elbow Connector	EA	10
750-NMLT9050	1/2" Non-Metallic 90 Degree Elbow Connector	EA	10
750-NMLT75	3/4" Non-Metallic Straight Connector	EA	10
750-NMLT4575	3/4" Non-Metallic 45 Degree Elbow Connector	EA	10
750-NMLT9075	3/4" Non-Metallic 90 Degree Elbow Connector	EA	10
750-NMLT100	1" Non-Metallic Straight Connector	EA	5
750-NMLT90100	1" Non-Metallic 90 Degree Elbow Connector	EA	5
750-MLT50	1/2" Metallic Straight Connector	EA	25
750-MLT9050	1/2" Metallic 90 Degree Elbow Connector	EA	10
750-MLT75	3/4" Metallic Straight Connector	EA	10
750-MLT9075	3/4" Metallic 90 Degree Elbow Connector	EA	10

WHIPS CONT'D

DiversiWhips

Liquid tight flexible conduit system. A labor saving convenience kit for A/C unit hookup. Also use for heat pumps, refrigeration, hot tubs, swimming pools and outdoor lighting. Three distinct wire colors for ease of hook up. 1 straight and 1 90 degree metallic or non metallic connector. 90 degree connector is removable for straight connections. (Second straight connector not included.) U.L. and C.U.L Listed.



6-12-4

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-12-4	1/2" x 4' #10 THHN Wire – Metallic Connectors	EA	6
6-12-6	1/2" x 6' #10 THHN Wire – Metallic Connectors	EA	6
6-34-4	3/4" x 4' #8 THHN Wire – Metallic Connectors	EA	6
6-34-6	3/4" x 6' #8 THHN Wire – Metallic Connectors	EA	6
6-34-8	3/4" x 8' #8 THHN Wire – Metallic Connectors	EA	6
6-12-4NM	1/2" x 4' #10 THHN Wire – Non-Metallic Connectors	EA	6
6-12-6NM	1/2" x 6' #10 THHN Wire – Non-Metallic Connectors	EA	6
6-34-4NM	3/4" x 4' #8 THHN Wire – Non-Metallic Connectors	EA	6
6-34-6NM	3/4" x 6' #8 THHN Wire – Non-Metallic Connectors	EA	6
6-34-8NM	3/4" x 8' #8 THHN Wire – Non-Metallic Connectors	EA	6
6-12-6NMS	1/2" x 6' #10 THHN Wire – 2 Non-Metallic Straight Connectors	EA	6
6-34-6NMS	3/4" x 6' #8 THHN Wire – 2 Non-Metallic Straight Connectors	EA	6
6-12-6NM-2	1/2" x 6' #10 THHN Wire, 2-piece Non-Metallic Connectors	EA	6
6-34-6NM-2	3/4" x 6' #8 THHN Wire, 2-piece Non-Metallic Connectors	EA	6

*For DiversiWhips produced with 2 straight connectors, add S to part number (ex: 6-12-4S)

DiversiWhip - Up to 30 Amp

An economical whip for applications up to 30 Amp. A labor saving convenience kits for A/C hookup, heat pumps, refrigeration, hot tubs, swimming pools and outdoor lighting. One straight and one 90 degree non-metallic connector included.



6-12-6NMP

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-12-6NMP	1/2" x 6' #12 THHN Wire – Non-Metallic Connectors, Up to 30 Amp	EA	6

DiversiWhips Pallet Packs

DiversiWhips are now available in a convenient, bulk packaged pallet pack at a discounted price. Pallet pack makes an attractive floor standing display. 1 straight and 1 90 degrees metallic or non metallic connector.



B6-12-4

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
B6-12-4	1/2 x 4' #10 THHN Wire – Metallic Connectors	EA	90
B6-12-6	1/2 x 6' #10 THHN Wire – Metallic Connectors	EA	60
B6-34-6	3/4 x 6' #8 THHN Wire – Metallic Connectors	EA	45
B6-12-4NM	1/2 x 4' #10 THHN Wire – Non-Metallic Connectors	EA	90
B6-12-6NM	1/2 x 6' #10 THHN Wire – Non-Metallic Connectors	EA	60
B6-34-4NM	3/4 x 4' #8 THHN Wire – Non-Metallic Connectors	EA	60
B6-34-6NM	3/4 x 6' #8 THHN Wire – Non-Metallic Connectors	EA	45

DiversiWhips for the Swimming Pool Industry

A labor saving kit for hookup of swimming pool motors, pumps, filters, and timers. Three distinct wire colors for ease of hookup. 1 straight and 1 90 degree non-metallic connector included.



6-12-4NMSWP

CATALOG NO.	DESCRIPTION	UOM	OM
6-12-4NMSP	1/2" x 4' #10 THHN Wire – In Box	EA	6
6-12-6NMSP	1/2" x 6' #10 THHN Wire – In Box	EA	6
6-34-4NMSP	3/4" x 4' #8 THHN Wire – In Box	EA	6
6-34-6NMSP	3/4" x 6' #8 THHN Wire – In Box	EA	6
SOLID WIRE WHIPS			
6-12-4NMSWP	1/2" x 4' #12 Solid 3 Wire – Non-Metallic Connectors	EA	6
6-12-6NMSWP	1/2" x 6' #12 Solid 3 Wire – Non-Metallic Connectors	EA	6
6-12-8NMSWP	1/2" x 8' #12 Solid 3 Wire – Non-Metallic Connectors	EA	3

DiversiWhips with Extended Length Wires

DiversiWhips are available with extra long lead wires for those difficult to wire applications. These whips offer 10in. of lead wire on the straight side and 18in. of lead wire on the 90 degree side.



6-12-4R

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-12-6NMR	1/2 x 6' #10 THHN Wire – Non-Metallic Connectors	EA	6
6-34-6NMR	3/4 x 6' #8 THHN Wire – Non-Metallic Connectors	EA	6

METALLIC AND NON-METALLIC

Disconnects - Metallic



PD60NF

Features

Non-Fused Pullout
Rated NEMA 3R for outdoor use
Line, load, and ground terminals aligned for easy hook up with heavy wires
Full dead front
Knockouts accommodate three sizes (1/2", 3/4", and 1")
Rear, bottom and side entry knockouts
Heavy gauge steel case
Large internal wiring space
Individually wrapped in boxes of 6
Folding pivot locking tab

CATALOG NO.	DESCRIPTION	FUSED	UOM	OM
PD60NF	60 Amp Non Fused Metal	No	EA	6
PD30F	30 Amp Fused Metal	Yes	EA	6
PD60F	60 Amp Fused Metal	Yes	EA	6

Dimensions (LxWxH): 8.77 x 5.45 x 3.18

Disconnects - Non-Metallic



PD-NM-60F

Features

Amperage Rating: 30 and 60A
Rated NEMA 3R for outdoor use
Non-fused pullout
Standard 1/4" head screw on dead front
Plastic non-metallic Encl.s have a single unit door and protective shield for installer convenience
Plastic non-metallic Encl.s are durable and provide excellent weather resistance
Rear, bottom and side entry knockouts
Individually wrapped in boxes of 6
Great for salt air regions

CATALOG NO.	DESCRIPTION	FUSED	UOM	OM
PD-NM-60NF	60 Amp Non Fused Plastic	No	EA	6
PD-NM-30F	30 Amp Fused Plastic	Yes	EA	6
PD-NM-60F	60 Amp Fused Plastic	Yes	EA	6

Dimensions (LxWxH): 8.81 x 6.26 x 4.39

Disconnects— Non-Metallic Case

This 60 Amp non-fusible disconnect is housed in a lightweight, non-metallic case. It features a side opening door with more than 180° access, full dead front, and a locking tab.



750-P60NF

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
750-P60NF	60A Non Fusible Disconnect Switch, Non-Metallic Case, Plastic	EA	10

3 Pole Switch for Mini-Splits

Three-pole, 30 Amp, 600 Volt rated disconnect switch provides safe, reliable manual ON/OFF switching control for Mini-splits and HVAC systems. This switch meets the local code requirements of breaking both the power lines (L1 and L2) and the communication line of the mini-split's indoor unit for service.



755-303SW

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
755-303SW	3 Pole Switch for Mini-Splits	EA	1

DIVERSITECH ELECTRICAL DISCONNECTS

Disconnects—Metal Case

Fused model designed with fuses in pull out handle for easy replacement. The line, load, and ground terminals are aligned for ease of wiring. The fused models have indicator lights for blown fuses. This is rain tight and sleet resistant. The UL Listed number is IRF9, NEMA Type 3R and the US Patent is 6,630,637.



DDS-60

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DDS-30	30A Fusible Disconnect Switch	EA	10
DDS-60	60A Fusible Disconnect Switch	EA	10
DDS-60U	60A Non-Fusible Disconnect Switch	EA	10

Low Profile Disconnects-Metal Case

This low profile disconnect switch is a slightly smaller design than that of the standard DiversiTech disconnects. This has a side opening door with a full dead front. This is rain tight and sleet resistant. The UL Listed number is IRF9, NEMA Type 3R.



EDS-60U



EDS-12-6NM

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
EDS-60U	60A Non-Fusible Disconnect Switch	EA	10
EDS-12-6NM	Disconnect and Whip Combo Kit	EA	3

Molded Case Switch Disconnect

The DDS-60SW Molded Case Switch Disconnect is rugged and easy to use like an ordinary light switch. It eliminates the pullout handle used in traditional AC disconnects and is easy to install. It is UL listed and rated for inoor and outdoor applications with NEMA 3R rating.



DDS-60SW

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DDS-60SW	Molded Case Switch Disconnect, 60A 240 VAC	EA	10

EATON ELECTRICAL DISCONNECTS

Eaton Switch A/C Disconnect

This A/C Disconnect is 60 Amps switch rated for 10 HP motors at 240VAC. The switch is an on off circuit breaker with no pull out head that could be lost or stolen. It has easy-to-remove front cover with no screws or fasteners to remove.



DPB222R

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DPB222R	60A molded case switch	EA	1

Eaton Three Phase Disconnects

These disconnects are UL listed and meet UL 98 for enclosed switches and NEMA Std. KS-1. They are suitable as service entrance equipment when applied with neutral or ground lug kit. They come with rainproof NEMA 3R Encl..



DG322NRB

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DG321NRB	Fusible 30 Amp, 240VAC	EA	1
DG322NRB	Fusible 60 Amp, 240VAC	EA	1
DG322URB	Non-fusible 60 Amp, 240VAC	EA	1

Definite Purpose Contactors with Cross References

Features

Electrical endurance
Multiple configurations
Long mechanical life
Compact footprint
Fully enclosed body
Meets ARI 780/790 standard



TMX330C2

TITAN MAX®

DROP IN FURNAS REPLACEMENT

CATALOG NO.	F/L INDUC-TIVE AMPS	LOCKED ROTOR AMPS 240/480/600	RESISTIVE AMPS	COIL VOLTAGE	INDUSTRY NO.	DIRECT REPLACEMENT FOR FURNAS			ACCEPTS AUX. SWITCH*
Titan Max 1 Pole									
TMX125A2	25	150/125/100	35	24	—	45DG10AJA	—	—	—
TMX125B2	25	150/125/100	35	120	—	45DG10AFA	—	—	—
TMX125C2	25	150/125/100	35	208-240	—	45DG10AGA	—	—	—
TMX130A2	30	180/150/120	40	24	61720	45EG10AJA	45EG10AJAL	—	—
TMX130B2	30	180/150/120	40	120	61721	45EG10AFA	45EG10AFAL	—	—
TMX130C2	30	180/150/120	40	208-240	61722	45EG10AGA	45EG10AGAL	—	—
TMX140A2	40	240/200/160	50	24	61730	45GG10AJA	45GG10AJAL	—	—
TMX140B2	40	240/200/160	50	120	61731	45GG10AFA	45GG10AFAL	—	—
TMX140C2	40	240/200/160	50	208-240	61732	45GG10AGA	45GG10AGAL	—	—
Titan Max 2 Pole									
TMX225A2	25	150/125/100	35	24	—	42AF15AJ	45DG20AJ	—	—
TMX225B2	25	150/125/100	35	120	—	42AF15AF	45DG20AF	—	—
TMX225C2	25	150/125/100	35	208-240	—	42AF15AG	45DG20AG	—	—
TMX230A2	30	180/150/120	40	24	61745	42BF15AJ	45EG20AJ	45EG20AJL	—
TMX230B2	30	180/150/120	40	120	61746	42BF15AF	45EG20AF	45EG20AFL	—
TMX230C2	30	180/150/120	40	208-240	61747	42BF15AG	45EG20AG	45EG20AGL	—
TMX240A2	40	240/200/160	50	24	61755	42CF15AJ	45GG20AJ	45GG20AJL	—
TMX240B2	40	240/200/160	50	120	61756	42CF15AF	45GG20AFL	—	—
TMX240C2	40	240/200/160	50	208-240	61757	42CF15AG	45GG20AG	45GG20AGL	—
Titan Max 3 Pole									
TMX330A2	30	180/150/120	40	24	61430	42BF35AJ	—	—	Yes
TMX330B2	30	180/150/120	40	120	61431	42BF35AF	—	—	Yes
TMX330C2	30	180/150/120	40	208-240	61432	42BF35AG	—	—	Yes
TMX340A2	40	240/200/160	50	24	61445	42CF35AJ	—	—	Yes
TMX340B2	40	240/200/160	50	120	61446	42CF35AF	—	—	Yes
TMX340C2	40	240/200/160	50	208-240	61447	42CF35AG	—	—	Yes
TMX350A2	50	300/250/200	65	24	61460	42DF35AJ	—	—	Yes
TMX350B2	50	300/250/200	65	120	61461	42DF35AF	—	—	Yes
TMX350C2	50	300/250/200	65	208-240	61462	42DF35AG	—	—	Yes
TMX360A2	60	360/300/240	75	24	61470	42EF35AJ	—	—	Yes
TMX360B2	60	360/300/240	75	120	61471	42EF35AF	—	—	Yes
TMX360C2	60	360/300/240	75	208-240	61472	42EF35AG	—	—	Yes
TMX375A2	75	450/375/300	90	24	61480	42FE35AJ106	—	—	Yes
TMX375B2	75	450/375/300	90	120	61481	42FE35AF106	—	—	Yes
TMX375C2	75	450/375/300	90	208-240	61482	42FE35AG106	—	—	Yes
TMX390A2	90	540/450/360	120	24	61490	42GE35AJ106	—	—	Yes
TMX390B2	90	540/450/360	120	120	61491	42GE35AF106	—	—	Yes
TMX390C2	90	540/450/360	120	208-240	61492	42GE35AG106	—	—	Yes
Titan Max 4 Pole									
TMX430A2	30	180/150/120	40	24	—	42BF25AJ	—	—	Yes
TMX430B2	30	180/150/120	40	120	—	42BF25AF	—	—	Yes
TMX430C2	30	180/150/120	40	208-240	—	42BF25AG	—	—	Yes
TMX440A2	40	240/200/160	50	24	—	42CF25AJ	—	—	Yes
TMX440B2	40	240/200/160	50	120	—	42CF25AF	—	—	Yes
TMX440C2	40	240/200/160	50	208-240	—	42CF25AG	—	—	Yes

*Flexible auxiliary switch options allow you to select any of the Titan Max auxiliary switches depending on your application. **TMX1NC** (SPST NC), **TMX1NO** (SPST NO), **TMX2NC** (DPST NC), **TMX2NO** (DPST NO), **TMX1NC/NO** (DPST 1NC + 1NO), **TMXSPDT1** (SPDT - left position), **TMXSPDT2** (SPDT - right position), **TMX2SPDT** (2xSPDT) will fit any 3 pole, 30 – 60 Amp Titan Max contactor. **TMX7590NO** (SPST NO), **TMX7590NC** (SPST NC), **TMX7590SPDT** (SPDT) will fit any 3 pole, 75 – 90 Amp Titan Max contactor.

NOTE: Item numbers in **RED** indicate **Made in the U.S.A.**

Packard Definite Purpose Contactors

Features

Contactors meet UL508 specifications for devices up to 600 Vac.
50/60 Hertz
Coils have class B insulation
Includes lugs, spade terminals and covers
All single pole include shunt



C130B

Packard



C430A

Packard

CATALOG NO.	POLES	F/L INDUCTIVE AMPS	LOCKED ROTOR AMPS 240/480/600	RESISTIVE AMPS	COIL VOLTAGE
1 Pole					
C125A	1+	25	150/125/100	35	24
C125B	1+	25	150/125/100	35	120
C125C	1+	25	150/125/100	35	208/240
C130A	1+	30	180/150/120	40	24
C130B	1+	30	180/150/120	40	120
C130C	1+	30	180/150/120	40	208/240
C140A	1+	40	240/200/160	50	24
C140B	1+	40	240/200/160	50	120
C140C	1+	40	240/200/160	50	208/240
2 Pole					
C220A	2	20	120/100/80	30	24
C220B	2	20	120/100/80	30	120
C220C	2	20	120/100/80	30	208/240
C225A	2	25	150/125/100	35	24
C225B	2	25	150/125/100	35	120
C225C	2	25	150/125/100	35	208/240
C230A	2	30	180/150/120	40	24
C230B	2	30	180/150/120	40	120
C230C	2	30	180/150/120	40	208/240
C230D*	2	30	180/150/120	40	208/240
C230E	2	30	180/150/120	40	277
C240A	2	40	240/200/160	50	24
C240B	2	40	240/200/160	50	120
C240C	2	40	240/200/160	50	208/240
C240E	2	40	240/200/160	50	277

CATALOG NO.	POLES	F/L INDUCTIVE AMPS	LOCKED ROTOR AMPS 240/480/600	RESISTIVE AMPS	COIL VOLTAGE	AUX. SWITCH
3 Pole						
C325A	3	25	150/125/100	35	24	AC3
C325B	3	25	150/125/100	35	120	AC3
C325C	3	25	150/125/100	35	208/240	AC3
C330A	3	30	180/150/120	40	24	AC3, P6S, P7S
C330B	3	30	180/150/120	40	120	AC3, P6S, P7S
C330C	3	30	180/150/120	40	208/240	AC3, P6S, P7S
C330E	3	30	180/150/120	40	277	AC3, P6S, P7S
C330F	3	30	180/150/120	40	480	AC3, P6S, P7S
C340A	3	40	240/200/160	50	24	AC3, P6S, P7S
C340B	3	40	240/200/160	50	120	AC3, P6S, P7S
C340C	3	40	240/200/160	50	208/240	AC3, P6S, P7S
C340E	3	40	240/200/160	50	277	AC3, P6S, P7S
C340F	3	40	240/200/160	50	480	AC3, P6S, P7S
C350A	3	50	300/250/200	65	24	P8S, P38K
C350B	3	50	300/250/200	65	120	P8S, P38K
C350C	3	50	300/250/200	65	208/240	P8S, P38K
C350F	3	50	300/250/200	65	480	P8S, P38K
C360A	3	60	360/300/240	75	24	P8S, P38K
C360B	3	60	360/300/240	75	120	P8S, P38K
C360C	3	60	360/300/240	75	208/240	P8S, P38K
C360F	3	60	360/300/240	75	480	P8S, P38K
C375A	3	75	450/375/300	90	24	P9S
C375B	3	75	450/375/300	90	120	P9S
C375C	3	75	450/375/300	90	208/240	P9S
C390A	3	90	540/450/360	120	24	P9S
C390B	3	90	540/450/360	120	120	P9S
C390C	3	90	540/450/360	120	208/240	P9S
4 Pole						
C430A	4	30	180/150/120	40	24	AC3, P6S, P7S
C430B	4	30	180/150/120	40	120	AC3, P6S, P7S
C430C	4	30	180/150/120	40	208/240	AC3, P6S, P7S
C430F	4	30	180/150/120	40	480	AC3, P6S, P7S
C440A	4	40	240/200/160	50	24	AC3, P6S, P7S
C440B	4	40	240/200/160	50	120	AC3, P6S, P7S
C440C	4	40	240/200/160	50	208/240	AC3, P6S, P7S
C440F	4	40	240/200/160	50	480	AC3, P6S, P7S

Notes: *Spade terminals and cover only. Auxiliary Switches sold separately.

DP Contactor



PR4013

Packard

CATALOG NO.	FULL LOAD AMPS	POLES	RESISTIVE AMPS	COIL VOLTAGE	DIRECT REPLACEMENT FOR	UOM	OM
PR4013	30	1	40	24	DP1030A5013	EA	1

Magnetic Contactor




C18001

Packard

CATALOG NO.	TYPE	RESISTIVE AMPS	FULL LOAD AMPS	LOCKED ROTOR AMPS	COIL VOLTAGE	HERTZ	MAX. SURROUNDING AIR TEMP.	PHASE	DIRECT REPLACEMENT FOR	UOM	OM
C18001	DPST N.O.	30	30	120	24	50/60	40°C	Single	3ARR8E4, MC11 18001, 90-230, R850B1146	EA	1

CONTACTOR ACCESSORIES


3 Pole Contactor Replacement Coils



C32040A

Packard

CATALOG NO.	COIL VOLTAGE	FULL LOAD AMPS	UOM	ORDER MULTIPLE
C32040A	24	20-40	EA	1
C32040B	120	20-40	EA	1
C32040C	208/240	20-40	EA	1
C32040D	277	20-40	EA	1
C32040E	480	20-40	EA	1



C35060A

Packard

CATALOG NO.	COIL VOLTAGE	FULL LOAD AMPS	UOM	ORDER MULTIPLE
C35060A	24	50-60	EA	1
C35060B	120	50-60	EA	1
C35060C	208/240	50-60	EA	1
C35060D	277	50-60	EA	1
C35060E	480	50-60	EA	1



C37590B

Packard

CATALOG NO.	COIL VOLTAGE	FULL LOAD AMPS	UOM	ORDER MULTIPLE
C37590B	120	75-90	EA	1
C37590C	208/240	75-90	EA	1
C37590D	277	75-90	EA	1
C37590E	480	75-90	EA	1

4 Pole Contactor Replacement Coils



C42040A

Packard

CATALOG NO.	COIL VOLTAGE	FULL LOAD AMPS	UOM	ORDER MULTIPLE
C42040A	24	20-40	EA	1
C42040B	120	20-40	EA	1
C42040C	208/240	20-40	EA	1
C42040D	277	20-40	EA	1

3 Pole Contactor Replacement Coils



TMXC32040A

TITAN MAX®

CATALOG NO.	COIL VOLTAGE	FULL LOAD AMPS	UOM	ORDER MULTIPLE
TMXC32040A	24	20-40	EA	1
TMXC32040B	120	20-40	EA	1
TMXC32040C	208/240	20-40	EA	1
TMXC35060A	24	50-60	EA	1
TMXC35060B	120	50-60	EA	1
TMXC35060C	208/240	50-60	EA	1



TMXC37590B

TITAN MAX®

CATALOG NO.	COIL VOLTAGE	FULL LOAD AMPS	UOM	ORDER MULTIPLE
TMXC37590B	120	75-90	EA	1
TMXC37590C	208/240	75-90	EA	1

Auxiliary Switches For Packard Contactors



P38K

Packard

CATALOG NO.	TYPE	UOM	ORDER MULTIPLE
P38K	Includes P8S and AC3	EA	6



AC4

Packard

CATALOG NO.	TYPE	USE WITH	UOM	ORDER MULTIPLE
AC4*	1 SPDT	50-60 Amp 3 & 4 Pole	EA	6

*For use with the open style coil contactors only.

CONTACTOR ACCESSORIES CONT'D

Auxiliary Switches For Packard Contactors



P6S

Packard

CATALOG NO.	TYPE	USE WITH	UOM	ORDER MULTIPLE
P6S	SPDT	25-40 Amp 3 & 4 Pole	EA	6

Auxiliary Switches For Packard Contactors



MI1

Packard

CATALOG NO.	TYPE	USE WITH	UOM	ORDER MULTIPLE
MI1	Mech. Interlock	25-40 Amp 3 & 4 Pole	EA	6

Auxiliary Switches For Packard Contactors



P8S

Packard

CATALOG NO.	TYPE	USE WITH	UOM	ORDER MULTIPLE
P8S	SPDT	50-60 Amp 3 & 4 Pole	EA	6
P9S	SPDT	70-90 Amp 3 & 4 Pole	EA	6

Auxiliary Switches For Packard Contactors



MI1


Packard

CATALOG NO.	TYPE	USE WITH	UOM	ORDER MULTIPLE
AC3	NO/NC	25-40 Amp 3 & 4 Pole	EA	6

Auxiliary Switches for TITAN MAX® Contactors

Features

Mounts on 75 & 90 Amp Titan Max brand contactors
Single screw mounting
Switches when contactor coil is energized
Choice of NC, NO, or SPDT



TMX7590SPDT

TITAN MAX®

CATALOG NO.	TYPE	UOM	ORDER MULTIPLE
TMX7590SPDT	Single Pole Double Throw	EA	6

Auxiliary Contacts for TITAN MAX® Contactors



TMX7590NC

TITAN MAX®

CATALOG NO.	TYPE	UOM	ORDER MULTIPLE
TMX7590NC	Normally Closed	EA	6
TMX7590NO	Normally Closed	EA	6

Dimensions (LxWxH): 8.77 x 5.45 x 3.18

Microswitch Blocks for TITAN MAX® Contactors

Features

For use on Titan Max 3 and 4 pole contactors 30-60 amp.



TMXSPDT1

TITAN MAX®

CATALOG NO.	TYPE	UOM	ORDER MULTIPLE
TMXSPDT1	SPDT at left position	EA	6
TMXSPDT2	SPDT at right position	EA	6
TMX2SPDT	DPDT	EA	6

Dimensions (LxWxH): 8.77 x 5.45 x 3.18

Contact Blocks with with Quick Connect TITAN MAX® Contactors



TMXSPDT1

TITAN MAX®

CATALOG NO.	TYPE	UOM	ORDER MULTIPLE
TMX1NC	SPST NC	EA	6
TMX1NO	SPST NO	EA	6
TMX2NC	DPST NC	EA	6
TMX2NO	DPST NO	EA	6

FOOT MOUNTED

Class II Foot Mount Transformers

Features

Made in the USA
Class 2 Recognized
50/60Hz Operation



TF42450A

TITAN HD™ TRANSFORMERS

CATALOG NO.	PRIMARY VOLTAGE	VA RATING	SECONDARY RATING	MOUNTING OPTION	CONNECTION	DIRECT REPLACEMENT FOR	UOM	OM
TF12440A	120V	40	24V	Foot	Wire Lead	AT140A1000, AT140B1206	EA	1
TM12440A	120V	40	24V	Multi	Wire Lead	90-4011M	EA	1
TF4031OEMA	120/208/240V	40	24V	Foot	1/4" Spade Terminal	GT4031OEM, 46-101905-01	EA	1
TF42440A	120/208/240V	40	24V	Foot	Wire Lead	AT140A1018, AT40A1121	EA	1
TF22440A	208/240V	40	24V	Foot	Wire Lead	AT40A1139, AT40B1032	EA	1
TF40224A	208/240V	40	24V	Foot	1/4" Spade Terminal	0130M00138, 14262087	EA	1
TM32440A	120/208/240V	40	24V	Multi	Wire Lead	90-4021M, AT140A1026	EA	1
TF40350A	120/208/240V	50	24V	Foot	Wire Lead	GT5031F, 46-102856-02	EA	1
TF42450A	120/208/240/480V	50	24V	Foot	Wire Lead	GT5041C	EA	1
TM44450A	120/208/240V	50	24V	Multi	Primary - Wire Lead, Secondary - Screw Terminal	AT150A1007, 90-5031M	EA	1
TM52460A*	120/208/240V	60	24V	Multi	Wire Lead	GT6041C, UET160	EA	1
TF52475A*	120/208/240/480V	75	24V	Foot	Wire Lead	90-T75C3, GT7541C	EA	1
TM524100A*	120/208/240/480V	100	24V	Multi	Wire Lead	GT10041C	EA	1

* Equipped with Circuit Breaker

FOOT MOUNTED CONT'D

Class II Foot Mount Transformers

Features

Packard transformers replace models with equal or lower VA rating
Foot mount
Class II transformers



PF90501

Packard

CATALOG NO.	PRIMARY VOLTAGE	VA RATING	SECONDARY RATING	MOUNTING OPTION	CONNECTION	DIRECT REPLACEMENT FOR	UOM	OM
PF12416	120	10VA	16	Foot	Wire Lead / Term	UET 10A	EA	1
PF24200	120	20VA	24	Foot	Wire Lead / Term	Williams Furnace 24200	EA	1
PF42420	120/208/240	20VA	24	Foot	Wire Lead	Jard 2031F UET 114	EA	1
PF12440	120	40VA	24	Foot	Wire Lead	Jard 4011F	EA	1
PF40115	120	40VA	24	Bracket	1/4" QC Term.	Goodman 013M00140S	EA	1
PF113	120	40VA	24	Foot	Wire Lead/Term	90-113 Fan Center Transformer	EA	1
PF12406	120	40VA	24	Foot	Wire Lead	46-24124-06	EA	1
PF40224	208/240	40VA	24	Foot	Terminals	Goodman 013M00138S	EA	1
PF22440	208/240	40VA	24	Foot	Wire Lead	Jard 4021F	EA	1
PF137	208/240	40VA	24	Foot	Wire Lead	First Company E137	EA	1
PF90501	208/240	40VA	24	Foot	1/4" QC Term.	46-101905-01	EA	1
PF105	120/208/240	40VA	24	Foot	Wire Lead	UET 105	EA	1

Class II Foot Mount Transformers (cont'd)

Features

Packard transformers replace models with equal or lower VA rating
Foot mount
Class II transformers



PF52460

Packard

CATALOG NO.	PRIMARY VOLTAGE	VA RATING	SECONDARY RATING	MOUNTING OPTION	CONNECTION	DIRECT REPLACEMENT FOR	NOTES	UOM	OM
PF42450	120/208/240/480	50VA	24	Foot	Wire Lead	Jard 5041C	117	EA	1
PF52460	120/208/240	60VA	24	Foot	Wire Lead	Jard 6041C UET 160	117	EA	1
PF52475F	120/208/240/480	75VA	24	Foot	Wire Lead	Jard 7541M UET 175	118	EA	1
PF52475	120/208/240/480	75VA	24	Foot	Wire Lead	Jard 7541C UET 179R	117	EA	1
PF57575	120/208/240/575	75VA	24	Foot	Wire Lead	Mars 50375	117	EA	1
PF524100	120/208/240/480	100VA	24	Foot	Wire Lead	Jard 10041C	117	EA	1

Notes: 117. Equipped with a circuit breaker 118. Built-In fuse included

FOOT MOUNTED CONT'D

Class II Foot Mount Transformers (cont'd)



PF27440

Packard

Features

Packard transformers replace models with equal or lower VA rating
Foot mount
Class II transformers

CATALOG NO.	PRIMARY VOLTAGE	VA RATING	SECONDARY RATING	MOUNTING OPTION	CONNECTION	DIRECT REPLACEMENT FOR	NOTES	UOM	OM
PF4031VM	120/208/240	40VA	24	Foot	Wire Lead	Jard 4031VM Rheem 46-24124-06		EA	1
PF42440	120/208/240	40VA	24	Foot	Wire Lead	Jard 4031F UET 115		EA	1
PF4031OEM	120/208/240	40VA	24	Foot	Terminals	Jard 4031OEM Rheem 46-101905-01		EA	1
PF32440	120/208/240	40VA	24/12/2.5	Foot	Wire Lead	Jard 4032F UET 101	118	EA	1
PF27440	277	40VA	24	Foot	Wire Lead	Jard 40271F		EA	1
PF12450*	120	50VA	24	Foot	Wire Lead	Rheem 46-102856-02		EA	1
PF85602	120	50VA	24	Foot	Wire Lead	46-102856-02		EA	1
PF40350	120/208/240	50VA	24	Foot	Wire Lead	Jard 5031F		EA	1

Notes: 118. Built-In fuse included

*Includes an Internal 2.5 Amp, 250V, Slow Blow Fuse

Class II Multi-Mount Transformers



PM44450

Packard

Features

Packard transformers replace models with equal or lower VA rating
Multi-mount transformers
4-1/4" x 4-1/4" mounting plate included
1/2" conduit hub for electrical knockout mounting
Class II transformers

CATALOG NO.	PRIMARY VOLTAGE	VA RATING	SECONDARY RATING	MOUNTING OPTION	CONNECTION	DIRECT REPLACEMENT FOR	NOTES	UOM	OM
PM12040	120	40VA	24	Plate	Wire Lead/Term	Universal Replacement		EA	1
PM12440	120	40VA	24	Multi	Wire Lead	Jard 4011M UET 112		EA	1
PM32440	120/240	40VA	24	Multi	Wire Lead	Jard 4021M UET 113	118	EA	1
PM42440	120/208/240	40VA	24	Multi	Wire Lead	Jard 4031M		EA	1
PM43440	120/208/240	40VA	24/12/2.5	Multi	Wire Lead	UET 111	118	EA	1
PM43448	120/208/240	48VA	24/12/2.5	Multi	Wire Lead	Universal Replacement		EA	1
PM44450	120/208/240	50VA	24	Multi	Wire Lead/Term	Jard 5031M UET 150	118	EA	1
PM43450	120/208/240	50VA	24/12/2.5	Multi	Wire Lead	Jard 5032M		EA	1
PM7541MCB	120/208/240/480	75VA	24	Multi	Wire Lead	Jard 7541MCB	117	EA	1
PM10048P	208/240/480	100VA	24/120	Multi	Wire Lead	Jard 10048P		EA	1

Notes: 117. Equipped with a circuit breaker 118. Built-In fuse included

BLOWER AND FURNACE CONTROLS

Furnace Controls



ICM292

Features
Direct Spark Ignition (DSI) control board
Microprocessor-based
Controls induced draft and indoor blower motors; humidifier output, spark ignitor and gas valve
Monitors timing, trial for ignition, flame sensing and lockout
100% lockout safety feature
Compatible with LP or natural gas
Status LEDs for fault codes to aid in troubleshooting

Control voltage: 24 VAC (18-30 VAC), 60 Hz
Line voltage: 115 VAC, 60 Hz
Power cons: 0.3A plus gas valve current at 24 VAC
Operating temp: -40°C (-40°F) to 75°C (176°F)
Pre-purge: 30 seconds
Trial for ignition: 7 sec.
Retries: 2 groups of 2, 30 seconds delay within the group and 3 minutes delay between groups
Lockout: 1 hour
Power: 24 VAC and COM
Post-purge: 90, 120, 160 and 180 seconds
Thermostat interface: R, W, Y and G
System switches: Vent pressure and limit switches (main and over-temperature switches in series)
Flame sensing
Spark: SE
Gas valve: GV
Heat blower OFF delay: SW1 toggle switch
Spark: SE
Gas valve: GV
Inducer draft motor: IDM
Electric Air Cleaner: EAC
Relay: HUM • Heat/cool relay: H/C
Blower motor: FAN, COOL and HEAT speeds
LED indicators:
Power, green LED: PWR
Status, green LED: OK
Flame status, yellow LED: FLAME

Direct Replacement For:
Rheem: 62-24140-04

CATALOG NO.	DESCRIPTION	UOM	OM
ICM292	Furnace Controls	EA	1

Defrost Controls



ICM550

Features
Adjustable 15 min to 23 hours 45 min defrost cycle
Timed or manual defrost termination
High power condenser fan & defrost heater relay output
100% monitoring of defrost inputs and outputs
Mounting bracket easily removed to allow for installation into weatherproof enclosures
Simple to use, drag & drop replacement for popular defrost timers
User-friendly time clock for commercial refrigerant cooler applications

Electrical Rating:
Voltage: 120-240 VAC
Frequency: 60 Hz
Fan:
Type: Relay
Form: SPST, normally closed
Rating: 30 amps @ 240 VAC
Time Delays:
Minimum defrost time: 15 minutes
Maximum defrost time: 23 hr, 45 min.

Direct Replacement For:
Intermatic/Grasslin: 010-0011B, DT040, DT140, DTAV40, DTAV40M, DT-B, DTMV, DTSX
Paragon: 8041, 8045, 8047, 8141, 8143, 8145, 8245, 8247
Precision: 6041, 6045, 6047, 6141, 06145

CATALOG NO.	DESCRIPTION	UOM	OM
ICM550	Defrost Controls	EA	1

Gas Ignition Controls



ICM283

Features
Hot Surface Ignition (HSI) Module
Single/Dual rod sensing capabilities
For gas fired furnaces, boilers and other heating appliances
Switch selectable lockout times, ignition trials
Works with both Natural & LP gas systems
Diagnostic LED to aid in troubleshooting

Input voltage: 120 & 24 VAC, 60 Hz
- HSI: 120 VAC, 5A maximum
- Valve: 24V, 2A maximum
- Total: 24V Load = 0.4 + valve load

Pre-purge time: 32 seconds
Trial time: 4 or 7 seconds (switch selectable)
Ignition trials to lockout: 1 or 3 (switch selectable)
Flame sense: Single rod or dual rod
Gas type: Natural or LP

Direct Replacement For:
Honeywell: S8910U-1000
Robertshaw: HS780
White Rodgers: 50E47, 50F47

CATALOG NO.	DESCRIPTION	UOM	OM
ICM283	Single Phase Voltage Monitors	EA	1

FAN CONTROL CENTER

Fan Control Centers

Features

Low voltage terminal board
Color coded leads



FC90112

Packard

CATALOG NO.	PRIMARY VOLTAGE	PRIMARY CONNECTIONS	SECONDARY VOLTAGE	SECONDARY CONNECTIONS	RELAY	DIRECT REPLACEMENT FOR	UOM	OM
FC90112	120	Leads	24	Terminal Board	DPDT	White-Rodgers 90-112	EA	1
FC90113	120	Leads	24	Terminal Board	SPDT	White-Rodgers 90-113	EA	1
FC90118	120	Leads	24	Terminal Board	SPNO/SPNC	White-Rodgers 90-118E	EA	1
FC90119	208/240	Leads	24	Terminal Board	SPDT	White-Rodgers 90-119	EA	1
FC90130	120/208/240	Leads	24	Terminal Board	DPDT	White-Rodgers 90-130	EA	1

Fan Centers

The fan centers offer low voltage for one and two speed fan motors; auxiliary circuits in heating cooling, or heating/cooling applications. This has a DPDT Relay and is UL rated. There are color coded pre-stripped leads on this center. This product has a 24V coil voltage, power, and duty rated contacts. It mounts directly to a 4in. electrical box.



D-90113

CATALOG NO.	VOLTAGE	UOM	OM
D-90113	120	EA	1
D-90118	208/240	EA	1

GENERAL PURPOSE

Relay Overloads

Features

Direct Replacement for relay and overload combinations on 1/8 thru 1/3 HP compressors.

CATALOG NO.	VOLTS	HP	HERTZ	UOM	OM
RO15	115	1/8-1/5	50/60	EA	1
RO13	115	1/4 and 1/3	50/60	EA	1



RO15

Packard

Direct Replacement Relays For ICP and Nordyne

Features

Electric heater relay
Used with AMF(K,H)xxCxx heaters in ICP and Nordyne air handlers

CATALOG NO.	DESCRIPTION	AMPS @ 277VAC	AMPS @ 240VAC	COIL	DIRECT REPLACEMENT FOR	UOM	OM
PR1922	SPST-NO	30	40	22VDC	ICP 111001922 ICP 1084529	EA	1
PR1931	SPDT	30	40	24VAC	Nordyne 621931	EA	1



PR1922

Packard

GENERAL PURPOSE CONT'D

General Purpose Relays – 9400 Series

This product features quick connect terminals with universal mounting with break away tabs.



D90-360

CATALOG NO.	DESCRIPTION	AMPS RES	FLA/RA@125V	FLA/RA@250V	COIL VOLTAGE	UOM	ORDER MULTIPLE
D90-360	SPST-NO	18	12/60	8/48	24 VAC	EA	1
D90-370	SPDT	18	14/84	8/48	24 VAC	EA	1
D90-372	SPDT	18	14/84	8/48	120 VAC	EA	1
D90-380	SPST NO+NC	18	12/60	8/48	24 VAC	EA	1
D90-382	SPST NO+NC	18	12/60	8/48	120 VAC	EA	1
D90-384	SPST NO+NC	18	12/60	8/48	240 VAC	EA	1

General Purpose Relays – 8400 Series

This product features quick connect terminals with universal mounting with break away tabs.



D90-290Q

CATALOG NO.	DESCRIPTION	AMPS RES/IND	COIL VOLTAGE	UOM	ORDER MULTIPLE
D90-290Q	SPST-NO	16/8	24 VAC	EA	1
D90-291Q	SPST-NO	16/8	120 VAC	EA	1
D90-292Q	SPST-NO	16/8	240 VAC	EA	1
D90-293Q	SPDT	8/8	24 VAC	EA	1
D90-294Q	SPDT	8/8	120 VAC	EA	1
D90-295Q	SPDT	8/8	240 VAC	EA	1

General Purpose Switching Relays

The Switching Relay has quick connect terminals for termination. The base is designed for easy replacement of competitive relays.



D-90340

CATALOG NO.	COIL VOLTAGE	TERMINALS 1-2-3	TERMINALS 4-5-6	UOM	ORDER MULTIPLE
D-90340	24	Power	Power	EA	1
D-90341	110/120	Power	Power	EA	1
D-90342	208/240	Power	Power	EA	1

POTENTIAL RELAYS

Sequencers

The sequencers are used in electric heat systems to stage blower motors and heating elements. All sequencers are for 24V control.



HDR-101

CATALOG NO.	NO. OF CON-DUITS	KILXON NO.	SWITCH CONFIGURATION	DALY ON TIME MIN.-MAX. SEC	DALY ON TIME MIN.-MAX. SEC	UOM	ORDER MULTIPLE
HDR-102	1 Main	60000A0147	SPST-NO	30-75	1-40	EA	1
HDR-201	2 Main	60000E0110	DPST-NO	1-24	45-75	EA	1
HDR-202	2 Main	60000E0109	DPST-NO	30-70	1-40	EA	1
HDR-211	2 Main Staged	60200A0117	DPST-NO	30-110	1-40	EA	1
HDR-212	2 Main Staged	60200A0127	DPST-NO	1-25	50-110	EA	1
HDR-222	4 Main Staged	51172-131-2	2 DPST-NO	1-40	50-110	EA	1

POTENTIAL RELAYS CONT'D

SPST and SPDT Fan Relays



PR290Q

Packard

Features

1/4" Quick connect terminals
Used for switching solenoids, fan motors, and other applications.

CATALOG NO.	DESCRIPTION	AMPS RES.	FLA/LRA AT 125 VOLTS	FLA/LRA AT 250 VOLTS	COIL VOLTAGE	DIRECT REPLACEMENT FOR	UOM	OM
PR290Q	SPST-NO	16	—	8/25	24 VAC	90-290Q	EA	1
PR291Q	SPST-NO	16	—	8/25	120 VAC	90-291Q	EA	1
PR292Q	SPST-NO	16	—	8/25	240 VAC	90-292Q	EA	1
PR293Q	SPDT	16	—	8/25	24 VAC	90-293Q	EA	1
PR294Q	SPDT	16	—	8/25	120 VAC	90-294Q	EA	1
PR295Q	SPDT	16	—	8/25	240 VAC	90-295Q	EA	1
PR360	SPST-NO	18	12/60	8/48	24 VAC	90-360	EA	1
PR362	SPST-NO	18	12/60	8/48	120 VAC	90-362	EA	1
PR370	SPDT	18	12/60	8/48	24 VAC	90-370	EA	1
PR372	SPDT	18	12/60	8/48	120 VAC	90-372	EA	1
PR374	SPDT	18	12/60	8/48	240 VAC	90-374	EA	1
PR380	SPST NO + NC	18	12/60	8/48	24 VAC	90-380	EA	1
PR382	SPST NO + NC	18	12/60	8/48	120 VAC	90-382	EA	1
PR384	SPST NO + NC	18	12/60	8/48	240 VAC	90-384	EA	1

Switching Relays



PR340

Packard

Features

Used on heat pumps, vending machines, fans, and heating and air conditioning

CATALOG NO.	COIL VOLTAGE	DESCRIPTION	TERMINAL 1-2-3	TERMINAL 4-5-6	DIRECT REPLACEMENT FOR	UOM	OM
PR340	24	DPDT	Power	Power	90-340	EA	1
PR341	110/120	DPDT	Power	Power	90-341	EA	1
PR342	208/240	DPDT	Power	Power	90-342	EA	1
PR343	24	SPDT	Power	Pilot	90-343	EA	1
PR344	110/120	SPDT	Power	Pilot	90-344	EA	1
PR345	208/240	SPDT	Power	Pilot	90-345	EA	1

POTENTIAL RELAYS CONT'D

Potential Relays



PR9066

Packard

Features

Temperature range: 40°F to 130°F
Class B insulation
Continuous duty
UL recognized

CATALOG NO.	CONTINUOUS COIL VOLTAGE	PICK-UP MIN.	PICK-UP MAX.	DROP OUT MAX.	DC RES	COIL DATA MA	COIL DATA NOM. VA	INRUSH VA	CLASS INSULATION	DIRECT REPLACEMENT FOR	UOM	OM
PR9026	395	180	195	100	7147	12.7	5	10	B	90-26, 19008	EA	1
PR9063	170	140	153	65	1399	29	5	10	B	90-63, 19002	EA	1
PR9064	395	245	275	140	7147	12.7	5	10	B	90-64, 19003	EA	1
PR9065	332	171	184	90	5180	15	5	10	B	90-65, 19004	EA	1
PR9066	395	208	239	130	7147	12.7	5	10	B	90-66, 19005	EA	1
PR9067	420	300	328	121	10000	12	5	10	B	90-67, 19006	EA	1
PR9068	495	323	352	135	11950	10	5	10	B	90-68, 19007	EA	1
PR9071	420	223	252	150	10000	12	5	10	B	90-71, 19010	EA	1
PR9169	332	180	193	105	5600	12	5	10	B	19008	EA	1

Potential Relays - Titan Ice



TR63

TITAN ICE®

Features

Universal replacements for thousands of GE 3ARR3 model relays and many other OEM's
Proven performance for 40 years
Contact rating: 35 amps max, break only
Endurance up to 500,000 operations depending on load
Screw type terminals #8-32 thread
Six (6) quick connect terminals and screws included with each relay

Applications:

Central air conditioner compressors
Submersible pump motors
Motors generally over 1/3 HP with start capacitors

CATALOG NO.	INDUSTRY #	CONTINUOUS COIL VOLTAGE	PICK UP MIN	PICK UP MAX	DROP-OUT MAX	UOM	OM
TR63	19002	170V	136V	156V	58V	EA	1
TR64	19003	395V	257V	278V	123V	EA	1
TR65	19004	332V	165V	185V	93V	EA	1
TR66	19005	395V	210V	230V	123V	EA	1
TR67	19006	420V	292V	318V	130V	EA	1
TR68	19007	500V	322V	348V	138V	EA	1
TR69	19008	336V	177V	198V	108V	EA	1
TR70	19009	253V	282V	308V	80V	EA	1
TR71	19010	420V	209V	235V	124V	EA	1

CATALOG NO.	INDUSTRY #	CONTINUOUS COIL VOLTAGE	PICK UP MIN	PICK UP MAX	DROP-OUT MAX	UOM	OM
TR550	19550	130V	111V	134V	42V	EA	1
TR551	19551	332V	243V	271V	91V	EA	1

CATALOG NO.	DESCRIPTION	UOM	OM
TRQC6	Package of six (6) double quick connect terminals with screws	EA	1



TRQC6

TITAN ICE®

POTENTIAL RELAYS CONT'D

Universal Relay



UMSR-50B-LF

Features

Replacement for all standard potential relays
Patented differential voltage sensing
No user-adjustments required
Non-positional mounting configuration
50A switching capabilities
Universal mounting bracket for easy installation
.250" quick connect termination
Safety timer

Input:
- Voltage Rating: 110-270 VAC, Single Phase
- Maximum Voltage Contact Rating: 502 VAC (absolute)

Motor power rating: Up to 10 HP
Operating Position: Non-positional

Safety Time Out: Approximately 1-second per 100 microfarads
Insulation: Class B (130°C); Conforms to IEC 1000- standards (6kV impulse / 6kV contact)
Consumption: 5VA max.

Life Expectancy (min. operations):
Mechanical: 1 x 106
Electrical: 1x106 at 16A 400 VAC
5x105 at 35A 400 VAC (break only)
5x105 at 50A 400 VAC (break only)
Contacts: Contact rating: 50A (break only), 400 VAC cos Ø = 0.7 to 0.8

CATALOG NO.	DESCRIPTION	DIRECT REPLACEMENT FOR	UOM	ORDER MULTIPLE
UMSR-50B-LF	Universal Motor Starting Relay	Supco: APR5, SUPR	EA	1

HEAT SEQUENCERS

Heat Sequencers



HS24A345


Features

Contact ratings: up to 25 Amps at 120 or 240 Volts
Full-load rated auxiliary contacts
Standard operating ambient between -50°F (-45.5°C) and 165°F (73.8°C)
Shock and vibration resistant
Solid state
Quick-connect terminals
Mounts in any position
UL recognized

			TIMINGS - ON					TIMINGS - OFF							
CATALOG NO.	TIMINGS	SWITCHES	M1-M2	M3-M4	M5-M6	M7-M8	M9-M10	M1-M2	M3-M4	M5-M6	M7-M8	M9-M10	TYPE	UOM	OM
HS24A341	1	1	1-20	—	—	—	—	40-110	—	—	—	—	SPST	EA	1
HS24A342	1	1	—	—	30-90	—	—	—	—	1-30	—	—	SPST	EA	1
HS24A343	1	2	1-20	1-20	—	—	—	40-110	40-110	—	—	—	DPDT	EA	1
HS24A344	1	2	—	—	30-90	30-90	—	—	—	1-30	1-30	—	DPDT	EA	1
HS24A345	2	3	1-110	1-110	1-110	—	—	1-110	1-110	1-110	—	—	DPDT-SPST	EA	1
HS24A346	2	4	1-110	1-110	1-110	1-110	—	1-110	1-110	1-110	1-110	—	2-DPDT	EA	1
HS24A3414	4	5	1-160	1-160	1-160	1-160	1-160	1-160	1-160	1-160	1-160	1-160	2DPDT-SPST	EA	1

DIRECT REPLACEMENT FOR	HS24A341	HS24A342	HS24A343	HS24A344	HS24A345	HS24A346	HS24A3414
Gemline	GS101	GS102	GS103	GS104	GS105	GS106	GS107
Klixon	60000AOM	A012	E017	51172-22	51172-32	51172-33	51172-131-5
White-Rodgers	24A34-1	24A34-2	24A34-3	24A34-4	24A34-5	24A34-6	24A34-14

Heat Sequencers



HS33247

Features

Contact ratings: up to 25 Amps at 120 or 240 Volts
Full-load rated auxiliary contacts
Standard operating ambient between -50°F (-45.5°C) and 165°F (73.8°C)
Shock and vibration resistant
Solid state
Quick-connect terminals
Mounts in any position
UL recognized

CATALOG NO.	TYPE	CONTROL VOLTAGE	DELAY ON (SECONDS)	DELAY OFF (SECONDS)	DIRECT REPLACEMENT FOR	UOM	OM
HS33247	SPDT 1 & 3 N.O.	24	1-24	15-75	Goodman B1370738 Klixon COM-21	EA	1

TIME DELAYS

Time Delay Relays



PTD102

Packard

Application

Prevents short cycling of air conditioning, refrigeration and heat pump compressors

Features

Universal voltage
Mounts in any position
Adjustable up to 10 minutes
Easy two-wire installation
Delay on make / delay on break

CATALOG NO.	CONN.	TIME DELAY	INPUT LINE FREQ.	INPUT LINE VOLTAGE	OUTPUT RATINGS INRUSH	OUTPUT RATINGS MAX.	OUTPUT RATINGS MIN.	DIRECT REPLACEMENT FOR			UOM	OM
PTD102	2 - 1/4" male terminals	.03 - 10 mins.	50/60	18-240VAC/ VDC	15 amps	1.5 amps	40 mA	Carrier P284-2391 Gemline IC213 Gemline IC310	ICM 102B ICM 102FB ICP 1160706 Lennox 24C4101 Lennox 47A7301	McQuay 282101B14 McQuay 282101B2 McQuay 282101B3 Rheem 42-22326-01 Rheem 42-41542-01 3310-068 ADM-2	EA	1
PTD203	2 - 1/4" male terminals	.03 - 10 mins.	50/60	18-240VAC/ VDC	15 amps	1.5 amps	40 mA	A-1 Components F7035 Carrier P284-2392	ICM 203B ICP 1160708 ICP 1160711	3310-072 Trane TMR107 Trane TMR52 ADB-1	EA	1

Delay on Make Timers



ICM103

ICM CONTROLS

Applications

Ideal for compressor staging and stagger starting multiple motors and other equipment. Helps to reduce power surges.

Features

Highly precise digital timing
Switch-settable time delays
Ideal for ice machine applications
Universal voltage operation
Repeat accuracy .5% over voltage and temperature range

CATALOG NO.	VOLTAGE	FREQUENCY	DIMENSIONS	DIRECT REPLACEMENT FOR	UOM	OM
ICM103	18-240 VAC	50/60 Hz	2" x 2"	A-1: 7061. Gemline: 1C213, Ice-O-Matic: TD3001A, Mars: 32394, 32396 Robertshaw: 3310-068, Supco: TMF-19, TMF-80	EA	1

LIMIT THERMOSTATS

Manual - SPST - Limit Thermostats

Features

Used in gas fired furnaces, unit heater and rooftop units
Manual reset
Wide temperature range for most heating applications



PRL240

CATALOG NO.	TERMINALS	SWITCH ACTION	SWITCH TYPE	CUT IN TEMP.	CUT OUT TEMP.	AMPS	VOLTS	HERTZ	DIRECT REPLACEMENT FOR	UOM	OM
PRL130	Vertical 1/4"	Open On Rise	SPST	Manual Reset	130°F	16.0	250	50/60	Rheem 47-22453-01	EA	1
PRL135	Vertical 1/4"	Open On Rise	SPST	Manual Reset	135°F	16.0	250	50/60	Rheem 47-22453-02	EA	1
PRL220	Vertical 1/4"	Open On Rise	SPST	Manual Reset	220°F	16.0	250	50/60	Nordyne 626354	EA	1
PRL230	Vertical 1/4"	Open On Rise	SPST	Manual Reset	230°F	16.0	250	50/60	Nordyne 626353	EA	1
PRL240	Vertical 1/4"	Open On Rise	SPST	Manual Reset	240°F	16.0	250	50/60	Nordyne 626355	EA	1
PRL250	Vertical 1/4"	Open On Rise	SPST	Manual Reset	250°F	16.0	250	50/60	Nordyne 626352	EA	1
PRL260	Vertical 1/4"	Open On Rise	SPST	Manual Reset	260°F	16.0	250	50/60	Nordyne 626350	EA	1
PRL300	Vertical 1/4"	Open On Rise	SPST	Manual Reset	300°F	16.0	250	50/60	Heil 1005549 York 026-34027-000	EA	1
PRL350	Vertical 1/4"	Open On Rise	SPST	Manual Reset	350°F	16.0	250	50/60	Rheem 47-22861-01 Goodman B1370154	EA	1

Automatic Small Flush Mount - SPST - Limit Thermostats

Features

Used in gas fired furnaces, unit heater and rooftop units
Automatic reset
Wide temperature range for most heating applications



PLF190HA

CATALOG NO.	TERMINALS	CUT IN TEMP.	CUT OUT TEMP.	DIFFERENTIAL	UOM	OM
PLF130VA	Vertical 1/4"	115°F	130°F	15°F	EA	1
PLF155VA	Vertical 1/4"	115°F	155°F	40°F	EA	1
PLF158VB	Vertical 3/16"	118°F	158°F	40°F	EA	1
PLF165VA	Vertical 1/4"	125°F	165°F	40°F	EA	1
PLF170VA	Vertical 1/4"	130°F	170°F	40°F	EA	1
PLF185VB	Vertical 3/16"	145°F	185°F	40°F	EA	1
PLF190HA	Horizontal 1/4"	150°F	190°F	40°F	EA	1
PLF194HB	Horizontal 3/16"	154°F	194°F	40°F	EA	1
PLF200HA	Horizontal 1/4"	160°F	200°F	40°F	EA	1
PLF200VA	Vertical 1/4"	160°F	200°F	40°F	EA	1
PLF210HA	Horizontal 1/4"	170°F	210°F	40°F	EA	1
PLF222VA	Vertical 1/4"	182°F	222°F	40°F	EA	1
PLF230HA	Horizontal 1/4"	190°F	230°F	40°F	EA	1
PLF230HB	Horizontal 3/16"	190°F	230°F	40°F	EA	1
PLF250HA	Horizontal 1/4"	200°F	250°F	50°F	EA	1
PLF252VB	Vertical 3/16"	202°F	252°F	50°F	EA	1
PLF255VA	Vertical 1/4"	205°F	255°F	50°F	EA	1
PLF260HA	Horizontal 1/4"	210°F	260°F	50°F	EA	1
PLF275HB	Horizontal 3/16"	225°F	275°F	50°F	EA	1
PLF275VB	Vertical 3/16"	225°F	275°F	50°F	EA	1
PLF280HB	Horizontal 3/16"	230°F	280°F	50°F	EA	1
PLF300HB	Horizontal 3/16"	250°F	300°F	50°F	EA	1
PLF300VA	Vertical 1/4"	250°F	300°F	50°F	EA	1
PLF330VA	Vertical 1/4"	280°F	330°F	50°F	EA	1

Manual Reset Fire Stat

This bi-metal switch is used as a manual reset. When temperature condition is met, the device opens. The manual reset can only be reset after proper cool down of the switch. The HMR 130 is a popular fire stat in ducted air distribution systems. Should temperatures in the duct exceed 130° F, the switch opens, shutting down the whole system so no fire or smoke can be spread by the fan.



HMR-130

CATALOG NO.	DESCRIPTION	UOM	OM
HMR-130	Bi-metal Manual Reset Fire Stat	EA	1

LIMIT THERMOSTATS CONT'D

Adjustable Thermostats



PT014

Packard

Applications

Covers approximately 95% of the hundreds of different temperature ranges and styles used on dryers and heating applications

Features

Dial knob
1/4" quick connect terminals

CATALOG NO.	SWITCH ACTION	SWITCH TYPE	TEMP. RANGE	DIFFERENTIAL	VOLTS	AMPS	HERTZ	DIRECT REPLACEMENT FOR	UOM	OM
Limit Controls										
PT012	Open On Rise	SPST	135°F to 175°F	40°F	250	25	50/60	AT012 39220 3L05-1	EA	1
PT013	Open On Rise	SPST	175°F to 215°F	40°F	250	25	50/60	AT013 39225 3L05-2	EA	1
PT014	Open On Rise	SPST	210°F to 250°F	40°F	250	25	50/60	AT014 39230 3L05-4	EA	1
PT015	Open On Rise	SPST	250°F to 290°F	40°F	250	25	50/60	AT015 39235 3L05-13	EA	1
Fan Controls										
PT021	Close On Rise	SPST	90°F to 130°F	20°F	250	25	50/60	AT021 39205 3F05-1	EA	1
PT022	Close On Rise	SPST	140°F to 180°F	20°F	250	25	50/60	AT022 39210 3F05-2	EA	1

Thermostats - I3 Wi-Fi



I2020WR

ICM CONTROLS

Through innovation comes affordability! ICM's Programmable I3 Series of touch thermostats is designed around a unique way of using capacitive sensing technology to bring affordability to the touch marketplace. Each model features a huge display and a patent-pending dynamic interface for intuitive programming that makes installation and set up incredibly easy.

Features

Large Display
Buttonless/Switchless Front
Dynamic Interface: Highly intuitive
Customizable Printed Interface
Customizable Icons
Wi-Fi compatible
Humidity Control
Dual Fuel Compatibility
Thin profile
Mounting Base
Removable Logo Plate
Thermal Safety
User Coded Lockout

ITEM ID	TYPE	STAGES	HEAT PUMP	POWER	WI-FI	HUMIDITY	TERMINATIONS	UOM	ORDER MULTIPLE
I1010WR	7-Day Programmable	1 H/1C	Y	Hardwired	Y	N	R, C, W1/O/B, Y1, G, S1, S2	EA	1
I2010WR	7-Day Programmable	2 H/1C	Y	Hardwired	Y	N	R, C, W1/O/B, W2, Y1, G, S1, S2	EA	1
I2020WR	7-Day Programmable	2 H/2C	Y	Hardwired	Y	N	R, C, W1/O/B, W2, Y1, Y2, G, S1, S2	EA	1
I3020WR	7-Day Programmable	3H/2C	Y	Hardwired	Y	N	R, C, W1/O/B, W2, AUX, Y1, Y2, G, S1, S2	EA	1

Temp Stat 65F Heat Only Thermostat



ACH065

ICM CONTROLS

The ICM ACH065 Temp Stat 65 Degree Heat Only Thermostat is a low, single set point thermostat intended for use as a temporary device to provide heating to allow drywall to dry during construction.
They can also be used as a low ambient cutoff switch.

Features

Temporary use for dryout applications
Can be used as a low ambient cutoff switch

ITEM ID	DESCRIPTION	UOM	ORDER MULTIPLE
ACH065	ICM Dryout / New Construction Thermostat - 65°F Heat Only Thermostat	EA	1

PLENUM THERMOSTATS

Plenum Thermostats



PHL501

Packard

Features

Opens when furnace plenum area temperature is too high
Shuts furnace down until the temperature returns to normal

CATALOG NO.	CLOSE TEMP. °F	OPEN TEMP. °F	THERMODISC	CROSS REFERENCES						UOM	OM
				CARRIER	BRYANT	GOODMAN	RHEEM	TRANE	YORK		
PHL501	130	170	L170-40 SPST	P331-2203	HH12ZA174A HH127A176A	—	47-21711-06	—	025-29041-007	EA	1
PHL502	150	180	L180-30 SPST	—	HH12ZA178A	B1370001	—	—	—	EA	1
PHL503	150	190	L190-40 SPST	P331-2205	HH12ZA189 HH12ZB190 HH12ZA193A	—	47-21711-03	—	025-29041-012	EA	1
PHL504	200	240	L240-40 SPST	P331-2217	HH12ZA240 HH12ZA252A	—	—	—	—	EA	1
PHL505	100	140	L140-40 SPST	—	HH12ZB140	—	—	—	—	EA	1
PHL506	130	170	L170-40 SPST	—	HH12ZB170	—	—	SWT1258	—	EA	1
PHL507	110	140	L140-30 SPST	—	HH12ZA140	—	—	—	025-29041-005	EA	1
PHL508	170	190	L150-20 SPST	P331-2005	HH12ZB190 HH12ZA193 HH12ZA189	B1370913	—	SWT1260	—	EA	1
PHL509	210	240	L240-30 SPST	P331-2217	HH12ZB240 HH12ZA252 HH12ZA240	B1370903	—	—	—	EA	1
PHL510	130	150	L150-20 SPST	—	HH12ZB150	—	—	—	—	EA	1
PHL511	140	160	L160-20 SPST	—	HH12ZB160	—	—	—	025-29041-004	EA	1
PHL512	150	170	L170-20 SPST	—	HH12ZB170	—	—	—	—	EA	1
PHL513	130	170	L170-40 SPST	—	—	—	—	—	—	EA	1
PHL514	104	180	L180-40 SPST	—	HH12ZB180	—	—	—	025-29031-711	EA	1
PHL515	160	200	L200-40 SPST	—	HH12ZB200 HH12ZA199 HH12ZA201	—	—	—	025-29041-006	EA	1
PHL516	170	210	L210-40 SPST	—	HH12ZB210	—	—	SWT1263	—	EA	1
PHL517	180	220	L220-50 SPST	48NHT042	HH12ZB220 HH12ZA219 HH12ZA223	—	—	SWT1273	—	EA	1
PHL518	210	250	L250-40 SPST	P331-2208	HH12ZB250 HH12ZA251	B1370012S	—	SWT1261 SWT1272	—	EA	1
PHL519	125	155	L155-30 SPST	—	—	B1370006	—	—	—	EA	1

ADJUSTABLE THERMOSTATS

Remote Sensor

The fast, easy solution for temperature sensing problems
For tamper-prone areas
Poor air flow areas
Troubled applications
Foam gasket prevents drafts through wall opening
Mounts to standard 2" x 4" outlet box



ACC-RT103


CATALOG NO.	REMOTE SENSOR COMPATIBLE WITH THE FOLLOWING SIMPLECOMFORT® THERMOSTATS	UOM	OM
ACC-RT103	SC700V, SC710V, SC900V, SC4011, SC4211, SC4811, SC4812, SC4813, SC5011, SC5211, SC5811, SC5812, SC5813	EA	1

CATALOG NO.	REMOTE SENSOR COMPATIBLE WITH THE FOLLOWING SIMPLECOMFORT®, FROST SENTRYTM AND I3 SERIES TOUCH THERMOSTATS	UOM	OM
ACC-RT104	SC1600L, SC1600VL, SC1800L, SC1800VL, SC1901L, SC1901VL, SC4010, SC5010, FS1500L, FS1500VL, I3 SERIES	EA	1

Remote Sensors

Applications

Outdoor sensor for SimpleComfort® PRO dual fuel thermostats (SC4812 and SC5812)



ACC-OD103

CATALOG NO.	LENGTH (IN.)	AMPS	WEIGHT (LBS.)	UOM	OM
ACC-OD103	36	1.5	0.05	EA	1

Transfer Cables

Features

Transfers the program and/or configuration from one thermostat to another like model in seconds
Saves valuable installation time
For use with select SimpleComfort® thermostats featuring ICM's patented SimpleSet™
Target programming technology
Use with Simple Comfort Non-Programmable Thermostats



ACC-WIH21

CATALOG NO.	UOM	OM
ACC-WIH21	EA	1

LuxPro Thermostats

LuxPro thermostats are designed to be a reliable, simple solution to in home comfort, so that everyone can enjoy the benefits and comforts of advanced temperature control. Diversitech offers a variety of LuxPro models and options to match any installation need.



675-P521U

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
675-P521U	5-2 program, 2 H/1 C, Programmable	EA	1
675-P722U	7 Day, Programmable, 2 H/2 C for Conventional, 2 H/1 C for Heat Pumps	EA	1
675-PSD010BF	Digital for Heat Only, with Fan Switch	EA	1
675-PSD111	1 H /1 C, Non-Programmable, Vertical/Horizontal	EA	1
675-PSDH121	1 or 2 H/C, Non-Programmable, Vertical/Horizontal	EA	1
675-PSM30SA	Heat Only Mechanical	EA	1
675-PSM40SA	Heating & Cool Mechanical	EA	1

PRESSURE SWITCHES

Cartridge Low Pressure Controls



PLP0520

Features

18 inch leads
Hermetically sealed
Tamper proof construction
Direct mounting on tubing
100% tested
UL recognized
Contacts rated at 6 amps, 24-240 volts
For use in residential and commercial A/C and commercial refrigeration

CATALOG NO.	OPEN PSI	CLOSE PSI	TOLERANCE	DIRECT REPLACEMENT FOR	UOM	OM
PLP0520	5	20	± 5 PSI	SLP0520	EA	1
PLP1025	10	25	± 5 PSI	SLP1025	EA	1
PLP1535	15	35	± 5 PSI	SLP1535	EA	1
PLP2550	25	50	± 5 PSI	SLP2550	EA	1
PLP2565	25	65	± 5 PSI	SLP2565	EA	1
PLP2580	25	80	± 5 PSI	SLP2580	EA	1
PLP4080	40	80	± 5 PSI	SLP4080	EA	1
PLP5090	50	90	± 5 PSI	SLP5090	EA	1
PLP75100	75	100	± 5 PSI	SLP75100	EA	1
PLP90120	90	120	± 5 PSI	SLP90120	EA	1

Cartridge High Pressure Controls



PHP200150

Features

18 inch leads
Hermetically sealed
Tamper proof construction
Direct mounting on tubing
100% tested
UL recognized
Contacts rated at 6 amps, 24-240 volts
For use in residential and commercial A/C and commercial refrigeration

CATALOG NO.	OPEN PSI	CLOSE PSI	TOLERANCE	DIRECT REPLACEMENT FOR	UOM	OM
PHP200150	200	150	± 15 PSI	SHP200150	EA	1
PHP250150	250	150	± 15 PSI	SHP250150	EA	1
PHP275195	275	195	± 15 PSI	SHP275195	EA	1
PHP300200	300	200	± 15 PSI	SHP300200	EA	1
PHP350250	350	250	± 15 PSI	SHP350250	EA	1
PHP375265	375	265	± 15 PSI	SHP375265	EA	1
PHP400200	400	200	± 15 PSI	SHP400200	EA	1
PHP400280	400	280	± 15 PSI	SHP400280	EA	1
PHP400300	400	300	± 15 PSI	SHP400300	EA	1
PHP425300	425	300	± 15 PSI	SHP425300	EA	1
PHP425325	425	325	± 15 PSI	SHP425325	EA	1
PHP450250	450	250	± 15 PSI	SHP450250	EA	1
PHP600475	600	475	± 15 PSI	33361	EA	1
PHP610420	610	420	± 15 PSI	SHP610420	EA	1

Cartridge Fan Cycle Pressure Controls



PFC75120

Features

18 inch leads
Hermetically sealed
Tamper proof construction
Direct mounting on tubing
100% tested
UL recognized
Contacts rated at 6 amps, 24-240 volts
For use in residential and commercial A/C and commercial refrigeration

CATALOG NO.	OPEN PSI	CLOSE PSI	TOLERANCE	DIRECT REPLACEMENT FOR	UOM	OM
PFC75120	75	120	± 15 PSI	SFC75120	EA	1
PFC110170	110	170	± 15 PSI	SFC110170	EA	1
PFC210275	210	275	± 15 PSI	SFC210275	EA	1
PFC150225	150	225	± 15 PSI	SFC150225	EA	1
PFC170250	170	250	± 15 PSI	SFC170250	EA	1
PFC200365	200	365	± 15 PSI	SFC200365	EA	1
PFC300400	300	400	± 15 PSI	SFC300400	EA	1

Cartridge Manual High Pressure Controls



PMR375

Features

18 inch leads
Hermetically sealed
Tamper proof construction
Direct mounting on tubing
100% tested
UL recognized
Contacts rated at 6 amps, 24-240 volts
For use in residential and commercial A/C and commercial refrigeration

CATALOG NO.	OPEN PSI	CLOSE PSI	TOLERANCE	DIRECT REPLACEMENT FOR	UOM	OM
PMR375	375	Manual	± 15 PSI	SMR375	EA	1
PMR410	410	Manual	± 15 PSI	SMR410	EA	1
PMR440	440	Manual	± 15 PSI	SMR440	EA	1
PMR575	575	Manual	± 15 PSI	SMR575	EA	1
PMR610	610	Manual	± 15 PSI	SMR610	EA	1
PMR630	630	Manual	± 15 PSI	SMR630	EA	1

PRESSURE SWITCHES CONT'D

Air Pressure Sensing Switch Kits



PS415

Features

Designed for residential furnace and light commercial aftermarket applications; duct heater, oven, and other HVAC or energy management applications
Mounts with the diaphragm in vertical plane
Easy installation

CATALOG NO.	DESCRIPTION	RANGE	OPERATING TEMP. RANGE	CONTACT ARRANGEMENT	CONNECTION	APPROVAL	UOM	OM
PS000	Field Adjustable Switch Kit	0.10"wc To 10.0"wc.	-40F To 190F	SPDT	1/4" Quick-Connect Terminals	UL, CUL	EA	1
PS495	Field Adjustable Switch Kit	0.20"wc To 1.0"wc.	-40F To 190F	SPDT	3 Male 90° Quick-Connect terminals	UL	EA	1
PS498	Field Adjustable Switch Kit	1.0"wc To 4.0"wc.	-40F To 190F	SPDT	3 Male 90° Quick-Connect terminals	UL	EA	1
PS222	Field Adjustable Switch Kit	0.05"wc To 10.0"wc.	-40F To 180F	SPDT	Screw Top Terminals With Cup Washers	UL	EA	1
PS221	Fixed Set Point Switch Kit	Operates On Pressure Rise At 0.05±0.02"w.c.	-40F To 180F	SPDT	1/4" Male 90° Quick-Connect terminals	UL	EA	1
PS400	Field Adjustable Switch Kit	0.15"wc To 5.0"wc.	-40F To 180F	SPDT	Screw Terminals With Cup Washers	UL, CUL	EA	1
PS415	Field Adjustable Switch Kit	0.15"wc To 5.0"wc.	-40F To 180F	SPST-NO. SPST-NC, SPDT	1/4" 90° Quick-Connect Terminals, Screw Terminals With Cup Washers	UL	EA	1

CATALOG NO.	DESCRIPTION	INCLUDES	UOM	OM
PS606	Universal Air Flow Sample Probe & Tubing Kit	7" Universal Probe, Mounting Flange, 6-32 Slotted Flange-Locking Set Screw, 3′ Tubing	EA	1



PS606

TUTCO

THERMOCOUPLES

Thermocouples



22218

Packard

Features

Designed to simplify installation on automatic controls and burners
Stainless steel head and weld at tip to provide reliable performance
Kit includes adapters to fit most types of pilot burners
Five popular lengths are available

CATALOG NO.	LENGTH (IN.)	DIRECT REPLACEMENT FOR HONEYWELL	JOHNSON	PENN	ROBERTSHAW	UOM	OM
22218	18	Q340A1066	K19AT-18, K15DS-18	K19AT-18, K15DS-18	1900-018, 1980-018	EA	1
22224	24	Q340A1074	K19AT-24, K15DS-24	K19AT-24, K15DS-24	1900-024, 1980-024	EA	1
22230	30	Q340A1082	K19AT-30, K15DS-30	K19AT-30, K15DS-30	1900-030, 1980-030	EA	1
22236	36	Q340A1090	K19AT-36, K15DS-36	K19AT-36, K15DS-36	1900-036, 1980-036	EA	1
22248	48	Q340A1108	K19AT-48, K15DS-48	K19AT-48, K15DS-48	1900-048, 1980-048	EA	1

VOLTAGE AND PHASE PROTECTION

Digital Three Phase Line Voltage Monitor



DTP-3

Offers continuous protection against voltage anomalies which can damage compressors, motors and other sensitive electrically operated devices.

PROTECTION: Loss of Phase, Phase Reversal, Voltage Imbalance, Low Voltage, High Voltage

DISPLAY: Large custom LCD display indicates all operating conditions at a glance. Three large sets of digits provide easy system troubleshooting.

VOLTMETER: Three independent voltmeters read both line and contactor load (backside) voltages.

MONITORED VOLTAGE: 160 to 600 Volts 50-60 Hz.

POWER SUPPLY: Power for the WPC-500 is automa-tically derived from any active phase. System operation is not dependent on the control voltage or a specific phase for power.

CONTROL VOLTAGE: 19-277 VAC. Anticipator load is provided for operation with 24 volt electronic and mechanical thermostats.

OPERATING VOLTAGE SET POINT: 175 to 650 VAC. Digitally adjustable in one volt increments.

VOLTAGE TRIP POINT: Adjustable in 1% increments between 6% and 18% of selected operating voltage. Restart voltage set point (hysterisis) fixed at cutout voltage + 3%.

VOLTAGE SYMMETRY: Adjustable imbalance trip point from 2% to 25% of selected operating voltage.

RESPONSE TIMES:
Phase Loss/Reversal: 100 mS max.
Imbalance: Adjustable Response Timer
Over or Under Voltage: Adjustable Response Timer

LOCKOUT DELAY TIMER: Fully adjustable 0 to 720 Seconds (0 to 12 minutes). Digital display shows re- maining time and user set points.

SEQUENTIAL START TIMER: 0 to 30 seconds in one second increments.

RESPONSE TIMER: 0.1 to 20 Seconds. Digital display shows remaining time and user set points.

MEMORY: Up to 25 past fault conditions are stored for later retrieval and analysis. The faults may be dis- played or cleared by the front panel buttons.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DTP-3	Digital 3-Phase Motor Protector	EA	1

Digital Single Phase Line Voltage Monitor



DSP-1

Automatic voltage monitor and control system. Continuously measures incoming line voltage, allowing detection of any voltage outside the tolerances that you set. If these limits are exceeded, the response timer begins counting. You may also set response time – a short time for a quick response or a long time to avoid nuisance tripping. If the voltage remains outside the tolerance after the time has elapsed, the DSP-1 will turn off its output relay and protect your device. While output is off, an additional delay timer activates to avoid rapid restarts.

FEATURES:
Digital voltmeter displays instantaneous line voltage;
Automatic voltage tester adjusts from 90 to 300 volts;
Adjustable response timer (0.1 to 10 sec.) prevents nuisance tripping;
Adjustable delay timer (1 to 720 sec.) prevents rapidrestarts;
Digital display makes for easy viewing and operation

SPECIFICATIONS:

Voltmeter:	70 to 325 Volts
Voltage Set Point:	90 to 300 Volts
Tolerance Limits:	6 to 18%
Response Timer:	0.1 to 10 seconds
Delay Timer:	1 to 720 seconds
Output Relay:	10 Amps, 250 VAC resistive, single-pole/double-throw
Control Input:	18 to 250 VAC with anticipator load for 24 volt thermostats

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DSP-1	Digital Single Phase Motor Protector	EA	1

SURGE PROTECTORS CONT'D

Ditek Single Phase Surge Protectors

Features

Weatherproof Encl.
Parallel connection for easy installation
Diagnostic LED provides positive indication of power, ground presence, and surge protection
Automatically resets to handle multiple surge events
Typical Applications: A/C disconnect, small electrical panels, pool/well pumps
Half the response time as similar models



PSP72KA

CATALOG NO.	SERVICE WIRING	SURGE CURRENT RATING	MCOV	UL 1449, 3RD ED. V.P.R.	SHORT CIRCUIT CURRENT RATING	UL1449, 3RD ED. IN RATING	DIRECT REPLACEMENT FOR	UOM	ORDER MULTIPLE
PSP72KA	Split Φ (2W + G), 120/240VAC	50,000A	150/320V	700V L-G, 1,200V L-L	10,000A	10,000A	SMC60 SMC150	EA	1

Ditek Single Phase Surge Protectors

Features

Voice, data and signaling circuit surge protection
Adds no resistance to loop circuits
#22-#16 AWG screw terminal connections
For 24 volt service



PSP38VDC

CATALOG NO.	PROTECTION MODE	SURGE CURRENT RATING	MCOV	MAX CONTINUOUS CURRENT	CLAMPING VOLTAGE	DIRECT REPLACEMENT FOR	UOM	ORDER MULTIPLE
PSP38VDC	Line-Ground	2,000 Amps/Pair (5-48V) 9,000 Amps/Pair (75-130V)	38VDC	5A, 0.5A (SCP)	47V	SYCST027B	EA	1

Ditek CMXPLUS 3 Phase Surge Protectors

Features

NEMA 4X Encl. allows for use in harsh environments
Parallel connection for easy installation
Flexible Lockstrap
Diagnostic LED indicates system power and function
Automatically resets to handle multiple surge events



DTK-4803CMXPLUS

CATALOG NO.	DESCRIPTION	SERVICE VOLTAGE	PHASE	TYPE	UOM	ORDER MULTIPLE
DTK-2403CMXPLUS	3 Phase Surge Protector	208/240VAC	3	SPD Type 1	EA	1
DTK-4803CMXPLUS	3 Phase Surge Protector	480VAC	3	SPD Type 1	EA	1
DTK-6003CMXPLUS	3 Phase Surge Protector	600VAC	3	SPD Type 1	EA	1

VOLTAGE AND PHASE PROTECTION CONT'D

Motor Protection Controls



ICM441

Protects Against
Under voltage
Over temperature
Power interruptions
Rapid short cycling
Shorted temperature sensor
Open temperature sensor
Control duty, SPST relay layout
Anti-short cycle time delay,
4 minutes (nominal)
1-second manual bypass

Voltage: 120 or 208/240 VAC
Frequency: 50/60 Hz
Output:
- **Relay:** SPST
- **N.O.:** 6 Amps resistive

Dimensions: 3.25" x 3" x 1.25"

Direct Replacement For:
Bristol: 241680
Copeland: 071-0376-01, 071-0376-02, 071-0397-00, 071-0397-01, 071-0424-00, 071-0424-01, 071-9800-00, 071-9800-01
Mars: 37300, 37302, 37304, 37306, 37322
Texas Instruments: 15AA1600 B, 15AA1600 C, 15AA1603 B, 15AA1603 C, 31AA1600 E, 31AA1606 E

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ICM441	3-Phase Motor Protectors	EA	1

Motor Protection and Surge Protectors



ICM517

Features
Easy installation
Low cost, high performance
Rugged, reliable
UL Listed, Type 2 device
NEMA Type 3R metal enclosure

Service voltage: 120/240 volt, single phase
Maximum surge current: 100,000 Amps
Maximum energy dissipation: 1,020 Joules
Installation point: Electrical panel/disconnect
Diagnostics: Green light indicates surge suppression present
AC protection modes: L-L, L-N, L-G, N-G
Conduit connection: 3/4"
Dimensions: 5.0" x 2.78" x 2.16"
Weight: 0.55 lbs.

Direct Replacement For:
Supco: SCM Plus, SCM150
Intermatic: AG3000

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ICM517	Single Phase Surge Protector	EA	1

Motor Protection Controls



ICM450A

Features
Fully programmable w/LCD diagnostic display
Easy to configure - simple push button setup
Easy to customize - set points, variables and features are fully adjustable and may be defined by the user while in control SETUP mode
Non-volatile 25-fault memory storage
Independent high and low voltage settings ideal for dual voltage compressor applications
Identifies front and back side faults
Reset mode: choice of auto or manual
Protects against: voltage unbalance, high/low voltage, phase loss, phase reversal, faulty power, incorrect sequencing and rapid short cycling
Reliable, high temperature LCD to 167˚F
Simultaneous voltage display, no scrolling
Line voltage programmable
Universal voltage operation: 190-630 VAC

Voltage: 190-630 VAC
Frequency: 50/60 Hz
Voltage unbalance: Adjustable: 2-25%
Control voltage: 18-240 VAC (optional)
Delay on break timer: 0-10 minutes
Output:
• **Relay:** SPDT • **N.O.:** 10 Amps • **N.C.:** 6 Amps
Dimensions: 6.5" x 4.25" x 1.5"

Direct Replacement For:
A-1: EAC-800, EAC-8000, EAC-8002
Copeland: 085-0160-00
Diversified: AC-2020, AC-301, AC-302
Mars: PFM-2000, Motorsaver: 455
SSAC: QLM, QLV, Time Mark: 265
Wagner/DiversiTech: DTP-3, WPC-800

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ICM450A	3-Phase Line Voltage Monitors	EA	1

FAN BLADES

OEM Direct Replacements

CARRIER | GOODMAN | GREENHECK | HC DUKE | HUSSMAN LENNOX | NORDYNE | RHEEM | SCOTTSMAN | TAYLOR TRANE | LENNOX / ALLIED AIR | LENNOX/EXCEL

OEM BRAND	OEM PART NUMBER	CATALOG NO.
CARRIER	LA01EA025	R32213
CARRIER	LA01EA026	R21801
CARRIER	LA01EA037	R32205
CARRIER	LA01EA038 / LA01EA037	R32206
CARRIER	LA01EC018	R31821
CARRIER	LA01EW051	R31404
CARRIER	LA01RA004	R32603
CARRIER	LA01RA005	R32607
CARRIER	LA01RA006	R32610
CARRIER	LA01RA015	R31811
CARRIER	LA01RA027	R32202
CARRIER	LA01RA028B	R32208
CARRIER	LA01RA033	R32017
CARRIER	LA01RA038A	R32215
CARRIER	LA01RA220	R22001
CARRIER	LA01RA221	R22002
CARRIER	LA01RA222	R22401
CARRIER	LA01RA225	R22402
CARRIER	LA01RA312	R32402
CARRIER	LA01RA320	R32004
CARRIER	LA01RA321	R32008
CARRIER	LA01RA323	R32409
CARRIER	LA01RA324	R32406
CARRIER	LA01RA325	R32401
CARRIER	LA01RA326	R32602
CARRIER	LA01RA327	R32605
CARRIER	LA01RA329	R32606
CARRIER	LA01RA334	R32601
GOODMAN	10625738	R32604
GOODMAN	0150M00001P	R32009
GOODMAN	0150M00016	R32204
GOODMAN	B1086756	R31815
GOODMAN	B1086764	R42201
GOODMAN	B1086765	R42209
GOODMAN	B1086770	R32201

OEM BRAND	OEM PART NUMBER	CATALOG NO.
GOODMAN	B1086771	R31816
GOODMAN	B1086773	R32209
GOODMAN	B1086775 / 0150M00006	R32216
GREENHECK	335629	R31270
GREENHECK	335650	R31272
HC DUKE	HC159037	R31268
HUSSMAN	E316580	R31267
HUSSMAN	E410387001	R31266
LENNOX	100060-09 / 68J2801	R41812
LENNOX	100060-10	R42210
LENNOX	100060-13	R42204
LENNOX	37L4801	R31604
LENNOX/ALLIED AIR	68J2601 / 100060-07	R31807
LENNOX/ALLIED AIR	68J2701 / 100060-08	R41805
LENNOX/EXCEL	100060-18	R32204
LENNOX/EXCEL	20391102	R31817
LENNOX/EXCEL	100060-03	R31810
LENNOX/EXCEL	100060-19	R32212
NORDYNE	667303	R32406
NORDYNE	6672790	R32003
NORDYNE	667261C	R31801
NORDYNE	667262B	R31814
NORDYNE	667316A	R32403
NORDYNE	667319A	R22405
RHEEM	702185906	R22201
RHEEM	7010132314	R31781
RHEEM	7010132315	R21781
RHEEM	7010201106	R32010
RHEEM	7010201107	R22204
RHEEM	70-102011-04	R22406
SCOTTSMAN	18888201	R31271
TAYLOR	63397	R31269
TRANE	D154218P38 / D154218P37	R22701
TRANE	D154229P01	R31901
TRANE	D154229P02	R31902

FAN BLADES CONT'D

KH/KC Fans



R42408

Applications

Commercial air conditioning and ventilation
Air handlers
Cooling towers
Large unit heaters
Agricultural applications

Features

24" to 48" diameters
Heavy-Gauge for added strength
Steel spiders
Rotation determined by viewing air-discharge side of fan
Individually boxed
6 blade available
Made in USA

CATALOG NO.	NO. OF BLADES	DIAM. (IN.)	PITCH (°)	ROTATION	BORE (IN.)	HUB LOCATION	MATERIAL	MAX RPM	INDUSTRY NO.	UOM	OM
R42408	4	24	28	CW	—	Hubless	GALV	1140	40200	EA	1
R42407	4	24	34	CW	—	Hubless	GALV	1140	40201	EA	1
R42603	4	26	28	CW	—	Hubless	GALV	1140	40202	EA	1
R42606	4	26	38	CW	—	Hubless	GALV	1140	40203	EA	1
R42801	4	28	34	CW	5/8	Discharge	GALV	1140	40396	EA	1
R43002	4	30	22	CW	—	Hubless	GALV	1140	40205	EA	1
R43003	4	30	30	CW	5/8	Discharge	GALV	1140	40397	EA	1
R43004	4	30	30	CW	—	Hubless	GALV	1140	40206	EA	1
R43601	4	36	32	CW	—	Hubless	GALV	850	40208	EA	1
R43602	4	36	34	CW	—	Hubless	GALV	850	40209	EA	1
R43603	4	36	38	CW	—	Hubless	GALV	850	40211	EA	1
R44202	4	42	38	CW	—	Hubless	GALV	850	40213	EA	1
R44801	4	48	38	CW	—	Hubless	GALV	700	40216	EA	1

Fan should be guarded before operating.
Tighten cap screws securely before operating.

Swept Fans



R22405



R32017

Applications

Commercial and residential condensers

Features

Carrier Replacements
Up to 50% reduction in noise level
Rotation is determined by viewing the discharge side of fan
Made in USA

CATALOG NO.	NO. OF BLADES	DIAM. (IN.)	PITCH (°)	ROTATION	BORE (IN.)	HUB POSITION	UOM	OM
R22405	2	24	27	CW	1/2	Intake	EA	1
R22701	2	27	28	CCW	1/2	Intake	EA	1

CATALOG NO.	NO. OF BLADES	DIAM. (IN.)	PITCH (°)	ROTATION	BORE (IN.)	HUB POSITION	UOM	OM
R32017	3	20	34	CW	1/2	Intake	EA	1
R32607	3	26	24	CW	1/2	Intake	EA	1
R32610	3	26	28	CW	1/2	Intake	EA	1

Additional models available upon request

FAN BLADES CONT'D

Propellers With Fixed Hub - 3-Blade



R31811

REVCOR REVOLUTIONARY AIR FLOW™

Applications

Unitary condensing units, heat pumps, unit heaters, ventilators and exhaust fans

Features

14" to 30" diameters
Embossed for added strength
Factory balanced
Steel spiders with 1/2" and 5/8" bores
Individually boxed
Aluminum fan blades unless otherwise specified
Made in USA

CATALOG NO.	DIAM. (IN.)	PITCH (°)	ROTA.	BORE (IN.)	HUB POSITION	DIRECT REPLACEMENT FOR
R31403	14	32	CW	1/2	Discharge	40328
R31404*	14	38	CW	1/2	Intake	LA01EW051
R31602	16	28	CW	1/2	Intake	40331
R31603	16	30	CW	1/2	Intake	40332
R31604	16	32	CCW	1/2	Intake	37L4801
R31781*	17.8	34	CCW	1/2	Intake	7010132314
R31801*	18	19	CW	1/2	Intake	667261C
R31804	18	26	CW	1/2	Discharge	40338
R31805	18	26	CCW	1/2	Intake	40339
R31809	18	27	CW	1/2	Discharge	40340
R31807*	18	27	CCW	1/2	Intake	68J2601
R31810*	18	27	CCW	1/2	Intake	100060-03
R31811	18	27	CW	1/2	Intake	LA01RA015
R31814*	18	30	CW	1/2	Intake	667262B
R31815*	18	31	CCW	1/2	Intake	B1086756
R31816	18	32	CCW	1/2	Intake	B1086771
R31817	18	32	CW	1/2	Intake	20391102
R31820	18	33	CW	1/2	Discharge	40343
R31821	18	35	CW	1/2	Intake	LA01EC018
R31901	19	30	CCW	1/2	Intake	D154229P01
R31902	19	32	CCW	1/2	Intake	D154229P02
R32001	20	23	CW	1/2	Discharge	F20233
R32003*	20	26	CW	1/2	Intake	6672790
R32004	20	26	CW	1/2	Intake	LA01RA320
R32008	20	28	CW	1/2	Intake	LA01RA321
R32009*	20	28	CCW	1/2	Intake	0150M00001P
R32010*	20	29	CCW	1/2	Intake	7010201106
R32014	20	31	CW	1/2	Discharge	L6130630001
R32201	22	19	CCW	1/2	Intake	B1086770
R32202*	22	20	CW	1/2	Intake	LA01RA027
R32203	22	20	CW	1/2	Intake	L6129570001

*Note - Galvanized Fan Blades

CATALOG NO.	DIAM. (IN.)	PITCH (°)	ROTA.	BORE (IN.)	HUB POSITION	DIRECT REPLACEMENT FOR
R32204	22	22	CCW	1/2	Intake	100060-18
R32207*	22	24	CW	1/2	Discharge	40352
R32205*	22	24	CW	1/2	Intake	L6130640001
R32206	22	24	CW	1/2	Intake	LA01EA038, 40353
R32208*	22	24	CW	1/2	Intake	LA01RA028B
R32209	22	24	CCW	1/2	Intake	B1086773
R32212	22	27	CW	1/2	Intake	100060-19
R32213	22	28	CW	1/2	Intake	LA01EA025
R32214	22	28	CW	1/2	Intake	40355
R32215*	22	28	CW	1/2	Intake	LA01RA038A
R32216	22	28	CCW	1/2	Intake	B1086775
R32221	22	33	CW	1/2	Intake	40356
R32401*	24	18	CW	1/2	Intake	LA01RA325
R32402*	24	19	CW	1/2	Intake	LA01RA312
R32403*	24	20	CW	1/2	Intake	667316A
R32404	24	22	CW	1/2	Intake	L6131430001
R32405	24	22	CCW	1/2	Intake	40323
R32406*	24	24	CW	1/2	Intake	LA01RA324
R32409*	24	26	CW	1/2	Intake	LA01RA323
R32410	24	30	CW	1/2	Intake	40359
R32601*	26	15	CW	1/2	Intake	LA01RA334
R32602	26	18	CW	1/2	Intake	LA01RA326
R32604	26	20	CCW	1/2	Intake	10625738
R32605*	26	21	CW	1/2	Intake	LA01RA327
R32606*	26	24	CW	1/2	Intake	LA01RA329
R32608	26	26	CW	1/2	Discharge	40362
R32609	26	27	CW	1/2	Intake	40363
R33001	30	30	CW	5/8	Discharge	—

Additional blade options available upon request

FAN BLADES CONT'D

Propellers With Fixed Hub - 2, 4 and 5-Blade



R21402



R41607



R51803

REVCOR
REVOLUTIONARY AIR FLOW

Applications

Unitary condensing units, heat pumps, unit heaters, ventilators and exhaust fans

Features

14" to 30" diameters
Embossed for added strength
Factory balanced
Steel spiders
Individually boxed
Aluminum fan blades unless otherwise specified
Made in USA

CATALOG NO.	NO. OF BLADES	DIAM. (IN.)	PITCH (°)	ROTATION	BORE (IN.)	HUB POSITION	DIRECT REPLACEMENT FOR	UOM	OM
R21402	2	14	36	CW	1/2	Discharge	L60743401	EA	1
R21401	2	14	36	CCW	1/2	Intake	40301	EA	1
R21781*	2	17.8	31	CCW	1/2	Intake	7010132315	EA	1
R21801	2	18	20	CW	1/2	Intake	LA01EA026	EA	1
R21802	2	18	24	CW	1/2	Intake	40305	EA	1
R21803	2	18	29	CCW	1/2	Intake	40308	EA	1
R21804	2	18	29	CW	1/2	Intake	40307	EA	1
R21805	2	18	33	CCW	1/2	Intake	40408	EA	1
R22001	2	20	20	CW	1/2	Intake	LA01RA220	EA	1
R22002	2	20	24	CW	1/2	Intake	LA01RA221	EA	1
R22003	2	20	29	CCW	1/2	Intake	40315	EA	1
R22201*	2	22	22	CCW	1/2	Intake	40319	EA	1
R22202	2	22	27	CCW	1/2	Intake	F22272	EA	1
R22203*	2	22	29	CCW	1/2	Intake	40321	EA	1
R22204*	2	22	35	CCW	1/2	Intake	7010201107	EA	1
R22401*	2	24	16	CW	1/2	Intake	LA01RA222	EA	1
R22402*	2	24	18	CW	1/2	Intake	LA01RA225	EA	1
R22403	2	24	24	CCW	1/2	Intake	40324	EA	1
R22404	2	24	27	CCW	1/2	Intake	L60772801	EA	1
R22406*	2	24	31	CCW	1/2	Intake	70-102011-04	EA	1
R41607	4	16	33	CW	1/2	Discharge	40372	EA	1
R41805*	4	18	27	CCW	1/2	Intake	68J2701	EA	1
R41808	4	18	30	CW	1/2	Intake	40375	EA	1
R41811	4	18	33	CW	1/2	Discharge	40376	EA	1
R41812	4	18	34	CCW	1/2	Intake	68J2801	EA	1
R42009	4	20	33	CW	1/2	Intake	40378	EA	1
R42010	4	20	36	CW	1/2	Intake	40379	EA	1
R42201*	4	22	22	CCW	1/2	Intake	B1086764	EA	1
R42205	4	22	24	CW	1/2	Discharge	40380	EA	1
R42204	4	22	24	CCW	1/2	Intake	100060-13	EA	1
R42206	4	22	26	CW	1/2	Intake	40381	EA	1
R42209*	4	22	28	CCW	1/2	Intake	B1086765	EA	1
R42210	4	22	32	CCW	1/2	Intake	100060-10	EA	1
R42212	4	22	33	CCW	1/2	Intake	40382	EA	1
R42404	4	24	27	CCW	1/2	Discharge	F24278	EA	1
R42604	4	26	30	CW	5/8	Discharge	L6130720001	EA	1
R43001	4	30	22	CW	5/8	Intake	40392	EA	1
R51803	5	18	33	CW	1/2	Discharge	40404	EA	1

***Note - Galvanized Fan Blades** **Additional blade options available upon request**

FAN BLADES CONT'D

REVCOR Hubless Propellers - 3-Blade



R31802

REVCOR REVOLUTIONARY AIR FLOW

Applications

Air conditioning condensing units, power roof ventilators, heat pumps, heat exchangers, unit heaters, commercial and industrial equipment

Features

10" to 24" diameter available
Embossed for added strength
Use with interchangeable hubs
Individually boxed
Aluminum fan blades
Steel spiders
Made in USA
Max motor speed for blades up to 16" is 1725 Rpm.
Max motor speed for blades 18" to 26" is 1140 Rpm.

CATALOG NO.	NO. OF BLADES	DIAMETER (IN.)	PITCH (°)	ROTATION	DIRECT REPLACEMENT FOR	UOM	OM
R31201	3	12	19	CW	40061	EA	1
R31202	3	12	27	CW	L6129790001	EA	1
R31401	3	14	23	CW	L60716501	EA	1
R31402	3	14	27	CW	L60716701	EA	1
R31601	3	16	23	CW	—	EA	1
R31802	3	18	23	CCW	L60556001	EA	1
R31803	3	18	23	CW	40041	EA	1
R31806	3	18	27	CCW	40044	EA	1
R31808	3	18	27	CW	40043	EA	1
R31812	3	18	30	CCW	18307	EA	1
R31813	3	18	30	CW	L60556301	EA	1
R31818	3	18	33	CCW	40046	EA	1
R31819	3	18	33	CW	40045	EA	1
R32002	3	20	24	CW	L6129830001	EA	1
R32005	3	20	27	CW	—	EA	1
R32006	3	20	28	CCW	L60556801	EA	1
R32007	3	20	28	CW	40049	EA	1
R32011	3	20	30	CW	40067	EA	1
R32012	3	20	31	CCW	L60557001	EA	1
R32013	3	20	31	CW	—	EA	1
R32015	3	20	33	CCW	40052	EA	1
R32016	3	20	33	CW	40051	EA	1
R32210	3	22	27	CCW	40054	EA	1
R32211	3	22	27	CW	40053	EA	1
R32217	3	22	30	CCW	40024	EA	1
R32218	3	22	30	CW	40069	EA	1
R32219	3	22	33	CCW	40056	EA	1
R32220	3	22	33	CW	40055	EA	1
R32407	3	24	26	CCW	40058	EA	1
R32408	3	24	26	CW	40057	EA	1
R32411	3	24	33	CW	—		

Additional blade options available upon request

Hubs With Set Screws and Mounting Screws



H60765801

Packard

CATALOG NO.	BORE (IN.)	NO. OF SET SCREWS	UOM	OM
H60765801	1/4	1	EA	1
H60765802	5/16	1	EA	1
H60765803	3/8	1	EA	1
H60765804	1/2	2	EA	1
H60765805	5/8	2	EA	1
H60765806	3/4	2	EA	1

Shafts

Features

1018 Cold Rolled Steel
Ground & Polished



S38220501

Packard

CATALOG NO.	DIAM. (IN.)	LENGTH (IN.)	UOM	OM
S38220501	5/8	20	EA	1
S38209601	3/4	20	EA	1
S38269301	3/4	35	EA	1
S38209501	1	25	EA	1
S38249201	1	35	EA	1

FAN BLADES CONT'D

Hubless Propellers - 4 & 5-Blade

Applications

Air conditioning condensing units, power roof ventilators, heat pumps, heat exchangers, unit heaters, commercial and industrial equipment

Features

10" to 26" diameter

Steel spiders
Embossed for added strength
For motor speeds up to 1625 RPM
Use with interchangeable hubs
Individually boxed
Aluminum fan blades
Made in USA



R51801

REVCOR
REVOLUTIONARY AIR FLOW™

CATALOG NO.	NO. OF BLADES	DIAMETER (IN.)	PITCH (°)	ROTATION	DIRECT REPLACEMENT FOR	UOM	OM
R41001	4	10	27	CW	L60717701	EA	1
R41201	4	12	23	CCW	40077	EA	1
R41202	4	12	23	CW	40076	EA	1
R41203	4	12	27	CCW	40079	EA	1
R41204	4	12	27	CW	40078	EA	1
R41205	4	12	33	CW	40080	EA	1
R41401	4	14	23	CCW	L60718801	EA	1
R41403	4	14	23	CW	40082	EA	1
R41405	4	14	27	CCW	40085	EA	1
R41406	4	14	27	CW	40084	EA	1
R41407	4	14	33	CW	40086	EA	1
R41601	4	16	23	CCW	L60719401	EA	1
R41602	4	16	23	CW	40088	EA	1
R41603	4	16	27	CCW	40091	EA	1
R41604	4	16	27	CW	40090	EA	1
R41605	4	16	33	CCW	16338	EA	1
R41606	4	16	33	CW	40092	EA	1
R41801	4	18	19	CW	18194	EA	1
R41802	4	18	23	CCW	40095	EA	1
R41803	4	18	23	CW	L60800201	EA	1
R41804	4	18	27	CCW	40097	EA	1
R41806	4	18	27	CW	18274	EA	1
R41807	4	18	30	CCW	L60558401	EA	1
R41809	4	18	33	CCW	18338	EA	1
R41810	4	18	33	CW	18334	EA	1
R42001	4	20	23	CCW	L60800501	EA	1
R42002	4	20	23	CW	L60800401	EA	1
R42003	4	20	27	CCW	40103	EA	1
R42004	4	20	27	CW	40102	EA	1
R42005	4	20	29	CCW	L60559001	EA	1
R42006	4	20	29	CW	L60558901	EA	1
R42007	4	20	33	CCW	40105	EA	1
R42008	4	20	33	CW	40104	EA	1
R42202	4	22	23	CCW	40107	EA	1
R42203	4	22	23	CW	40106	EA	1
R42207	4	22	27	CCW	40109	EA	1
R42208	4	22	27	CW	40108	EA	1
R42211	4	22	33	CW	40110	EA	1
R42213	4	22	35	CW	40139	EA	1
R42401	4	24	23	CCW	40113	EA	1
R42402	4	24	23	CW	40112	EA	1
R42403	4	24	27	CCW	40115	EA	1
R42405	4	24	27	CW	40114	EA	1
R42406	4	24	33	CW	40116	EA	1
R42601	4	26	24	CW	L60760701	EA	1
R42602	4	26	27	CW	40118	EA	1
R42605	4	26	33	CW	L60761101	EA	1
R51601	5	16	27	CCW	40151	EA	1
R51602	5	16	33	CW	40402	EA	1
R51801	5	18	27	CCW	L60560601	EA	1
R51802	5	18	27	CW	L60560501	EA	1
R52201	5	22	33	CW	40164	EA	1
R52401	5	24	27	CW	L60561701	EA	1

Additional blade options available upon request

FAN BLADES CONT'D

3-Blade Propellers Heavy Duty Condenser Style



L60716301

Lau Industries, Inc.

Applications

Air conditioning condensing units
Power roof ventilators
Heat pumps
Heat exchangers
Roof top air conditioners
Commercial and industrial equipment
Unit heaters
Agricultural ventilating equipment
Walk-in refrigeration units
General cooling/heating applications

Features

3-blade configuration is normally used in low pressure applications
Square pressure-type blades are required for most condenser applications
High quality aluminum blades
Interchangeable hubs available from 1/4" through 3/4" bore, may be attached on either intake or discharge side
Pitches available for most common horsepower and motor speeds up to 1725 RPM in both CW and CCW rotations

CATALOG NO.	DIAMETER (IN.)	PITCH (°)	ROTATION	BORE (IN.)	HUB POSITION	UOM	OM
L60716101	12	19	CW	—	Interchangeable	EA	2
L60716301	12	23	CW	—	Interchangeable	EA	2
L60716401	12	23	CCW	—	Interchangeable	EA	2
L60716501	14	23	CW	—	Interchangeable	EA	2
L60716601	14	23	CCW	—	Interchangeable	EA	2
L60716701	14	27	CW	—	Interchangeable	EA	2
L60716801	14	27	CCW	—	Interchangeable	EA	2
L60717001	16	19	CCW	—	Interchangeable	EA	2
L60717101	16	23	CW	—	Interchangeable	EA	2
L60717201	16	23	CCW	—	Interchangeable	EA	2
L6129800001	16	27	CCW	—	Interchangeable	EA	2
L60556201	18	27	CCW	—	Interchangeable	EA	2
L60556301	18	30	CW	—	Interchangeable	EA	2
L60556401	18	30	CCW	—	Interchangeable	EA	2
L60556501	18	33	CW	—	Interchangeable	EA	2
L60556601	18	33	CCW	—	Interchangeable	EA	2
L6129820001	20	24	CCW	—	Interchangeable	EA	2
L60556701	20	27	CW	—	Interchangeable	EA	2
L60556801	20	27	CCW	—	Interchangeable	EA	2
L60556901	20	30	CW	—	Interchangeable	EA	2
L60557001	20	30	CCW	—	Interchangeable	EA	2
L60557101	20	33	CW	—	Interchangeable	EA	2
L60557201	20	33	CCW	—	Interchangeable	EA	2
L6130640001	22	24	CW	1/2	Intake	EA	2
L60557301	22	27	CW	—	Interchangeable	EA	2
L60557401	22	27	CCW	—	Interchangeable	EA	2
L60557501	22	33	CW	—	Interchangeable	EA	2
L60557601	22	33	CCW	—	Interchangeable	EA	2
L60557701	24	27	CW	—	Interchangeable	EA	2
L60557801	24	27	CCW	—	Interchangeable	EA	2
L60557901	24	33	CW	—	Interchangeable	EA	2
L60558001	24	33	CCW	—	Interchangeable	EA	2
L6129910001	26	33	CW	—	Interchangeable	EA	1
L6129930001	30	27	CW	—	Interchangeable	EA	1

FAN BLADES CONT'D

4-Blade Propellers Heavy Duty Condenser Style



L60717601

Lau Industries, Inc.

Applications

Condensing units, general building and agricultural ventilation fans

Features

High strength aluminum blades with corrosion resistant center spiders

CATALOG NO.	DIAM. (IN.)	PITCH (°)	ROTA.	BORE (IN.)	HUB POSITION	UOM	OM
L60717501	10	23	CW		Interchangeable	EA	2
L60717601	10	23	CCW		Interchangeable	EA	2
L60717701	10	27	CW		Interchangeable	EA	2
L60759901	10	33	CW		Interchangeable	EA	2
L60718101	12	23	CW		Interchangeable	EA	2
L60718201	12	23	CCW		Interchangeable	EA	2
L60718301	12	27	CW		Interchangeable	EA	2
L60760101	12	33	CW		Interchangeable	EA	2
L60760201	12	33	CCW		Interchangeable	EA	2
L60718501	14	19	CW		Interchangeable	EA	2
L60718701	14	23	CW		Interchangeable	EA	2
L60718801	14	23	CCW		Interchangeable	EA	2
L60718901	14	27	CW		Interchangeable	EA	2
L60719001	14	27	CCW		Interchangeable	EA	2
L60760301	14	33	CW		Interchangeable	EA	2
L60760401	14	33	CCW		Interchangeable	EA	2
L60719101	16	19	CW		Interchangeable	EA	2
L60719401	16	23	CCW		Interchangeable	EA	2
L60719501	16	27	CW		Interchangeable	EA	2
L60760501	16	33	CW		Interchangeable	EA	2
L60760601	16	33	CCW		Interchangeable	EA	2
L60800201	18	23	CW		Interchangeable	EA	2
L60800301	18	23	CCW		Interchangeable	EA	2
L60558101	18	27	CW		Interchangeable	EA	2
L60558201	18	27	CCW		Interchangeable	EA	2
L60558301	18	30	CW		Interchangeable	EA	2

CATALOG NO.	DIAM. (IN.)	PITCH (°)	ROTA.	BORE (IN.)	HUB POSITION	UOM	OM
L60558401	18	30	CCW		Interchangeable	EA	2
L60558501	18	33	CW		Interchangeable	EA	2
L60558601	18	33	CCW		Interchangeable	EA	2
L60800401	20	23	CW		Interchangeable	EA	2
L60800501	20	23	CCW		Interchangeable	EA	2
L60558701	20	27	CW		Interchangeable	EA	2
L60558801	20	27	CCW		Interchangeable	EA	2
L60558901	20	30	CW		Interchangeable	EA	2
L60559001	20	30	CCW		Interchangeable	EA	2
L60559101	20	33	CW		Interchangeable	EA	2
L60559201	20	33	CCW		Interchangeable	EA	2
L60804101	22	23	CW		Interchangeable	EA	2
L60804201	22	23	CCW		Interchangeable	EA	2
L60559301	22	27	CW		Interchangeable	EA	2
L60559401	22	27	CCW		Interchangeable	EA	2
L60559501	22	33	CW		Interchangeable	EA	2
L60559601	22	33	CCW		Interchangeable	EA	2
L6130190001	24	18	CW		Interchangeable	EA	2
L60804301	24	23	CW		Interchangeable	EA	2
L60804401	24	23	CCW		Interchangeable	EA	2
L60559701	24	27	CW		Interchangeable	EA	2
L60559801	24	27	CCW		Interchangeable	EA	2
L60559901	24	33	CW		Interchangeable	EA	2
L60560001	24	33	CCW		Interchangeable	EA	2
L60760701	26	24	CW		Interchangeable	EA	1
L60760801	26	24	CCW		Interchangeable	EA	1
L60760901	26	27	CW		Interchangeable	EA	1
L60761001	26	27	CCW		Interchangeable	EA	1
L60997201	26	32	CW	5/8	Discharge	EA	1
L60761101	26	33	CW		Interchangeable	EA	1
L60761201	26	33	CCW		Interchangeable	EA	1
L61017601	28	25	CW	5/8	Discharge	EA	1
L6131250001	30	27	CW		Interchangeable	EA	1
L6127290001	30	30	CW	5/8	Discharge	EA	1
L6131260001	30	33	CCW		Interchangeable	EA	1
L6131270001	30	33	CW		Interchangeable	EA	1

FAN BLADES CONT'D

2-Blade Propellers OEM Style With Fixed Hub



L60772501

Applications


For lower static pressure condensing units. Replacements for G.E., Rheem-Rudd, Singer-Climate Control, Trane, etc.

Features

14" to 24" diameter
High strength aluminum blades
Each blade clearly labeled as to Pitch, Diam., Rotation, & Max. RPM
Top quality, epoxy painted spiders with high salt spray characteristics
Steel fixed hub - 1/2" bore - exact propellers as supplied to OEMs

CATALOG NO.	DIAMETER (IN.)	PITCH (°)	ROTATION	BORE (IN.)	HUB POSITION	UOM	OM
L6130470001	14	32	CW	1/2	Discharge	EA	2
L60772501	18	28	CCW	1/2	Intake	EA	2
L6130510001	18	29	CW	1/2	Intake	EA	2
L60652101	18	32	CCW	1/2	Intake	EA	2
L6130520001	18	36	CW	1/2	Intake	EA	2
L60772601	20	28	CCW	1/2	Intake	EA	2
L60772701	22	16	CCW	1/2	Intake	EA	2
L60814201	22	27	CCW	1/2	Intake	EA	2
L6130580001	24	24	CCW	1/2	Intake	EA	2
L60772801	24	27	CCW	1/2	Intake	EA	2

3-Blade and 4-Blade Propellers Free Air Style




L60265401

Applications

Pedestal and window fans, air circulators

Features

Designed for free air, low pressure applications
High quality, rounded aluminum blades for maximum free air delivery with minimum noise levels
Pitches available for most common HP and motor speeds
Hubs attached on either the intake or discharge side



L60262201

CATALOG NO.	NO. OF BLADES	DIAM. (IN.)	PITCH (°)	ROTATION	HUB POSITION	UOM	OM
L60265401	3	12	23	CW	Interchangeable	EA	2
L60265801	3	14	23	CW	Interchangeable	EA	2
L60266201	3	16	23	CW	Interchangeable	EA	2
L60267001	3	20	23	CW	Interchangeable	EA	2
L60267101	3	20	23	CCW	Interchangeable	EA	2
L60267601	3	24	18	CW	Interchangeable	EA	2
L60262201	4	12	23	CW	Interchangeable	EA	2
L60555301	4	18	23	CW	Interchangeable	EA	2
L60555401	4	18	23	CCW	Interchangeable	EA	2
L60263801	4	20	23	CW	Interchangeable	EA	2
L60562301	4	24	23	CW	Interchangeable	EA	2
L60562501	4	24	27	CW	Interchangeable	EA	2

FAN BLADES CONT'D

5-Blade Propellers Heavy Duty Condenser Style



L60720601

Lau Industries, Inc.

Applications

Industrial air circulators, exhaust fan units and large condensing units

Features

High quality aluminum blades with corrosion resistant center spiders

CATALOG NO.	DIAMETER (IN.)	PITCH (°)	ROTATION	HUB POSITION	UOM	OM
L60720501	12	23	CW	Interchangeable	EA	2
L60721401	14	27	CCW	Interchangeable	EA	2
L60560101	16	27	CW	Interchangeable	EA	2
L60560301	16	33	CW	Interchangeable	EA	2
L60560401	16	33	CCW	Interchangeable	EA	2
L60561101	20	33	CW	Interchangeable	EA	2
L60561701	24	27	CW	Interchangeable	EA	2
L60561801	24	27	CCW	Interchangeable	EA	2
L60561901	24	33	CW	Interchangeable	EA	2
L60761301	26	27	CW	Interchangeable	EA	1
L6130420001	30	29	CCW	Interchangeable	EA	1

FAN BLADES CONT'D

Small Aluminum Fan Blades With Hubs

Features

Hub Location is Intake



FB99100

Packard

CATALOG NO.	DIAM. (IN.)	BLADES	BORE (IN.)	PITCH (°)	ROTA.	UOM	OM
A61948	2	10	3/16	12	CW	EA	1
A61949	2-1/2	10	3/16	20	CW	EA	1
A61950	3	10	3/16	24	CW	EA	1
A61954	3	10	1/4	30	CW	EA	1
A61003	3-1/4	12	5/16	90	CW	EA	1
A61951	3-1/2	10	3/16	27	CW	EA	1
A61955	3-1/2	10	1/4	40	CW	EA	1
A61952	4	10	3/16	28	CW	EA	1
A61956	4	10	1/4	30	CW	EA	1
A61465	4-1/2	10	3/16	30	CW	EA	1
A61467	5	10	3/16	35	CW	EA	1
A61468	5	10	1/4	40	CW	EA	1
A61473	5-1/2	4	1/4	19	CW	EA	1
A61474	5-1/2	4	3/16	19	CW	EA	1
A61476	5-1/2	4	3/16	19	CCW	EA	1
A64550	5-1/2	4	3/16	19	CW	EA	1
A64455	5-1/2	4	3/16	24	CCW	EA	1
A65503	5-1/2	5	5/16	27	CW	EA	1
A65504	5-1/2	5	1/4	27	CW	EA	1
A65513	5-1/2	5	5/16	27	CCW	EA	1
A65515	5-1/2	5	1/4	27	CCW	EA	1
A61469	6	4	3/16	19	CW	EA	1
A61470	6	4	1/4	19	CW	EA	1
A60604	6	5	1/4	27	CW	EA	1
A60614	6	5	1/4	27	CCW	EA	1
A65632	6	5	5/16	27	CW	EA	1
A65633	6	5	5/16	27	CCW	EA	1
A65125	6	4	1/4	19	CW	EA	1
A65131	6	5	5/16	30	CW	EA	1
A65225*	6	5	1/4	30	CCW	EA	1
A65231*	6	5	5/16	30	CCW	EA	1
A61471	6-1/2	4	3/16	19	CW	EA	1
A64650	6-1/2	4	1/4	19	CW	EA	1
A66504	6-1/2	5	1/4	27	CW	EA	1
A82694FB	6-3/4	5	1/4	26	CCW	EA	1
A63473	7	5	1/4	21	CW	EA	1
A60704	7	5	1/4	27	CW	EA	1
A60714	7	5	1/4	27	CCW	EA	1
A65732	7	5	5/16	27	CW	EA	1
A75131	7	5	5/16	40	CW	EA	1
A75225*	7	5	1/4	40	CCW	EA	1
A75231*	7	5	5/16	40	CCW	EA	1

CATALOG NO.	DIAM. (IN.)	BLADES	BORE (IN.)	PITCH (°)	ROTA.	UOM	OM
A63475	8	5	1/4	23	CW	EA	1
A63841*	8	5	1/4	24	CW	EA	1
A65825	8	5	1/4	27	CW	EA	1
A65826	8	5	1/4	27	CCW	EA	1
A65832	8	5	5/16	27	CW	EA	1
A65833	8	5	5/16	27	CCW	EA	1
A85131	8	5	5/16	30	CW	EA	1
A60804	8	5	1/4	36	CW	EA	1
A60805	8	5	5/16	36	CW	EA	1
A60814	8	5	1/4	36	CCW	EA	1
A60815	8	5	5/16	36	CCW	EA	1
A85225*	8	5	1/4	40	CCW	EA	1
A85231*	8	5	5/16	40	CCW	EA	1
A63477	9	5	1/4	25	CW	EA	1
A65925	9	5	1/4	26	CW	EA	1
A65926	9	5	1/4	26	CCW	EA	1
A65932	9	5	5/16	26	CW	EA	1
A65933	9	5	5/16	26	CCW	EA	1
A95131	9	5	5/16	30	CW	EA	1
A95225*	9	5	1/4	30	CCW	EA	1
A95231*	9	5	5/16	30	CCW	EA	1
A65105	10	5	1/4	20	CCW	EA	1
A65104	10	5	1/4	20	CW	EA	1
A65133	10	5	5/16	20	CCW	EA	1
A65132	10	5	5/16	20	CW	EA	1
A63479	10	5	1/4	28	CW	EA	1
A15225*	10	5	1/4	30	CCW	EA	1
A61322	10	5	5/16	30	CCW	EA	1
A61323*	10	5	5/16	30	CCW	EA	1
A61312	10	5	5/16	30	CW	EA	1
A61015	10	5	5/16	40	CCW	EA	1
A61005	10	5	5/16	40	CW	EA	1
A65123*	12	5	5/16	23	CW	EA	1
A61215	12	5	5/16	24	CCW	EA	1
A61216*	12	5	5/16	24	CCW	EA	1
A61205	12	5	5/16	24	CW	EA	1
FB99100*	12	5	1/2	33	CW	EA	1
A61405	14	5	5/16	19	CW	EA	1
A65145	14	5	1/2	32	CW	EA	1

***Hub Location = Discharge**

FAN BLADES CONT'D

Small Aluminum Fan Blades - Hubless



A85150

Packard

CATALOG NO.	DIAM. (IN.)	BLADES	PITCH (°)	ROTATION	UOM	OM
A61101	6	5	21	CW	EA	1
A61102	6	5	21	CCW	EA	1
A63607	6	5	30	CW	EA	1
A63617	6	5	30	CCW	EA	1
A61608	6-3/4	5	21	CW	EA	1
A61618	6-3/4	5	21	CCW	EA	1
A67513	6-3/4	5	30	CW	EA	1
A67523	6-3/4	5	30	CCW	EA	1
A63474	7	5	21	CW	EA	1
A61103	7	5	25	CW	EA	1
A61104	7	5	25	CCW	EA	1
A63707	7	5	31	CW	EA	1
A63717	7	5	31	CCW	EA	1
A75221	7	5	40	CCW	EA	1
A63100	7-3/4	5	22	CW	EA	1
A65751	7-3/4	5	22	CCW	EA	1
A77551	7-3/4	5	40	CW	EA	1
A77552	7-3/4	5	40	CCW	EA	1
A63806	8	5	22	CW	EA	1
A63816	8	5	22	CCW	EA	1
A63476	8	5	30	CW	EA	1
A63817	8	5	30	CCW	EA	1
A61831	8	5	31	CW	EA	1
A61835	8	5	35	CW	EA	1
A61837	8	5	37	CCW	EA	1
A85223	8	5	40	CCW	EA	1
A85150	8	6	50	CW	EA	1
A61807	8-3/4	5	30	CW	EA	1
A61817	8-3/4	5	30	CCW	EA	1
A87513	8-3/4	5	30	CW	EA	1
A87523	8-3/4	5	30	CCW	EA	1
A63906	9	5	25	CW	EA	1
A63916	9	5	25	CCW	EA	1
A63917	9	5	30	CCW	EA	1
A63907	9	5	31	CW	EA	1
A63116	10	5	25	CCW	EA	1
A63126	10	5	25	CW	EA	1
A61480	10	5	28	CW	EA	1
A61108	10	5	30	CW	EA	1
A61481	10	5	30	CCW	EA	1
A63117	10	5	30	CCW	EA	1

Additional blades available upon request.

Plastic Fan Blades



A61718

Packard

CATALOG NO.	DIAM. (IN.)	BLADES	ROTATION	BORE (IN.)	UOM	OM
A61299	2-1/2	4	CW	3/16	EA	1
A61300	3	4	CW	1/8	EA	1
A61301	3	4	CW	3/16	EA	1
A65569FB	3-5/16	n/a	CCW	5/16	EA	1
A61302	3-1/2	4	CCW	3/16	EA	1
A61353	4	4	CCW	Hub	EA	1
A61406	4	4	CW	1/8	EA	1
A61408	4	4	CW	3/16	EA	1
A61401	4	5	CW	1/8	EA	1
A61402	4	5	CW	3/16	EA	1
A61403	4	5	CCW	1/8	EA	1
A61404	4	5	CCW	3/16	EA	1
A61501	5	5	CW	3/16	EA	1
A61502	5	5	CW	1/4	EA	1
A61503	5	5	CW	5/16	EA	1
A61504	5	5	CCW	3/16	EA	1
A61505	5	5	CCW	1/4	EA	1
A61506	5	5	CCW	5/16	EA	1
A61550	5-1/2	4	CCW	3/16	EA	1
A61551	5-1/2	4	CW	3/16	EA	1
A61455	5-9/16	5	CCW	3/16	EA	1
A61602	6	4	CW	1/4	EA	1
A61603	6	4	CW	5/16	EA	1
A61604	6	4	CCW	3/16	EA	1
A61605	6	4	CCW	1/4	EA	1
A61606	6	4	CCW	5/16	EA	1
A61601	6	6	CW	3/16	EA	1
A61650	6-1/2	5	CW	3/16	EA	1
A61651	6-1/2	5	CW	1/4	EA	1
A61652	6-1/2	5	CW	5/16	EA	1
A61660*	6-5/8	5	CW	7/32	EA	1
A61665*	6-5/8	5	CW	7/32	EA	1
A61701	7	5	CW	1/4	EA	1
A61703	7	5	CCW	1/4	EA	1
A61718	7	5	CW	Hub	EA	1
A61801	8	5	CW	1/4	EA	1
A61802	8	5	CW	5/16	EA	1

***D-Style Bore**

BLOWER WHEELS

Universal Single Inlet Blower Wheels



RBW30112

REVCOR
REVOLUTIONARY AIRFLOW

Applications

Draft inducers, power venting, small appliances, heating, ventilation, air conditioning, convectors, appliances, kitchen and bath exhaust

Features

5-1/4" to 12-5/8" diameters
Embossed backs for added strength
Factory balanced
Individually boxed
Made in USA
Additional blower wheels available upon request

CATALOG NO.	DIA. (IN.)	WIDTH (IN.)	ROTATION	BORE (IN.)	MATERIAL	HUB LOCATION	LOCK TYPE	DIRECT REPLACEMENT FOR	UOM	OM
RBW30100	3	1	CW	5/16	Aluminum	Inside	Strip Wheels	—	EA	1
RBW30101	3	1-7/8	CW	5/16	Alum. Steel	Inside	Strip Wheels	—	EA	1
RBW30102	3	1-7/8	CCW	5/16	Alum. Steel	Inside	Strip Wheels	—	EA	1
RBW30103	3-13/16	1-1/8	CCW	1/4	Alum. Steel	Inside	Tab Lock	—	EA	1
RBW30104	3-13/16	1-1/4	CW	1/2	Galvanized	Inside	Tab Lock	—	EA	1
RBW30106	3-13/16	1-1/2	CW	5/16	Alum. Steel	Inside	Strip Wheels	—	EA	1
RBW30107	3-13/16	1-1/2	CCW	5/16	Alum. Steel	Inside	Strip Wheels	—	EA	1
RBW30109	3-13/16	1-7/8	CW	5/16	Galvanized	Inside	Strip Wheels	40556	EA	1
RBW30110	3-13/16	1-7/8	CCW	5/16	Galvanized	Inside	Strip Wheels	40557	EA	1
RBW30111	3-13/16	2-1/16	CW	5/16	Galvanized	Inside	Strip Wheels	—	EA	1
RBW30112	3-13/16	2-1/16	CCW	5/16	Galvanized	Inside	Strip Wheels	—	EA	1
RBW30115	3-13/16	2-1/4	CW	5/16	Alum. Steel	Inside	Tab Lock	—	EA	1
RBW30116	3-13/16	2-1/4	CCW	5/16	Alum. Steel	Inside	Tab Lock	—	EA	1
RBW30117	3-13/16	2-1/2	CW	5/16	Galvanized	Inside	Strip Wheels	—	EA	1
RBW30118	3-13/16	2-1/2	CCW	5/16	Galvanized	Inside	Strip Wheels	40559	EA	1
RBW40101*	4	1-1/2	CCW	5/16	Alum. Steel	Inside	Tab Lock	40564	EA	1
RBW40102*	4	2-1/2	CCW	1/4	Galvanized	Inside	Tab Lock	40563, 40601	EA	1
RBW40103	4-1/4	2-1/2	CW	3/8	Alum. Steel	Inside	Strip Wheels	—	EA	1
RBW40104	4-1/4	2-1/2	CCW	3/8	Alum. Steel	Inside	Strip Wheels	—	EA	1
RBW40105	4-1/4	2-15/16	CCW	1/4	Galvanized	Inside	Strip Wheels	40565	EA	1
RBW40106	4-1/4	2-15/16	CW	1/4	Galvanized	Inside	Strip Wheels	—	EA	1
RBW40107	4-1/4	2-15/16	CCW	5/16	Galvanized	Inside	Strip Wheels	—	EA	1
RBW40108	4-1/4	2-15/16	CW	5/16	Galvanized	Inside	Strip Wheels	—	EA	1
RBW40114	4-3/4	2-1/2	CCW	5/16	Galvanized	Inside	Strip Wheels	—	EA	1
RBW40115	4-3/4	2-1/2	CW	5/16	Galvanized	Inside	Strip Wheels	—	EA	1
RBW40117	4-3/4	2-15/16	CCW	5/16	Galvanized	Inside	Strip Wheels	—	EA	1
RBW40122	4-3/4	3-7/16	CW	1/2	Galvanized	Inside	Strip Wheels	40605, 40606	EA	1
RBW40123	4-13/16	1-1/8	CW	5/16	Galvanized	Inside	Tab Lock	—	EA	1
RBW40124	4-13/16	1-1/8	CCW	5/16	Galvanized	Inside	Tab Lock	—	EA	1
RBW50100	5-1/16	2-1/2	CW	1/2	Galvanized	Inside	Tab Lock	—	EA	1

*1/2" Deep conic back plate

BLOWER WHEELS CONT'D

Universal Single Inlet Blower Wheels (cont.)



RBW50119

REVCOR
REVOLUTIONARY AIRFLOW

Applications

Draft inducers, power venting, small appliances, heating, ventilation, air conditioning, convectors, appliances, kitchen and bath exhaust

Features

5-1/4" to 12-5/8" diameters
Embossed backs for added strength
Factory balanced
Individually boxed
Made in USA
Additional blower wheels available upon request

CATALOG NO.	DIA. (IN.)	WIDTH (IN.)	ROTATION	BORE (IN.)	MATERIAL	HUB LOCATION	LOCK TYPE	DIRECT REPLACEMENT FOR	UOM	OM
RBW50106	5-1/4	2-1/2	CCW	1/2	Galvanized	Inside	Strip Wheels	—	EA	1
RBW50107	5-1/4	2-1/2	CW	5/16	Galvanized	Inside	Strip Wheels	40609	EA	1
RBW50108	5-1/4	2-1/2	CCW	5/16	Galvanized	Inside	Strip Wheels	40608	EA	1
RBW50109	5-1/4	2-15/16	CW	5/16	Galvanized	Inside	Strip Wheels	40611	EA	1
RBW50110	5-1/4	2-15/16	CCW	5/16	Galvanized	Inside	Strip Wheels	—	EA	1
RBW50111	5-1/4	2-15/16	CW	1/2	Galvanized	Inside	Strip Wheels	—	EA	1
RBW50112	5-1/4	2-15/16	CCW	1/2	Galvanized	Inside	Strip Wheels	—	EA	1
RBW50113	5-1/4	3-7/16	CW	5/16	Galvanized	Inside	Strip Wheels	—	EA	1
RBW50114	5-1/4	3-7/16	CCW	5/16	Galvanized	Inside	Strip Wheels	—	EA	1
RBW50115	5-1/4	3-7/16	CW	1/2	Galvanized	Inside	Strip Wheels	—	EA	1
RBW50116	5-1/4	3-7/16	CCW	1/2	Galvanized	Inside	Strip Wheels	40607	EA	1
RBW50117	5-1/2	1	CW	5/16	Galvanized	Inside	Tab Lock	—	EA	1
RBW50118	5-1/2	1-3/4	CW	1/2	Alum. Steel	Inside	Tab Lock	—	EA	1
RBW50119	5-3/4	1-1/2	CCW	1/2	Galvanized	Inside	Tab Lock	—	EA	1
RBW50124	5-3/4	2-1/2	CCW	5/16	Galvanized	Inside	Strip Wheels	—	EA	1
RBW50125	5-3/4	2-1/2	CW	5/16	Galvanized	Inside	Strip Wheels	—	EA	1
RBW50128	5-3/4	2-15/16	CW	1/2	Galvanized	Inside	Strip Wheels	—	EA	1
RBW50129	5-3/4	2-15/16	CCW	1/2	Galvanized	Inside	Strip Wheels	—	EA	1
RBW50130	5-3/4	3	CW	5/16	Galvanized	Inside	Tab Lock	—	EA	1
RBW50131	5-3/4	3	CCW	5/16	Galvanized	Inside	Tab Lock	—	EA	1
RBW50133	5-3/4	3-7/16	CCW	3/8	Galv. Ring and Back / Alum. Blades	Inside	Strip Wheels	—	EA	1
RBW50136	5-3/4	3-13/16	CW	1/2	Galvanized	Inside	Strip Wheels	—	EA	1
RBW50139	5-3/4	4	CW	1/2	Galvanized	Inside	Strip Wheels	40615	EA	1
RBW50140	5-3/4	4	CCW	1/2	Galvanized	Inside	Strip Wheels	—	EA	1
RBW60100	6-5/16	1-1/2	CW	5/16	Aluminum	Inside	Tab Lock	—	EA	1
RBW60102	6-5/16	2	CW	1/2	Galvanized	Inside	Tab Lock	40617	EA	1
RBW60103	6-5/16	2	CCW	1/2	Galvanized	Inside	Tab Lock	40618	EA	1
RBW60104	6-5/16	2-1/2	CW	1/2	Galvanized	Inside	Tab Lock	40619	EA	1
RBW60105	6-5/16	2-1/2	CCW	1/2	Galvanized	Inside	Tab Lock	40620	EA	1
RBW60108	6-5/16	2-15/16	CCW	5/16	Galvanized	Inside	Strip Wheels	—	EA	1

BLOWER WHEELS CONT'D

Universal Single Inlet Blower Wheels (cont.)



RBW60112

REVCOR
REVOLUTIONARY AIRFLOW

Applications

Draft inducers, power venting, small appliances, heating, ventilation, air conditioning, convectors, appliances, kitchen and bath exhaust

Features

5-1/4" to 12-5/8" diameters
Embossed backs for added strength
Factory balanced
Individually boxed
Made in USA
Additional blower wheels available upon request

CATALOG NO.	DIA. (IN.)	WIDTH (IN.)	ROTATION	BORE (IN.)	MATERIAL	HUB LOCATION	LOCK TYPE	DIRECT REPLACEMENT FOR	UOM	OM
RBW60109	6-5/16	2-15/16	CW	5/16	Galvanized	Inside	Strip Wheels	—	EA	1
RBW60110	6-5/16	3	CW	1/2	Galvanized	Inside	Tab Lock	40623	EA	1
RBW60111	6-5/16	3	CCW	1/2	Galvanized	Inside	Tab Lock	40624	EA	1
RBW60112	6-5/16	3-1/4	CW	5/8	Alum. Steel	Inside	Tab Lock	—	EA	1
RBW60113	6-5/16	3-1/4	CCW	5/8	Alum. Steel	Inside	Tab Lock	—	EA	1
RBW60114	6-5/16	3-7/16	CW	1/2	Galvanized	Inside	Strip Wheels	—	EA	1
RBW60115	6-5/16	3-7/16	CCW	1/2	Galvanized	Inside	Strip Wheels	—	EA	1
RBW60118	6-5/16	4	CW	1/2	Galvanized	Inside	Strip Wheels	—	EA	1
RBW60119	6-5/16	4	CCW	1/2	Galvanized	Inside	Strip Wheels	—	EA	1
RBW60124	6-3/4	4	CCW	1/2	Galvanized	Inside	Tab Lock	—	EA	1
RBW70102	7-1/8	1-7/8	CCW	1/2	Galvanized	Inside	Tab Lock	41204	EA	1
RBW70103	7-1/8	1-7/8	CCW	1/2	Galvanized	Inside	Tab Lock	—	EA	1
RBW70104	7-1/8	1-7/8	CW	5/16	Galvanized	Inside	Tab Lock	—	EA	1
RBW70105	7-1/8	2	CCW	5/16	Galvanized	Inside	Tab Lock	—	EA	1
RBW70106	7-1/8	2-1/2	CW	1/2	Galvanized	Inside	Tab Lock	—	EA	1
RBW70108	7-1/8	4	CCW	1/2	Galvanized	Inside	Tab Lock	—	EA	1
RBW70109	7-1/8	4	CW	1/2	Galvanized	Inside	Tab Lock	—	EA	1
RBW70110	7-7/16	1-1/2	CCW	1/2	Galvanized	Inside	Tab Lock	—	EA	1
RBW70116	7-7/16	2-3/4	CCW	1/2	Galvanized	Inside	Tab Lock	40633	EA	1
RBW70117	7-7/16	3-1/4	CW	1/2	Galvanized	Inside	Tab Lock	—	EA	1
RBW70118	7-7/16	3-1/4	CCW	1/2	Galvanized	Inside	Tab Lock	—	EA	1
RBW70119	7-7/16	4	CW	1/2	Aluminum	Inside	Tab Lock	—	EA	1
RBW70120	7-7/16	4	CCW	1/2	Aluminum	Inside	Tab Lock	—	EA	1
RBW70121	7-5/8	4	CW	1/2	Galvanized	Inside	Tab Lock	—	EA	1
RBW80101	8	1-1/2	CW	1/2	Galvanized	Inside	Tab Lock	—	EA	1
RBW80103	8	1-3/4	CCW	1/2	Alum. Steel	Inside	Tab Lock	—	EA	1
RBW80104	8	1-7/8	CW	1/2	Galvanized	Inside	Tab Lock	—	EA	1
RBW80105	8	2	CW	3/8	Alum. Steel	Inside	Tab Lock	—	EA	1
RBW80108	8	2-3/8	CCW	1/2	Galvanized	Inside	Tab Lock	41205	EA	1
RBW80110	8	2-1/2	CCW	1/2	Galvanized	Inside	Tab Lock	—	EA	1

BLOWER WHEELS CONT'D

Universal Single Inlet Blower Wheels (cont.)



RBW90123

REVCOR
REVOLUTIONARY AIRFLOW

Applications

Draft inducers, power venting, small appliances, heating, ventilation, air conditioning, convectors, appliances, kitchen and bath exhaust

Features

5-1/4" to 12-5/8" diameters
Embossed backs for added strength
Factory balanced
Individually boxed
Made in USA
Additional blower wheels available upon request

CATALOG NO.	DIA. (IN.)	WIDTH (IN.)	ROTATION	BORE (IN.)	MATERIAL	HUB LOCATION	LOCK TYPE	DIRECT REPLACEMENT FOR	UOM	OM
RBW80111	8	4	CCW	1/2	Aluminum	Inside	Tab Lock	—	EA	1
RBW80112	8	4	CW	1/2	Aluminum	Inside	Tab Lock	—	EA	1
RBW80116	8-1/2	2	CCW	5/8	Alum. Steel	Inside	Tab Lock	41212	EA	1
RBW80117	8-1/2	2-3/4	CW	1/2	Galvanized	Outside	Tab Lock	40615	EA	1
RBW80118	8-1/2	2-3/4	CCW	1/2	Galvanized	Outside	Tab Lock	—	EA	1
RBW80120	8-1/2	3-3/4	CCW	1/2	Galvanized	Inside	Tab Lock	—	EA	1
RBW80122	8-1/2	4	CCW	1/2	Galvanized	Inside	Tab Lock	—	EA	1
RBW80123	8-1/2	4-1/4	CW	1/2	Galvanized	Inside	Tab Lock	—	EA	1
RBW80124	8-1/2	4-1/4	CCW	1/2	Galvanized	Inside	Tab Lock	—	EA	1
RBW90106	9-1/8	3-3/4	CCW	1/2	Galvanized	Inside	Tab Lock	—	EA	1
RBW90108	9-1/8	4-1/4	CCW	1/2	Galvanized	Inside	Tab Lock	—	EA	1
RBW90109	9-1/8	4-1/2	CW	5/8	Aluminum	Inside	Tab Lock	—	EA	1
RBW90110	9-1/8	4-1/2	CCW	5/8	Aluminum	Inside	Tab Lock	—	EA	1
RBW90114	9-7/8	1-1/2	CCW	5/8	Alum. Steel	Inside	Tab Lock	41241	EA	1
RBW90117	9-7/8	1-7/8	CCW	5/8	Galvanized	Inside	Tab Lock	40642	EA	1
RBW90123	9-7/8	2	CCW	5/8	Galvanized	Inside	Tab Lock	41202	EA	1
RBW90126	9-7/8	2-1/8	CCW	1/2	Galvanized	Inside	Tab Lock	41242	EA	1
RBW90128	9-7/8	2-1/4	CCW	1/2	Galvanized	Inside	Tab Lock	—	EA	1
RBW90131	9-7/8	6	CW	1/2	Galvanized	Inside	Tab Lock	—	EA	1
RBW10100	10-3/4	1-3/8	CCW	5/8	Galvanized	Inside	Tab Lock	—	EA	1
RBW10103	10-3/4	4	CCW	1/2	Galvanized	Inside	Tab Lock	—	EA	1
RBW10104	10-3/4	4	CW	1/2	Galvanized	Inside	Tab Lock	—	EA	1
RBW10106	10-3/4	5	CCW	1/2	Galvanized	Inside	Tab Lock	—	EA	1
RBW10107	10-3/4	6	CW	1/2	Galvanized	Inside	Tab Lock	—	EA	1
RBW10108	10-3/4	6	CCW	1/2	Galvanized	Inside	Tab Lock	—	EA	1
RBW12100	12-5/8	5	CW	1/2	Galvanized	Inside	Tab Lock	—	EA	1
RBW12101	12-5/8	5	CCW	1/2	Galvanized	Inside	Tab Lock	—	EA	1

BLOWER WHEELS CONT'D

Universal Double Inlet Blower Wheels



RBW50207

REVCOR
REVOLUTIONARY AIRFLOW

Applications

Power venting, small appliances, heating, ventilation, air conditioning, PTAC, fan coils, and mini split systems

Features

- 4-3/4" to 12-5/8" diameters
- Embossed backs for added strength
- Factory balanced
- Variety of materials available
- Individually boxed
- Made in USA
- Additional blower wheels available upon request

CATALOG NO.	DIAM. (IN.)	WIDTH (IN.)	ROTATION	BORE (IN.)	MATERIAL	HUB LOCATION	TYPE	DIRECT REPLACEMENT FOR	UOM	OM
RBW50200	5-1/4	6-7/8	CW	1/2	Aluminum	Center	Strip Wheels	41134	EA	1
RBW50201	5-1/4	6-7/8	CCW	1/2	Galvanized	Center	Strip Wheels	41108	EA	1
RBW50202	5-1/4	6-7/8	CW	1/2	Galvanized	Center	Strip Wheels	41107	EA	1
RBW50203	5-1/4	6	CW	1/2	Galvanized	Center	Tab Lock	—	EA	1
RBW50204	5-1/4	6-3/4	CCW	1/2	Galvanized	Center	Tab Lock	—	EA	1
RBW50205	5-1/4	8	CCW	1/2	Galvanized	Center	Strip Wheels	—	EA	1
RBW50206	5-1/2	5	CW	1/2	Galvanized	Center	Tab Lock	—	EA	1
RBW50207	5-1/2	6-1/2	CCW	1/2	Galvanized	Center	Tab Lock	41110	EA	1
RBW50208	5-3/4	5	CW	1/2	Galvanized	Center	Strip Wheels	41111	EA	1
RBW50209	5-3/4	5-7/8	CW	1/2	Galvanized	Center	Strip Wheels	41112	EA	1
RBW50215	5-3/4	6	CCW	1/2	Galvanized	Center	Tab Lock	—	EA	1
RBW50216	5-3/4	6-1/2	CCW	1/2	Aluminum	Center	Tab Lock	—	EA	1
RBW50210	5-3/4	6-7/8	CW	1/2	Galvanized	Center	Strip Wheels	41113	EA	1
RBW50218	5-3/4	7-1/4	CCW	3/8	Aluminum	Center	Tab Lock	—	EA	1
RBW50211	5-3/4	7-5/8	CCW	1/2	Galvanized	Center	Strip Wheels	41115	EA	1
RBW50212	5-3/4	7-5/8	CW	1/2	Galvanized	Center	Strip Wheels	41114	EA	1
RBW50214	5-3/4	8	CW	1/2	Galvanized	Center	Strip Wheels	41116	EA	1
RBW50219	5-3/4	8	CCW	1/2	Galvanized	Center	Strip Wheels	41117	EA	1
RBW60200	6-1/8	7-1/4	CW	1/2	Galvanized	Center	Tab Lock	—	EA	1
RBW60204	6-5/16	4	CW	1/2	Galvanized	Center	Tab Lock	—	EA	1
RBW60205	6-5/16	5	CW	1/2	Galvanized	Center	Tab Lock	—	EA	1
RBW60206	6-5/16	5-7/16	CW	1/2	Galvanized	Off Center	Strip Wheels	—	EA	1
RBW60208	6-5/16	6-3/8	CW	1-1/4	Aluminum	Center	Tab Lock	—	EA	1
RBW60201	6-5/16	6-7/8	CW	1/2	Galvanized	Center	Strip Wheels	41123	EA	1
RBW60209	6-5/16	6-7/8	CCW	1/2	Galvanized	Center	Strip Wheels	—	EA	1
RBW60210	6-5/16	7	CCW	1/2	Galvanized	Center	Tab Lock	41127	EA	1
RBW60211	6-5/16	7	CW	1/2	Galvanized	Center	Tab Lock	41126	EA	1
RBW60212	6-5/16	7-1/2	CCW	1/2	Aluminum	Center	Tab Lock	—	EA	1
RBW60202	6-5/16	7-5/8	CCW	1/2	Aluminum	Center	Strip Wheels	41124	EA	1
RBW60213	6-5/16	7-5/8	CW	1/2	Galvanized	Center	Tab Lock	41130	EA	1
RBW60203	6-5/16	8	CW	1/2	Galvanized	Center	Strip Wheels	41125	EA	1
RBW60215	6-5/16	8-1/8	CW	1/2	Galvanized	Center	Tab Lock	—	EA	1
RBW60216	6-5/16	8-1/8	CCW	1/2	Galvanized	Center	Tab Lock	—	EA	1
RBW60217	6-5/16	8-1/4	CW	1/2	Galvanized	Center	Tab Lock	—	EA	1
RBW60218	6-3/4	7-1/4	CW	1/2	Galvanized	Center	Tab Lock	—	EA	1
RBW60219	6-3/4	8-1/4	CW	1/2	Galvanized	Center	Tab Lock	—	EA	1
RBW70203	7-7/16	7	CCW	1/2	Galvanized	Center	Tab Lock	—	EA	1
RBW70204	7-7/16	9	CW	1/2	Galvanized	Center	Tab Lock	41132	EA	1
RBW70205	7-5/8	5-3/8	CCW	3/8	Galvanized	Center	Tab Lock	—	EA	1
RBW70206	7-5/8	7	CW	1/2	Galvanized	Center	Tab Lock	—	EA	1
RBW80200*	8-1/2	7	CW	1/2	Galvanized	Center	Tab Lock	—	EA	1

BLOWER WHEELS CONT'D

Circulation Double Inlet Blower Wheels



RBW90203

REVCOR
REVOLUTIONARY AIRFLOW

Applications

Furnaces, ventilation, air conditioning, mini split systems, evaporative coolers, commercial A/C, and fan coils

Features

9-1/2" to 12-5/8" diameters
Embossed backs for added strength
Factory balanced
Individually boxed
Made in USA
Additional blower wheels available upon request

CATALOG NO.	DIAM. (IN.)	WIDTH (IN.)	ROTATION	BORE (IN.)	MATERIAL	HUB LOCATION	BACK PLATE	DIRECT REPLACEMENT FOR	UOM	OM
RBW90201	9-1/2	4-1/2	CW	1/2	Galvanized	Center	Convex	41360	EA	1
RBW90202	9-1/2	6-1/16	CW	1/2	Galvanized	Center	Convex	41303	EA	1
RBW90203	9-1/2	7-1/8	CCW	1/2	Galvanized	Center	Convex	41306	EA	1
RBW90204	9-1/2	7-1/8	CW	1/2	Galvanized	Center	Convex	41307	EA	1
RBW90205	9-1/2	8-1/16	CCW	1/2	Galvanized	Center	Convex	41310	EA	1
RBW90206	9-1/2	8-1/16	CW	1/2	Galvanized	Center	Convex	41311	EA	1
RBW90207	9-1/2	9-1/2	CW	1/2	Galvanized	Center	Concave	41312	EA	1
RBW90208	9-1/2	9-1/2	CCW	1/2	Galvanized	Center	Concave	41361	EA	1
RBW90209	9-7/8	7	CCW	1/2	Galvanized	Center	Convex	—	EA	1
RBW90210	9-7/8	9-1/4	CCW	1/2	Galvanized	Center	Convex	—	EA	1
RBW90211	9-7/8	10-1/2	CCW	1/2	Galvanized	Center	Convex	—	EA	1
RBW10201	10-5/8	4-1/2	CW	1/2	Galvanized	Center	Convex	41314	EA	1
RBW10202	10-5/8	6-1/16	CCW	1/2	Galvanized	Center	Convex	41317	EA	1
RBW10203	10-3/4	6-1/16	CW	1/2	Galvanized	Center	Convex	41318	EA	1
RBW10204	10-5/8	6-1/16	CW	5/8	Galvanized	Center	Convex	41321	EA	1
RBW10205	10-5/8	7-1/8	CW	1/2	Galvanized	Center	Convex	41323	EA	1
RBW10206	10-5/8	7-1/8	CCW	1/2	Galvanized	Center	Convex	41362	EA	1
RBW10207	10-5/8	8-1/16	CCW	1/2	Galvanized	Center	Convex	41326	EA	1
RBW10208	10-5/8	8-1/16	CW	1/2	Galvanized	Center	Concave	41327	EA	1
RBW10209	10-5/8	9-1/2	CCW	1/2	Galvanized	Center	Concave	41328	EA	1
RBW10210	10-5/8	9-1/2	CW	1/2	Galvanized	Center	Concave	41329	EA	1
RBW10211	10-3/4	9-5/8	CW	1/2	Galvanized	Center	Convex	41331	EA	1
RBW10212	10-5/8	10-11/16	CCW	1/2	Galvanized	Center	Concave	41332	EA	1
RBW10213	10-5/8	10-11/16	CW	1/2	Galvanized	Center	Concave	41333	EA	1
RBW10214	10-5/8	10-11/16	CW	1/2	Galvanized	Center	Convex	—	EA	1
RBW10215	10-3/4	10-1/2	CW	1/2	Galvanized	Center	Convex	41335	EA	1
RBW11200	11-15/16	6-1/6	CW	1/2	Galvanized	Center	Convex	41339	EA	1
RBW11201	11-15/16	7-1/8	CW	1/2	Galvanized	Center	Convex	41341	EA	1
RBW11202	11-15/16	8-1/16	CW	1/2	Galvanized	Center	Convex	41345	EA	1
RBW11203	11-15/16	8-1/16	CW	1/2	Galvanized	Center	Concave	41343	EA	1
RBW11204	11-15/16	8-1/16	CCW	1/2	Galvanized	Center	Convex	41344	EA	1
RBW11205	11-15/16	9-1/2	CCW	1/2	Galvanized	Center	Convex	41348	EA	1
RBW11206	11-15/16	9-1/2	CW	1/2	Galvanized	Center	Convex	41349	EA	1
RBW11207	11-15/16	10-11/16	CCW	1/2	Galvanized	Center	Concave	41350	EA	1
RBW11208	11-15/16	10-11/16	CW	1/2	Galvanized	Center	Concave	41351	EA	1
RBW12201	12-7/8	9-1/2	CW	1/2	Galvanized	Center	Convex	41363	EA	1
RBW12202	12-7/8	12-5/8	CW	1/2	Galvanized	Center	Concave	41355	EA	1
RBW12203	12-7/8	12-5/8	CW	5/8	Galvanized	Center	Concave	41356	EA	1

BLOWER WHEELS CONT'D

Double Inlet Blower Wheels

Features

Universal replacement wheels for direct drive blowers
Galvanized, cold rolled steel
Recommended for application temperatures that do not exceed 135˚F (60˚C)



L01333602

Lau Industries, Inc.

				DIMENSIONS (IN.)						
CATALOG NO.	BORE	ROTATION	CENTER DISC	D	W	X	U	Z	UOM	OM
L01333602	1/2	CW	Convex	9-1/2	7-1/8	7-11/16	1-1/4	1-25/32	EA	1
L01333603	1/2	CCW	Convex	9-1/2	7-1/8	7-11/16	1-1/4	1-25/32	EA	1
L01333701	1/2	CW	Convex	9-1/2	8	7-11/16	1-1/4	1-25/32	EA	1
L01333703	1/2	CCW	Convex	9-1/2	8	7-11/16	1-1/4	1-25/32	EA	1
L01333201	1/2	CW	Concave	9-1/2	9-1/2	7-11/16	1-1/4	7/32	EA	1
L01333203	1/2	CCW	Concave	9-1/2	9-1/2	7-11/16	1-1/4	7/32	EA	1
L01332701	1/2	CW	Convex	10-5/8	4-1/2	8-7/8	1-1/4	1-15/16	EA	1
L01332601	1/2	CW	Convex	10-5/8	6	8-7/8	1-1/4	1-15/16	EA	1
L01332602	1/2	CCW	Convex	10-5/8	6	8-7/8	1-1/4	1-15/16	EA	1
L01332501	1/2	CW	Convex	10-5/8	7-1/8	8-7/8	1-1/4	1-15/16	EA	1
L02710204	1/2	CCW	Convex	10-5/8	7-1/8	8-7/8	1-1/4	1-15/16	EA	1
L01332401	1/2	CW	Convex	10-5/8	8	8-7/8	1-1/4	1-15/16	EA	1
L01332402	1/2	CCW	Convex	10-5/8	8	8-7/8	1-1/4	1-15/16	EA	1
L01331701	1/2	CW	Concave	10-5/8	9-1/2	8-7/8	1-1/4	1/16	EA	1
L01331704	1/2	CCW	Concave	10-5/8	9-1/2	8-7/8	1-1/4	1/16	EA	1
L01332301	1/2	CW	Convex	10-5/8	9-1/2	8-7/8	1-1/4	1-1/15	EA	1
L01331602	1/2	CW	Concave	10-5/8	10-5/8	8-7/8	1-1/4	1/16	EA	1
L01332203	1/2	CW	Convex	10-5/8	10-5/8	8-7/8	1-1/4	1-1/15	EA	1
L01331606	1/2	CCW	Concave	10-5/8	10-5/8	8-7/8	1-1/4	1/16	EA	1
L02694005	1/2	CW	Convex	11-3/4	7-1/8	10	1-1/4	2	EA	1
L02694007	1/2	CW	Convex	11-3/4	8	10	1-1/4	2	EA	1
L02694107	1/2	CW	Concave	11-3/4	8	10	1-1/4	1/16	EA	1
L02694009	1/2	CW	Convex	11-3/4	9-1/2	10	1-1/4	2	EA	1
L02694010	1/2	CCW	Convex	11-3/4	9-1/2	10	1-1/4	2	EA	1
L02694111	1/2	CW	Concave	11-3/4	10-5/8	10	1-1/4	1/16	EA	1
L02694112	1/2	CCW	Concave	11-3/4	10-5/8	10	1-1/4	1/16	EA	1
L01369325	1/2	CW	Convex	12-5/8	9-1/2	10-5/16	1-1/4	2	EA	1
L01556507	1/2	CW	Concave	12-5/8	12-5/8	10-5/16	1-1/4	1/16	EA	1
L01556504	5/8	CW	Concave	12-5/8	12-5/8	10-5/16	1-1/4	1/16	EA	1

BLOWER WHEELS CONT'D

Galvanized Steel Blower Wheels



BW16045

Packard

Applications

Condensers, draft boosters, flue exhaust, small appliances, furnaces

Features

Rotation viewed side opposite hub

CATALOG NO.	DIA. (IN.)	WIDTH (INV.)	ROTA.	BORE (IN.)	MAX RPM	UOM	OM
BW16039	3	1-7/8	CCW	1/4	5000	EA	1
BW16038	3	1-7/8	CW	1/4	5000	EA	1
BW16044	3-13/16	2-1/2	CW	5/16	5000	EA	1
BW16043	3-13/16	1-7/8	CW	5/16	5000	EA	1
BW16042	3-13/16	1-7/8	CCW	5/16	5000	EA	1
BW16045	3-13/16	2-1/2	CCW	5/16	5000	EA	1
BW16041	3-13/16	1-7/8	CW	1/4	5000	EA	1
BW16040	3-13/16	1-7/8	CCW	1/4	5000	EA	1
BW16051	3-27/32	1-13/64	CCW	1/4	5640	EA	1
A65048BW*	3.82	1.65	CW Hub End	5/16	—	EA	1
BW16623*	4	1	CCW	1/4	—	EA	1
BW16626*	4	2	CW	3/8	—	EA	1
BW16141	4	1-1/2	CCW	5/16	3600	EA	1
A65569BW*	4	1-1/2	CCW	5/16	—	EA	1
BW16123	4	7/8	CW	5/16	3600	EA	1
BW16046	4-1/4	2	CCW	1/4	4500	EA	1
BW16052	4-1/4	2-15/16	CCW	1/4	4500	EA	1
BW11046*	4-1/2	1.65	CCW	1/4	—	EA	1
BW16160	4-17/32	1-1/4	CW	5/16	6300	EA	1
BW16161	4-17/32	1-1/4	CCW	5/16	6300	EA	1
BW16054	5-13/64	2-29/32	CCW	5/16	3600	EA	1
BW16025	5-13/64	2-1/2	CCW	5/16	3600	EA	1
BW16053	5-13/64	2-29/32	CW	5/16	3600	EA	1
BW16024	5-13/64	2-1/2	CW	5/16	3600	EA	1
BW16549*	5-1/4	1	CW	5/16	—	EA	1
BW16548*	5-3/4	1	CW	5/16	—	EA	1
BW16002	5-45/64	4	CW	1/2	2800	EA	1
BW16057	5-45/64	4	CCW	1/2	2800	EA	1
BW16058	6	3-1/4	CW	1/2	2400	EA	1
BW16010	6	3-1/4	CCW	1/2	2400	EA	1

*BW43425 Direct Replacement For Reznor 43425
A65048BW Direct Replacement For Carrier LA11XA048
BW16623 Direct Replacement For York 026-32623-700 | Stainless Steel
BW16626 Direct Replacement For York 026-32626-700 | Stainless Steel
A65569BW Direct Replacement For Carrier LA11AA005
BW11046 Direct Replacement For Carrier LA11XA046

CATALOG NO.	DIA. (IN.)	WIDTH (IN.)	ROTA.	BORE (IN.)	MAX RPM	UOM	OM
BW16064	6-25/64	4	CCW	1/2	1700	EA	1
BW16063	6-25/64	4	CW	1/2	1700	EA	1
BW16005	7-1/8	4	CCW	1/2	1500	EA	1
A60200BW*	7-11/16	8	CW	1/2	—	EA	1
BW16008	9-1/8	5	CW	1/2	1350	EA	1
BW16007	9-1/8	4-1/4	CW	1/2	1475	EA	1
BW16009	9-1/8	5	CCW	1/2	1350	EA	1
BW16027	9-31/32	6	CW	1/2	1100	EA	1

CATALOG NO.	DIA. (IN.)	WIDTH (IN.)	ROTA.	BORE (IN.)	MAX RPM	UOM	OM
A65894BW	3-13/16	1-5/8	CW	7/32	n/a	EA	1
BW16000	4-22/32	2-15/16	CCW	5/16	3600	EA	1
BW26011	4-27/32	7	CW	1/2	3600	EA	1
BW26013	5-9/16	6-1/2	CW	1/2	2500	EA	1
BW26084	3-3/16	7-5/8	CW	1/2	3000	EA	1
BW26083	6-25/64	7	CCW	1/2	2050	EA	1
BW26032	5-45/64	7-5/8	CCW	1/2	3000	EA	1
BW26033	5-3/4	7-55/64	CW	1/2	1700	EA	1
BW26022	10-25/32	10-1/2	CW	1/2	1150	EA	1
BW26030	5-1/4	6-7/8	CW	1/2	3600	EA	1
BW26031	5-45/64	7-5/8	CW	1/2	3000	EA	1
BW26018	7-31/64	9	CW	1/2	1600	EA	1
BW26014	5-9/16	6-1/2	CCW	1/2	2500	EA	1

*BW16549 Direct Replacement For Carrier LA21RB549
BW16548 Direct Replacement For Carrier LA21RB548
A60200BW Direct Replacement For First Company W200

BLOWER WHEELS CONT'D

Galvanized Blower Wheels - Double Inlet

Applications

Furnaces, Air Handlers, Package Units

Features

9" to 12" diameter
Dynamically balanced
Made in USA
Individually boxed



BW45015

Morrison Products
Innovating Air Flow

CATALOG NO.	DIAM. (IN.)	WIDTH (IN.)	ROTATION	BORE (IN.)	MAX RPM	TYPE	MATERIAL	HUB LOCATION	BACK PLATE	UOM	OM
BW31018	9.62	6.06	CW	1/2	2600	Strip	Galvanized	Center	Convex	EA	1
BW32019	9.58	7.12	CW	1/2	2400	Strip	Galvanized	Center	Convex	EA	1
BW33002	9.53	8.06	CW	1/2	2300	Strip	Galvanized	Center	Convex	EA	1
BW43016	10.62	8.06	CW	1/2	2100	Strip	Galvanized	Center	Convex	EA	1
BW44005	10.62	9.5	CW	1/2	2000	Strip	Galvanized	Center	Convex	EA	1
BW45015	10.62	10.68	CW	1/2	1700	Strip	Galvanized	Center	Convex	EA	1
BW51013	12.15	6.06	CW	1/2	2300	Strip	Galvanized	Center	Convex	EA	1
BW52004	11.98	7.12	CW	1/2	2200	Strip	Galvanized	Center	Convex	EA	1
BW53018	11.96	8.06	CW	1/2	2100	Strip	Galvanized	Center	Convex	EA	1
BW54010	11.95	9.5	CW	1/2	1800	Strip	Galvanized	Center	Convex	EA	1
BW54202	11.95	9.5	CW	1/2	1800	Strip	Galvanized	Center	Concave	EA	1
BW55017	11.95	10.68	CW	1/2	1500	Strip	Galvanized	Center	Convex	EA	1

Direct OEM Replacement Blower Wheels

Applications

Furnaces, Air Handlers, Package Units

Features

9" to 13" diameter
Dynamically balanced
Individually boxed
Made in USA
Additional models available on request



BW55303

Morrison Products
Innovating Air Flow

CATALOG NO.	DIAM. (IN.)	WIDTH (IN.)	ROTATION	BORE (IN.)	MAX RPM	TYPE	MATERIAL	HUB LOCATION	BACK PLATE	DIRECT REPLACEMENT FOR	UOM	OM
BW55204	11.95	10.68	CW	1/2	1500	Strip	Galvanized	Center	Concave	03-55294	EA	1
BW55303	11.95	10.68	CCW	1/2	1500	Strip	Galvanized	Center	Concave	03-55320	EA	1
BW64208	12.81	9.5	CW	1/2	1900	Strip	Galvanized	Center	Concave	03-64222	EA	1

IMPELLERS

Plastic Blower Wheels




A65900

Packard

CATALOG NO.	BORE (IN.)	DIAM. (IN.)	WIDTH (IN.)	BORE	DIRECT REPLACEMENT FOR	UOM	OM
A65900	1/4	5-3/4	2	D Shape	Nutone 59000A000	EA	1

Plastic Impellers



A65216FB

Packard


CATALOG NO.	BORE (IN.)	DIAM. (IN.)	BORE	DIRECT REPLACEMENT FOR	UOM	OM
A65100FB	7/32	4-9/16	D Shape	Nutone 68920	EA	1
A65216FB	3/16	4 1/2	D Shape	—	EA	1
A64031FB	0.181	4 1/2	Round	—	EA	1

BELTS

Hi-Power® II Belts - A Section

Built for superior performance on heavy duty classical cross-section drives. The raw edge, Ethylene Elastomer construction and special notch design makes the Tri-Power belt especially suited for small diameter pulleys and back side idler drives.





A52

Features

All sizes meet Gates V80® system matching tolerances.
Meets ARPM/RMA IP-3-2 oil and heat resistant standards.
Meets ARPM/RMA IP-3-3 static conductivity requirements.
REACH and RoHS 2 compliant.
Operating temperature range: -30°C/-22°F to +60°C/140°F.

CATALOG NO.	TYPE	O.C. (IN.)	WEIGHT (LBS.)	UOM	OM
A20	A Section	22.0	.120	EA	1
A21	A Section	23.0	.130	EA	1
A22	A Section	24.0	.140	EA	1
A23	A Section	25.0	.150	EA	1
A24	A Section	26.0	.160	EA	1
A25	A Section	27.0	.170	EA	1
A26	A Section	28.0	.170	EA	1
A27	A Section	29.0	.170	EA	1
A28	A Section	30.0	.180	EA	1
A29	A Section	31.0	.190	EA	1
A30	A Section	32.0	.200	EA	1
A31	A Section	33.0	.200	EA	1
A32	A Section	34.0	.210	EA	1
A33	A Section	35.0	.220	EA	1
A34	A Section	36.0	.220	EA	1
A35	A Section	37.0	.230	EA	1
A36	A Section	38.0	.230	EA	1
A37	A Section	39.0	.240	EA	1
A38	A Section	40.0	.250	EA	1
A39	A Section	41.0	.260	EA	1
A40	A Section	42.0	.260	EA	1
A41	A Section	43.0	.270	EA	1
A42	A Section	44.0	.270	EA	1
A43	A Section	45.0	.290	EA	1
A44	A Section	46.0	.290	EA	1
A45	A Section	47.0	.300	EA	1
A46	A Section	48.0	.300	EA	1
A47	A Section	49.0	.310	EA	1
A48	A Section	50.0	.310	EA	1
A49	A Section	51.0	.320	EA	1
A50	A Section	52.0	.330	EA	1
A51	A Section	53.0	.330	EA	1
A52	A Section	54.0	.340	EA	1
A53	A Section	55.0	.350	EA	1
A54	A Section	56.0	.360	EA	1
A55	A Section	57.0	.370	EA	1
A56	A Section	58.0	.380	EA	1
A57	A Section	59.0	.380	EA	1

CATALOG NO.	TYPE	O.C. (IN.)	WEIGHT (LBS.)	UOM	OM
A58	A Section	60.0	.390	EA	1
A59	A Section	61.0	.400	EA	1
A60	A Section	62.0	.400	EA	1
A61	A Section	63.0	.410	EA	1
A62	A Section	64.0	.410	EA	1
A63	A Section	65.0	.420	EA	1
A64	A Section	66.0	.430	EA	1
A65	A Section	67.0	.440	EA	1
A66	A Section	68.0	.450	EA	1
A67	A Section	69.0	.450	EA	1
A68	A Section	70.0	.460	EA	1
A69	A Section	71.0	.470	EA	1
A70	A Section	72.0	.470	EA	1
A71	A Section	73.0	.480	EA	1
A72	A Section	74.0	.480	EA	1
A73	A Section	75.0	.500	EA	1
A74	A Section	76.0	.510	EA	1
A75	A Section	77.0	.510	EA	1
A76	A Section	78.0	.520	EA	1
A77	A Section	79.0	.530	EA	1
A78	A Section	80.0	.540	EA	1

BELTS CONT'D


Hi-Power® II Belts - B Section



The wrapped classical section Hi-Power V-belt has a long reputation for reliability on agricultural and industrial applications. The arched top of the Hi-Power belt provides superior strength to prevent "dishing" and distortion of the tensile section. The cords are properly aligned, each of them carrying its full share of the load.

Features

All sizes meet Gates V80® system matching tolerances
Meets ARPM/RMA IP-3-2 oil and heat resistant standards
REACH and RoHS 2 compliant
Meets ARPM/RMA IP-3-3 static conductivity requirements
Operating temperature range: -30°C/-22°F to +60°C/140°F



B36

CATALOG NO.	TYPE	O.C. (IN.)	WEIGHT (LBS.)	UOM	OM
B28	B Section	31.0	.330	EA	1
B29	B Section	32.0	.340	EA	1
B30	B Section	33.0	.350	EA	1
B31	B Section	34.0	.360	EA	1
B32	B Section	35.0	.370	EA	1
B33	B Section	36.0	.380	EA	1
B34	B Section	37.0	.390	EA	1
B35	B Section	38.0	.400	EA	1
B36	B Section	39.0	.410	EA	1
B37	B Section	40.0	.420	EA	1
B38	B Section	41.0	.440	EA	1
B39	B Section	42.0	.460	EA	1
B40	B Section	43.0	.470	EA	1
B41	B Section	44.0	.480	EA	1
B42	B Section	45.0	.490	EA	1
B43	B Section	46.0	.500	EA	1
B44	B Section	47.0	.510	EA	1
B45	B Section	48.0	.520	EA	1
B46	B Section	49.0	.530	EA	1
B47	B Section	50.0	.540	EA	1
B48	B Section	51.0	.550	EA	1
B49	B Section	52.0	.550	EA	1
B50	B Section	53.0	.560	EA	1
B51	B Section	54.0	.570	EA	1
B52	B Section	55.0	.580	EA	1
B53	B Section	56.0	.600	EA	1
B54	B Section	57.0	.620	EA	1
B55	B Section	58.0	.630	EA	1
B56	B Section	59.0	.650	EA	1
B57	B Section	60.0	.650	EA	1
B58	B Section	61.0	.670	EA	1
B59	B Section	62.0	.680	EA	1
B60	B Section	63.0	.680	EA	1
B61	B Section	64.0	.690	EA	1
B62	B Section	65.0	.700	EA	1
B63	B Section	66.0	.720	EA	1
B64	B Section	67.0	.730	EA	1
B65	B Section	68.0	.740	EA	1


CATALOG NO.	TYPE	O.C. (IN.)	WEIGHT (LBS.)	UOM	OM
B66	B Section	69.0	.760	EA	1
B67	B Section	70.0	.770	EA	1
B68	B Section	71.0	.780	EA	1
B69	B Section	72.0	.790	EA	1
B70	B Section	73.0	.800	EA	1
B71	B Section	74.0	.810	EA	1
B72	B Section	75.0	.820	EA	1
B73	B Section	76.0	.820	EA	1
B74	B Section	77.0	.830	EA	1
B75	B Section	78.0	.850	EA	1
B76	B Section	79.0	.850	EA	1
B77	B Section	80.0	.870	EA	1
B78	B Section	81.0	.890	EA	1
B79	B Section	82.0	.890	EA	1
B80	B Section	83.0	.900	EA	1
B81	B Section	84.0	.910	EA	1
B82	B Section	85.0	.920	EA	1
B83	B Section	86.0	.920	EA	1
B84	B Section	87.0	.930	EA	1
B85	B Section	88.0	.950	EA	1
B86	B Section	89.0	.960	EA	1
B87	B Section	90.0	.970	EA	1
B88	B Section	91.0	.980	EA	1
B89	B Section	92.0	.990	EA	1
B90	B Section	93.0	1.000	EA	1
B91	B Section	94.0	1.020	EA	1
B92	B Section	95.0	1.030	EA	1
B93	B Section	96.0	1.040	EA	1
B94	B Section	97.0	1.050	EA	1
B95	B Section	98.0	1.060	EA	1
B96	B Section	99.0	1.070	EA	1
B97	B Section	100.0	1.080	EA	1
B98	B Section	101.0	1.100	EA	1
B99	B Section	102.0	1.110	EA	1
B112	B Section	115.0	1.240	EA	1
B120	B Section	123.0	1.320	EA	1
B128	B Section	131.0	1.430	EA	1
B144	B Section	147.0	1.610	EA	1
B148	B Section	151.0	1.640	EA	1

BELTS CONT'D

Tri-Power® Belts - AX Section

Built for superior performance on heavy duty classical cross-section drives. The raw edge, Ethylene Elastomer construction and special notch design makes the Tri-Power belt especially suited for small diameter pulleys and back side idler drives.





AX75

Features

Suitable for all industrial applications, particularly where small or sub-minimal sheave diameters are required.
15% capacity increase over wrapped belts.
Meets ARPM/RMA IP-3-2 oil and heat resistant standards.
Meets ARPM/RMA IP-3-3 static conductivity requirements.
REACH and RoHS 2 compliant.
Operating temperature range: -51°C/-70°F to +121°C /+250°F.

CATALOG NO.	TYPE	O.C. (IN.)	WEIGHT (LBS.)	UOM	OM
AX20	AX Section	22.0	.110	EA	1
AX21	AX Section	23.0	.150	EA	1
AX22	AX Section	24.0	.150	EA	1
AX23	AX Section	25.0	.150	EA	1
AX24	AX Section	26.0	.150	EA	1
AX25	AX Section	27.0	.150	EA	1
AX26	AX Section	28.0	.150	EA	1
AX27	AX Section	29.0	.150	EA	1
AX28	AX Section	30.0	.150	EA	1
AX29	AX Section	31.0	.150	EA	1
AX30	AX Section	32.0	.200	EA	1
AX31	AX Section	33.0	.200	EA	1
AX32	AX Section	34.0	.200	EA	1
AX33	AX Section	35.0	.200	EA	1
AX34	AX Section	36.0	.200	EA	1
AX35	AX Section	37.0	.200	EA	1
AX36	AX Section	38.0	.200	EA	1
AX37	AX Section	39.0	.200	EA	1
AX38	AX Section	40.0	.200	EA	1
AX39	AX Section	41.0	.200	EA	1
AX40	AX Section	42.0	.200	EA	1
AX41	AX Section	43.0	.250	EA	1
AX42	AX Section	44.0	.250	EA	1
AX43	AX Section	45.0	.250	EA	1
AX44	AX Section	46.0	.250	EA	1
AX45	AX Section	47.0	.250	EA	1
AX46	AX Section	48.0	.250	EA	1
AX47	AX Section	49.0	.300	EA	1
AX48	AX Section	50.0	.300	EA	1
AX49	AX Section	51.0	.300	EA	1
AX50	AX Section	52.0	.300	EA	1
AX51	AX Section	53.0	.300	EA	1
AX52	AX Section	54.0	.300	EA	1
AX53	AX Section	55.0	.300	EA	1
AX54	AX Section	56.0	.300	EA	1
AX55	AX Section	57.0	.300	EA	1
AX56	AX Section	58.0	.300	EA	1
AX57	AX Section	59.0	.300	EA	1

CATALOG NO.	TYPE	O.C. (IN.)	WEIGHT (LBS.)	UOM	OM
AX58	AX Section	60.0	.300	EA	1
AX59	AX Section	61.0	.300	EA	1
AX60	AX Section	62.0	.350	EA	1
AX61	AX Section	63.0	.350	EA	1
AX62	AX Section	64.0	.350	EA	1
AX63	AX Section	65.0	.350	EA	1
AX64	AX Section	66.0	.350	EA	1
AX65	AX Section	67.0	.350	EA	1
AX66	AX Section	68.0	.350	EA	1
AX67	AX Section	69.0	.400	EA	1
AX68	AX Section	70.0	.400	EA	1
AX69	AX Section	71.0	.400	EA	1
AX70	AX Section	72.0	.400	EA	1
AX71	AX Section	73.0	.400	EA	1
AX72	AX Section	74.0	.400	EA	1
AX73	AX Section	75.0	.400	EA	1
AX74	AX Section	76.0	.400	EA	1
AX75	AX Section	77.0	.400	EA	1
AX76	AX Section	78.0	.450	EA	1
AX77	AX Section	79.0	.450	EA	1
AX78	AX Section	80.0	.450	EA	1
AX79	AX Section	81.0	.450	EA	1
AX80	AX Section	82.0	.450	EA	1
AX81	AX Section	83.0	.450	EA	1
AX82	AX Section	84.0	.450	EA	1
AX83	AX Section	85.0	.500	EA	1
AX84	AX Section	86.0	.500	EA	1
AX85	AX Section	87.0	.500	EA	1
AX86	AX Section	88.0	.500	EA	1
AX87	AX Section	89.0	.500	EA	1
AX88	AX Section	90.0	.500	EA	1
AX89	AX Section	91.0	.500	EA	1
AX90	AX Section	92.0	.500	EA	1
AX91	AX Section	93.0	.550	EA	1
AX92	AX Section	94.0	.550	EA	1
AX93	AX Section	95.0	.550	EA	1
AX94	AX Section	96.0	.550	EA	1
AX95	AX Section	97.0	.550	EA	1

BELTS CONT'D

Tri-Power® Belts - BX Section

Built for superior performance on heavy duty classical cross-section drives. The raw edge, Ethylene Elastomer construction and special notch design makes the Tri-Power belt especially suited for small diameter pulleys and back side idler drives.



Features

Suitable for all industrial applications, particularly where small or sub-minimal sheave diameters are required.
15% capacity increase over wrapped belts.
Meets ARPM/RMA IP-3-2 oil and heat resistant standards.
Meets ARPM/RMA IP-3-3 static conductivity requirements.
REACH and RoHS 2 compliant.
Operating temperature range: -51°C/-70°F to +121°C /+250°F.

CATALOG NO.	TYPE	O.C. (IN.)	WEIGHT (LBS.)	UOM	OM
BX27	BX Section	30.0	.250	EA	1
BX28	BX Section	31.0	.300	EA	1
BX29	BX Section	32.0	.300	EA	1
BX30	BX Section	33.0	.300	EA	1
BX31	BX Section	34.0	.300	EA	1
BX32	BX Section	35.0	.300	EA	1
BX33	BX Section	36.0	.300	EA	1
BX34	BX Section	37.0	.300	EA	1
BX35	BX Section	38.0	.350	EA	1
BX36	BX Section	39.0	.350	EA	1
BX37	BX Section	40.0	.350	EA	1
BX38	BX Section	41.0	.350	EA	1
BX39	BX Section	42.0	.350	EA	1
BX40	BX Section	43.0	.350	EA	1
BX41	BX Section	44.0	.350	EA	1
BX42	BX Section	45.0	.400	EA	1
BX43	BX Section	46.0	.400	EA	1
BX44	BX Section	47.0	.400	EA	1
BX45	BX Section	48.0	.450	EA	1
BX46	BX Section	49.0	.450	EA	1
BX47	BX Section	50.0	.450	EA	1
BX48	BX Section	51.0	.450	EA	1
BX49	BX Section	52.0	.450	EA	1
BX50	BX Section	53.0	.500	EA	1
BX51	BX Section	54.0	.500	EA	1
BX52	BX Section	55.0	.500	EA	1
BX53	BX Section	56.0	.500	EA	1
BX54	BX Section	57.0	.500	EA	1
BX55	BX Section	1.0	.500	EA	1
BX56	BX Section	59.0	.550	EA	1
BX57	BX Section	60.0	.550	EA	1
BX1	BX Section	61.0	.550	EA	1
BX59	BX Section	62.0	.550	EA	1
BX60	BX Section	63.0	.550	EA	1
BX61	BX Section	64.0	.600	EA	1
BX62	BX Section	65.0	.600	EA	1
BX63	BX Section	66.0	.600	EA	1
BX64	BX Section	67.0	.600	EA	1
BX65	BX Section	68.0	.600	EA	1
BX66	BX Section	69.0	.600	EA	1
BX67	BX Section	70.0	.600	EA	1
BX68	BX Section	71.0	.650	EA	1
BX69	BX Section	72.0	.650	EA	1

CATALOG NO.	TYPE	O.C. (IN.)	WEIGHT (LBS.)	UOM	OM
BX70	BX Section	73.0	.650	EA	1
BX71	BX Section	74.0	.650	EA	1
BX72	BX Section	75.0	.700	EA	1
BX73	BX Section	76.0	.700	EA	1
BX74	BX Section	77.0	.700	EA	1
BX75	BX Section	78.0	.700	EA	1
BX76	BX Section	79.0	.700	EA	1
BX77	BX Section	80.0	.750	EA	1
BX78	BX Section	81.0	.750	EA	1
BX79	BX Section	82.0	.750	EA	1
BX80	BX Section	83.0	.750	EA	1
BX81	BX Section	84.0	.750	EA	1
BX82	BX Section	85.0	.750	EA	1
BX83	BX Section	86.0	.800	EA	1
BX84	BX Section	87.0	.800	EA	1
BX85	BX Section	88.0	.800	EA	1
BX86	BX Section	89.0	.800	EA	1
BX87	BX Section	90.0	.800	EA	1
BX88	BX Section	91.0	.800	EA	1
BX89	BX Section	92.0	.800	EA	1
BX90	BX Section	93.0	.850	EA	1
BX91	BX Section	94.0	.850	EA	1
BX92	BX Section	95.0	.850	EA	1
BX93	BX Section	96.0	.850	EA	1
BX94	BX Section	97.0	.850	EA	1
BX95	BX Section	98.0	.900	EA	1
BX96	BX Section	99.0	.900	EA	1
BX97	BX Section	100.0	.900	EA	1
BX98	BX Section	101.0	.900	EA	1
BX99	BX Section	102.0	.900	EA	1
BX100	BX Section	103.0	.950	EA	1
BX103	BX Section	106.0	.950	EA	1
BX106	BX Section	109.0	.950	EA	1
BX112	BX Section	115.0	1.000	EA	1
BX116	BX Section	119.0	1.050	EA	1
BX120	BX Section	123.0	1.100	EA	1
BX136	BX Section	139.0	1.200	EA	1
BX140	BX Section	143.0	1.250	EA	1

BELTS CONT'D

Truflex® V-Belts - 3L and 4L Section





Engineered with all the qualities of a great belt, including flexibility, durability, and resistance to contaminants. It includes a thin profile, designed for small-diameter sheaves, and a lower cord positioning to improve belt performance on light-duty belt drives and in your backside idler applications.

Features

Perfect for auxiliary automotive applications like electric windows, windshield wipers, and central locking systems, drive pumps, power tools, and domestic appliance applications, FHP motors and light-duty applications.

Meets ARPM/RMA IP-3-2 oil and heat resistant standards.
Meets ARPM/RMA IP-3-3 static conductivity requirements.
Operating temperature range: -30°C/-22°F to +60°C/140°F.
REACH and RoHS 2 compliant.





3L280

CATALO NO.	TYPE	O.C. (IN.)	WEIGHT (LBS.)	UOM	OM
3L170	3L Section	17.0	.073	EA	1
3L180	3L Section	18.0	.076	EA	1
3L190	3L Section	19.0	.078	EA	1
3L200	3L Section	20.0	.080	EA	1
3L210	3L Section	21.0	.075	EA	1
3L220	3L Section	22.0	.085	EA	1
3L230	3L Section	23.0	.088	EA	1
3L240	3L Section	24.0	.100	EA	1
3L250	3L Section	25.0	.093	EA	1
3L260	3L Section	26.0	.095	EA	1
3L280	3L Section	28.0	.099	EA	1
4L170	4L Section	17.0	.090	EA	1
4L180	4L Section	18.0	.100	EA	1
4L190	4L Section	19.0	.110	EA	1
4L200	4L Section	20.0	.110	EA	1
4L210	4L Section	21.0	.110	EA	1
4L220	4L Section	22.0	.120	EA	1
4L230	4L Section	23.0	.120	EA	1
4L240	4L Section	24.0	.120	EA	1
4L250	4L Section	25.0	.130	EA	1
4L260	4L Section	26.0	.140	EA	1
4L270	4L Section	27.0	.150	EA	1
4L280	4L Section	28.0	.150	EA	1
4L290	4L Section	29.0	.150	EA	1
4L300	4L Section	30.0	.160	EA	1

CATALO NO.	TYPE	O.C. (IN.)	WEIGHT (LBS.)	UOM	OM
4L310	4L Section	31.0	.160	EA	1
4L320	4L Section	32.0	.170	EA	1
4L330	4L Section	33.0	.180	EA	1
4L340	4L Section	34.0	.190	EA	1
4L350	4L Section	35.0	.190	EA	1
4L360	4L Section	36.0	.200	EA	1
4L370	4L Section	37.0	.200	EA	1
4L380	4L Section	38.0	.200	EA	1
4L390	4L Section	39.0	.210	EA	1
4L400	4L Section	40.0	.210	EA	1
4L410	4L Section	41.0	.220	EA	1
4L420	4L Section	42.0	.220	EA	1
4L430	4L Section	43.0	.230	EA	1
4L440	4L Section	44.0	.230	EA	1
4L450	4L Section	45.0	.240	EA	1
4L460	4L Section	46.0	.240	EA	1
4L470	4L Section	47.0	.250	EA	1
4L480	4L Section	48.0	.250	EA	1
4L490	4L Section	49.0	.260	EA	1
4L500	4L Section	50.0	.260	EA	1
4L510	4L Section	51.0	.270	EA	1
4L520	4L Section	52.0	.280	EA	1
4L530	4L Section	53.0	.280	EA	1
4L540	4L Section	54.0	.290	EA	1
4L550	4L Section	55.0	.300	EA	1

BELTS CONT'D


Super HC® Molded Notch Belts - 5VX Section



Combines the strength of a wrapped belt construction with the economies of a narrow section V-belt. It transmits more power in a given space and allows more compact drive design than classical section V-belts. In short, it offers you more power and considerably reduces the space needed. This significantly cuts the overall drive cost. Super HC V-belts also have exclusive Gates construction features for longer life on your drives.

Features

All sizes meet Gates V80® system matching tolerances.
Recommended for use on all industrial heavy-duty, narrow section V-belt drives.
With an increased transmission efficiency this belt allows for a more compact and highly economical drive design by reducing size of pulleys, bearings, guards and mounts.
Improved belt life reducing expensive maintenance time.
REACH and RoHS 2 compliant.
Operating temperature range: -51°C/-60°F to +121°C/250°F.



AX75

CATALO NO.	TYPE	O.C. (IN.)	WEIGHT (LBS.)	UOM	OM
5VX470	5VX Section	47.0	.480	EA	1
5VX500	5VX Section	50.0	.510	EA	1
5VX530	5VX Section	53.0	.540	EA	1
5VX550	5VX Section	55.0	.560	EA	1
5VX570	5VX Section	57.0	.580	EA	1
5VX600	5VX Section	60.0	.600	EA	1
5VX630	5VX Section	63.0	.640	EA	1
5VX650	5VX Section	65.0	.660	EA	1
5VX710	5VX Section	71.0	.710	EA	1
5VX750	5VX Section	75.0	.760	EA	1
5VX780	5VX Section	78.0	.780	EA	1
5VX800	5VX Section	80.0	.800	EA	1

CATALOG NO.	TYPE	O.C. (IN.)	WEIGHT (LBS.)	UOM	OM
5VX830	5VX Section	83.0	.830	EA	1
5VX840	5VX Section	84.0	.840	EA	1
5VX860	5VX Section	86.0	.860	EA	1
5VX900	5VX Section	90.0	.900	EA	1
5VX950	5VX Section	95.0	.950	EA	1
5VX1000	5VX Section	100.0	1.000	EA	1
5VX1030	5VX Section	103.0	1.030	EA	1
5VX1060	5VX Section	106.0	1.060	EA	1
5VX1120	5VX Section	112.0	1.110	EA	1
5VX1180	5VX Section	118.0	1.170	EA	1
5VX1320	5VX Section	132.0	1.300	EA	1
5VX1400	5VX Section	140.0	1.380	EA	1

Quick-Link® Emergency V-Belts



Combines the strength of a wrapped belt construction with the economies of a narrow section V-belt. It transmits more power in a given space and allows more compact drive design than classical section V-belts. In short, it offers you more power and considerably reduces the space needed. This significantly cuts the overall drive cost. Super HC V-belts also have exclusive Gates construction features for longer life on your drives.

Features

All sizes meet Gates V80® system matching tolerances.
Recommended for use on all industrial heavy-duty, narrow section V-belt drives and particularly where space, weight and horsepower capacity are critical.
Up to 300% capacity increase over classical belts.
Meets ARPM/RMA IP-3-2 oil and heat resistant standards.
Meets ARPM/RMA IP-3-3 static conductivity requirements.
REACH and RoHS 2 compliant.
Operating temperature range: -30°C/-22°F to +82°C/180°F.

A/4L-5

CATALOG NO.	TYPE	TOP WIDTH (IN.)	STD. BOX (FT.)	STD. SLEEVE (FT.)	WEIGHT (LBS.)	UOM	OM
A/4L-5	Quick-Link	1/2	—	5	.070	EA	1

Notes: Quick-Link does not meet ARPM requirements for V-belt static conductivity. Quick-Link is available in lengths noted below.

Warning: Do NOT use with backside idlers.

SHAFTS AND BEARINGS

Stock Bushings

"P" Style Bushings

Features

Solid flange helps reduces vibration in the drive
3/4" taper per foot, self locking
Double split barrel provides positive clamping to the shaft

Uses

Sheaves
Sprockets
Pulleys



PP11316

Packard

CATALOG NO.	STOCK BORE (IN.)	KEY WAY	UOM	OM
PP1118	1-1/8	1/4 x 1/8	EA	1
PP11316	1-3/16	1/4 x 1/8	EA	1
PP1138	1-3/8	5/16 x 5/32	EA	1
PP11716	1-7/16	3/8 x 3/16	EA	1
PP178	7/8	3/16 x 3/32	EA	1

"Q" Style Bushings

Features

Solid flange helps reduces vibration in the drive
3/4" taper per foot, self locking
Double split barrel provides positive clamping to the shaft

Uses

Sheaves
Sprockets
Pulleys



PP11316

Packard

CATALOG NO.	STOCK BORE (IN.)	KEY WAY	UOM	OM
PQ11	1	1/4 x 1/8	EA	1
PQ1118	1-1/8	1/4 x 1/8	EA	1
PQ1138	1-3/8	3/8 x 3/16	EA	1

"H" Style Bushings

Features

Solid flange helps reduces vibration in the drive
3/4" taper per foot, self locking
Double split barrel provides positive clamping to the shaft

Uses

Sheaves
Sprockets
Pulleys



PH1316

Packard

CATALOG NO.	STOCK BORE (IN.)	KEY WAY	UOM	OM
PH38	3/8	None	EA	1
PH12	1/2	1/8 x 1/16	EA	1
PH58	5/8	3/16 x 3/32	EA	1
PH34	3/4	3/16 x 3/32	EA	1
PH1316	13/16	3/16 x 3/32	EA	1
PH78	7/8	3/16 x 3/32	EA	1
PH1	1	1/4 x 1/8	EA	1
PH118	1-1/8	1/4 x1/8	EA	1
PH114	1-1/4	1/4 x 1/16	EA	1
PH138	1-3/8	5/16 x 1/16	EA	1

STOCK SPLINE BORES
0.978 - 10 Inv
1-1/8 - 6B
1-3/8 - 6B
1-3/8 - 21 Inv

QD Bushings

"SH" Style Bushings

Features

Drilled with six holes (three drilled and three tapped) to allow pull-up bolts to be inserted from either side. This enables variations of mounting characteristics to suit a particular installation.



PSH1716

Packard

CATALOG NO.	STOCK BORE (IN.)	KEY WAY	UOM	OM
PSH1316	1-3/16	1/4 x 1/8	EA	1
PSH1716	1-7/16	3/8 x 3/16	EA	1

PULLEYS

Stock PVP Variable Pitch Single Groove Pulleys

Features

Fitted with hollow head set screws
Any standard double groove Packard Drive Pulley can be used as a companion pulley



PVP50118

Packard

			3L BELTS				4L OR A BELTS				5L OR B BELTS							
CATALOG NO.	TYPE	O.D. (IN.)	MIN. PITCH	MIN. TURNS OPEN	MAX. PITCH	MAX. TURNS OPEN	MIN. DATUM	MIN. TURNS OPEN	MAX. DATUM	MAX. TURNS OPEN	MIN. DATUM	MIN. TURNS OPEN	MAX. DATUM	MAX. TURNS OPEN	STOCK BORE (IN.)	DIRECT REPLACEMENT FOR	UOM	OM
PVP2512	1	2.50	1.6	4	2.4	0	—	—	—	—	—	—	—	—	1/2	1VP25 x 1/2	EA	1
PVP3012	1	2.87	1.8	4	2.7	0	—	—	—	—	—	—	—	—	1/2	1VP30 x 1/2	EA	1
PVP3058	1	2.87	1.8	4	2.7	0	—	—	—	—	—	—	—	—	5/8	1VP30 x 5/8	EA	1
PVP3412	1	3.15	1.7	4	2.5	0	1.9	5	2.9	0	2.4	5	3.2	1	1/2	1VP34 x 1/2	EA	1
PVP3458	1	3.15	1.7	4	2.5	0	1.9	5	2.9	0	2.4	5	3.2	1	5/8	1VP34 x 5/8	EA	1
PVP3478	1	3.15	1.7	4	2.5	0	1.9	5	2.9	0	2.4	5	3.2	1	7/8	1VP34 x 7/8	EA	1
PVP4012	1	3.75	2.3	4	3.1	0	2.4	5	3.4	0	2.7	6	3.7	1	1/2	1VP40 x 1/2	EA	1
PVP4034	1	3.75	2.3	4	3.1	0	2.4	5	3.4	0	2.7	6	3.7	1	3/4	1VP40 x 3/4	EA	1
PVP4058	1	3.75	2.3	4	3.1	0	2.4	5	3.4	0	2.7	6	3.7	1	5/8	1VP40 x 5/8	EA	1
PVP4078	1	3.75	2.3	4	3.1	0	2.4	5	3.4	0	2.7	6	3.7	1	7/8	1VP40 x 7/8	EA	1
PVP4412	1	4.15	2.7	4	3.5	0	2.8	5	3.8	0	3.1	6	4.1	1	1/2	1VP44 x 1/2	EA	1
PVP4458	1	4.15	2.7	4	3.5	0	2.8	5	3.8	0	3.1	6	4.1	1	5/8	1VP44 x 5/8	EA	1
PVP4434	1	4.15	2.7	4	3.5	0	2.8	5	3.8	0	3.1	6	4.1	1	3/4	1VP44 x 3/4	EA	1
PVP4478	2	4.15	2.7	4	3.5	0	2.8	5	3.8	0	3.1	6	4.1	1	7/8	1VP44 x 7/8	EA	1
PVP44118	2	4.15	2.7	4	3.5	0	2.8	5	3.8	0	3.1	6	4.1	1	1-1/8	1VP44 x 1-1/8	EA	1
PVP5012	1	4.75	3.3	4	4.1	0	3.4	5	4.4	0	3.7	6	4.7	1	1/2	1VP50 x 1/2	EA	1
PVP5058	1	4.75	3.3	4	4.1	0	3.4	5	4.4	0	3.7	6	4.7	1	5/8	1VP50 x 5/8	EA	1
PVP5078	2	4.75	3.3	4	4.1	0	3.4	5	4.4	0	3.7	6	4.7	1	7/8	1VP50 x 7/8	EA	1
PVP50118	2	4.75	3.3	4	4.1	0	3.4	5	4.4	0	3.7	6	4.7	1	1-1/8	1VP50 x 1-1/8	EA	1
PVP5658	1	5.35	3.9	4	4.7	0	4	5	5.0	0	4.3	6	5.3	1	5/8	1VP56 x 5/8	EA	1
PVP5678	2	5.35	3.9	4	4.7	0	4	5	5.0	0	4.3	6	5.3	1	7/8	1VP56 x 7/8	EA	1
PVP56118	2	5.35	3.9	4	4.7	0	4	5	5.0	0	4.3	6	5.3	1	1-1/8	1VP56 x 1-1/8	EA	1
PVP6078	2	6.00	—	—	—	—	4.2	5	5.2	0	4.3	6	5.5	0	7/8	1VP60 x 7/8	EA	1
PVP60118	2	6.00	—	—	—	—	4.2	5	5.2	0	4.3	6	5.5	0	1-1/8	1VP60 x 1-1/8	EA	1
PVP60138	2	6.00	—	—	—	—	4.2	5	5.2	0	4.3	6	5.5	0	1-3/8	1VP60 x 1-3/8	EA	1
PVP62118	2	5.95	4.5	4	5.3	0	4.6	5	5.7	0	4.8	6	5.9	0	1-1/8	1VP62 x 1-1/8	EA	1
PVP62138	2	5.95	4.5	4	5.3	0	4.6	5	5.7	0	4.8	6	5.9	0	1-3/8	1VP62 x 1-3/8	EA	1
PVP6278	2	5.95	4.5	4	5.3	0	4.6	5	5.7	0	4.8	6	5.9	0	7/8	1VP62 x 7/8	EA	1
PVP65118	2	6.5	—	—	—	—	4.7	5	5.7	0	4.8	6	6.0	0	1-1/8	1VP65 x 1-1/8	EA	1
PVP68118	2	6.55	5.1	4	5.9	0	5.2	5	6.2	0	5.5	6	6.5	1	1-1/8	1VP68 x 1-1/8	EA	1
PVP75138	2	7.5	—	—	—	—	5.7	5	6.7	0	5.8	6	7.0	0	1-3/8	1VP75 x 1-3/8	EA	1

			5V BELTS							
CATALOG NO.	TYPE	O.D.(IN.)	MIN. PITCH	MIN. TURNS OPEN	MAX. PITCH	MAX. TURNS OPEN	STOCK BORE (IN.)	DIRECT REPLACEMENT FOR	UOM	OM
PVP65118	2	6.5	5.2	6	6.4	0	1-1/8	1VP65 x 1-1/8	EA	1
PVP68118	2	6.55	5.9	6	6.9	1	1-1/8	1VP68 x 1-1/8	EA	1
PVP75138	2	7.5	6.2	6	7.4	0	1-3/8	1VP75 x 1-3/8	EA	1

PULLEYS CONT'D

Stock P2VP Variable Pitch Double Groove Pulleys

Features

Fitted with hollow head set screws
Any standard double groove Packard Drive
Pulley can be used as a companion pulley



P2VP6278

Packard

			3L BELTS				4L OR A BELTS				5L OR B BELTS							
CATALOG NO.	TYPE	O.D. (IN.)	MIN. PITCH	MIN. TURNS OPEN	MAX. PITCH	MAX. TURNS OPEN	MIN. DATUM	MIN. TURNS OPEN	MAX. DATUM	MAX. TURNS OPEN	MIN. DATUM	MIN. TURNS OPEN	MAX. DATUM	MAX. TURNS OPEN	STOCK BORE (IN.)	DIRECT REPLACEMENT FOR	UOM	OM
P2VP3658	4	3.95	1.9	4	2.7	0	2	5	3	0	2.5	5	3.3	1	5/8	2VP36 x 5/8	EA	1
P2VP3678	4	3.95	1.9	4	2.7	0	2	5	3	0	2.5	5	3.3	1	7/8	2VP36 x 7/8	EA	1
P2VP4258	4	3.95	2.5	4	3.3	0	2.6	5	3.6	0	2.9	6	3.9	1	5/8	2VP42 x 5/8	EA	1
P2VP4278	4	3.95	2.5	4	3.3	0	2.6	5	3.6	0	2.9	6	3.9	1	7/8	2VP42 x 7/8	EA	1
P2VP42118	4	3.95	2.5	4	3.3	0	2.6	5	3.6	0	2.9	6	3.9	1	1-1/8	2VP42 x 1-1/8	EA	1
P2VP5058	5	4.75	3.3	4	4.1	0	3.4	5	4.4	0	3.7	6	4.7	1	5/8	2VP50 x 5/8	EA	1
P2VP5078	5	4.75	3.3	4	4.1	0	3.4	5	4.4	0	3.7	6	4.7	1	7/8	2VP50 x 7/8	EA	1
P2VP50118	5	4.75	3.3	4	4.1	0	3.4	5	4.4	0	3.7	6	4.7	1	1-1/8	2VP50 x 1-1/8	EA	1
P2VP5678	5	5.35	3.9	4	4.7	0	4	5	5	0	4.3	6	5.3	1	7/8	2VP56 x 7/8	EA	1
P2VP56118	5	5.35	3.9	4	4.7	0	4	5	5	0	4.3	6	5.3	1	1-1/8	2VP56 x 1-1/8	EA	1
P2VP6278	5	5.95	4.5	4	5.3	0	4.6	5	5.6	0	4.9	6	5.9	1	7/8	2VP62 x 7/8	EA	1
P2VP60118	5	6	—	—	—	—	4.2	5	5.2	0	4.3	6	5.5	0	1-1/8	2VP60 x 1-1/8	EA	1
P2VP60138	5	6	—	—	—	—	4.2	5	5.2	0	4.3	6	5.5	0	1-3/8	2VP60 x 1-3/8	EA	1
P2VP60158	5	6	—	—	—	—	4.2	5	5.2	0	4.3	6	5.5	0	1-5/8	2VP60 x 1-5/8	EA	1
P2VP62118	5	6	4.5	4	5.3	0	4.6	5	5.6	0	4.9	6	5.9	1	1-1/8	2VP62 x 1-1/8	EA	1
P2VP65118	5	5.95	—	—	—	—	4.7	5	5.7	0	4.8	6	6	0	1-1/8	2VP65 x 1-1/8	EA	1
P2VP68118	5	6.5	5.1	4	5.9	0	5.2	5	6.2	0	5.5	6	6.5	1	1-1/8	2VP68 x 1-1/8	EA	1
P2VP71118	5	7.1	—	—	—	—	5.3	5	6.3	0	5.4	6	6.6	1	1-1/8	2VP71 x 1-1/8	EA	1
P2VP71138	5	7.1	—	—	—	—	5.3	5	6.3	0	5.4	6	6.6	1	1-3/8	2VP71 x 1-3/8	EA	1
P2VP71158	5	7.1	—	—	—	—	5.5	5	6.5	0	5.8	6	7	0	1-5/8	2VP71 x 1-5/8	EA	1
P2VP75138	5	7.1	—	—	—	—	5.7	5	6.7	0	5.8	6	7	0	1-3/8	2VP75 x 1-3/8	EA	1

	5V BELTS									
CATALOG NO.	TYPE	O.D. (IN.)	MIN. PITCH	MIN. TURNS OPEN	MAX. PITCH	MAX. TURNS OPEN	STOCK BORE (IN.)	DIRECT REPLACEMENT FOR	UOM	OM
P2VP6278	5	5.95	5.3	6	6.3	1	7/8	2VP62 x 7/8	EA	1
P2VP62118	5	6	5.3	6	6.3	1	1-1/8	2VP62 x 1-1/8	EA	1
P2VP65118	5	5.95	5.2	6	6.4	0	1-1/8	2VP65 x 1-1/8	EA	1
P2VP68118	5	6.5	5.9	6	6.9	1	1-1/8	2VP68 x 1-1/8	EA	1
P2VP71118	5	7.1	5.8	6	7	0	1-1/8	2VP71 x 1-1/8	EA	1
P2VP71138	5	7.1	5.8	6	7	0	1-3/8	2VP71 x 1-3/8	EA	1
P2VP71158	5	7.1	5.8	6	7	0	1-5/8	2VP71 x 1-5/8	EA	1
P2VP75138	5	7.1	6.2	6	7.4	0	1-3/8	2VP75 x 1-3/8	EA	1

NOTE: Item numbers in **RED** indicate **Made in the U.S.A.**

PULLEYS CONT'D

Two Groove Pulleys for 4L or A Belts



P2AK46H

Features

3L belts may be used with these pulleys

CATALOG NO.	DIAM. (IN.) O.D.	DATUM A	PITCH 3L	TYPE	DIMENSIONS (IN.) O.L.	F	L	P	C	X	G	E	DIRECT REPLACEMENMT FOR BROWNING	UOM	OM
P2AK30H	3.05	2.8	2.46	1	2-7/16	1-3/8	1-1/4	7/8	15/16	7/8	7/16	3/16	2AK30H	EA	1
P2AK39H	3.75	3.5	3.16	1	2	1-3/8	1-1/4	716	1/2	7/8	7/16	3/16	2AK39H	EA	1
P2AK41H	3.95	3.7	3.36	2	1-1/2	1-3/8	1-1/4	1/16	—	7/8	7/16	3/16	2AK41H	EA	1
P2AK46H	4.45	4.2	3.86	2	1-1/2	1-3/8	1-1/4	1/16	—	7/8	7/16	3/16	2AK46H	EA	1
P2AK54H	5.25	5.0	4.66	2	1-1/2	1-3/8	1-1/4	1/16	—	7/8	7/16	3/16	2AK54H	EA	1
P2AK56H	5.45	5.2	4.86	2	1-1/2	1-3/8	1-1/4	1/16	—	7/8	7/16	3/16	2AK56H	EA	1

Two Groove Pulleys for 4L or A Belts and 5L or B Belts



P2BK3058

Features

Packard drive “P2BK” sheaves accurately machined from grained cast iron, statically balanced, painted and individually packaged
Furnished with standard keyway and hollow head set screws

CATALOG NO.	DIAM. (IN.) O.D.	DATUM A	DATUM B	TYPE	STOCK BORE (IN.)	DIMENSIONS (IN.) F	L	P	C	DIRECT REPLACEMENT FOR BROWNING	UOM	OM
P2BK2558	2.6	2	2.4	1	5/8	1-3/4	1-31/32	15/32	1/4	2BK2558	EA	1
P2BK28118	2.95	2.2	2.6	1	1-1/8	1-3/4	1-31/32	15/32	1/4	2BK28118	EA	1
P2BK3058	3.15	2.4	2.8	1	5/8	1-3/4	1-31/32	15/32	1/4	2BK3058	EA	1
P2BK30118	3.15	2.4	2.8	1	5/8	1-3/4	1-31/32	15/32	1/4	2BK30118	EA	1
P2BK34118	3.55	2.8	3.2	1	1-1/8	1-3/4	1-31/32	15/32	1/4	2BK34118	EA	1
P2BK3658	3.75	3	3.4	1	5/8	1- 3/4	1-31/32	15/32	1/4	2BK3658	EA	1
P2BK4058	3.95	3.2	3.6	2	5/8	1-3/4	1-15/32	15/32	3/4	2BK4058	EA	1
P2BK4558	4.25	3.5	3.9	2	5/8	1-3/4	1-15/32	15/32	3/4	2BK4558	EA	1
P2BK5058	4.75	4	4.4	2	5/8	1-3/4	1-15/32	15/32	3/4	2BK5058	EA	1
P2BK5558	5.25	4.5	4.9	2	5/8	1-3/4	1-15/32	15/32	3/4	BK5558	EA	1
P2BK1001	9.75	9.0	9.40	3	1	1-3/4	1-19/32	11/32	1/2	BK1001	EA	1
P2BK1301716	12.75	12.0	12.4	3	1-7/16	1-3/4	1-19/32	11/32	1/2	BK1301716	EA	1

PULLEYS CONT'D

Light Duty Bush Type Pulley

Features

2 Groove



P2BK40H

Packard

CATALOG NO.	DIAM. (IN.) O.D.	DATUM A	DATUM B	TYPE	DIMENSIONS (IN.) O.L.	F	L	P	C	X	G	E	DIRECT REPLACEMENT FOR BROWNING	UOM	OM
P2BK32H	3.35	2.6	3	1	2-13/16	1-3/4	1-1/4	7/8	15/16	7/8	7/16	3/16	2BK32H	EA	1
P2BK34H	3.55	2.8	3.2	1	2-13/16	1-3/4	1-1/4	7/8	15/16	7/8	7/16	3/16	2BK34H	EA	1
P2BK36H	3.75	3.0	3.4	1	2-13/16	1-3/4	1-1/4	7/16	7/8	7/8	7/16	3/16	2BK36H	EA	1
P2BK40H	3.95	3.2	3.6	1	2-13/16	1-3/4	1-1/4	7/16	7/8	7/8	7/16	3/16	2BK40H	EA	1
P2BK45H	4.25	3.5	3.9	1	2-13/16	1-3/4	1-1/4	7/16	7/8	7/8	7/16	3/16	2BK45H	EA	1
P2BK47H	4.45	3.7	4.1	2	1-3/4	1-3/4	1-1/4	7/16	—	7/8	7/16	3/16	2BK47H	EA	1
P2BK50H	4.75	4.0	4.4	2	1-3/4	1-3/4	1-1/4	7/16	—	7/8	7/16	3/16	2BK50H	EA	1
P2BK52H	4.95	4.2	4.6	2	1-3/4	1-3/4	1-1/4	7/16	—	7/8	7/16	3/16	2BK52H	EA	1
P2BK55H	5.25	4.5	4.9	2	1-3/4	1-3/4	1-1/4	7/16	—	7/8	7/16	3/16	2BK55H	EA	1
P2BK57H	5.45	4.7	5.1	2	1-3/4	1-3/4	1-1/4	7/16	—	7/8	7/16	3/16	2BK57H	EA	1
P2BK62H	5.95	5.2	5.6	2	1-3/4	1-3/4	1-1/4	7/16	—	7/8	7/16	3/16	2BK62H	EA	1
P2BK65H	6.25	5.5	5.9	3	1-3/4	1-3/4	1-1/4	7/16	7/8	7/8	7/16	3/16	2BK65H	EA	1
P2BK67H	6.45	5.7	6.1	3	1-3/4	1-3/4	1-1/4	7/16	7/8	7/8	7/16	3/16	2BK67H	EA	1
P2BK70H	6.75	6.0	6.4	3	1-3/4	1-3/4	1-1/4	7/16	7/8	7/8	7/16	3/16	2BK70H	EA	1
P2BK80H	7.75	7.0	7.4	3	1-3/4	1-3/4	1-1/4	7/16	7/8	7/8	7/16	3/16	2BK80H	EA	1
P2BK90H	8.75	8.0	8.4	3	1-3/4	1-3/4	1-1/4	7/16	7/8	7/8	7/16	3/16	2BK90H	EA	1
P2BK100H	9.75	9.0	9.4	3	1-3/4	1-3/4	1-1/4	7/16	7/8	7/8	7/16	3/16	2BK100H	EA	1
P2BK120H	11.75	11.0	11.4	3	1-3/4	1-3/4	1-1/4	7/16	7/8	7/8	7/16	3/16	2BK120H	EA	1
P2BK130H	12.75	12.0	12.4	3	1-3/4	1-3/4	1-1/4	7/16	7/8	7/8	7/16	3/16	2BK130H	EA	1
P2BK140H	13.75	13.0	13.4	3	1-3/4	1-3/4	1-1/4	7/16	7/8	7/8	7/16	3/16	2BK140H	EA	1
P2BK160H	15.75	15.0	15.4	3	1-3/4	1-3/4	1-1/4	7/16	7/8	7/8	7/16	3/16	2BK160H	EA	1

PULLEYS CONT'D

PVL Variable Pitch Pulleys

Features

Adjust the size of the pulley based on needed air flow or speed required
Furnished with standard keyway and hollow head set screws
(All set screws are 5/16-18 knurled)

BORE RANGE (IN.)	KEYWAY (IN.)
1/2	None
5/8 - 7/8	3/16 x 3/32
1-5/16 - 1-1/4	1/4 x 1/8
1-7/16	3/8 x 3/16



PVL2512

Packard

		3L BELTS				4L OR A BELTS				5L OR B BELTS							
CATALOG NO.	O.D. (IN.)	MIN. PITCH	MIN. TURNS OPEN	MAX. PITCH	MAX. TURNS OPEN	MIN. DATUM	MIN. TURNS OPEN	MAX. DATUM	MAX. TURNS OPEN	MIN. TURNS OPEN	MIN. DATUM	MAX. DATUM	MAX. TURNS OPEN	STOCK BORE (IN.)	DIRECT REPLACEMENT FOR BROWNING	UOM	OM
PVL2512	2.5	1.6	4	2.4	0	—	—	—	—	—	—	—	—	1/2	1VL25 x 1/2	EA	1
PVL2558	2.5	1.6	4	2.4	0	—	—	—	—	—	—	—	—	5/8	1VL25 x 5/8	EA	1
PVL3012	2.87	1.8	4	2.7	0	—	—	—	—	—	—	—	—	1/2	1VL30 x 1/2	EA	1
PVL3058	2.87	1.8	4	2.7	0	—	—	—	—	—	—	—	—	5/8	1VL30 x 5/8	EA	1
PVL3412	3.15	1.7	4	2.5	0	1.9	5	2.9	0	5	2.4	3.2	1	1/2	1VL34 x 1/2	EA	1
PVL3434	3.15	1.7	4	2.5	0	1.9	5	2.9	0	5	2.4	3.2	1	3/4	1VL34 x 3/4	EA	1
PVL3458	3.15	1.7	4	2.5	0	1.9	5	2.9	0	5	2.4	3.2	1	5/8	1VL34 x 5/8	EA	1
PVL4012	3.75	2.3	4	3.1	0	2.4	5	3.4	0	6	2.7	4.1	1	1/2	1VL40 x 1/2	EA	1
PVL4034	3.75	2.3	4	3.1	0	2.4	5	3.4	0	6	2.7	4.1	1	3/4	1VL40 x 3/4	EA	1
PVL4058	3.75	2.3	4	3.1	0	2.4	5	3.4	0	6	2.7	4.1	1	5/8	1VL40 x 5/8	EA	1
PVL4078	3.75	2.3	4	3.1	0	2.4	5	3.4	0	6	2.7	4.1	1	7/8	1VL40 x 7/8	EA	1
PVL4412	4.15	2.7	4	3.5	0	2.8	5	3.8	0	6	3.1	4.1	1	1/2	1VL44 x 1/2	EA	1
PVL4434	4.15	2.7	4	3.5	0	2.8	5	3.8	0	6	3.1	4.1	1	3/4	1VL44 x 3/4	EA	1
PVL4458	4.15	2.7	4	3.5	0	2.8	5	3.8	0	6	3.1	4.1	1	5/8	1VL44 x 5/8	EA	1
PVL4478	4.15	2.7	4	3.5	0	2.8	5	3.8	0	6	3.1	4.1	1	7/8	1VL44 x 7/8	EA	1

PAL Pulleys For 4L Or A Belts

BORE RANGE (IN.)	KEYWAY (IN.)
1/2	None
5/8 - 7/8	3/16 x 3/32
1-5/16 - 1-1/4	1/4 x 1/8
1-7/16	3/8 x 3/16



PAL9434

Packard

	DIAMETER (IN.)			DIMENSIONS (IN.)			DIRECT REPLACEMENT		
CATALOG NO.	O.D.	PITCH	STOCK BORE (IN.)	F	P	L	FOR BROWNING	UOM	OM
PAL541	4.93	4.78	1	19/32	15/32	1-1/16	AL541	EA	1
PAL5434	4.93	4.78	3/4	19/32	15/32	1-1/16	AL5434	EA	1
PAL5458	4.93	4.78	5/8	19/32	15/32	1-1/16	AL5458	EA	1
PAL6434	5.93	5.78	3/4	19/32	15/32	1-1/16	AL6434	EA	1
PAL6458	5.93	5.78	5/8	19/32	15/32	1-1/16	AL6458	EA	1
PAL641	5.93	5.78	1	19/32	15/32	1-1/16	AL641	EA	1
PAL7434	6.93	6.78	3/4	19/32	15/32	1-1/16	AL7434	EA	1
PAL741	6.93	6.78	1	19/32	15/32	1-1/16	AL741	EA	1
PAL8434	7.93	7.78	3/4	19/32	15/32	1-1/16	AL8434	EA	1
PAL841	7.93	7.78	1	19/32	15/32	1-1/16	AL841	EA	1
PAL8458	8.25	7.78	5/8	19/32	15/32	1-1/16	AL8458	EA	1
PAL9434	8.93	8.78	3/4	19/32	15/32	1-1/16	AL9434	EA	1
PAL941	8.93	8.78	1	19/32	15/32	1-1/16	AL941	EA	1
PAL1041	9.93	9.78	1	19/32	15/32	1-1/16	AL1041	EA	1
PAL10434	9.93	9.78	3/4	19/32	15/32	1-1/16	AL10434	EA	1
PAL11434	10.93	10.78	3/4	19/32	15/32	1-1/16	AL11434	EA	1
PAL1141	10.93	10.78	1	19/32	15/32	1-1/16	AL1141	EA	1
PAL12434	11.93	11.78	3/4	19/32	15/32	1-1/16	AL12434	EA	1
PAL1241	11.93	11.78	1	19/32	15/32	1-1/16	AL1241	EA	1

Note: Do not use "A" Gripnotch Belt Ratings with "AL" or "AM" sheaves.

PULLEYS CONT'D

Single Groove Pulleys For 4L Or A Belts

Features

PACKARD DRIVE "PAK", "PBK", "PAKH" and "PBKH" pulleys accurately machined from grained cast iron, statically balanced, painted and individually packaged

Furnished with standard keyway and hollow head set screws

3L belts may be used with these pulleys

BORE RANGE (IN.)	KEYWAY (IN.)
1/2	None
5/8 - 7/8	3/16 x 3/32
1-5/16 - 1-1/4	1/4 x 1/8
1-7/16	3/8 x 3/16



P2BK40H

Packard

	DIAMETER (IN.)					DIMENSIONS (IN.)				DIRECT REPLACEMENT		
CATALOG NO.	O.D.	DATUM A	PITCH 3L	TYPE	STOCK BORE (IN.)	F	L	P	C	FOR BROWNING	UOM	OM
PAK1712	1.75	1.5	1.16	1	1/2	21/32	15/16	7/16	5/32	AK1712	EA	1
PAK1758	1.75	1.5	1.16	1	5/8	21/32	15/16	7/16	5/32	AK1758	EA	1
PAK2012	2	1.8	1.46	1	1/2	21/32	15/16	7/16	5/32	AK2012	EA	1
PAK2058	2	1.8	1.46	1	5/8	21/32	15/16	7/16	5/32	AK2058	EA	1
PAK2158	2.10	1.9	1.56	1	5/8	21/32	15/16	7/16	5/32	AK2158	EA	1
PAK2212	2.2	2	1.66	1	1/2	21/32	15/16	7/16	5/32	AK2212	EA	1
PAK2258	2.2	2	1.66	1	5/8	21/32	15/16	7/16	5/32	AK2258	EA	1
PAK2312	2.3	2.1	1.76	1	1/2	21/32	15/16	7/16	5/32	AK2312	EA	1
PAK2358	2.3	2.1	1.76	1	5/8	21/32	15/16	7/16	5/32	AK2358	EA	1
PAK2512	2.5	2.3	1.96	2	1/2	21/32	15/16	7/16	5/32	AK2512	EA	1
PAK2558	2.5	2.3	1.96	2	5/8	21/32	15/16	7/16	5/32	AK2558	EA	1
PAK2634	2.6	2.4	2.06	2	3/4	21/32	15/16	7/16	5/32	AK2634	EA	1
PAK2712	2.7	2.5	2.16	2	1/2	21/32	15/16	7/16	5/32	AK2712	EA	1
PAK2758	2.7	2.5	2.16	2	5/8	21/32	15/16	7/16	5/32	AK2758	EA	1
PAK2812	28	2.6	2.26	2	1/2	21/32	15/16	7/16	5/32	AK2812	EA	1
PAK2858	2.8	2.6	2.26	2	5/8	21/32	15/16	7/16	5/32	AK2858	EA	1
PAK3012	3.05	2.8	2.46	2	1/2	21/32	15/16	7/16	5/32	AK3012	EA	1
PAK3058	3.05	2.8	2.46	2	5/8	21/32	15/16	7/16	5/32	AK3058	EA	1
PAK3034	3.05	2.8	2.46	2	3/4	21/32	15/16	7/16	5/32	AK3034	EA	1
PAK3258	3.25	3	2.66	2	5/8	21/32	15/16	7/16	5/32	AK3258	EA	1
PAK3412	3.45	3.2	2.86	2	1/2	21/32	15/16	7/16	5/32	AK3412	EA	1
PAK3458	3.45	3.2	2.86	2	5/8	21/32	15/16	7/16	5/32	AK3458	EA	1
PAK3478	3.45	3.2	2.86	2	7/8	21/32	15/16	7/16	5/32	AK3478	EA	1
PAK3958	3.75	3.5	3.16	2	5/8	3/4	1-5/32	15/32	1/16	AK3958	EA	1
PAK3978	3.75	3.5	3.16	2	7/8	3/4	1-5/32	15/32	1/16	AK3978	EA	1
PAK4134	3.95	3.7	3.36	2	3/4	3/4	1-5/32	15/32	1/16	AK4134	EA	1
PAK4158	3.95	3.7	3.36	2	5/8	3/4	1-5/32	15/32	1/16	AK4158	EA	1
PAK4178	3.95	3.7	3.36	2	7/8	3/4	1-5/32	15/32	1/16	AK4178	EA	1
PAK4458	4.25	4	3.66	3	5/8	3/4	1-5/32	15/32	1/16	AK4458	EA	1

Note: Do not use PAK sheaves with bores 1" and under with cogged belt ratings.

PULLEYS CONT'D

Single Groove Pulleys For 4L Or A Belts (cont.)



PAK5178

Packard

Features

PACKARD DRIVE “PAK”, “PBK”, “PAKH” and “PBKH” pulleys accurately machined from grained cast iron, statically balanced, painted and individually packaged

Furnished with standard keyway and hollow head set screws

3L belts may be used with these pulleys

BORE RANGE (IN.)	KEYWAY (IN.)
1/2	None
5/8 - 7/8	3/16 x 3/32
1-5/16 - 1-1/4	1/4 x 1/8
1-7/16	3/8 x 3/16

	DIAM. (IN.)					DIMENSIONS (IN.)				DIRECT REPLACEMENT		
CATALOG NO.	O.D.	DATUM A	PITCH 3L	TYPE	STOCK BORE (IN.)	F	L	P	C	FOR BROWNING	UOM	OM
PAK4458	4.25	4	3.66	3	5/8	3/4	1-5/32	15/32	1/16	AK4458	EA	1
PAK4658	4.45	4.2	3.86	3	5/8	3/4	1-5/32	15/32	1/16	AK4658	EA	1
PAK4678	4.45	4.2	3.86	3	7/8	3/4	1-5/32	15/32	1/16	AK4658	EA	1
PAK5158	4.95	4.7	4.36	3	5/8	3/4	1-5/32	15/32	1/16	AK5158	EA	1
PAK5178	4.95	4.7	4.36	3	7/8	3/4	1-5/32	15/32	1/16	AK5178	EA	1
PAK5434	5.25	5.0	4.66	3	3/4	3/4	1-5/32	15/32	1/16	AK5434	EA	1
PAK5634	5.45	5.2	4.86	3	3/4	3/4	1-5/32	15/32	1/16	AK5634	EA	1
PAK5978	5.75	5.5	5.16	3	7/8	3/4	1-5/32	15/32	1/16	AK5978	EA	1
PAK6134	5.95	5.7	5.36	3	3/4	3/4	1-5/32	15/32	1/16	AK6134	EA	1
PAK6158	5.95	5.7	5.36	3	5/8	3/4	1-5/32	15/32	1/16	AK6158	EA	1
PAK6178	5.95	5.7	5.36	3	7/8	3/4	1-5/32	15/32	1/16	AK6178	EA	1
PAK6458	6.25	6	5.66	3	5/8	3/4	1-5/32	15/32	1/16	AK6458	EA	1
PAK7434	7.25	7	6.66	3	3/4	3/4	1-5/32	23/32	0	AK7434	EA	1
PAK8934	8.75	8.5	8.16	3	3/4	3/4	1-15/32	23/32	0	AK8934	EA	1

PULLEYS CONT'D

Single Groove Pulleys For 4L Or A Belts and 5L Or B Belts



P2BK40H

Packard

Features

PACKARD DRIVE "PBK" pulleys accurately machined from grained cast iron, statically balanced, painted and individually packaged

Furnished with standard keyway and hollow head set screws

BORE RANGE (IN.)	KEYWAY (IN.)
1/2	None
5/8 - 7/8	3/16 x 3/32
1-5/16 - 1-1/4	1/4 x 1/8
1-7/16	3/8 x 3/16

	DIAMETER (IN.)					DIMENSIONS (IN.)				DIRECT REPLACEMENT FOR		
CATALOG NO.	O.D.	DATUM A	DATUM B	TYPE	STOCK BORE (IN.)	F	L	P	C	BROWNING	UOM	OM
PBK2258	2.4	1.8	2.2	1	5/8	13/16	1-1/16	13/32	5/32	BK2258	EA	1
PBK2512	2.5	1.9	2.3	1	1/2	13/16	1-1/16	13/32	5/32	BK2512	EA	1
PBK2534	2.5	1.9	2.3	1	3/4	13/16	1-1/16	13/32	5/32	BK2534	EA	1
PBK2558	2.5	1.9	2.3	1	5/8	13/16	1-1/16	13/32	5/32	BK2558	EA	1
PBK2578	2.5	1.9	2.3	1	7/8	13/16	1-1/16	13/32	5/32	BK2578	EA	1
PBK2678	2.6	2.0	2.4	1	7/8	13/16	1-1/16	13/32	5/32	BK2678	EA	1
PBK2758	2.7	2.1	2.5	2	5/8	13/16	1-1/16	13/32	5/32	BK2758	EA	1
PBK2812	2.95	2.2	2.6	2	1/2	13/16	1-1/16	13/32	5/32	BK2812	EA	1
PBK2858	2.95	2.2	2.6	2	5/8	13/16	1-1/16	13/32	5/32	BK2858	EA	1
PBK2878	2.95	2.2	2.6	2	7/8	13/16	1-1/16	13/32	5/32	BK2878	EA	1
PBK3012	3.15	2.4	2.8	2	1/2	13/16	1-1/16	13/32	5/32	BK3012	EA	1
PBK3058	3.15	2.4	2.8	2	5/8	13/16	1-1/16	13/32	5/32	BK3058	EA	1
PBK3078	3.15	2.4	2.8	2	7/8	13/16	1-1/16	13/32	5/32	BK3078	EA	1
PBK3258	3.35	2.6	3	2	5/8	13/16	1-1/16	13/32	5/32	BK3258	EA	1
PBK3234	3.35	2.6	3	2	3/4	13/16	1-1/16	13/32	5/32	BK3234	EA	1
PBK3278	3.35	2.6	3	2	7/8	13/16	1-1/16	13/32	5/32	BK3278	EA	1

Note: Do not use PBK sheaves with bores 1" and under with cogged belt ratings.

PULLEYS CONT'D

Single Groove Pulleys For 4L Or A Belts and 5L Or B Belts



PBK3658

Packard

Features

PACKARD DRIVE "PBK" pulleys accurately machined from grained cast iron, statically balanced, painted and individually packaged

Furnished with standard keyway and hollow head set screws

BORE RANGE (IN.)	KEYWAY (IN.)
1/2	None
5/8 - 7/8	3/16 x 3/32
1-5/16 - 1-1/4	1/4 x 1/8
1-7/16	3/8 x 3/16

	DIAM. (IN.)					DIMENSIONS (IN.)				DIRECT REPLACEMENT FOR		
CATALOG NO.	O.D.	DATUM A	DATUM B	TYPE	STOCK BORE (IN.)	F	L	P	C	BROWNING	UOM	OM
PBK3412	3.55	2.8	3.2	2	1/2	7/8	1-5/32	13/32	1/8	BK3412	EA	1
PBK3458	3.55	2.8	3.2	2	5/8	7/8	1-5/32	13/32	1/8	BK3458	EA	1
PBK3658	3.75	3	3.4	2	5/8	7/8	1-5/32	13/32	1/8	BK3658	EA	1
PBK4058	3.95	3.2	3.6	2	5/8	7/8	1-5/32	13/32	1/8	BK4058	EA	1
PBK4078	3.95	3.2	3.6	2	7/8	7/8	1-5/32	13/32	1/8	BK4078	EA	1
PBK4758	4.45	3.7	4.1	2	5/8	7/8	1-5/32	13/32	1/8	BK4758	EA	1
PBK47118	4.45	3.7	4.1	2	1-1/8	7/8	1-5/32	13/32	1/8	BK47118	EA	1
PBK50118	4.75	4.0	4.3	3	1-1/8	7/8	1-5/32	13/32	1/8	BK50118	EA	1
PBK5278	4.95	4.2	4.6	3	7/8	7/8	1-5/32	13/32	1/8	BK5278	EA	1
PBK6058	5.75	5	5.4	3	5/8	7/8	1-5/32	13/32	1/8	BK6058	EA	1
PBK6034	5.75	5	5.4	3	3/4	7/8	1-5/32	13/32	1/8	BK6034	EA	1
PBK6078	5.75	5	5.4	3	7/8	7/8	1-5/32	13/32	1/8	BK6078	EA	1
PBK6234	5.95	5.2	5.6	3	3/4	7/8	1-5/32	13/32	1/8	BK6234	EA	1
PBK6534	6.25	5.5	5.9	3	3/4	7/8	1-5/32	13/32	1/8	BK6534	EA	1
PBK7534	7.25	6.5	6.9	3	3/4	7/8	1-15/32	21/32	1/16	BK7534	EA	1

Note: Do not use PBK sheaves with bores 1" and under with cogged belt ratings.

PULLEYS CONT'D

Single Groove Pulleys

Features

3L belts may be used with these pulleys



PAK66H

Packard

	DIAMETER (IN.)				DIMENSIONS (IN.)								DIRECT REPLACEMENT FOR		
CATALOG NO.	O.D.	DATUM A	PITCH 3L	TYPE	O.L.	F	L	P	C	X	G	E	BROWNING	UOM	OM
PAK30H	3.05	2.8	2.46	1	1-13/16	3/4	1-1/4	7/8	—	1-3/16	7/16	3/16	AK30H	EA	1
PAK32H	3.25	3.0	2.66	1	1-13/16	3/4	1-1/4	7/8	—	1-3/16	7/16	3/16	AK32H	EA	1
PAK34H	3.45	3.2	2.86	1	1-1/2	3/4	1-1/4	9/16	—	7/8	7/16	3/16	AK34H	EA	1
PAK39H	3.75	3.5	3.16	2	1-1/2	3/4	1-1/4	9/16	—	7/8	7/16	3/16	AK39H	EA	1
PAK41H	3.95	3.7	3.36	2	1-1/2	3/4	1-1/4	9/16	—	7/8	7/16	3/16	AK41H	EA	1
PAK44H	4.25	4	3.66	2	1-1/2	3/4	1-1/4	9/16	—	7/8	7/16	3/16	AK44H	EA	1
PAK46H	4.45	4.2	3.86	2	1-1/2	3/4	1-1/4	9/16	—	7/8	7/16	3/16	AK46H	EA	1
PAK49H	4.75	4.5	4.16	2	1-1/2	3/4	1-1/4	9/16	—	7/8	7/16	3/16	AK49H	EA	1
PAK51H	4.95	4.7	4.36	2	1-1/2	3/4	1-1/4	9/16	—	7/8	7/16	3/16	AK51H	EA	1
PAK54H	5.25	5	4.66	2	1-1/2	3/4	1-1/4	9/16	—	7/8	7/16	3/16	AK54H	EA	1
PAK56H	5.45	5.2	4.86	2	1-1/2	3/4	1-1/4	9/16	—	7/8	7/16	3/16	AK56H	EA	1
PAK59H	5.75	5.5	5.16	2	1-1/2	3/4	1-1/4	9/16	—	7/8	7/16	3/16	AK59H	EA	1
PAK61H	5.95	5.7	5.36	3	1-1/2	3/4	1-1/4	9/16	—	7/8	7/16	3/16	AK61H	EA	1
PAK64H	6.25	6	5.66	3	1-1/2	3/4	1-1/4	9/16	—	7/8	7/16	3/16	AK64H	EA	1
PAK66H	6.45	6.2	5.86	3	1-1/2	3/4	1-1/4	9/16	—	7/8	7/16	3/16	AK66H	EA	1
PAK69H	6.75	6.5	6.16	3	1-1/2	3/4	1-1/4	9/16	—	7/8	7/16	3/16	AK69H	EA	1
PAK71H	6.95	6.7	6.36	3	1-1/2	3/4	1-1/4	9/16	—	7/8	7/16	3/16	AK71H	EA	1
PAK74H	7.25	7	6.66	3	1-1/2	3/4	1-1/4	9/16	—	7/8	7/16	3/16	AK74H	EA	1
PAK79H	7.75	7.5	7.16	3	1-1/2	3/4	1-1/4	9/16	—	7/8	7/16	3/16	AK79H	EA	1
PAK84H	8.25	8	7.66	3	1-1/2	3/4	1-1/4	9/16	—	7/8	7/16	3/16	AK84H	EA	1
PAK89H	8.75	8.5	8.16	3	1-1/2	3/4	1-1/4	9/16	—	7/8	7/16	3/16	AK89H	EA	1
PAK94H	9.25	9.0	8.66	3	1-1/2	3/4	1-1/4	9/16	—	7/8	7/16	3/16	AK94H	EA	1
PAK99H	9.75	9.5	9.16	3	1-1/2	3/4	1-1/4	9/16	—	7/8	7/16	3/16	AK99H	EA	1
PAK114H	11.25	11	10.66	3	1-1/2	3/4	1-1/4	9/16	—	7/8	7/16	3/16	AK114H	EA	1
PAK124H	12.25	12	11.66	3	1-1/2	3/4	1-1/4	9/16	—	7/8	7/16	3/16	AK124H	EA	1

PULLEYS CONT'D

Single Groove Pulleys

Features

3L belts may be used with these pulleys



PBK62H

Packard

	DIAM. (IN.)				DIMENSIONS (IN.)								DIRECT REPLACEMENT FOR		
CATALOG NO.	O.D.	DATUM A	DATUM B	TYPE	O.L.	F	L	P	C	X	G	E	BROWNING	UOM	OM
PBK30H	3.15	2.4	2.8	1	1-15/16	7/8	1-1/4	7/8	—	1-5/16	7/16	3/16	BK30H	EA	1
PBK32H	3.35	2.6	3	1	1-15/16	7/8	1-1/4	7/8	—	1-5/16	7/16	3/16	BK32H	EA	1
PBK34H	3.55	2.8	3.2	1	1-15/16	7/8	1-1/4	7/16	—	1-5/16	7/16	3/16	BK34H	EA	1
PBK36H	3.75	3	3.4	2	1-1/2	7/8	1-1/4	7/16	—	7/8	7/16	3/16	BK36H	EA	1
PBK40H	3.95	3.2	3.6	2	1-1/2	7/8	1-1/4	7/16	—	7/8	7/16	3/16	BK40H	EA	1
PBK45H	4.25	3.5	3.9	2	1-1/2	7/8	1-1/4	7/16	—	7/8	7/16	3/16	BK45H	EA	1
PBK47H	4.45	3.7	4.1	2	1-1/2	7/8	1-1/4	7/16	—	7/8	7/16	3/16	BK47H	EA	1
PBK50H	4.75	4	4.4	2	1-1/2	7/8	1-1/4	7/16	—	7/8	7/16	3/16	BK50H	EA	1
PBK52H	4.95	4.2	4.6	2	1-1/2	7/8	1-1/4	7/16	—	7/8	7/16	3/16	BK52H	EA	1
PBK55H	5.25	4.5	4.9	2	1-1/2	7/8	1-1/4	7/16	—	7/8	7/16	3/16	BK55H	EA	1
PBK57H	5.45	4.7	5.1	2	1-1/2	7/8	1-1/4	7/16	—	7/8	7/16	3/16	BK57H	EA	1
PBK60H	5.75	5	5.4	2	1-1/2	7/8	1-1/4	7/16	—	7/8	7/16	3/16	BK60H	EA	1
PBK62H	5.95	5.2	5.6	2	1-1/2	7/8	1-1/4	7/16	—	7/8	7/16	3/16	BK62H	EA	1
PBK65H	6.25	5.5	5.9	2	1-1/2	7/8	1-1/4	7/16	—	7/8	7/16	3/16	BK65H	EA	1
PBK67H	6.45	5.7	6.1	2	1-1/2	7/8	1-1/4	7/16	—	7/8	7/16	3/16	BK67H	EA	1
PBK70H	6.75	6	6.4	3	1-9/16	7/8	1-1/4	1/2	1/16	7/8	7/16	3/16	BK70H	EA	1
PBK72H	6.95	6.2	6.6	3	1-9/16	7/8	1-1/4	1/2	1/16	7/8	7/16	3/16	BK72H	EA	1
PBK75H	7.25	6.5	6.9	3	1-9/16	7/8	1-1/4	1/2	1/16	7/8	7/16	3/16	BK75H	EA	1
PBK77H	7.45	6.7	7.1	3	1-9/16	7/8	1-1/4	1/2	1/16	7/8	7/16	3/16	BK77H	EA	1
PBK80H	7.75	7	7.4	3	1-9/16	7/8	1-1/4	1/2	1/16	7/8	7/16	3/16	BK80H	EA	1
PBK85H	8.25	7.5	7.9	3	1-9/16	7/8	1-1/4	1/2	1/16	7/8	7/16	3/16	BK85H	EA	1
PBK90H	8.75	8	8.4	3	1-9/16	7/8	1-1/4	1/2	1/16	7/8	7/16	3/16	BK90H	EA	1
PBK95H	9.25	8.5	8.9	3	1-9/16	7/8	1-1/4	1/2	1/16	7/8	7/16	3/16	BK95H	EA	1
PBK100H	9.75	9	9.4	3	1-9/16	7/8	1-1/4	1/2	1/16	7/8	7/16	3/16	BK100H	EA	1
PBK105H	10.25	9.5	9.9	3	1-9/16	7/8	1-1/4	1/2	1/16	7/8	7/16	3/16	BK105H	EA	1
PBK110H	10.75	10	10.4	3	1-9/16	7/8	1-1/4	1/2	1/16	7/8	7/16	3/16	BK110H	EA	1
PBK120H	11.75	11	11.4	3	1-9/16	7/8	1-1/4	1/2	1/16	7/8	7/16	3/16	BK120H	EA	1
PBK130H	12.75	12	12.4	3	1-9/16	7/8	1-1/4	1/2	1/16	7/8	7/16	3/16	BK130H	EA	1
PBK140H	13.75	13	13.4	3	1-9/16	7/8	1-1/4	1/2	1/16	7/8	7/16	3/16	BK140H	EA	1
PBK150H	14.75	14	14.4	3	1-9/16	7/8	1-1/4	1/2	1/16	7/8	7/16	3/16	BK150H	EA	1
PBK160H	15.75	15	15.4	3	1-9/16	7/8	1-1/4	1/2	1/16	7/8	7/16	3/16	BK160H	EA	1

WIRE CONNECTORS

Grommets – Vinyl (By Panel Hole Size)

Grommets safely route cables and wires through sharp edged cutouts.



GV06

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
GV06*	Grommets – 3/8", pack of 18	PK	1
GV07	Grommets – 7/16", pack of 12	PK	1
GV08*	Grommets – 1/2", pack of 12	PK	1
GV10*	Grommets – 5/8", pack of 7	PK	1
GV12	Grommets – 3/4", pack of 3	PK	1
GV14*	Grommets – 7/8", pack of 4	PK	1
GVA1	Assortment – Small – GV04, GV05, GV06, GV07, GV08, pack of 15	PK	1
GVA2	Assortment – Large – GV08, GV10, GV12, GV14, GV16, pack of 5	PK	1

Sizes shown above also available in 100 packs. Replace "" with "C" for part number.

Heat Shrink Tubing – Polyolefin 50% Shrink, Black Commercial Grade

Our shrinking tube is economical and mechanically tough heat shrinkable tubing used for insulating, jacketing and identification.



HSA1

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
HS03	3/16" I.D. Expanded – 4" Long, pack of 8	PK	1*
HS04	1/4" I.D. Expanded – 4" Long, pack of 7	PK	1*
HS06	3/8" I.D. Expanded – 4" Long, pack of 6	PK	1*
HS08	1/2" I.D. Expanded – 4" Long, pack of 5	PK	1*
HSA1	Assorted 3/16", 1/4", 3/8" – 4" Long, pack of 7	PK	1
HSA2	Assorted 1/2", 3/4", 1" – 4" Long, pack of 4	PK	1

Available in lengths up to 250 ft.
*These items are also available in bulk. To order, enter the catalog number followed by the letter "B". For example, HS03B is the bulk part number for HS03. Bulk items are priced and shipped by the foot.

Compressor Repair Kit

Finally, a product that simplifies the repair of burned or damaged spade terminals when reconnecting or replacing a compressor. Fits both non burned and burned terminals. Connects to the compressor via precision brass cylinders that fit over the terminals and connect with stainless steel set screws. Wires are permanently attached. Standard factory 600V, 65 strand machine wire. Easy to install and guaranteed for the life of the compressor.



TLC-3-8

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
TLC-3-8	3 Wire, 8 Gauge Connection Kit	EA	1
TLC-3-10	3 Wire, 10 Gauge Connection Kit	EA	1
TLC-3-12	3 Wire, 12 Gauge Connection Kit	EA	1

Transparent Plastic Boxes with Terminal Assortments

Boxes are made of soft, pliable, durable K resin with 18 compartments containing the most popular terminals, including hi temp and compressor terminals.



PA25

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PA10	180 Terminals (10 Each Kind)	EA	1
PA25	360 Terminals (20 Each Kind)	EA	1
PA25AP	Appliance Parts Technician Assortment (mostly Hi-Temp)	EA	1
PA18	"K" Resin Plastic Box Only	EA	1

200 Piece Terminal Kit

High impact re-usable plastic box
Assortment of ring & spade terminals, butt connectors, male & female disconnects



10816

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
10816	200 Piece Terminal Kit	EA	5

TERMINALS IN KIT

RING TERMINAL	QTY
22-16 #6	4
22-16 #8	4
22-16 #10	4
16-14 #6	4
16-14 #8	4
16-14 #10	5
12-10 #8	4
12-10 #10	6
12-10 1/4"	5
12-10 5/16"	4

SPADE TERMINAL	QTY
22-16 #10	4
16-14 #6	5
16-14 #8	4
16-14 #10	4
12-10 #8	4
12-10 #10	16
12-10 1/4"	4
22-16 #6	11
22-16 #8	13

MALE - VINYL DISCONNECT	QTY
22-10 .250	4
22-16 .250	4
22-14 .250	4

FEMALE VINYL DISCONNECT	QTY
22-18 .250	5
16-14 .187	4
16-14 .250	11
12-10 .250	13

NYL FULL INS DISCON - MALE	QTY
22-18 .250	4
16-14 .250	4

NYL FULL INS DISCON - FEMALE	QTY
22-18	4
16-14	5
12-10 .250	4

BUTT CONNECTOR	QTY
22-18	11
16-14	11
12-10	9

WIRE CONNECTORS CONT'D

Twist-On Wire Connectors Combo Kit

The 623-MIX Twist-On Wire Connectors Combo Kit is a very handy and convenient wire connector kit. It contains 600 pieces of color-coded, twist-on and winged twist-on wire connectors in 9 commonly used sizes. Its durable and configurable Plano box is agreat organizer for wire connector refills and storage. A wiring combinations chart for each connector is also included. It is a great truck stock item for contractors.



623-MIX

CATALOG NO.	DESCRIPTION	UOM	OM
623-MIX	Twist-On Wire Connectors Combo Kit, Pack of 600	PK	1

U.L. Listed. CSA Approved.

Wire Connectors-Contractor Packs, U.L. Listed, C.S.A Approved

These connectors have a high dielectric thermoplastic shell. These are UL listed and CSA approved. This product is great for making quick and secure connections.



C312 C222

CATALOG NO.	DESCRIPTION	UOM	OM
C222	Closed End Connectors 22-14 W, pack of 18	PK	1
C222C	Closed End Connectors 22-14 W, pack of 100	PK	1
C223	Closed End Connectors 18-10 W, pack of 15	PK	1
C223C	Closed End Connectors 18-10 W, pack of 100	PK	1
C241	Blue Wire Connectors 22-16 W, pack of 20	PK	1
C241L	Blue Wire Connectors 22-16 W, pack of 50	PK	1
C243	Orange Wire Connectors 22-14 W, pack of 15	PK	1
C243L	Orange Wire Connectors 22-14 W, pack of 50	PK	1
C245	Yellow Wire Connectors 18-10 W, pack of 13	PK	1
C245L	Yellow Wire Connectors 18-10 W, pack of 50	PK	1
C247	Red Wire Connectors 18-10 W, pack of 10	PK	1
C312	Yellow Winged Wire Connectors, pack of 13	PK	1
C312L	Yellow Winged Wire Connectors, pack of 50	PK	1
C512	Red Winged Wire Connectors, pack of 10	PK	1
C512L	Red Winged Wire Connectors, pack of 50	PK	1

U.L. Listed. CSA Approved.

Wire Connectors-Screw On, U.L. Listed, C.S.A Approved

Color coded connectors make quick, secure connections for positive continuity. High dielectric thermoplastic shell resists chemical action from hydrocarbons, dilute acid or alkaline solutions. Deep skirt design prevents exposure of bare wire. New handy carry handle and grip bottle. U.L. Listed. C.S.A. Approved.



623-014

CATALOG NO.	DESCRIPTION	UOM	OM
623-012	Blue Screw-On – Size 72B, #22 to #16 AWG, 300V Max., pack of 600	PK	1
623-013	Orange Screw-On – Size 73B, #22 to #14 AWG, 600V Max., pack of 300	PK	1
623-014	Yellow Screw-On – Size 74B, #18 to #10 AWG, 600V Max., pack of 200	PK	1

U.L. Listed. CSA Approved.

Porcelain Wire Connectors

Porcelain Wire Connectors are used in high temperature applications such as appliances.



CPN1

CATALOG NO.	DESCRIPTION	AWG	UOM	OM
CPN1	Porcelain – Small, pack of 15	22-16, 2 Strand Wire	PK	1
CPN1C	Porcelain – Small, pack of 100	22-16, 2 Strand Wire	PK	1
CPN2	Porcelain – Medium, pack of 10	18-14, 2 Strand Wire	PK	1
CPN2C	Porcelain – Medium, pack of 100	18-14, 2 Strand Wire	PK	1
CPN3	Porcelain – Large, pack of 10	18-14, 3 Strand Wire	PK	1
CPN3C	Porcelain – Large, pack of 100	18-14, 3 Strand Wire	PK	1
CPN2M	Porcelain – Medium, pack of 1000	18-14, 2 Strand Wire	PK	1

WIRE CONNECTORS CONT'D

Wire Connectors-Screw On, U.L. Listed, C.S.A Approved



623-002

Color coded connectors make quick, secure connections for positive continuity. High dielectric thermoplastic shell resists chemical action from hydrocarbons, dilute acid or alkaline solutions. Deep skirt design prevents exposure of bare wire.

CATALOG NO.	DESCRIPTION	UOM	OM
623-001	Gray Screw-On – Size 71B, #22 to #16 AWG, 300V Max., pack of 100	PK	1
623-002	Blue Screw-On – Size 72B, #22 to #16 AWG, 300V Max., pack of 100	PK	1
623-003	Orange Screw-On – Size 73B, #22 to #14 AWG, 600V Max., pack of 100	PK	1
623-004	Yellow Screw-On – Size 74B, #18 to #10 AWG, 600V Max., pack of 100	PK	1
623-005	Red Screw-On – Size 76B, #18 to #10 AWG, 600V Max., pack of 100	PK	1

U.L. Listed. CSA Approved.

Wire Connectors-Winged, U.L. Listed, C.S.A Approved



623-007

Wings give surer grip; offset center design provides great twisting leverage. Expandable square-wire spring instantly adjusts to shape and size to create a strong, vibration-resistant connection. Same tough shell as screw-on type.

CATALOG NO.	DESCRIPTION	UOM	OM
623-000	Lg. Gray Winged – Size 78B, #14 to #8 AWG, 600V Max., pack of 50	PK	1
623-006	Yellow Winged – Size 84, #22 to #10 AWG, 600V Max., pack of 100	PK	1
623-007	Red Winged – Size 86, #18 to #10 AWG, 600V Max., pack of 100	PK	1
623-008	Blue Winged – Size 89, #10 to #6, 600V Max., pack of 50	PK	1

U.L. Listed. C.S.A. Approved.

Wire Connectors



PWNR-25

Packard

Electrical wire connectors may be used to make branch circuit or fixture wire connections on numerous combinations of solid and/or stranded wire cable.

CATALOG NO.	DESCRIPTION	DIRECT REPLACEMENT FOR	UOM	OM
PWNG-25	Gray Wire Connector, 300V	25860	PK	25
PWNG-100	Gray Wire Connector, 300V	25880	PK	100
PWNB-100	Blue Wire Connector, 300V	T1150C , 25881	PK	100
PWNY-25	Yellow Wire Connector, 600V (25PK)	25863	PK	25
PWNY-100	Yellow Wire Connector, 600V (100PK)	T1152C, 25883	PK	100
PWNR-25	Red Wire Connector, 600V (25PK)	25864	PK	25

THERMOSTAT WIRE

Thermostat Wire

Class 2 thermostat wire for indoor wiring needs. Soft drawn bare copper wire, semi rigid PVC insulation and PVC overall jacket. Packaged on aluminum spool.



620-18-5

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
620-18-2	18 AWG, 2 Conductors – 500 ft. Spool	EA	4
620-18-3	18 AWG, 3 Conductors – 500 ft. Spool	EA	4
620-18-4	18 AWG, 4 Conductors – 250 ft. Spool	EA	4
620-18-5	18 AWG, 5 Conductors – 250 ft. Spool	EA	4
620-18-6	18 AWG, 6 Conductors – 250 ft. Spool	EA	4
620-18-7	18 AWG, 7 Conductors – 250 ft. Spool	EA	4
620-18-8	18 AWG, 8 Conductors – 250 ft. Spool	EA	4
620-18-10	18 AWG,10 Conductors – 250 ft. Spool	EA	4
620-20-3	20 AWG, 3 Conductors – 500 ft. Spool	EA	4
620-20-4	20 AWG, 4 Conductors – 250 ft. Spool	EA	4
620-20-5	20 AWG, 5 Conductors – 250 ft. Spool	EA	4
620-20-6	20 AWG, 6 Conductors – 250 ft. Spool	EA	4
620-20-7	20 AWG, 7 Conductors – 250 ft. Spool	EA	4
620-20-8	20 AWG, 8 Conductors – 250 ft. Spool	EA	4
620-20-10	20 AWG,10 Conductors – 250 ft. Spool	EA	4

U.L. Listed. Meets Subject 13 per Article 725, 1990 NEC.

Plenum Thermostat Wire

The Plenum Thermostat Wire is UL Listed type CL2P NEC Article 725 and is designed for use in thermostat control applications.



620-18-3P

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
620-18-2P	18 AWG, 2 Conductors – 500 ft. Spool	EA	4
620-18-3P	18 AWG, 3 Conductors – 500 ft. Spool	EA	4
620-18-6P	18 AWG, 6 Conductors – 250 ft. Spool	EA	4
620-18-8P	18 AWG, 8 Conductors – 250 ft. Spool	EA	4

Non-Metallic Sheathed Cable (Romex Wire)

600V building wire. Easy to pull and strip, flame and moisture resistant. Saves time, labor and money. Color coded conductors of copper, PVC insulation and outer jacket with ground. U.L. Listed 719 Federal Specifications J C94.



620-6-2

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
620-6-2	6 AWG, 2 Conductors with Ground – 125' per pack	EA	1
620-8-2	8 AWG, 2 Conductors with Ground – 125' per pack	EA	1
620-10-2	10 AWG, 2 Conductors with Ground – 250' per pack	EA	1
620-12-2	12 AWG, 2 Conductors with Ground – 250' per pack	EA	1
620-14-2	14 AWG, 2 Conductors with Ground – 250' per pack	EA	1

U.L. Listed 719 Federal Specifications J-C94.

STRANDED AND SOLID WIRE

Stranded Copper Wire on Spool

This copper wire is UL listed and THHN wire. It is 19 strand copper and is 600 V as well as 90°C Stranded. This comes 50 ft. per spool.



W125-50

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
W801-50	08 Gauge, 50 ft. Spool, Black	EA	1
W802-50	08 Gauge, 50 ft. Spool, Red	EA	1
W803-50	08 Gauge, 50 ft. Spool, Green	EA	1
W804-50	08 Gauge, 50 ft. Spool, Blue	EA	1
W805-50	08 Gauge, 50 ft. Spool, White	EA	1
W101-50	10 Gauge, 50 ft. Spool, Black	EA	1
W102-50	10 Gauge, 50 ft. Spool, Red	EA	1
W103-50	10 Gauge, 50 ft. Spool, Green	EA	1
W104-50	10 Gauge, 50 ft. Spool, Blue	EA	1
W105-50	10 Gauge, 50 ft. Spool, White	EA	1
W121-50	12 Gauge, 50 ft. Spool, Black	EA	1
W122-50	12 Gauge, 50 ft. Spool, Red	EA	1
W123-50	12 Gauge, 50 ft. Spool, Green	EA	1
W124-50	12 Gauge, 50 ft. Spool, Blue	EA	1
W125-50	12 Gauge, 50 ft. Spool, White	EA	1
W141-50	14 Gauge, 50 ft. Spool, Black	EA	1
W142-50	14 Gauge, 50 ft. Spool, Red	EA	1
W143-50	14 Gauge, 50 ft. Spool, Green	EA	1
W144-50	14 Gauge, 50 ft. Spool, Blue	EA	1
W145-50	14 Gauge, 50 ft. Spool, White	EA	1

High Temperature Wire, 400°F (204°C), 600 V.

7 strand tin coated copper wire with silicone rubber insulation protected by a braided fiberglass jacket. Use on the front of all gas furnaces with spark ignition because of flame roll out on start up. Also on all power feeds to electric strip and duct heaters. Also used on all heat producing food preparation equipment.




WHTR14-50

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
WHT20	14 Gauge, Black, 10 ft. White, 10 ft.	EA	1
WHTB14-50	14 Gauge, Black, 50 ft.	EA	1
WHTR14-50	14 Gauge, Red, 50 ft.	EA	1
WHTW14-50	14 Gauge, White, 50 ft.	EA	1
WHTB12-50	12 Gauge, Black, 50 ft.	EA	1
WHTB10-50	10 Gauge, Black, 50 ft.	EA	1

Wire for Mini-Split Installation

Wire and cabling specific for mini split installation power supply and control circuits.



230-18-4

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
230-18-4	Stranded Shielded CL3R, 50' per roll	EA	1
230-14-4	Stranded Non-Shielded CL3R, 50' per roll	EA	1
230-14-7	Stranded Non-Shielded CL3R, 50' per roll	EA	1
230-14-4S	Stranded Shielded CL3R, 50' per roll	EA	1

SECOP - COMPRESSORS

Fractional Horsepower Compressors



TL5G-2

SECOP

Features

Replacement compressors for food service equipment, vending machines, bottle coolers, ice machines and other refrigeration equipment
Additional mounting configurations on base plate
Warranty: One year from installation or return no later than two years from manufacturer date - whichever comes first
For use with low, medium and high back pressure
Compact construction | Durable housing | Optimized motor technology | Wide voltage range
Low noise and high energy efficiency | Robust in tough operating conditions | BTU ratings based on Ashrae conditions

R134A

CATALOG NO.	NOMINAL HP	VOLTS-PHASE-HZ	BTU LT@ (-10/130°F)	BTU MT@ (20/130°F)	BTU HT@ (45/130°F)	MOUNTING CENTERS	I.D. DISCHARGE SIZE (IN.)	I.D. SUCTION SIZE (IN.)	UOM	OM
BD35F510	-	12/24V DC & 100-240V AC 50/60Hz	113 - 171	140 - 257	518 - 648	2.76 X 6.7	0.19	0.24	EA	1
BD50F510	-	12/24V DC & 100-240V AC 50/60Hz	142 - 245	360 - 613	633 - 810	2.76 x 6.7	0.20	0.252	EA	1
PL35G-2	1/10	220/240-1-50/60	131	406	-	4 X 6.5	0.19	0.24	EA	1
PL50F-1	1/10	115-1-60	175	388	-	4 X 6.5	0.20	0.25	EA	1
TL2.5G-1	1/10	115V 60Hz	190	557	966	4 X 6.5	0.20	0.25	EA	1
TL2.5G-2	1/10	220/240-1-50/60	203	525	969	4 X 6.5	0.20	0.25	EA	1
TL3G-2	1/10	220/240-1-50/60	228	-	-	4 X 6.5	0.19	0.25	EA	1
TL3F-1	1/10+	115-1-60	253	639	-	4 X 6.5	0.25	0.378	EA	1
TL4G-2	1/10+	220/240-1-50/60	265	699	-	4 X 6.5	0.19	0.24	EA	1
TL4G-1	1/10+	115-1-60	306	729	1369	4 X 6.5	0.20	0.25	EA	1
TL5G-2	1/8	220/240-1-50/60	429	912	-	4 X 6.5	0.20	0.25	EA	1
TFS4.5FT-1	1/8	115-1-60	477	1135	-	4 X 6.5	0.25	0.32	EA	1
TL4GH-2	1/8	220/240-1-50/60	-	-	1525	4 X 6.5	0.19	0.24	EA	1
NL6.1MF-2	1/8	208/230-1-60		1309		4 X 6.5	0.24	0.32	EA	1
FR7.5G-2	1/4	220/240-1-50/60	662	-	-	4 X 6.5	0.24	0.32	EA	1
FR7GH-2	1/4	208/230-1-60	-	1320	2537	4 X 6.5	0.32	0.32	EA	1
FR8.5G-2	1/4	220/240-1-50/60	659	-	-	4 X 6.5	0.24	0.32	EA	1
FF8.5GX-1	1/4	115-1-60	662	1570	2842	4 X 6.5	0.25	0.31	EA	1
NF5.5FX-1	1/4	115-1-60	695	1442	-	4 X 6.5	0.25	0.32	EA	1
FF10GX-1	1/4	115-1-60	716	1721	3147	4 X 6.5	0.25	0.32	EA	1
NF6.1FX.2-1	1/4	115-1-60	721	1541	-	4 X 6.5	0.25	0.31	EA	1
FR10G-2	1/4	220/240-1-50/60	730	-	-	4 X 6.5	0.24	0.32	EA	1
NF7FX-1	1/4	115-1-60	858	1703	-	4 X 6.5	0.25	0.31	EA	1
NF7.3FX.2-1	1/4	115-1-60	892	1857	-	4 X 6.5	0.25	0.32	EA	1
NF10FX-2	1/3	220/240-1-50/60	905	-	-	4 X 6.5	0.25	0.32	EA	1
NF9FX-1	1/3	115-1-60	935	3374	-	4 X 6.5	0.25	0.32	EA	1
SC10GH-2	1/3	220/240-1-50/60	-	-	3510	4 X 6.5	0.32	0.40	EA	1
SC12G-1	1/3	115-1-60	972	2588	4730	4 X 6.5	0.25	0.31	EA	1
SC12G-2	1/3	220/240-1-50/60	976	2726	-	4 X 6.5	0.24	0.32	EA	1
NF8.4FX.2-1	1/3	115-1-60	1030	2106	-	4 X 6.5	0.25	0.32	EA	1
NF10FX-1	1/3	115-1-60	1046	2123	3756	4 X 6.5	0.25	0.32	EA	1
SC12GH-2	1/3	220/240-1-50/60	-	-	4680	4 X 6.5	0.32	0.40	EA	1
SC15GH-2	1/3	220/240-1-50/60	-	-	4694	4 X 6.5	0.32	0.40	EA	1
NF11FX-1	1/3	115-1-60	1101	2279	-	4 X 6.5	0.25	0.32	EA	1
NF11FX.2-1	1/3	115-1-60	1301	2700	4726	4 X 6.5	0.25	0.32	EA	1
SC15G-1	1/2	115-1-60	1241	3045	5496	4 X 6.5	0.25	0.32	EA	1
SC18G-1	1/2	115-1-60	1357	3469	6200	4 X 6.5	0.25	0.378	EA	1
SC18G-1T	1/2	115-1-60	1357	3469	6200	4 X 6.5	0.25	0.378	EA	1
SC21G-2	1/2+	208/230-1-60	1516	-	-	4 X 6.5	0.24	0.40	EA	1
SC15FT-2	1/2+	220/240-1-50/60	1542	-	-	4 X 6.5	0.24	0.40	EA	1
SC15FTX-1	1/2+	115-1-60	1550	3531	-	4 X 6.5	0.25	0.31	EA	1
SC15G-2	1/2+	220/240-1-50/60	1600	-	-	4 X 6.5	0.24	0.40	EA	1
SC18G-2	1/2+	220/240-1-50/60	1600	-	-	4 X 6.5	0.24	0.40	EA	1
SC18GH-2	1/2+	220/240-1-50/60	-	-	6237	4 X 6.5	0.25	0.40	EA	1
SC21FTX-2	1/2+	208/230-1-60	2180	-	-	4 X 6.5	0.24	0.40	EA	1

SECOP - COMPRESSORS CONT'D

Reciprocating Compressors



SC12CLX.2-1

SECOP

Features

Direct replacement compressors for Whirlpool, GE and Electrolux appliances
Replacement compressors for food service equipment, vending machines, bottle coolers, ice machines and other refrigeration equipment
Additional mounting configurations on base plate.

R404A

CATALOG NO.	NOMINAL HP	VOLTS-PHASE-HZ	BTU LT@ (-10/130°F)	BTU MT@ (20/130°F)	BTU HT@ (45/130°F)	MOUNTING CENTERS	I.D. DISCHARGE SIZE (IN.)	I.D. SUCTION SIZE (IN.)	UOM	OM
TF4CLX-1	1/5	115-1-60	702	1285	-	4 X 6.5	0.19	0.25	EA	1
TFS4.5CLX-1	1/4	115-1-60	926	-	-	4 X 6.5	0.19	0.25	EA	1
NF5.5CLX-1	1/3	115-1-60	1376	2209	-	4 X 6.5	0.25	0.31	EA	1
SC10CL-1	1/2	115-1-60	1420	3096	-	4 X 6.5	0.25	0.31	EA	1
NF7CLX-1	1/2	115-1-60	1716	2789	-	4 X 6.5	0.25	0.31	EA	1
SC10CLX-2	1/2	220/240-1-50/60	2002	4094	-	4 X 6.5	0.24	0.32	EA	1
SC12CL-1	1/2	115-1-60	2374	-	-	4 X 6.5	0.25	0.32	EA	1
SC12CLX.2-1	1/2	115-1-60	2466	-	-	4 X 6.5	0.25	0.32	EA	1
SC12CLX.2-2	1/2	220/240-1-50/60	2466	-	-	4 X 6.5	0.25	0.322	EA	1
SC12MLX-1	3/4	115-1-60	-	4391	-	4 X 6.5	0.25	0.32	EA	1
SC12MLX-2	3/4	208/230-1-60	-	4307	-	4 X 6.5	0.25	0.32	EA	1
SC15CLX.2-1	3/4	115-1-60	3000	-	-	4 X 6.5	0.25	0.378	EA	1
SC15CLX.2-1T	3/4	115-1-60	3000	-	-	4 X 6.5	0.25	0.378	EA	1
SC15CLX.2-2	3/4	208/230-1-60	3005	-	-	4 X 6.5	0.25	0.378	EA	1
SC15MLX.2-1	3/4	115-1-60	-	5120	-	4 X 6.5	0.25	0.378	EA	1
SC15MLX.2-2	3/4	208/230-1-60	-	5118	-	4 X 6.5	0.25	0.378	EA	1
SC18CLX.2-1	1	115-1-60	3656	-	-	4 X 6.5	0.25	0.378	EA	1
SC18CLX.2-2-230V	1	208/230-1-60	3797	-	-	4 X 6.5	0.25	0.378	EA	1
SC18MLX-1	1	115-1-60	-	6296	-	4 X 6.5	0.25	0.378	EA	1
SC18MLX-2	1	208/230-1-60	-	6291	-	4 X 6.5	0.25	0.381	EA	1



SCE21CNLX-2

R290

CATALOG NO.	VOLTS-PHASE-HZ	BTU LT@ (-10/130°F)	BTU MT@ (20/130°F)	BTU HT@ (45/130°F)	MOUNTING CENTERS	I.D. DISCHARGE SIZE (IN.)	I.D. SUCTION SIZE (IN.)	UOM	OM
DLE4CN-1	115-1-60	783	1416	-	4 X 6.5	0.25	0.32	EA	1
DLE4.8CN-1	115-1-60	972	1722	-	4 X 6.5	0.25	0.32	EA	1
DLE4.8CNT-2	208/230-1-60	964	1714	-	4 X 6.5	0.25	0.32	EA	1
DLE6.5CN-1	115-1-60	1283	2287	-	4 X 6.5	0.25	0.32	EA	1
NLE8.0CN-1	115-1-60	1545	3078	-	4 X 6.5	0.25	0.32	EA	1
NLE10CN-1	115-1-60	2073	3652	-	4 X 6.5	0.25	0.32	EA	1
SC12CNX.2-1	115-1-60	2085	4023	-	4 X 6.5	0.25	0.378	EA	1
NLE11CNL-1	115-1-60	2291	-	-	4 X 6.5	0.25	0.32	EA	1
NLE11MN-1	115-1-60	-	4107	-	4 X 6.5	0.25	0.32	EA	1
SCE15CNLX-1	115-1-60	2731	-	-	4 X 6.5	0.25	0.378	EA	1
SCE18CNLX-1	115-1-60	3220	-	-	4 X 6.5	0.25	0.378	EA	1
SCE18CNLX-2	208/230-1-60	3100	-	-	4 X 6.5	0.25	0.378	EA	1
SCE18MNX-1	115-1-60	-	6101	-	4 X 6.5	0.25	0.378	EA	1
SCE21CNLX-1	115-1-60	3715	-	-	4 X 6.5	0.25	0.378	EA	1
SCE21CNLX-2	208/230-1-60	3754	-	-	4 X 6.5	0.25	0.378	EA	1

EMBRACO - COMPRESSORS

Refrigeration Compressors

Features

Triple duty compressors that may be used in low, medium and high temperature applications (direct replacements for Tecumseh)
Replacement compressors for Whirlpool, GE and Electrolux appliances (EM models)
Replacement compressors for food service equipment, vending machines, bottle coolers, ice machines and other refrigeration equipment
BTU ratings are in ASHRAE conditions



FFI12BX1

	CATALOG NO.	NOMINAL HP	VOLTS-PHASE-HERTZ	LT @ -10°F	MT @ 20°F	HT @ 45°F	FOOT (IN.)	I.D. DISCHARGE SIZE (IN.)	I.D. SUCTION SIZE (IN.)	DIRECT REPLACEMENT FOR TECUMSEH	UOM	OM
R12 Blend	EMI30ER1	1/10	115-1-60	350	-	-	6.5 x 4.0*	3/16	1/4	—	EA	1
	EMI45ER1	1/8	115-1-60	485	-	-	6.5 x 4.0*	3/16	1/4	—	EA	1
	EMI55ER1	1/6	115-1-60	570	-	-	5.91 X 5.67*	1/4	5/16	—	EA	1
	EM65NR1	1/5	115-1-60	635	-	-	6.5 x 4.0*	1/4	5/16	—	EA	1
	FFC60BK1	1/5	115-1-60	756	1644	2573	6.5 x 4.0*	1/4	5/16	—	EA	1
	FF8.5BK1	1/5	115-1-60	850	1759	3080	6.5 x 4.0*	1/4	5/16	AEA3430AXA	EA	1
	FF10BK1	1/4	115-1-60	915	1908	3204	6.5 x 4.0*	1/4	5/16	AEA3430AXA	EA	1
	FF10BX1	1/4	115-1-60	915	2000	3200	6.5 x 4.0*	1/4	5/16	—	EA	1
	FF11.5BK1	1/4	115-1-60	1130	1893	4000	6.5 x 4.0*	1/4	5/16	—	EA	1
	FFI12BX1	1/3	115-1-60	1350	2600	5000	6.5 x 4.0*	1/4	5/16	AEA4440AXA, AEA2415AAB	EA	1
	EMIS30HHR1	1/10	115-1-60	340	742	1480	6.5 x 4.0*	3/16	1/4	AEA0335YXA	EA	1
	EM45HHR1	1/8	115-1-60	420	866	1775	6.5 x 4.0*	3/16	1/4	AZA0350YXA	EA	1
	EMI55HER1	1/6	115-1-60	510	-	-	6.5 x 4.0*	3/16	1/4	—	EA	1
	EMI60HER1	1/6+	115-1-60	570	-	-	6.5 x 4.0*	1/4	1/4	THA1358YXA	EA	1
	FF7.5HBK1	1/5	115-1-60	630	1622	2760	6.5 x 4.0*	1/4	5/16	AEA1360YXA	EA	1
	EMIS70HHR1	1/5	115-1-60	700	1829	-	6.5 x 4.0*	1/4	1/4	AE3425Y-AA1A	EA	1
	FF8.5HBK1	1/4	115-1-60	740	1745	3135	6.5 x 4.0*	1/4	5/16	AEA3425YXA, TPA1370YXA	EA	1
	FF8.5HBK1C**	1/4	115-1-60	740	1745	3135	6.5 x 4.0*	1/4	5/16	AEA3425YXA, TPA1370YXA	EA	1
	FF10HBX1	1/4+	115-1-60	840	1973	3650	6.5 x 4.0*	1/4	5/16	—	EA	1
	NEK6132Z1	1/6	115-1-60	-	800	1472	6.5 x 4.0*	1/4	5/16	—	EA	1
	NEK6160Z1	1/4	115-1-60	-	-	2884	6.5 x 4.0*	3/16	1/4	AEA3430AXA	EA	1
R134A	NEK6170Z1	1/4	115-1-60	-	-	3336	6.5 x 4.0*	3/16	1/4	AEA3430AXA	EA	1
	FF10HBK1	1/4+	115-1-60	840	1995	3530	6.5 x 4.0*	1/4	5/16		EA	1
	NE2121Z1	1/4	115-1-60	950	-	-	6.5 x 4.0*	1/4	5/16	—	EA	1
	FFU130HAX1	1/3	115-1-60	1250	3022	-	6.5 x 4.0*	1/4	5/16	AE2413Y-AA1B	EA	1
	FFI10HBX1	1/3	115-1-60	1065	2038	4400	6.5 x 4.0*	1/4	5/16	AEA4440YXA, AEA3440YXA	EA	1
	NEK6187Z1	1/3	115-1-60	-	-	3830	6.5 x 4.0*	1/4	5/16		EA	1
	NEK6210Z1	1/3+	115-1-60	-	2524	4524	6.5 x 4.0*	1/4	5/16	AEA4440AXA	EA	1
	FFI12HBX1	1/3+	115-1-60	1190	2886	5300	6.5 x 4.0*	1/4	5/16	AE4440Y-AA1A, AEA4448YXA	EA	1
	NEK6212Z1	1/2	115-1-60	-	-	5178	6.5 x 4.0*	1/4	5/16		EA	1
	NT6215Z1	1/2+	115-1-60	-	3705	6626	8.0 x 4.8*	1/4	3/8	AKA4460YXA	EA	1
	NEK6214Z1	1/2	115-1-60	-	-	5960	6.5 x 4.0*	1/4	5/16		EA	1
	NT6215Z2	1/2+	208-230/60/1	-	3739	6626	8.0 x 4.8*	1/4	3/8	AKA4460YXD	EA	1
	NT6217Z1	3/4	115-1-60	-	3909	7460	8.0 x 4.8*	1/4	3/8	AKA4476YXA	EA	1
	NT6217Z2	3/4	208/230-1-60	-	3909	7579	8.0 x 4.8*	1/4	3/8	AKA4476YXD	EA	1
	NE2130Z1	1/3	115-1-60	1252	-	-	6.5 x 4.0*	1/4	5/16	AE2413Y-AA1B	EA	1
	NE2134Z1	1/3	115-1-60	1452	-	-	6.5 x 4.0*	1/4	5/16	AEA2413YXA, AEA2415AAB	EA	1
	NT6220Z1	1	115-1-60	-	4369	8414	8.0 x 4.8*	1/4	3/8	—	EA	1
	NT6220Z2	1	208-230/60/1	-	4711	8414	8.0 x 4.8*	1/4	3/8	—	EA	1
	NJ6220Z1	1	115-1-60	-	5343	10169	8.0 x 4.8*	1/4	3/8	AJA4492AXA	EA	1
	NJ6220Z2	1	208-230/60/1	-	5343	10169	8.0 x 4.8*	1/4	3/8	AJA4492AXD	EA	1
	NJ6220ZX	1	460-3P	-	5343	10169	8.0 x 4.8*	1/4	3/8	—	EA	1
	NJ6226Z2	1	208-230/60/1	-	5821	11130	8.0 x 4.8*	1/4	3/8	—	EA	1
	NJ6226ZX	1	460-3P	-	6555	11882	8.0 x 4.8*	1/4	3/8	—	EA	1

*Additional mounting configurations on base plate. **FF8.5HBK1C includes start capacitor.
Cross reference comparisons do not imply that all products compared are exact in reference to form, fit and function. Review specifications carefully prior to purchase.

EMBRACO - COMPRESSORS CONT'D

Applications

Replacement compressors for food service equipment, vending machines, bottle coolers, ice machines and other refrigeration equipment

CATALOG NO.	NOMINAL HP	VOLTS-PHASE-HERTZ	BTU			FOOT (IN.)	I.D. DISCHARGE SIZE (IN.)	I.D. SUCTION SIZE (IN.)	DIRECT REPLACEMENT FOR TECUMSEH	UOM	OM
			LT @ -10°F	MT @ 20°F	HT @ 45°F						
NEK2121GK1	1/3	115-1-60	1212	-	-	6.5 x 4.0	3/16	1/4	—	EA	1
NEK2125GK1	1/3	115-1-60	1458	-	-	6.5 x 4.0	1/4	5/16	AEA2411ZXA	EA	1
NEK2134GK1	1/2	115-1-60	1947	-	-	6.5 x 4.0	1/4	5/16	AJA2419ZXA	EA	1
NEK2134GK2	1/2	208/230-1-60	1858	-	-	6.5 x 4.0	1/4	5/16	AJA2419ZXA	EA	1
NEK2150GK1	1/2	115-1-60	2448	-	-	6.5 x 4.0	1/4	5/16	—	EA	1
NT2168GKV1	3/4	115-1-60	2628	-	-	8.0 x 4.8	1/4	3/8	AJA2425ZXA	EA	1
NT2168GKV2	3/4	208/230-1-60	2628	-	-	8.0 x 4.8	1/4	3/8	AJA2425ZXA	EA	1
NEK2168GK1	1/2	115-1-60	2841	-	-	6.5 x 4.0	1/4	5/16	AJA2425ZXA	EA	1
NT2180GKV1	1	115-1-60	3962	-	-	8.0 x 4.8	1/4	3/8	—	EA	1
NT2180GKV2	1	208/230-1-60	3962	-	-	8.0 x 4.8	1/4	3/8	—	EA	1
NT2192GKV1	1 1/4	115-1-60	4306	-	-	8.0 x 4.8	1/4	3/8	—	EA	1
NT2192GKV2	1 1/4	208/230-1-60	4306	-	-	8.0 x 4.8	1/4	3/8	AHA2445AXD	EA	1
NJ2192GK1	1 1/4	115-1-60	4500	-	-	8.0 x 4.8	5/16	1/2	—	EA	1
NJ2192GJ2	1 1/4	208/230-1-60	4775	-	-	8.0 x 4.8	5/16	1/2	AJA2444ZXD	EA	1
NT2212GKV1	1 1/2	115-1-60	5710	-	-	8.0 x 4.8	1/4	3/8	AWA2460Z	EA	1
NT2212GKV2	1 1/2	208/230-1-60	5710	-	-	8.0 x 4.8	1/4	3/8	AWA2460ZXD	EA	1
NJ2212GK1	1 1/2	115-1-60	5444	-	-	8.0 x 4.8	5/16	1/2	—	EA	1
NJ2212GJ2	1 1/2	208/230-1-60	5491	-	-	8.0 x 4.8	5/16	1/2	—	EA	1
NEK6181GK1	1/3+	115-1-60	-	2629	4255	6.5 x 4.0	1/4	5/16	AEA9422EXA	EA	1
NEK6181GK2	1/3+	208/230-1-60	-	2629	4404	6.5 x 4.0	1/4	5/16	—	EA	1
NEK6210GK1	1/2	115-1-60	-	3216	5355	6.5 x 4.0	1/4	5/16	—	EA	1
NEK6210GK2	1/2	208/230-1-60	-	3216	5254	6.5 x 4.0	1/4	5/16	—	EA	1
NEK6213GK1	1/2+	115-1-60	-	4235	6660	6.5 x 4.0	1/4	5/16	—	EA	1
NEK6213GK2	1/2+	208-230/60/1	-	4235	6946	6.5 x 4.0	1/4	5/16	—	EA	1
NT6217GKV1	3/4	115/60/1	-	3511	-	8.0 x 4.8	1/4	3/8	AKA9442EXA	EA	1
NT6217GKV2	3/4	208-230/60/1	-	4369	7332	8.0 x 4.8	1/4	3/8	—	EA	1
NT6220GKV1	3/4	115/60/1	-	5015	8464	8.0 x 4.8	1/4	3/8	AWA9490Z	EA	1
NT6220GKV2	3/4	208-230/60/1	-	5015	8464	8.0 x 4.8	1/4	3/8	AKA9455EXD	EA	1
NT6222GKV1	1	115/60/1	-	6447	10376	8.0 x 4.8	1/4	3/8	—	EA	1
NT6222GKV2	1	208-230/60/1	-	6447	9992	8.0 x 4.8	1/4	3/8	AKA9462EXD, AWA9512Z	EA	1
NTU6232GKV2	1	208-230/60/1	-	7169	-	8.0 x 4.8	3/8	1/2	AJA9484EXD	EA	1
NT6224GKV1	1	115/60/1	-	7348	12326	8.0 x 4.8	1/4	3/8	—	EA	1
NT6224GKV2	1	208-230/60/1	-	7348	11984	8.0 x 4.8	1/4	3/8	AKA5512EXD	EA	1
NT6226GKV1	1+	115/60/1	-	7983	13254	8.0 x 4.8	1/4	3/8	—	EA	1
NT6226GKV2	1+	208-230/60/1	-	7675	-	8.0 x 4.8	1/4	3/8	—	EA	1
NTU6234GKV2	1 1/4	208-230/60/1	-	8453	-	8.0 x 4.8	3/8	1/2	—	EA	1
NJ9232GK2	1	208-230/60/1	-	9066	-	8.0 x 4.8	5/16	1/2	—	EA	1
NTU6238GKV2	1 1/2	208-230/60/1	-	9379	-	8.0 x 4.8	3/8	1/2	—	EA	1
NJ9238GK2	1 1/2	208-230/60/1	-	10743	-	8.0 x 4.8	5/16	1/2	—	EA	1

R404A

EMBRACO - COMPRESSORS CONT'D

Refrigeration Compressors



NEU2168U1

embraco Nidec

Features

High efficiency compressors designed for natural refrigerant with extremely low GWP (Global Warming Potential).
Replacement compressors for light commercial refrigeration.
Full L/MBP operating envelope.
Lower operating pressures and low refrigerant charge.

CATALOG NO.	NOMINAL HP	VOLTS-PHASE-HERTZ	BTU LT @ -10°F	BTU MT @ 20°F	BTU HT @ 45°F	FOOT (IN.)	I.D. DISCHARGE SIZE (IN.)	I.D. SUCTION SIZE (IN.)	DIRECT REPLACEMENT FOR TECUMSEH	UOM	OM
EMI50UER1	1/6	115/60/1	522	1211	N/A	6.5 x 4.0	1/3	5/16	TCW350U-DS6B	EA	1
EMI70UER1	1/5	115/60/1	699	1548	N/A	6.5 x 4.0	1/3	5/16	—	EA	1
EMI90UEX1	1/4	115/60/1	947	1798	N/A	6.5 x 4.0	1/4	1/4	TCW390U-DS6B	EA	1
FFU130UAX1	1/3	115/60/1	1358	2447	N/A	6.5 x 4.0	1/4	5/16	TCW410U-DS6B	EA	1
FFU160UAX1	1/2	115/60/1	1718	2969	N/A	6.5 x 4.0	1/4	5/16	TCW413U-DS1B	EA	1
NEU2155U1	1/2	115/60/1	2586	N/A	N/A	6.5 x 4.0	1/4	5/16	AEX424U-DS3C	EA	1
NEU2168U1	1/2	115/60/1	3241	N/A	N/A	6.5 x 4.0	1/4	5/16	AEX433U-DS3C	EA	1
NT2180UV2	1	208-230/60/1	3577	N/A	N/A	8.0 x 4.8	1/4	3/8	—	EA	1
NT2210UV1	1-1/4	115/60/1	4514	N/A	N/A	8.0 x 4.8	1/4	3/8	—	EA	1
NT2210UV2	1	208-230/60/1	4514	N/A	N/A	8.0 x 4.8	1/4	3/8	—	EA	1

R290*

*All R290 models are available upon request. Non-stock items.

Embraco Condensing Units



UFI10HBX1

embraco Nidec

CATALOG NO.	NOMINAL HP	REFRIGERANT	VOLTS-PHASE-HERTZ	BTU MT @ 20°F	BTU HT @ 45°F	UOM	OM
UFI10HBX1	1/2	134a	115-1-60	2720	4437	EA	1
UNEU6214Z1	1/3	134a	115-1-60	3708	5822	EA	1
UNT6220Z1	3/4	134a	115-1-60	4449	7491	EA	1
UNT6220Z2	3/4	134a	208/230-1-60	4894	7872	EA	1

Reciprocating A/C Compressors

Applications

Air Conditioning
Heat Pump

Features

POE Oil
For R22 and R410A Designed System Replacement
PSC motors are standard in all single-phase compressor models
BTU capacity ratings are based on 45°F evaporating temperature
Mounting hardware included
Molded plug included for most models



TFH5520EXN

TITAN FORGE

	CATALOG NO.	NOMINAL HP	VOLTS-PHASE-HZ	CAPACITY (BTU)	FOOT (IN.)	DISCHARGE I.D. (IN.)	SUCTION I.D. (IN.)	CRANK CASE HEATER	HEIGHT (IN.)	UOM	OM
R22	TFH5515EXN	1-1/4	208/230-1-60	15200	7.5 x 7.5	3/8	5/8	Yes	13.1	EA	1
	TFH5517EXD	1-1/2	208/230-1-60	16600	4.8 x 8	5/16	1/2	No	11.2	EA	1
	TFH5520EXN	1-3/4	208/230-1-60	20200	7.5 x 7.5	3/8	3/4	Yes	13.1	EA	1
	TFH5524EXN-B	2	208/230-1-60	24200	4.8 x 8	3/8	3/4	Yes	13.1	EA	1
	TFH5528EXN	2-1/4	208/230-1-60	28000	7.5 x 7.5	3/8	3/4	Yes	13.1	EA	1
	TFH5530EXN	2-1/2	208/230-1-60	30200	7.5 x 7.5	3/8	3/4	Yes	13.1	EA	1
	TFH5532EXN	2-1/2	208/230-1-60	31500	7.5 x 7.5	3/8	3/4	Yes	13.1	EA	1
	TFH5538EXN	3	208/230-1-60	38400	7.5 x 7.5	1/2	7/8	Yes	15.3	EA	1
	TFH5538EXT	3	208/230-3-60	38400	7.5 x 7.5	1/2	7/8	Yes	14.6	EA	1
	TFH5538EXG	3	460-3-60	38400	7.5 x 7.5	1/2	7/8	Yes	14.6	EA	1
	TFH5542EXG	3-1/2	460-3-60	42500	7.5 x 7.5	1/2	7/8	Yes	14.6	EA	1
	TFH5546EXN	3-3/4	208/230-1-60	46500	7.5 x 7.5	1/2	7/8	Yes	14.6	EA	1
	TFH5546EXG	3-3/4	460-3-60	46500	7.5 x 7.5	1/2	7/8	Yes	14.6	EA	1
	TFH5558EXN	5	208/230-1-60	57500	7.5 x 7.5	1/2	7/8	Yes	14.6	EA	1
	TFH5568EXT	5-1/2	208/230-3-60	68000	7.5 x 7.5	1/2	7/8	Yes	16.4	EA	1
	TFH5573EXG	6	460-3-60	72500	7.5 x 7.5	1/2	7/8	Yes	16.4	EA	1
R410A†	TFH5516BXN	1-1/4	208/230-1-60	16,200	7.5 x 7.5	3/8	5/8	No	13.672	EA	1
	TFH5520BXN	1-3/4	208/230-1-60	20,200	7.5 x 7.5	3/8	5/8	No	13.672	EA	1
	TFH5525BXN	2	208/230-1-60	25,750	7.5 x 7.5	3/8	5/8	No	13.672	EA	1
	TFH5528BXN	2	208/230-1-60	28,300	7.5 x 7.5	3/8	5/8	No	13.672	EA	1

LG - COMPRESSORS

Medium Temp Refrigeration Scrolls

Features

External thermal sensor protects the scroll mechanism from overheating
A relief valve that opens to protect against high internal pressure
Square mount for a quick and easy install
POE oil charged



MPA010KAA

LG

R404A, R507, R407A, R407C, R448A, R449A

CATALOG NO.	NOMINAL H.P	VOLTS-PHASE-HERTZ	CAPACITY (BTU) @20°F EVAP. / 120°F COND.	DISCHARGE LINE I.D.	SUCTION LINE I.D.	RUN CAPACITOR MFD/VOLTS	DIRECT REPLACEMENT FOR COPELAND	DIRECT REPLACEMENT FOR HEATCRAFT*	UOM	OM
MPA010KAA	1-1/4	208/230-1-60	9700	1/2	3/4	30/370	ZS09KAE-PFV	21518201	EA	1
MPA010RAA	1-1/4	208/230-3-60	9600	1/2	3/4	N/A	ZS09KAE-TF5	21518202	EA	1
MPA010SAA	1-1/4	460-3-60	9650	1/2	3/4	N/A	ZS09KAE-TFD	21518203	EA	1
MPA013KAA	1-3/4	208/230-1-60	12500	1/2	3/4	35/370	ZS13KAE-PFV	21518204	EA	1
MPA013RAA	1-3/4	208/230-3-60	12700	1/2	3/4	N/A	ZS13KAE-TF5	21518205	EA	1
MPA013SAA	1-3/4	460-3-60	12700	1/2	3/4	N/A	ZS13KAE-TFD	21518206	EA	1
MPA015KAA	2	208/230-1-60	15200	1/2	3/4	40/370	ZS15KAE-PFV	21518207	EA	1
MPA015RAA	2	208/230-3-60	14900	1/2	3/4	N/A	ZS15KAE-TF5	21518208	EA	1
MPA015SAA	2	460-3-60	14900	1/2	3/4	N/A	ZS15KAE-TFD	21518209	EA	1
MPA019KAA	2-1/4	208/230-1-60	16900	1/2	3/4	45/370	ZS19KAE-PFV	21518210	EA	1
MPA019RAA	2-1/4	208/230-3-60	16800	1/2	3/4	N/A	ZS19KAE-TF5	21518211	EA	1
MPA019SAA	2-1/4	460-3-60	16800	1/2	3/4	N/A	ZS19KAE-TFD	21518212	EA	1
MBA021KAA	2-3/4	208/230-1-60	22400	1/2	7/8	55/370	ZS21KAE-PFV	21518213	EA	1
MBA021RAA	2-3/4	208/230-3-60	22400	1/2	7/8	N/A	ZS21KAE-TF5	21518214	EA	1
MBA021SAA	2-3/4	460-3-60	22400	1/2	7/8	N/A	ZS21KAE-TFD	21518215	EA	1
MBA026KAA	3	208/230-1-60	25000	1/2	7/8	55/370	ZS26KAE-PFV	21518216	EA	1
MBA026RAA	3	208/230-3-60	24800	1/2	7/8	N/A	ZS26KAE-TF5	21518217	EA	1
MBA026SAA	3	460-3-60	24800	1/2	7/8	N/A	ZS26KAE-TFD	21518218	EA	1
MBA029KAA	3-1/2	208/230-1-60	27700	1/2	7/8	60/440	ZS29KAE-PFV	21518219	EA	1
MBA029RAA	3-1/2	208/230-3-60	27800	1/2	7/8	N/A	ZS29KAE-TF5	21518220	EA	1
MBA029SAA	3-1/2	460-3-60	27700	1/2	7/8	N/A	ZS29KAE-TFD	21518221	EA	1
MBA033KAA	4	208/230-1-60	31100	1/2	7/8	80/440	ZS33KAE-PFV	21518222	EA	1
MBA033RAA	4	208/230-3-60	31300	1/2	7/8	N/A	ZS33KAE-TF5	21518223	EA	1
MBA033SAA	4	460-3-60	31300	1/2	7/8	N/A	ZS33KAE-TFD	21518224	EA	1
MRA038KAA	4-1/2	208/230-1-60	37000	1/2	7/8	80/440	ZS38K4E-PFV	21518225	EA	1
MRA038RAA	4-1/2	208/230-3-60	37200	1/2	7/8	N/A	ZS38K4E-TF5	21518226	EA	1
MRA038SAA	4-1/2	460-3-60	37800	1/2	7/8	N/A	ZS38K4E-TFD	21518227	EA	1
MRA045RAA	5-1/4	208/230-3-60	45100	1/2	7/8	N/A	ZS45K4E-TF5	21518228	EA	1
MRA045SAA	5-1/4	460-3-60	45200	1/2	7/8	N/A	ZS45K4E-TFD	21518229	EA	1

Cross reference comparisons do not imply that all products compared are exact in reference to form, fit and function.
Review specifications carefully prior to purchase.

LG - COMPRESSORS CONT'D

Air Conditioning Scrolls



SQA022KAZ

Features

Quiet Start-up and Shut-down: Sound is minimized by a check valve in the discharge port of the scroll sets
Discharge Temperature Protection (DTP):
Internal thermal sensor protects against excessively high scroll temperatures
Internal Pressure Relief (IPR): Relief valve opens at very high internal pressures protecting the unit
Internal Motor Overload Protection (OLP):
Thermal switch senses high temperature of the compressor motor windings

R22, R407C

CATALOG NO.	NOMINAL HP	VOLTS-PHASE-HERTZ	CAPACITY (BTU)	DISCHARGE LINE I.D.	SUCTION LINE I.D.	RUN CAPACITOR MFD/VOLTS	DIRECT REPLACEMENT FOR COPELAND	UOM	OM
SQA022KAZ	1-3/4	208/230-1PH-60	21500	1/2	3/4	35/440	ZR21K5-PFV, ZR22K4PFV	EA	1
SQA026KAZ	2+	208/230-1PH-60	26100	1/2	3/4	35/440	ZR25K5-PFV	EA	1
SRA053KAZ	4-1/2	208/230-1PH-60	53500	1/2	7/8	70/440	ZR54K5-PFV	EA	1

R410A

GEN 2 CATALOG NO.	NOMINAL HP	VOLTS-PHASE-HERTZ	GEN 2 CAPACITY (BTU)	MOUNTING CENTERS	I.D. DISCHARGE LINE (IN.)	I.D. SUCTION LINE (IN.)	RUN CAPACITOR MFD/VOLTS	UOM	OM
APG016KACS	1-1/2	208/230-1-60	15,500	7-1/2 x 7-1/2	1/2	3/4	35/370	EA	1
APG020KACS	2	208/230-1-60	20,000	7-1/2 x 7-1/2	1/2	3/4	35/370	EA	1
APG024KBCS	2+	208/230-1-60	23,500	7-1/2 x 7-1/2	1/2	3/4	40/370	EA	1
APG031KACS	3	208/230-1-60	30,800	7-1/2 X 7-1/2	1/2	3/4	45/440	EA	1
APG031RACS	3	208/230-3-60	30,300	7-1/2 X 7-1/2	1/2	3/4	-	EA	1
APG031WACS	3	460-3-60	30,000	7-1/2 X 7-1/2	1/2	3/4	-	EA	1
ABG034KACS	3	208/230-1-60	34,350	7-1/2 X 7-1/2	1/2	7/8	45/440	EA	1
ABG036KACS	3+	208/230-1-60	36,000	7-1/2 X 7-1/2	1/2	7/8	45/440	EA	1
ABG042KACS	4	208/230-1-60	42,000	7-1/2 X 7-1/2	1/2	7/8	70/440	EA	1
ABG042RACS	4	208/230-3-60	41,500	7-1/2 x 7-1/2	1/2	7/8	-	EA	1
ABG042WACS	4	460-3-60	41,500	7-1/2 x 7-1/2	1/2	7/8	-	EA	1
ABG051KACS	5	208/230-1-60	51,000	7-1/2 x 7-1/2	1/2	7/8	75/440	EA	1
ABG051RACS	5	208/230-3-60	51,000	7-1/2 x 7-1/2	1/2	7/8	80/440	EA	1
ABG051WACS	5	460-3-60	51,000	7-1/2 x 7-1/2	1/2	7/8	-	EA	1

Capacities are at ARI conditions.

Cross reference comparisons do not imply that all products compared are exact in reference to form, fit and function.
Review specifications carefully prior to purchase.

BRISTOL - COMPRESSORS

Reciprocating Compressors

The Bristol line of reciprocating compressors are designed for easy drop-in installation for air conditioning and heat pump applications. The compressors are designed for use with R22 or R407C refrigerants and are charged with POE oil for versatility.

Features

Single phase and three phase options
Quick connect wiring connections
Mounting hardware and terminal cover included
Internal crankcase heaters included where noted



H2EB18SABCBP

BRISTOL COMPRESSORS

R22, R407C

CATALOG NO.	NOM. H.P	VOLTS-PHASE-HERTZ	CAPACITY (BTU)	MOUNTING (IN.)	DISCHARGE I.D. (IN.)	SUCTION I.D. (IN.)	CCH	COPELAND	TECUMSEH	TITAN FORCE	UOM	OM
H2EB18SABCAP	1-1/2	208/230-1-60	17600	7-1/2 x 7-1/2	3/8	5/8	NO	CR18K6E-PFV-875	AWG5519EXN	TFH5517EXD TFH5519EXN	EA	1
H2EB18SABCBP	1-1/2	208/230-1-60	17600	4 x 8	3/8	5/8	NO	—	—	—	EA	1
H2EB20SABCBP	1-1/2	208/230-1-60	20000	4 x 8	3/8	5/8	NO	CR20K6E-PFV-875	—	TFH5520EXN	EA	1
H2EB223ABCAP	2	208/230-1-60	21800	7-1/2 x 7-1/2	3/8	5/8	NO	CR22K6E-PFV-875	AWG5520EXN	TFH5520EXN	EA	1
H2EB24SABCAP	2	208/230-1-60	23600	7-1/2 x 7-1/2	1/2	3/4	NO	CR24K6E-PFV-875	AWG5524EXN	TFH5524EXN	EA	1
H2EB24SABCBP	2	208/230-1-60	23600	4 x 8	3/8	5/8	NO	—	AWG5524EXN	TFH5524EXN-B	EA	1
H2EB28SABCAP	2-1/2	208/230-1-60	28300	7-1/2 x 7-1/2	1/2	3/4	NO	CR28K6E-PFV-875	AWG5528EXN	TFH5528EXN	EA	1
H2EB283ABCBP	2-1/2	208/230-1-60	28100	4 x 8	3/8	5/8	NO	—	—	—	EA	1
H2EB32SABCAP	2-1/2	208/230-1-60	31500	7-1/2 x 7-1/2	1/2	3/4	NO	CR30K6E-PFV-875 CR32K6E-PFV-875	AWG5530EXN	TFH5530EXN TFH5532EXN	EA	1
H22J153ABCAP	1	208/230-1-60	15500	7-1/2 x 7-1/2	1/2	3/4	YES	CR16K6E-PFV-875	AWG5515EXN	TFH5515EXN	EA	1
H22J183ABCAP	1-1/2	208/230-1-60	18300	7-1/2 x 7-1/2	1/2	3/4	YES	CR18K6E-PFV-875 CR20K6E-PFV-875	AWG5519EXN	TFH5519EXN	EA	1
H22J223ABCAP	2	208/230-1-60	22600	7-1/2 x 7-1/2	1/2	3/4	YES	CR22K6E-PFV-875	AWG5520EXN	TFH5520EXN	EA	1
H22J253ABCAP	2	208/230-1-60	24200	7-1/2 x 7-1/2	1/2	3/4	YES	CR24K6E-PFV-875	AWG5524EXN	TFH5524EXN	EA	1
H22J293ABCAP	2-1/2	208/230-1-60	28800	7-1/2 x 7-1/2	1/2	3/4	YES	CR28K6E-PFV-875	AWG5530EXN	TFH5528EXN	EA	1
H22J333ABCAP	2-1/2	208/230-1-60	31900	7-1/2 x 7-1/2	1/2	3/4	YES	CR32K6E-PFV-875	AWG5532EXN	TFH5530EXN TFH5532EXN	EA	1
H22J363ABCAP	3	208/230-1-60	35700	7-1/2 x 7-1/2	1/2	3/4	YES	CR34K6E-PFV-875 CR35K6E-PFV-875	AVA5535EXN	TFH5535EXN	EA	1
H22J383ABCAP	3	208/230-1-60	37800	7-1/2 x 7-1/2	1/2	3/4	YES	CR38K6E-PFV-875 CR38K6E-TF5-875	AVA5538EXN	TFH5538EXN	EA	1
H22J383DBVAP	3	460-3-60	37500	7-1/2 x 7-1/2	1/2	3/4	YES	CR38K6E-TFD-875	AVA5568EXG	TFH5538EXG	EA	1
H22J413ABCAP	3-1/2	208/230-1-60	40900	7-1/2 x 7-1/2	1/2	3/4	YES	CR42K6E-PFV-875	AVA5542EXN	TFH5538EXN	EA	1
H22J413DBLAP	3-1/2	208/230-3-60	40500	7-1/2 x 7-1/2	1/2	3/4	YES	CR42K6E-TF5-875	AVA5538EXT	TFH5538EXT	EA	1
H22J413DBEAP	3-1/2	460-3-60	40400	7-1/2 x 7-1/2	1/2	3/4	YES	CR42K6E-TFD-875	AVA5538EXG	TFH5538EXG	EA	1
H22J443ABCAP	4	208/230-1-60	44300	7-1/2 x 7-1/2	1/2	3/4	YES	CR47KQE-PFV-970	AVA5546EXN	TFH5542EXN TFH5546EXN	EA	1
H22J443DBDAP	4	208/230-3-60	44100	7-1/2 x 7-1/2	1/2	3/4	YES	CR47KQE-TF5-970	AVA5542EXT AVA5546EXT	TFH5542EXT TFH5546EXT	EA	1
H22J443DBEAP	4	460-3-60	44100	7-1/2 x 7-1/2	1/2	3/4	YES	CR47KQE-TFD-970	AVA5542EXG AVA5546EXG	TFH5542EXG TFH5546EXG	EA	1
H22A543ABCAP	4-1/2	208/230-1-60	53400	7-1/2 x 7-1/2	1/2	7/8	YES	CR53KQE-PFV-970	AVB5558EXN	TFH5558EXN	EA	1
H22A543DBLAP	4-1/2	208/230-3-60	53400	7-1/2 x 7-1/2	1/2	7/8	YES	CR53KQE-TF5-970	AVB5558EXT	TFH5558EXT	EA	1
H22A543DBEAP	4-1/2	460-3-60	53400	7-1/2 x 7-1/2	1/2	7/8	YES	CRP5-0450-TFD CR53KQE-TFD-970	AVB5558EXG	TFH5558EXG	EA	1
H22A563DBLAP	4-1/2	208/230-3-60	55600	7-1/2 x 7-1/2	1/2	7/8	YES	CRP5-0450-TF5 CRPQ-045E-TF5-970	AVB5558EXT	TFH5558EXT	EA	1
H22A583ABCAP	4-1/2	208/230-1-60	57100	7-1/2 x 7-1/2	1/2	7/8	YES	CRPQ-045E-PFV-970	AVB5558EXN	TFH5558EXN	EA	1
H22A583DBEAP	4-1/2	460-3-60	58400	7-1/2 x 7-1/2	1/2	7/8	YES	CRP5-0500-TFD CRPQ-045E-TFD-970	AVB5558EXG	TFH5558EXG	EA	1
H22A623ABCAP	5	208/230-1-60	60800	7-1/2 x 7-1/2	1/2	7/8	YES	CRNQ-050E-PFV-970	—	—	EA	1
H22A623DBLAP	5	208/230-3-60	60800	7-1/2 x 7-1/2	1/2	7/8	YES	CRNQ-050E-TF5-970	AVB5558EXT	—	EA	1
H22A623DBEAP	5	460-3-60	60800	7-1/2 x 7-1/2	1/2	7/8	YES	CRNQ-050E-TFD-970	AVB5558EXG	—	EA	1

HEAT EXCHANGERS

Liquid Chillers/Evaporators

Designed for 1/2 to 80 tons applications for refrigerants other than R410A and ammonia
Maximum allowable working pressure: 450 psig (31Bar)

DESCRIPTION	DIRECT REPLACEMENT FOR FLAT PLATE / GEA SERIES	CAPACITY (SINGLE HEAT EXCHANGER*)
Chillers	CH	1/2 through 80 Tons
Condensers	C	1/2 through 80 Tons
Subcoolers	SC	1 through 120 Tons

*More than one heat exchanger can be installed in series or parallel for larger capacity



GBS400H-8

Kelvion

Standard Connections

CATALOG NO.	NOMINAL TONS	REF IN (IDS)	REF OUT (IDS)	FLUID (IDS)	DEPTH (IN.)	WEIGHT (LBS.)	UOM	OM
5″ x 12″ Models (4.9″W x 13.2″H)								
GBS400H-8 (OA1,H2) B	1/2	5/8	5/8	7/8	1.1	6	EA	1
GBS400H-12 (OA1,H2) B	1	5/8	5/8	7/8	1.4	8	EA	1
GBS400H-16 (OA1, H2)B	1-1/2	5/8	5/8	7/8	1.8	9	EA	1
GBS400H-20 (OA1,H2) B	2	5/8	5/8	7/8	2.1	10	EA	1
GBS400H-24 (OA1,H2) B	2-1/2	5/8	5/8	7/8	2.5	11	EA	1
GBS400H-30 (OA1,H2) B	3	5/8	5/8	7/8	3	13	EA	1
GBS400H-36 (H1,OA1,H2) B	3-1/2	5/8	7/8	7/8	3.6	14	EA	1
GBS400H-AE-44 (H1,OA1,IA2) B	4	5/8	7/8	1-1/8	4.3	17	EA	1
GBS400H-AE-54 (H1,OA1,IA2) B	5	5/8	7/8	1-1/8	5.1	20	EA	1
5″ x 20″ Models (4.9″W x 20.9″H)								
GBS500H-8 (OA1,H2) B	1-1/2	5/8	5/8	7/8	1.1	9	EA	1
GBS500H-10 (OA1,H2) B	2	5/8	5/8	7/8	1.3	10	EA	1
GBS500H-14 (OA1,H2) B	3	5/8	5/8	7/8	1.6	12	EA	1
GBS500H-AE-20 (H1,OA1,IA2) B	4	5/8	7/8	1-1/8	2.1	15	EA	1
GBS500H-AE-24 (H1,OA1,IA2) B	5	5/8	7/8	1-1/8	2.5	17	EA	1
GBS500H-AE-30 (IA1,H1,IA2) B	6	7/8	1-1/8	1-1/8	3	20	EA	1
GBS500H-AE-40 (IA1,H1,IA2) B	7-1/2	7/8	1-1/8	1-1/8	3.9	26	EA	1
GBS500H-AE-50 (K1,H1,K2) B	10	7/8	1-3/8	1-3/8	4.8	31	EA	1
GBS500H-AE-60 (K1,H1,K2) B	12	7/8	1-3/8	1-3/8	5.7	36	EA	1
GBS500H-AE-70 (K1,H1,K2) B	15	7/8	1-3/8	1-3/8	6.5	42	EA	1
10″ x 20″ Models (10.7″W x 20.9″H)								
GBS700M-AE-24 (K1,H1,LZA2) B	10	7/8	1-3/8	1-5/8	2.6	50	EA	1
GBS700M-AE-30 (K1,H1,LZA2) B	12	7/8	1-3/8	1-5/8	3.1	57	EA	1
GBS700M-AE-40 (K1,H1,LZA2) B	15	7/8	1-3/8	1-5/8	4	69	EA	1
GBS700M-AE-50 (LZA1,H1,LZA2) B	20	7/8	1-5/8	1-5/8	4.9	81	EA	1
GBS700M-AE-60 (LZA1,IA1,LAA2) B	25	1-1/8	1-5/8	2-1/8	5.8	93	EA	1
GBS700M-AE-70 (LAA1,IA1,LAA2) B	30	1-1/8	2-1/8	2-1/8	6.6	105	EA	1
GBS700M-AE-90 (LAA1,IA1,ZD2) B	35	1-1/8	2-1/8	2-5/8	8.4	129	EA	1
GBS700M-AE-100 (LAA1,IA1,ZD2) B	40	1-1/8	2-1/8	2-5/8	9.3	141	EA	1
GBS700M-AE-130 (ZD1,IA1.ZD2) B	50	1-1/8	2-5/8	2-5/8	12	176	EA	1
GBS700M-AE-150 (ZD1,IA1.ZD2) B	60	1-1/8	2-5/8	2-5/8	13.7	200	EA	1
GBS700M-AE-170 (ZD1,IA1.ZD2) B	70	1-1/8	2-5/8	2-5/8	15.5	224	EA	1
GBS700M-AE-190 (ZD1,IA1.ZD2) B	80	1-1/8	2-5/8	2-5/8	17.3	248	EA	1

HEAT EXCHANGERS

High Pressure Liquid Chillers/Evaporators

Designed for R-410A applications, 1/2 to 80 tons - can be used with other refrigerants as well (except ammonia)
Maximum allowable working pressure: 650 psig (45Bar)



GBH-UL400H-8

Kelvion

Standard Connections

CATALOG NO.	NOMINAL TONS	REF IN (IDS)	REF OUT (IDS)	FLUID (IDS)	DEPTH (IN.)	WEIGHT (LBS.)	UOM	OM
5″ x 12″ Models (4.9″W x 13.2″H)								
GBH-UL400H-8 (OA1,H2) B	1/2	5/8	5/8	7/8	1.1	6	EA	1
GBH-UL400H-10 (OA1,H2) B	3/4	5/8	5/8	7/8	1.25	7	EA	1
GBH-UL400H-12 (OA1,H2) B	1	5/8	5/8	7/8	1.4	8	EA	1
GBH-UL400H-16 (OA1,H2) B	1-1/2	5/8	5/8	7/8	1.8	9	EA	1
GBH-UL400H-20 (OA1,H2) B	2	5/8	5/8	7/8	2.1	10	EA	1
GBH-UL400H-24 (OA1,H2) B	2-1/2	5/8	5/8	7/8	2.5	11	EA	1
GBH-UL400H-30 (OA1,H2) B	3	5/8	5/8	7/8	3	12	EA	1
GBH-UL400H-36 (OA1,H2) B	3-1/2	5/8	5/8	7/8	3.6	14	EA	1
GBH-UL400H-AE-44 (H1,OA1,IA2) B	4	5/8	7/8	1-1/8	4.3	17	EA	1
GBH-UL400H-AE-54 (H1,OA1,IA2) B	5	5/8	7/8	1-1/8	5.2	20	EA	1
5″ x 20″ Models (4.9″W x 20.9″H)								
GBH-UL500H-8 (OA1,H2) B	1-1/2	5/8	5/8	7/8	1.1	9	EA	1
GBH-UL500H-10 (OA1,H2) B	2	5/8	5/8	7/8	1.25	10	EA	1
GBH-UL500H-14 (OA1,H2) B	3	5/8	5/8	7/8	1.6	12	EA	1
GBH-UL500H-AE-20 (H1,OA1,IA2) B	4	5/8	7/8	1-1/8	2.1	15	EA	1
GBH-UL500H-AE-24 (H1,OA1,IA2) B	5	5/8	7/8	1-1/8	2.5	17	EA	1
GBH-UL500H-AE-30 (IA1,H1,IA2) B	6	7/8	1-1/8	1-1/8	3.0	20	EA	1
GBH-UL500H-AE-40 (IA1,H1,IA2) B	7-1/2	7/8	1-1/8	1-1/8	3.9	26	EA	1
GBH-UL500H-AE-50 (K1,H1,K2) B	10	7/8	1-3/8	1-3/8	4.8	31	EA	1
GBH-UL500H-AE-60 (K1,H1,K2) B	12	7/8	1-3/8	1-3/8	5.7	36	EA	1
GBH-UL500H-AE-70 (K1,H1,K2) B	15	7/8	1-3/8	1-3/8	6.5	42	EA	1
10″ x 20″ Models (9.8″W x 20.3″H)								
CH10-XP	10	7/8	1-3/8	1-5/8	2.6	81	EA	1
CH15-XP	15	7/8	1-3/8	1-5/8	4.1	97	EA	1

HEAT EXCHANGERS

Subcoolers



GBS400H-AE-8

Kelvion

Features

Designed for refrigerants other than R410A and ammonia
Maximum allowable working pressure: 450 psig (31Bar)

Standard Connections

CATALOG NO.	NOMINAL TONS	REF. IN	REF. OUT	FLUID (IDS)	DEPTH (IN.)	WEIGHT (LBS.)	UOM	OM
5″ x 12″ Models (4.9″W x 13.2″H)								
GBS400H-AE-8 (H1,OA1,IA2) B	1	5/8	7/8	1-1/8	1.1	6	EA	1
GBS400H-AE-12 (H1,OA1,IA2) B	2	5/8	7/8	1-1/8	1.4	8	EA	1
GBS400H-AE-16 (H1,OA1,IA2) B	3	5/8	7/8	1-1/8	1.8	9	EA	1
GBS400H-AE-20 (H1,OA1,IA2) B	4	5/8	7/8	1-1/8	2.1	10	EA	1
GBS400H-AE-22 (IA1,H1,IA2) B	5	7/8	1-1/8	1-1/8	2.3	11	EA	1
GBS400H-AE-30 (IA1,H1,IA2) B	7-1/2	7/8	1-1/8	1-1/8	3	13	EA	1
GBS400H-AE-36 (K1,H1,K2) B	8	7/8	1-3/8	1-3/8	3.5	15	EA	1
GBS400H-AE-40 (K1,H1,K2) B	10	7/8	1-3/8	1-3/8	3.9	16	EA	1
GBS400H-AE-50 (K1,H1,K2) B	12	7/8	1-3/8	1-3/8	4.8	18	EA	1
GBS400H-AE-60 (K1,H1,K2) B	14	7/8	1-3/8	1-3/8	5.7	21	EA	1
10″ x 20″ Models (10.7″W x 20.9″H)								
GBS700M-AE-20 (LZA1,IA1,LAA2) B	16	1-1/8	1-5/8	2-1/8	2.3	45	EA	1
GBS700M-AE-30 (LZA1,IA1,LAA2) B	22	1-1/8	1-5/8	2-1/8	3.3	57	EA	1
GBS700M-AE-40 (LAA1,IA1,ZD2) B	28	1-1/8	2-1/8	2-5/8	4.2	69	EA	1

Features

2C (Two Circuit) Chiller for 3 to 80 tons
Designed for refrigerants other than R410A and ammonia
Maximum allowable working pressure: 450 psig (31Bar)



CH5-2C

Kelvion

Standard Connections

CATALOG NO.	NOMINAL TONS	REF IN (IDS)	REF OUT (IDS)	FLUID (MPT)	DEPTH (IN.)	WEIGHT (LBS.)	UOM	OM
2 Circuit 10″ x 20″ Models (9.8″W x 20.3″H) - Low Pressure								
CH5-2C	5	5/8	7/8	1	1.6	52	EA	1
CH15-2C	15	7/8	1-1/8	1-1/2	3.8	77	EA	1
CH30-2C	30	7/8	1-1/8	1-1/2	7	115	EA	1
CH35-2C	35	7/8	1-1/8	1-1/2	8.5	131	EA	1
CH60-2C	60	1-1/8	2-1/8	2-1/2	13.9	194	EA	1

Features

Designed for R410A
Maximum allowable working pressure: 650 psig (45Bar)

CATALOG NO.	NOMINAL TONS	REF IN (IDS)	REF OUT (IDS)	FLUID (MPT)	DEPTH (IN.)	WEIGHT (LBS.)	UOM	OM
2 Circuit 10″ x 20″ Models (9.8″W x 20.3″H) - High Pressure XP								
CH10-2C-XP	10	7/8	1-1/8	1-1/2	2.8	91	EA	1
CH15-2C-XP	15	7/8	1-1/8	1-1/2	3.9	104	EA	1
CH20-2C-XP	20	7/8	1-3/8	1-1/2	5	116	EA	1
CH25-2C-XP	25	7/8	1-3/8	2	6.1	128	EA	1
CH30-2C-XP	30	7/8	1-3/8	2	7.1	140	EA	1
CH35-2C-XP	35	7/8	1-3/8	2	8.4	155	EA	1
CH40-2C-XP	40	7/8	1-5/8	2-1/2	9.7	169	EA	1
CH50-2C-XP	50	1-1/8	1-5/8	2-1/2	12.2	197	EA	1
CH60-2C-XP	60	1-1/8	2-1/8	2-1/2	14	218	EA	1

HEAT EXCHANGERS

Liquid Condensers

Designed for refrigerants other than R410A and ammonia
Maximum allowable working pressure: 450 psig (31Bar)



GBS400H-AE-8

Kelvion

Standard Connections

CATALOG NO.	NOMINAL TONS	REF OUT (IDS)	REF IN (IDS)	FLUID (IDS)	DEPTH (IN.)	WEIGHT (LBS.)	UOM	OM
5″ x 12″ Models (4.9″W x 13.2″H)								
GBS400H-8 (OA1,H2) B	1/2	5/8	5/8	7/8	1.1	6	EA	1
GBS400H-10 (OA1,H2) B	3/4	5/8	5/8	7/8	1.3	7	EA	1
GBS400H-12 (OA1,H2) B	1	5/8	5/8	7/8	1.4	8	EA	1
GBS400H-16 (OA1,H2) B	1-1/2	5/8	5/8	7/8	1.8	9	EA	1
GBS400H-20 (OA1,H2) B	2	5/8	5/8	7/8	2.1	10	EA	1
GBS400H-24 (OA1,H2) B	2-1/2	5/8	5/8	7/8	2.5	11	EA	1
GBS400H-30 (OA1,H2) B	3	5/8	5/8	7/8	3	13	EA	1
GBS400H-36 (OA1,H2) B	3-1/2	5/8	5/8	7/8	3.5	15	EA	1
GBS400H-44 (H1,OA1,IA2) B	4	5/8	7/8	1-1/8	4.2	17	EA	1
GBS400H-54 (H1,OA1,IA2) B	5	5/8	7/8	1-1/8	5.1	20	EA	1
5″ x 20″ Models (4.9″W x 20.9″H)								
GBS500H-10 (OA1,H2) B	2	5/8	5/8	7/8	1.3	10	EA	1
GBS500H-12 (OA1,H2) B	2-1/2	5/8	5/8	7/8	1.4	10	EA	1
GBS500H-14 (OA1,H2) B	3	5/8	5/8	7/8	1.6	11	EA	1
GBS500H-18 (H1,OA1,IA2) B	4	5/8	7/8	1-1/8	2	13	EA	1
GBS500H-22 (H1,OA1,IA2) B	5	5/8	7/8	1-1/8	2.3	15	EA	1
GBS500H-24 (H1,OA1,IA2) B	6	5/8	7/8	1-1/8	2.5	16	EA	1
GBS500H-30 (IA1,H1,IA2) B	7-1/2	7/8	1-1/8	1-1/8	3	19	EA	1
GBS500H-40 (IA1,H1,IA2) B	10	7/8	1-1/8	1-1/8	3.9	24	EA	1
GBS500H-50 (K1,H1,K2) B	12	7/8	1-3/8	1-3/8	4.8	29	EA	1
GBS500H-60 (K1,H1,K2) B	15	7/8	1-3/8	1-3/8	5.7	34	EA	1

CATALOG NO.	NOMINAL TONS	REF OUT (IDS)	REF IN (IDS)	FLUID (IDS)	DEPTH (IN.)	WEIGHT (LBS.)	UOM	OM
10″ x 20″ Models (10.7″W x 20.9″H)								
GBS700M-30 (K1,H1,LZA2) B	15	7/8	1-3/8	1- 5/8	3.1	57	EA	1
GBS700M-40 (LZA1,IA1,LZA2) B	20	1-1/8	1-5/8	1-5/8	4	69	EA	1
GBS700M-50 (LZA1,IA1,LZA2) B	25	1-1/8	1-5/8	1-5/8	5	81	EA	1
GBS700M-60 (LAA1,K1,ZD2) B	30	1-3/8	2-1/8	2-5/8	5.8	93	EA	1
GBS700M-70 (LAA1,K1,ZD2) B	35	1-3/8	2-1/8	2-5/8	6.7	105	EA	1
GBS700M-80 (LAA1,LZA1,ZD2) B	40	1-5/8	2-1/8	2-5/8	7.6	117	EA	1
GBS700M-100 (LAA1,LZA1,ZD2) B	50	1-5/8	2-1/8	2-5/8	9.4	141	EA	1

HEAT EXCHANGERS

High Pressure Liquid Condensers



GBH-UL400H-8

Kelvion

Designed for R-410A applications, 1/2 to 80 tons - can be used with other refrigerants as well (except ammonia)
Maximum allowable working pressure: 650 psig (45Bar)

Standard Connections

CATALOG NO.	NOMINAL TONS	REF OUT (IDS)	REF IN (IDS)	FLUID (IDS)	DEPTH (IN.)	WEIGHT (LBS.)	UOM	OM
5″ x 12″ Models (4.9″W x 13.2″H)								
GBH-UL400H-8 (OA1,H2) B	1/2	5/8	5/8	7/8	1.1	6	EA	1
GBH-UL400H-10 (OA1, H2 B	3/4	5/8	5/8	7/8	1.25	7	EA	1
GBH-UL400H-12 (OA1,H2) B	1	5/8	5/8	7/8	1.4	8	EA	1
GBH-UL400H-16 (OA1, H2) B	1-1/2	5/8	5/8	7/8	1.8	9	EA	1
GBH-UL400H-20 (OA1,H2) B	2	5/8	5/8	7/8	2.1	10	EA	1
GBH-UL400H-24 (OA1,H2) B	2-1/2	5/8	5/8	7/8	2.5	11	EA	1
GBH-UL400H-30 (OA1,H2) B	3	5/8	5/8	7/8	3	12	EA	1
GBH-UL400H-36 (OA1, H2) B	3-1/2	5/8	5/8	7/8	3.6	14	EA	1
GBH-UL400H-44 (H1,OA1,IA2) B	4	5/8	7/8	1-1/8	4.3	17	EA	1
GBH-UL400H-54 (H1,OA1,IA2) B	5	5/8	7/8	1-1/8	5.1	20	EA	1
5″ x 20″ Models (4.9″W x 20.9″H)								
GBH-UL500H-10 (OA1,H2) B	2	5/8	5/8	7/8	1.3	9	EA	1
GBH-UL500H-14 (OA1,H2) B	3	5/8	5/8	7/8	1.6	11	EA	1
GBH-UL500H-18 (H1,OA1,IA2) B	4	5/8	7/8	1-1/8	2	13	EA	1
GBH-UL500H-22 (H1,OA1,IA2) B	5	5/8	7/8	1-1/8	2.3	15	EA	1
GBH-UL500H-24 (H1,OA1,IA2) B	6	5/8	7/8	1-1/8	2.5	17	EA	1
GBH-UL500H-30 (IA1,H1,IA2) B	7-1/2	7/8	1-1/8	1-1/8	3	19	EA	1
GBH-UL500H-40 (IA1,H1,IA2) B	10	7/8	1-1/8	1-1/8	3.9	24	EA	1
GBH-UL500H-50 (K1,H1,K2) B	12	7/8	1-3/8	1-3/8	4.7	31	EA	1
GBH-UL500H-60 (K1,H1,K2) B	15	7/8	1-3/8	1-3/8	5.7	34	EA	1

Additional Plate Counts Available

Hydronic Fluid-to-Fluid Plate Heat Exchangers



GBS Series

Kelvion

BRAZED MODEL SERIES	DESCRIPTION	CAPACITY (SINGLE HEAT EXCHANGER)
GBS Series*	General fluid-to-fluid	Up to 15" x 34" and 360 plates
GBS-L Series*	Low pressure drop liquid to liquid	5" x 12" and 10" x 20" dimensions
GB-DW (Double Wall)	Potable water, oil cooling, safety	5" x 12" and 5" x 20" up to 100 plates
GBE (Economy) Series	Water heating, hydraulic oils	Up to 5" x 20" and 100 plates
Gasketed Model Series		
NT / NX / NP / ND Series	Single wall, double wall, close temperature approaches, design pressures of 400psi+	1" - 20" connections

*Replaces FlatPlate and GEA FP/FG/FW Series brazed plates

HEAT EXCHANGERS

Brazed Liquid Heat Exchangers



GBS400H-06

Kelvion

Features

Full thickness 316L copper brazed plates
Mounting studs included
Ideal for residential and commercial applications
Maximum allowable working pressure: 450 psig (31Bar)

CATALOG NO.	FLUID (MPT) (IN.)	DEPTH (IN.)	WEIGHT (LBS.)	UOM	OM
3″ x 8″ Models (3.5″W x 9.1″H)					
GBS200H-8 (V1,V2) B	3/4	1.3	3.5	EA	1
GBS200H-10 (V1,V2) B	3/4	1.4	3.7	EA	1
GBS200H-14 (V1,V2) B	3/4	1.8	4.2	EA	1
GBS200H-20 (V1,V2) B	3/4	2.4	5	EA	1
GBS200H-30 (V1,V2) B	3/4	3.3	6.3	EA	1
5″ x 12″ Models (4.9″W x 13.2″H)					
GBS400H-06 (V1,V2) B	3/4	0.9	5	EA	1
GBS400H-08 (V1,V2) B	3/4	1.1	6	EA	1
GBS400H-10 (V1,V2) B	3/4	1.3	6.5	EA	1
GBS400H-12 (V1,V2) B	3/4	1.4	7	EA	1
GBS400H-14 (V1,V2) B	3/4	1.6	8	EA	1
GBS400H-16 (V1,V2) B	3/4	1.8	9	EA	1
GBS400H-20 (W1,W2) B	1	2.1	10	EA	1
GBS400H-24 (W1,W2) B	1	2.5	11	EA	1
GBS400H-30 (FN1,FN2) B	1-1/4	3	13	EA	1
GBS400H-30 (W1,W2) B	1	3	13	EA	1
GBS400H-36 (FN1,FN2) B	1-1/4	3.6	15	EA	1
GBS400H-40 (FN1,FN2) B	1-1/4	3.9	16	EA	1
GBS400H-50 (FN1,FN2) B	1-1/4	4.8	18	EA	1
GBS400H-60 (FN1,FN2) B	1-1/4	5.7	21	EA	1
GBS400H-70 (FN1,FN2) B	1-1/4	6.6	24	EA	1
GBS400H-80 (FN1,FN2) B	1-1/4	7.45	27	EA	1
GBS400H-90 (FN1,FN2) B	1-1/4	8.3	30	EA	1
GBS400H-100 (FN1,FN2) B	1-1/4	9.2	33	EA	1
GBS400H-110 (FN1,FN2) B	1-1/4	10.1	36	EA	1
GBS400H-120 (FN1,FN2) B	1-1/4	11	39	EA	1

Also available GBS220H (3.54"W x 12.91"H) | GBS240H (3.54"W x 18.27"H)

HEAT EXCHANGERS

Liquid Heat Exchangers (table continued from previous page)



GBS500H-14

Kelvion

Features

Full thickness 316L copper brazed plates
Mounting studs included
Ideal for residential and commercial applications
Maximum allowable working pressure: 450 psig (31Bar)

CATALOG NO.	FLUID (MPT) (IN.)	DEPTH (IN.)	WEIGHT (LBS.)	UOM	OM
5″ x 20″ Models (4.9″W x 20.9″H)					
GBS500H-8 (V1,V2) B	3/4	1.1	8	EA	1
GBS500H-10 (V1,V2) B	3/4	1.3	9	EA	1
GBS500H-14 (V1,V2) B	3/4	1.6	11	EA	1
GBS500H-20 (W1,W2) B	1	2.1	14	EA	1
GBS500H-24 (W1,W2) B	1	2.5	16	EA	1
GBS500H-30 (FN1,FN2) B	1-1/4	3	19	EA	1
GBS500H-36 (FN1,FN2) B	1-1/4	3.6	22	EA	1
GBS500H-40 (FN1,FN2) B	1-1/4	3.9	24	EA	1
GBS500H-50 (FN1,FN2) B	1-1/4	4.8	29	EA	1
GBS500H-60 (FN1,FN2) B	1-1/4	5.7	34	EA	1
GBS500H-70 (FN1,FN2) B	1-1/4	6.6	39	EA	1
GBS500H-80 (FN1,FN2) B	1-1/4	7.4	44	EA	1
GBS500H-90 (FN1,FN2) B	1-1/4	8.3	49	EA	1
GBS500H-100 (FN1,FN2) B	1-1/4	9.2	54	EA	1
GBS500H-110 (FN1,FN2) B	1/14	10.1	59	EA	1
GBS500H-120 (FN1,FN2) B	1-1/4	11	64	EA	1
10″ x 20″ Models (10.7″W x 20.9″H)*					
GBS700M-24 (TE1,TE2) B	1-1/2	2.6	50	EA	1
GBS700M-36 (TE1,TE2) B	1-1/2	3.6	64	EA	1
GBS700M-40 TE1,TE2) B	1-1/2	4.2	69	EA	1
GBS700M-50 (X1,X2) B	2	4.9	81	EA	1
GBS700M-60 (X1,X2) B	2	5.8	93	EA	1
GBS700M-70 (X1,X2) B	2	6.6	105	EA	1
GBS700M-80 (X1,X2) B	2	7.5	117	EA	1
GBS700M-100 (LGA1,LGA2) B	2-1/2	9.3	141	EA	1
GBS700M-110 (LGA1,LGA2) B	2-1/2	10.2	152	EA	1

VacInox Brazed Liquid Heat Exchanger



GVH400H-08

Kelvion

Features

VacInox Stainless Steel Heat Transfer Plates

- VacInox is a new and unique technology for a solid and corrosion resistant brazed connection of stainless steel plates
- VacInox is the solution for applications with aggressive media and high pressures
- The GVH & GVH-AE Series excels when hydronic, evaporator and condenser application fluids are too abrasive for copper brazing

XCR 254SMO stainless plate upgrade available
Maximum allowable working pressure 508psig (35Bar)

CATALOG NO.	FLUID (MPT) (IN.)	DEPTH (IN.)	WEIGHT (LBS.)	UOM	OM
5″ x 12″ Models (4.9″W x 13.2″H)					
GVH400H-08 (V1,V2) B	3/4	1.2	6	EA	1
GVH400H-10 (W1,W2) B	1	1.4	7	EA	1
GVH400H-20 (W1,W2) B	1	2.3	10	EA	1
GVH400H-24 (FN1,FN2) B	1-1/4	2.7	11	EA	1
GVH400H-30 (FN1,FN2) B	1-1/4	3.2	12	EA	1
GVH400H-50 (FN1,FN2) B	1-1/4	5	18	EA	1
5″ x 20″ H Models (4.9″W x 13.2″H)					
GVH500H-40 (FN1,FN2) B	1-1/4	4.1	26	EA	1
10″ x 20″ L Models (10.7″W x 20.9″H)					
GVH700L-30 (X1,X2) B	2	3.3	59	EA	1

HEAT EXCHANGERS

Low Pressure Drop Liquid Heat Exchangers



GBS420L-08

Kelvion

Features

Full thickness 316L copper brazed plates
Mounting studs included
Ideal for residential and commercial applications such as radiant, snow melt and domestic hot water
Maximum allowable working pressure: 450 psig (31Bar)

CATALOG NO.	FLUID (MPT) (IN.)	DEPTH (IN.)	WEIGHT (LBS.)	UOM	OM
5″ x 12″ L Models (5.0″W x 11.1″H)					
GBS420L-08 (XVC1,XVC2) B UL	3/4	1.2	5	EA	1
GBS420L-10 (XVD1,XVD2) B UL	1	1.4	5.6	EA	1
GBS420L-12 (XVD1,XVD2) B UL	1	1.7	6.1	EA	1
GBS420L-14 (XVD1,XVD2) B UL	1	1.9	6.6	EA	1
GBS420L-16 (XVD1,XVD2) B UL	1	2.1	7.1	EA	1
GBS420L-20 (XFN1,XFN2) B UL	1-1/4	2.5	8.2	EA	1
GBS420L-30 (XFN1,XFN2) B UL	1-1/4	3.6	11	EA	1
GBS420L-36 (XFN1,XFN2) B UL	1-1/4	4.3	12	EA	1
GBS420L-40 (XFN1,XFN2) B UL	1-1/4	4.7	13	EA	1
GBS420L-50 (XFN1,XFN2) B UL	1-1/4	5.8	16	EA	1
GBS420L-60 (XFN1,XFN2) B UL	1-1/4	6.9	18	EA	1
10″ x 20″ L Models (10.7″W x 20.9″H)					
GBS700L-20 (TE1,TE2) B	1-1/2	2.5	51	EA	1
GBS700L-24 (TE1,TE2) B	1-1/2	3	56	EA	1
GBS700L-30 (X1,X2) B	2	3.6	62	EA	1
GBS700L-40 (X1,X2) B	2	4.6	73	EA	1
GBS700L-50 (LGA1,LGA2) B	2-1/2	5.7	84	EA	1
GBS700L-60 (LGA1,LGA2) B	2-1/2	6.7	95	EA	1
GBS700L-70 (LGA1,LGA2) B	2-1/2	7.8	106	EA	1

GBE Economy Brazed Liquid-to-Liquid Heat Exchangers



GBE200H-14

Kelvion

Features

An economical solution for decentralized hot water systems,
separating systems and various regenerative applications
Compact brazed plate heat exchangers designed for hydronics
Maximum allowable working pressure 190 psi (13Bar) and temperature 300°F (150°C)

CATALOG NO.	FLUID (MPT) (IN.)	DEPTH (IN.)	WEIGHT (LBS.)	UOM	OM
3″ x 9″ Models (3.54″W x 9.09″H)					
GBE200H-14 (V3,V4)	3/4	1.8	4.2	EA	1
GBE200H-20 (V3,V4)	3/4	2.4	5	EA	1
GBE200H-30 (V3,V4)	3/4	3.3	6.3	EA	1
5″ x 12″ Models (4.88″W x 13.19″H)					
GBE400H-10 (W3,W4)	1	1.3	7	EA	1
GBE400H-20 (W3,PA4)	1 MPT, 3/4 FPT	2.2	10	EA	1
GBE400H-20 (W3,W4)	1	2.2	10	EA	1
GBE400H-30 (W3,W4)	1	3	13	EA	1
GBE400H-40 (W3,W4)	1	3.9	16	EA	1
GBE400H-50 (FN3,FN4)	1-1/4	4.8	18	EA	1

HEAT EXCHANGERS

Double Wall Brazed Liquid-to-Liquid Heat Exchangers



GBH-DW400H-20

Kelvion

Features

Heat exchangers consist of double-walled, hermetically sealed plates for better protection
Two stainless steel plates instead of one
Second wall not only separates the media from each other, but also makes any leak visible
Reliability, efficiency and highest safety in one product
Maximum allowable working pressure: 650 psig (45Bar)

CATALOG NO.	FLUID (MPT) (IN.)	DEPTH (IN.)	WEIGHT (LBS.)	UOM	OM
5″ x 13″ Models (4.9″W x 13.2″H)					
GBH-DW400H-20 (W1,W2) B	1	2.3	12	EA	1
GBH-DW400H-30 (W1,W2) B	1	3.3	15	EA	1
GBH-DW400H-40 (FN,FN2) B	1-1/4	4.3	19	EA	1
GBH-DW400H-50 (FN1,FN2) B	1-1/4	5.2	22	EA	1
GBH-DW400H-60 (FN1,FN2) B	1-1/4	6.2	26	EA	1
GBH-DW400H-70 (FN1,FN2) B	1-1/4	7.1	30	EA	1
5″ x 20″ Models (4.9″W x 20.9″H)					
GBH-DW500H-70 (FN1,FN2)	1-1/4	6.6	46	EA	1
GBH-DW500H-80 (FN1,FN2)	1-1/4	8.1	52	EA	1

GBS-DW400H (100 plates max.) 4.9" x 13.2"
GBS-DW500H (100 plates max.) 4.9" x 20.9"

GBS-DW models rated 232 psig (16Bar) are also available
GBH-DW400H and GBH-DW500H 650 psig/44.8 bar models also available

Corrosion-Resistant Plate Heat Exchangers



GNS

Kelvion

BRAZED MODEL SERIES	DESCRIPTION	SIZE NOTES
GNS (Nickel Brazed)	De-Ionized water, laser cooling, swimming pools and spas	Up to 10" x 20" and 150 plates; -XCR upgrade to 254 SMO stainless plates
GVH Series (VacInox Brazed)	Potable water, laser cooling, district heating	Up to 10" x 20" and 150 plates; -XCR upgrade to 254 SMO stainless plates
GNS-AE and GVH-AE Series	Ammonia evaporator & subcooler; corrosive fluid applications	Up to 10" x 20" and 150 plates
Gasketed Model Series		
NT / NX / NP	Single wall, swimming pools, corrosive fluids	Titanium Plates & Connections

HEAT EXCHANGERS

All Stainless Steel, Nickel-Chrome Brazed Liquid Heat Exchangers



Kelvion

Features

The GNS Series has all advantages of a brazed plate heat exchanger, but it is more stable against corrosive media such as ammonia, deionized water, sulphides and sulphates
75% is made of pure nickel
XCR 254 SMO stainless plate upgrade available
Maximum allowable working pressure of 232psi (16Bar) and temperature of 392˚F (200˚C)

CATALOG NO.	FLUID (MPT) (IN.)	DEPTH (IN.)	WEIGHT (LBS.)	UOM	OM
5″ x 12″ H Models (4.9″W x 13.1″H)					
GNS400H-10 (V1,V2) B	3/4	1.4	7	EA	1
GNS400H-20 (W1,W2) B	1	2.4	9	EA	1
GNS400H-20-XCR (W1,W2) B	1	2.4	9	EA	1
GNS400H-24 (W1,W2) B	1	2.8	10	EA	1
GNS400H-30 (FN1,FN2) B	1-1/4	3.3	12	EA	1
GNS400H-30-XCR (FN1,FN2) B	1-1/4	3.3	12	EA	1
GNS400H-40 (FN1,FN2) B	1-1/4	4.1	14	EA	1
5″ x 20″ H Models (4.9″W x 13.2″H)					
GNS500H-40 (FN1,FN2) B	1-1/4	4.1	26	EA	1
10″ x 20″ L Models (10.7″W x 20.9″H)					
GNS700L-20 (TE1,TE2) B	1-1/2	2.4	47	EA	1

Additional Plate Counts Available

HEAT EXCHANGER ACCESSORIES

Mounting Brackets

Features

Holding a brazed plate heat exchanger in place while you pipe up sweat connections can be challenging.

Most Kelvion brazed plate heat exchangers are equipped with mounting studs which allow for the use of our proprietary mounting brackets.

The bracket makes it much easier to complete the sweat connections.

Brackets are constructed of AISI 304 stainless steel.



BKT5X20

Kelvion

Insulation Kits

Features

Prevent condensation



Kelvion

PRESSURE CONTROLS

Dual Pressure Control



DNS-C1D306YQ11

SAGINOMIYA

Features

High durability & high reliability
Wide product lineup of pressure range
Compatible for various pressure unit scale
Compact and lightweight
SPDT, Manual reset type available

CATALOG NO.	PRESSURE	CAP TUBE	OPERATING PRESSURE (LOW SIDE/ HIGH SIDE)	RESET	CONTACT SYSTEM	RANGE PSI (LOW SIDE/ HIGH SIDE)	DIFFERENTIAL PSI (LOW SIDE/ HIGH SIDE)	MAX WORKING PRESSURE PSI (LOW SIDE/ HIGH SIDE)	DIRECT REPLACEMENT FOR	UOM	OM
DNS-C1D306YQ11	Dual	Yes	Low side: on at 40 off at 20/High side: on at 241 off at 300	Automatic	DPDT	-10 to 85 / 100-425	(8.5 to 55) (43 to 71)	279 / 479	060-5247	EA	1
DNS-C1D306YMQ2	Dual	Yes	Low side: on at 40 off at 20/High side: on at manual off at 300	Manual	DPDT	-10 to 85 / 100-425	(8.5 to 55) (43 to 71)	279 / 479	060-5249	EA	1
DNS-C1D306YMQ3	Dual	No	Low side: on at 40 off at 20/High side: on at manual off at 300	Manual	DPDT	-10 to 85 / 100-425	(8.5 to 55) (43 to 71)	279 / 479	060-5250	EA	1
DNS-C1D306YQ11	Dual	No	Low side: on at 40 off at 20/High side: on at 241 off at 300	Automatic	DPDT	-10 to 85 / 100-425	(8.5 to 55) (43 to 71)	279 / 479	060-5248	EA	1

Adjustable Pressure Control



SNS-C1C106YQ13

SAGINOMIYA

Features

For use with fluorinated refrigerants as well as with air and water
(Allowable fluid temp.: –20 to 120°C)
Type SNS for universal application
Type HNS for high pressure safety cut out
Available drip proof Encl. for marine application or explosion proof Encl. for special application
Mounting bracket is supplied as standard
With SPDT contact mechanism

CATALOG NO.	PRESSURE	CAP TUBE	OPERATING PRESSURE (LOW SIDE/ HIGH SIDE)	RESET	CONTACT SYSTEM	RANGE PSI (LOW SIDE/ HIGH SIDE)	DIFFERENTIAL PSI (LOW SIDE/ HIGH SIDE)	MAX WORKING PRESSURE PSI (LOW SIDE/HIGH SIDE)	DIRECT REPLACEMENT FOR	UOM	OM
SNS-C1C106YQ13	Low	No	off at 20/ on at 40	Automatic	SPDT	-10 to 85	8.5 to 55	213	060-5231, 060-5236, 060-5237, 060-5239	EA	1
SNS-C1C106YM2Q1	Low	Yes	off at 20psi	Manual	SPDT	-10 to 85	14	213	060-5232	EA	1
SNS-C1C106YM2Q2	Low	No	off at 20psi	Manual	SPDT	-10 to 85	14	213	060-5234	EA	1
SNS-C1C106YQ12	Low	Yes	off at 20/ on at 40	Automatic	SPDT	-10 to 85	8.5 to 55	213	060-5233, 060-5235, 060-5240	EA	1
SNS-C1C110YQ1	Low	Yes	off at 62/ on at 90	Automatic	SPDT	15 to 140	15 to 45	213	060-5231, 060-5237	EA	1
SNS-C1C110YQ2	Low	No	off at 62/ on at 90	Automatic	SPDT	15 to 140	15 to 45	213	060-5235, 060-5240	EA	1
SNS-C1C130YQ10	High	Yes	off at 200/ on at 300	Automatic	SPDT	70 to 425	42 to 145	551	060-5241	EA	1
SNS-C1C130YQ11	High	No	off at 200/ on at 300	Automatic	SPDT	70 to 425	42 to 145	551	060-5242	EA	1

VALVES

Sanhua Service Valves



SERVICE-BAR-3-S-T


SANHUA

Features

The Sanhua service valves are applicable for air conditioning or refrigeration systems requiring a means to shut off refrigerant flow. The valves can be used for system servicing, evacuation, and refrigerant charging.

CATALOG NO.	FLARE CONNECTIONS (IN.)	CHARGE PORT FLARE (IN.)	UOM	OM
SERVICE-BAR-3-S-T	7/16-20UNF	3/8	EA	1
SERVICE-BAR-4-S-T	5/8-18UNF	1/2	EA	1
SERVICE-BAR-5-S-T	3/4-16UNF	5/8	EA	1
SERVICE-BAR-6-S-T	7/8-14UNF	3/4	EA	1
SERVICE-BAR-7-S-T	1-1/16-14UNF	7/8	EA	1

Sanhua 4 Way Reversing Valves



SHF-L-100-1012-01

SANHUA

Features

SHF (L) series four-way reversing valves are applicable for heat pump systems such as central, unitary and room air conditioners to realize switching between cooling mode and heating mode by changing the flow path of refrigerant. The Sanhua service valves are applicable for air conditioning or refrigeration systems requiring a means to shut off refrigerant flow. The valves can be used for system servicing, evacuation, and refrigerant charging.

CATALOG NO.	VOLTAGE	HERTZ	POWER (W)	UOM	OM
SHF-L-100-1012-01	AC220~240, AC200, AC100, AC110~120, AC24, AC265~277	50/60	4.5/3.5	EA	1

Insulation for 1/4 - 5/8 Ball Valves



NBV-IN-S

NDL FITTING YOUR NEEDS

CATALOG NO.	DESCRIPTION	UOM	OM
NBV-IN-S	Insulation for 1/4 - 5/8 ball valves	EA	1
NBV-INH	Insulation for 3/4 - 1-1/8 ball valves	EA	1

Packard Sight Glass / Moisture Indicators



PSG025FFMF

Packard

Features

Easily visible
Accurate moisture indicator
Brass body
754 psi max working pressure
OEM approved

CATALOG NO.	CONN. SIZE (IN.)	CONNECTION TYPE	OVERALL LENGTH (IN.)	UOM	OM
PSG050FFMF	1/2 SAE	Female x Male Flare	2.64	EA	1
PSG025ODF	1/4 ODF	Solder	3.98	EA	1
PSG050ODF	1/2 ODF	Solder	5.75	EA	1
PSG875ODF	7/8 ODF	Solder	6.81	EA	1

BALL VALVES

NDL® Ball Valves



NBV02-S

Features

Full port valves engineered for refrigeration, commercial HVAC, VRV, VRF, and multi-mini split, with 900 PSIG working pressure on sizes up to 1-1/8"

Compatible with CFC, HCFC, HFC, and HFO refrigerants and oils

Reduce service calls, refrigerant loss, and environmental contamination with cone-shaped 100% virgin Teflon seals and seats

Bottom-up stem installation prevents stem blow-out and loss of charge if over-pressurized

Eliminate losing caps with the simple quarter-turn of the two-piece cap nut

Brass-oven brazed body for clean appearance and durable weld

Quality tested with 95% nitrogen and 5% hydrogen solution at 450 PSIG to detect and correct leaks before leaving the factory

Stamped with serial number and packaged in poly-bag to prevent contamination and malfunctions

Backed by an unparalleled two-year warranty

UL/cUL listed to conform to pressure equipment directive 2014/68/EU

CATALOG NO.	MAX WORKING PRESSURE PSIG	ODF SOLDER (IN.)	DIRECT REPLACEMENT FOR	UOM	OM
NBV02-S	900	1/4	009L8050	EA	1
NBV03-S	900	3/8	009L8051	EA	1
NBV04-S	900	1/2	009L8052	EA	1
NBV05-S	900	5/8	009L8053	EA	1
NBV06-S	900	3/4	009L8054	EA	1
NBV07-S	900	7/8	009L8065	EA	1
NBV09-S	700	1-1/8	009L8066	EA	1
NBV11-S	700	1-3/8	009L8067	EA	1
NBV13-S	700	1-5/8	009L8068	EA	1
NBV17-S	700	2-1/8	009L8059	EA	1
NBV21-S	650	2-5/8	009L8069	EA	1

SIGHT GLASES

NDL® Sight Glasses



NG-1/2-MF

Features

Sizes range 1/4"-7/8" with sweat (ODF) ends and 1/4"-3/4" in Flare (SAE) ends

Heavy brass body with extended copper ends for sweat, or standard flare ends

Tube ends are oven brazed onto brass body for enhanced leak protection

Special litmus paper returns to original color once system is cleaned; no need to change the eye

Positive color contrast: yellow = wet; green = dry
Maximum working pressure 600 PSI
UL listed

CATALOG NO.	MXF FLARE (IN.)	DIRECT REPLACEMENT FOR	UOM	OM
NG-1/2-MF	1/2	Danfoss 014L0203	EA	1
NG-1/4-MF	1/4	Danfoss 014L0201	EA	1
NG-3/4-MF	3/4	Danfoss 014L0201	EA	1
NG-3/8-MF	3/8	Danfoss 014L0202	EA	1
NG-5/8-MF	5/8	Danfoss 014L0204	EA	1
NGN-1/2-F	1/2	Danfoss 014L0173	EA	1
NGN-1/4-F	1/4	Danfoss 014L0171	EA	1
NGN-1/4-S	1/4	Danfoss 014L0181	EA	1
NGN-3/4-F	3/4	Danfoss 014L0175	EA	1
NGN-3/4-S	3/4	Danfoss 014L0185	EA	1
NGN-3/8-F	3/8	Danfoss 014L0172	EA	1
NGN-3/8-S	3/8	Danfoss 014L0246	EA	1
NGN-5/8-F	5/8	Danfoss 014L0174	EA	1
NGN-5/8-S	5/8	Danfoss 014L0184	EA	1
NGN-7/8-S	7/8	Danfoss 014L0186	EA	1

DRIERS

Liquid Line Filter Drier



NCH-032F

Features

Solid core type with XH-11 grade molecular sieves

Desiccant comprised of molecular sieve and activated alumina in a ratio of 80:20

Compatible with all refrigerants, molecular sieves are above XH-11 grade, and pore size design will not adsorb R32 components

Body design manufactured with advanced welding technology for leak-free joints and superior performance with high-pressure refrigerants

Furnace brazed pure copper ends, with longer length and thicker walls compared to other brands

Strong and rust-free furnace-brazed threaded fittings

Uses honey-comb design perforated plate to minimize pressure drops

Finished with semi-gloss black epoxy-polyester powder coat paint tested to 500+ hours of salt spray, exceeding ASTM standards.

UL and CRN Certified

CATALOG NO.	CONN. SIZE (IN.)	CUBIC INCHES	CONN. TYPE	LENGTH IN.	FLOW CAPACITY TAN @ 1PSI ΔP (FOR KW MULTIPLY TON BY 3.5)				UOM	OM
					R-134A	R-22 & R-410A	R-407C	R-404A & R-507		
NCH-032F	1/4	3	Flare	2.64	2	2	2	1.42	EA	1
NCH-032S	1/4	3	Sweat	2.64					EA	1
NCH-052F	1/4	5	Flare	3.07	2	2.28	2.28	1.42	EA	1
NCH-052S	1/4	5	Sweat	3.07					EA	1
NCH-053F	3/8	5	Flare	3.07	5.14	5.42	5.42	4	EA	1
NCH-053S	3/8	5	Sweat	3.07					EA	1
NCH-082F	1/4	8	Flare	3.90	2	2.28	2.28	1.42	EA	1
NCH-082S	1/4	8	Sweat	3.90					EA	1
NCH-083F	3/8	8	Flare	3.90	5.42	6	6	4	EA	1
NCH-083S	3/8	8	Sweat	3.90					EA	1
NCH-084F	1/2	8	Flare	3.90	7.42	8.28	8.28	5.71	EA	1
NCH-084S	1/2	8	Sweat	3.90					EA	1
NCH-163F	3/8	16	Flare	4.80	6.2	6.8	6.8	4.57	EA	1
NCH-163S	3/8	16	Sweat	4.80					EA	1
NCH-164F	1/2	16	Flare	4.80	8.5	9.4	9.4	6.2	EA	1
NCH-164S	1/2	16	Sweat	4.80					EA	1
NCH-165F	5/8	16	Flare	4.80	12.2	13.4	13.4	8.57	EA	1
NCH-165S	5/8	16	Sweat	4.80					EA	1
NCH-303F	3/8	30	Flare	7.48	6	6.57	6.57	4.28	EA	1
NCH-303S	3/8	30	Sweat	7.48					EA	1
NCH-304F	1/2	30	Flare	7.48	8.85	9.71	9.71	6.28	EA	1
NCH-304S	1/2	30	Sweat	7.48					EA	1
NCH-305F	5/8	30	Flare	7.48	12.85	14	14	9.42	EA	1
NCH-305S	5/8	30	Sweat	7.48					EA	1
NCH-307S	7/8	30	Sweat	7.48	17.71	19.42	19.42	12.85	EA	1
NCH-415F	5/8	41	Flare	7.80	15.14	16.57	16.57	10.57	EA	1
NCH-417S	7/8	41	Sweat	7.80	26	28.57	28.57	18.57	EA	1

DRIERS CONT'D

NDL® Suction Line Filter Drier



NCHSF-164S

Features

Solid core drier with XH-11 grade molecular sieves
Core composite: 70% molecular sieves, 25% activated alumina and 5% activated carbon
Compatible with all refrigerants, molecular sieves are above XH-11 grade, and pore size design will not absorb R32 components
Body design manufactured with advanced welding technology for leak-free joints and superior performance with high-pressure refrigerants
Furnace brazed pure copper connections, with longer length and thicker walls compared to other brands
Strong and rust-free furnace-brazed threaded fittings
Uses honey-comb design perforated plate to minimize pressure drops
Finished with semi-gloss black epoxy-polyester powder coat paint tested to 1,000 hours of salt spray, exceeding the ASTM standards
Packed under positive nitrogen pressure
UL and CRN Certified

CATALOG NO.	CONN. SIZE (IN.)	CUBIC INCHES	CONN. TYPE	LENGTH IN.	FLOW CAPACITY TAN @ 1PSI ΔP (FOR KW MULTIPLY TON BY 3.5) R-134A	R-22 & R-410A	R-407C	R-404A & R-507	UOM	OM
NCHSF-164S	1/2	16	Sweat	4.80	8.5	9.4	9.4	6.2	EA	1
NCHSF-165S	5/8	16	Sweat	4.80					EA	1
NCHSF-166S	3/4	16	Sweat	4.80	12.2	13.4	13.4	8.57	EA	1
NCHSF-167S	7/8	16	Sweat	4.80					EA	1
NCHSF-306S	3/4	30	Sweat	7.48					EA	1
NCHSF-307S	7/8	30	Sweat	7.48	17.71	19.42	19.42	12.85	EA	1
NCHSF-309S	1-1/8	30	Sweat	7.48					EA	1
NCHSF-419S	1-1/8	41	Sweat	7.80	26	28.57	28.57	18.57	EA	1

NDL® Bi-Flow Line Filter Drier



NCHBF-083S

Features

Solid core drier with XH-11 grade molecular sieves, designed for use on liquid line in reversible refrigeration heat pumps
Core composite: 80% molecular sieves and 20% activated alumina
Compatible with all refrigerants, molecular sieves are above XH-11 grade, and pore size design will not absorb R32 components
Body design manufactured with advanced welding technology for leak-free joints and superior performance with high-pressure refrigerants
Furnace brazed pure copper connections, with longer length and thicker walls compared to other brands
Strong and rust-free furnace-brazed threaded fittings
Uses honey-comb design perforated plate to minimize pressure drops
Finished with semi-gloss black epoxy-polyester powder coat paint tested to 1,000 hours of salt spray, exceeding ASTM standards
Packed under positive nitrogen pressure
UL and CRN Certified

CATALOG NO.	CONN. SIZE (IN.)	CUBIC IN.	CONN. TYPE	LENGTH IN.	FLOW CAPACITY TAN @ 1PSI ΔP (FOR KW MULTIPLY TON BY 3.5) R-134A	R-22 & R-410A	R-407C	R-404A & R-507	UOM	OM
NCHBF-083S	3/8	8	Sweat	3.82	4.6	5.1	5	3.4	EA	1
NCHBF-084S	1/2	8	Sweat	3.82	5.73	6.7	6.6	4.41	EA	1
NCHBF-163S	3/8	16	Sweat	4.61	4.75	5.2	5.1	3.66	EA	1
NCHBF-164S	1/2	16	Sweat	4.61	7.43	8.1	7.9	5.41	EA	1
NCHBF-165S	5/8	16	Sweat	4.61	7.3	8.7	8.5	5.64	EA	1

VALVES

Spun Copper Driers



PD103

Features

All Copper Shells
100% Molecular Sieve with XH9 and XH11 desiccants
Fully Compatible with ALL new refrigerants

CATALOG NO.	DESCRIPTION	STAMFORD	UOM	OM
PD103	1" Directional Drier	4050	EA	1
PD109	3/4" Non Directional Drier	4051	EA	1
PD109B	50 Pack of PD109	4051	EA	50
PD109P	3 Pack of PD109	4051	EA	1
PD110	3/4" Directional Drier	4040	EA	1
PD110B	50 Pack of PD110	4040	EA	50
PD111	1" Valve Drier	4039	EA	1
PD111B	50 Pack of PD111	4039	EA	50
PD111P	3 Pack of PD111	4039	EA	1
PD112	1" 30 Gram Drier	4049	EA	1
PD113	1" Double Inlet Drier	4042	EA	1
PD113B	50 Pack of PD113	4042	EA	50
PD114	1" Directional Drier	4041	EA	1
PD115	3/4" Valve Drier	4044	EA	1
PD115B	50 Pack of PD115	4044	EA	50
PD115P	3 Pack of PD115	4044	EA	1
PD4178 *	3/4" Universal UV Dye	4178	EA	1

* New breakthrough drier with UV Dye already installed in the drier to make it easy to locate leaks in sealed systems.

CRANKCASE HEATERS

Universal Self Regulating Crankcase Heater



CHU40120

Applications

Used on refrigeration compressors up to 5 HP and 40" circumference in non-hazardous locations.

Features

UNIVERSAL - Self Regulating
Pre-stripped leads
Flexible Lockstrap
60 watts at 0°F
No thermostat required

CATALOG NO.	LENGTH (IN.)	LEAD LENGTH (IN.)	VOLTS	DIRECT REPLACEMENT FOR	UOM	OM
CHU40120	40	28	120	CCH-1C 4DLE4	EA	1
CHU40208-277	40	28	208-277	CCH-2C 4DLE5	EA	1

Tutco Crankcase Heaters



02-8291-02S

Features

Ground Lead Included

CATALOG NO.	VOLTS	WATTS	GIRTH DIMENSIONS MIN	GIRTH DIMENSIONS MAX	SHAPE	UOM	OM
02-8291-02S	120	110	12	14-3/8	Oval	EA	1



CH196

Features

High temperature silicone rubber element and VW-1 insulated lead wires rated for 150°C
Wattage for each model matches compressor requirements
Nominal power consumption due to highly efficient heat transmission and low wattage
Voltage ratings through 600 VAC
Corrosion resistant exterior
Completely moisture-proof
Quick and easy installation
Custom leads and terminations available

CATALOG NO.	VOLTS	WATTS	GIRTH DIMENSIONS MIN	GIRTH DIMENSIONS MAX	SHAPE	UOM	OM
CH103340	480	45	31-13/16	39	Oval	EA	1
CH1962	120	40	19-15/16	27-1/8	Round	EA	1
CH197240	120	25	13-13/16	21	Round	EA	1
CH19740	240	25	13-13/16	21	Round	EA	1
CH1982	120	35	16-13/16	24	Oval	EA	1
CH135240	120	40	23-7/16	27-1/2	Oval	EA	1
CH13540	240	40	23-7/16	27-1/2	Oval	EA	1
CH196	240	40	19-15/16	27-1/8	Round	EA	1
CH2057	460	40	21-3/16	24-3/8	Round	EA	1
CH1963	480	40	19-15/16	27-1/8	Round	EA	1
CH103240	120	45	24-13/16	32	Oval	EA	1
CH10340	240	45	24-13/16	32	Oval	EA	1
CH184	240	45	13-13/16	21	Round	EA	1
CH10540	240	50	31-13/16	39	Round	EA	1
CH101240	120	54	27-7/16	39-5/8	Oval	EA	1
CH10140	240	54	27-7/16	39-5/8	Oval	EA	1
CH101340	480	54	27-7/16	39-5/8	Oval	EA	1
CH10240	240	60	25-13/16	33	Oval	EA	1
CH2022	120	70	33-9/16	37-3/8	Round	EA	1
CH2802	120	70	20-13/16	28	Round	EA	1
CH202	240	70	33-9/16	37-3/8	Round	EA	1
CH230	240	70	21-13/16	29	Round	EA	1
CH280	240	70	20-13/16	28	Round	EA	1
CH2023	480	70	33-9/16	37-3/8	Round	EA	1
CH2303	480	70	21-13/16	29	Round	EA	1
CH2803	480	70	28	20-13/16	Round	EA	1
CH2552	120	100	28-5/16	35-1/16	Round	EA	1
CH255	240	90	28-5/16	35-1/16	Round	EA	1
CH2707	460	100	36	43-3/8	Round	EA	1
CH2727	460	100	38	30-13/16	Round	EA	1
CH2553	480	90	28-5/16	35-1/16	Round	EA	1
CH2822	120	150	38-1/8	45-1/2	Round	EA	1
CH2557	460	90	27-3/4	35-1/8	Round	EA	1

WIRING HARNESS

Three Wire Compressor Terminal Repair Kits



TLC38

TERM-LOK

Features

The Term-Lok Kit was designed for the repair of burned or damaged spade terminals or for non burned terminals to prevent future burn off. They are made of high quality, heat sensored brass and are guaranteed for the life of the compressor.

Includes:

Brass cylindrical tube with a diameter large enough to slip over the pins
Stainless set screw to lock onto the terminal
Wrench for easy installation
Anti-arcing spacer to prevent arcing between posts
Will never crack, break or burn off
Provides four full points of contact on the new terminal

CATALOG NO.	GAUGE	SERVICES	UOM	OM
TLC38	8	5 ton units and above	EA	1
TLC310	10	3 - 5 ton units	EA	1
TLC312	12	1 - 3 ton units	EA	1

LG Wiring Harnesses



LG58-10QSS

LG

Features

This molded plug harness supplies power to LG brand compressors and eliminates the need for a terminal cover.

CATALOG NO.	GAUGE	AIR CONDITIONING COMPRESSOR	MEDIUM TEMP. COMPRESSOR	UOM	OM
LG58-10QSS	10	GEN1: AQA, ABA series 1ph & 3ph voltage GEN2: ABG, ABM series 1ph & 3ph voltage	GEN1: MBA series 1ph & 3ph voltage	EA	1
LG58-12QSS	12	GEN1: APA, APB series 1ph & 3ph voltage GEN2: APG, APM series 1ph & 3ph voltage	GEN1: MPA series 1ph & 3ph voltage	EA	1

Titan Force Wiring Harnesses



651078

TITAN FORCE

Features

Most compressor failures may be attributed to mis-wiring the compressor. These wiring harnesses with molded plug help to eliminate costly mis-wires and eliminates the guess work out of wiring in the compressor. The Wiring Harness provides a low cost solution by getting the serviceman to the next job faster.

For Bristol or Danfoss compressors

CATALOG NO.	GAUGE	DESCRIPTION	LENGTH (IN.)	UOM	OM
651078	12	For use on Titan Force compressors below 32,000 btu's	36	EA	1
651079	12	For use on Titan Force compressors above 32,000 btu's	36	EA	1

Replacement Compressor Leads



CC33

Extreme heat within compressors typically causes failure of wiring insulation. This can cause corrosion to the inner strands of copper within the wire used for compressor hook up. This reduces the power flow to the compressor causing the unit to overheat and can prevent the compressor from starting. A MINIMUM of 12in. of wire must be removed. The DiversiTech Replacement Compressor Leads are ideal for replacing this corroded wiring. 24in. leads also available for replacing wire all the way to the contactor and capacitor.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CC33	Compressor Leads – 12" with Butt, pack of 3	PK	1
CC33-18	Compressor Leads – 18" with Butt, pack of 3	PK	1
CC33-24	Compressor Leads – 24" with Ring, pack of 3	PK	1

HARD START KITS

Two Wire Electro-Mechanical Voltage Sensing Relay



TQS1

TORQSTART EM

Features

Potential relay and start capacitor for compressor hard start applications
More reliable than PTC type hard starts
Two wire connection
For use with reciprocating and scroll compressors
Quick connect terminals
Bleed down resister to safely discharge the capacitor

CATALOG NO.	CAPACITOR SIZE (MF)	TONS	COMPRESSOR	PICK-UP VOLTAGE (VAC)	MAXIMUM COIL VOLTAGE (VAC)	DIRECT REPLACEMENT FOR	UOM	OM
TQS1	189-227	1.5 - 3	Recip and Scroll	239-268	502	TO-5; SK3W3	EA	1
TQS2	270-324	3.5 - 5	Recip and Scroll	280-315	502	KS1; SK3W6S	EA	1

Standard PTC Relay and Hard Start Capacitor

Applications

For all permanent split capacitor, single phase air conditioning and heat pump systems



TQS5

TORQSTART ST

Features

Increases compressor starting torque for faster recycling
Wired with “Piggy-Back” terminals for easy installation on run capacitors
Designed for 115 volt thru 277 volt systems
Mounts easily with either screw or clip

CATALOG NO.	OPER. VOLTAGE (VAC)	RECOMM. RANGE (HP)	INCREASE IN TORQUE (%)	DIRECT REPLACEMENT FOR	UOM	OM
TQS5	115-277	1/2 to 10	300%	32701 600-057 SPP5	EA	1
TQS6	115-277	1/2 to 10	500%	32702 600-052 SPP6	EA	1
TQS8	115-277	1/2 to 10	600%	32708 SPP7S	EA	1

All Purpose 3-N-1 Kit



TQS21

TORQSTART AP

Features

Combination relay, overload and capacitor
Pre-wired for easy installation
Extra long compressor leads for mounting flexibility
All models adapt to 115 volt compressors with external overload protector

CATALOG NO.	COMPRESSOR SIZES	VOLTS	DIRECT REPLACEMENT FOR	UOM	OM
TQS21	1/2 HP	115	600-210 RCO210	EA	1
TQS41	1/4 and 1/3 HP	115	600-410 RCO410	EA	1
TQS81	1/12 thru 1/5 HP	115	600-810 RCO810	EA	1

Torque Plus— Hard Start Kits

Totally solid state, our DST 5 is just right for all permanent split capacitor (PSC) compressors from 1/2 to 10 HP It can be used on units that operate on 120 through 288 Volts. The DST 6 offers a larger capacitor for severely hard to start compressors. The DST 6 can be used on all PSC single phase compressors from 1-1/2 to 10 HP A unique combination of relay and safety timer. The capacitor is automatically disconnected in 0.5 seconds if the compressor fails to start.



DST-5 DST-6

CATALOG NO.	DESCRIPTION	UOM	OM
DST-5	Torque Plus – 300% Torque Multiplier	EA	1
DST-6	Torque Plus – 500% Torque Multiplier	EA	1

TOOLS AND TEST EQUIPMENT

Fin Comb



PFC550

Applications

Cleans and straightens fins

Features

Stainless steel teeth
Cushioned handle
Reversible
Adjustable to 4 sizes per wrench

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PFC550	Fin Comb	EA	1

Heat Gun



HG1000

Application

Used to defrost coils and frozen water pipes. To strip paint, remove adhesives, and many other uses.

Features

120 Volt AC
Double insulated
Low setting 750 Watts
High setting 1500 Watts
12 Amps
UL listed
4 tips included

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
HG1000	Heat Gun	EA	1

Tube Fitting Brush
- 1/4" thru 1-3/8"



PBRUSH-1-3/8

The handle makes it easy to clean tubes, pipes, and holes by hand. The stainless steel bristles won't leave behind debris that could cause rust on your workpiece.

CATALOG NO.	DESCRIPTION	UOM	OM
PBRUSH-1/4	1/4" OD, 1/8" ID	PK	2
PBRUSH-3/8	3/8" OD, 1/4" ID	PK	2
PBRUSH-1/2	1/2" OD, 3/8" ID	PK	2
PBRUSH.625	5/8" OD, 1/2" ID	PK	2
PBRUSH.75	3/4" OD, 5/8" ID	PK	2
PBRUSH-7/8	7/8" OD, 3/4" ID	PK	2
PBRUSH-1-1/8	1-1/8" OD, 1" ID	PK	2
PBRUSH-1-3/8	1-3/8" OD, 1-1/4" ID	PK	2

Sand Screen



A52008

Application

Used in preparation for brazing, soldering and epoxy repairs

CATALOG NO.	ROLL SIZE	UOM	OM
A52005	1-1/2" x 5 Yards	EA	1
A52008	1-1/2" x 2 Yards	EA	1
A52010	1-1/2" x 10 Yards	EA	1
A52025	1-1/2" x 25 Yards	EA	1

Contractor Brushes



PBRUSH-CF

CATALOG NO.	DESCRIPTION	QUANTITY	UOM	OM
PBRUSH-2RB	Radiator Brush	(1PK)	PK	1
PBRUSH-AP	Utility Brush Wood 2X9	(3PK)	PK	3
PBRUSH-CF	Brush Condensor Fin Wisk	(1PK)	PK	1
PBRUSH-FLUX	Flux Brush	(Box of 48)	Box	48
PBRUSH-SS	Plastic Handle SS Brush	(3PK)	PK	3

Digital Capacitor Tester



CT1

Features

Range 2 MFD to 2000 MFD
Accuracy ±5%
Color coded test leads
Insulated rubber casing
9 Volt battery included
Fuse protected

CATALOG NO.	DESCRIPTION	UOM	OM
CT1	Digital Capacitor Tester	EA	1

TOOLS AND TEST EQUIPMENT CONT'D

The Old "Switcheroo" HVAC Door Switch Depressor



FF75

CATALOG NO.	DESCRIPTION	DIRECT REPLACEMENT FOR	UOM	OM
FF75	The Old "Switcheroo" HVAC Door Switch Depressor	Supco FPRO100	EA	1

Board Pin Removal Tool



BRT10

CATALOG NO.	DESCRIPTION	DIRECT REPLACEMENT FOR	UOM	OM
BRT10	Board Pin Removal Tool	—	EA	1

Pin Extractor Tool



PE44

CATALOG NO.	DESCRIPTION	DIRECT REPLACEMENT FOR	UOM	OM
PE44	Pin Extractor Tool	—	EA	1

Ratchet Wrench

Features

Reversible



PHB316

Packard

CATALOG NO.	SQUARE SIZE (IN.)	UOM	ORDER MULTIPLE
PRW516	1/4-3/8-3/16-5/16	EA	1

Rhino Tank Carrier and Compressor Tote



PE44

CATALOG NO.	DESCRIPTION	DIRECT REPLACEMENT FOR	UOM	OM
RH-10	Rhino Tank Carrier and Compressor Tote (6/cs)	—	CS	6

Hex Bit



PHB316

Packard

CATALOG NO.	LENGTH (IN.)	UOM	ORDER MULTIPLE
PHB316	3/16	EA	1

Core Gripper Tool



CGR10

CATALOG NO.	DESCRIPTION	DIRECT REPLACEMENT FOR	UOM	OM
CGR10	Core Gripper Tool	Supco VCGT3	EA	1

TOOLS AND TEST EQUIPMENT CONT'D

LI'L POPPER Control Circuit Breaker

LI'L POPPER control circuit breaker saves the technician dozens of blown fuses while diagnosing control circuit failures. Simply plug the leads into the ATC fuse receptacle on the board, and manually reset the Li'L Popper each time for break blows. Has a quick setting thermal cut out. The self-adhesive backing allows the contractor to leave the unit on the job site overnight if they are out of fuses.



POP3

Features

3, 5, 10, 15 or 20 Amp Rating
Self-adhesive backing for easy, temporary installation

CATALOG NO.	AMPS	DESCRIPTION	DIRECT REPLACEMENT FOR	UOM	OM
POP3	3	125/250 VAC Control Circuit Breaker	Zebra ZK003	EA	1
POP5	5	125/250 VAC Control Circuit Breaker	Zebra ZK005	EA	1
POP10	10	125/250 VAC Control Circuit Breaker	—	EA	1
POP15	15	125/250 VAC Control Circuit Breaker	—	EA	1
POP20	20	125/250 VAC Control Circuit Breaker	—	EA	1

ACCESSORIES

Electric Water Heater Kit

Features

Repairs or renews your electric water heater system
Kit for use with many 2-element water heaters
Kit Includes: (2) 240V, 4500W Copper Elements, (2) Elements Gaskets, (1) Upper Thermostat, (1) Lower Thermostat



HWRK2000

Upper Thermostat with High Limit

Features

Double throw
120/480 vac
Upper thermostat for dual element tanks



HWHL203

Single Element Thermostat with High Limit

Features

Single throw
120/480 vac
Lower thermostat for single element tanks



HWST202

Lower Thermostat

Features

Single throw
120/480 vac
Lower thermostat for duel element tanks



HWLT200

CATALOG NO.	SWITCH ACTION	TEMP. RANGE (F)	CONTACT RATING RESISTIVE @ 120/240V	CONTACT RATING RESISTIVE @ 277V	CONTACT RATING RESISTIVE @ 480V	PILOT DUTY 120/480V	WATTS @ 120V	WATTS @ 240V	DIRECT REPLACEMENT FOR	UOM	OM
HWRK2000	Kit contains: (2) 240V, 4500W Copper Elements, (2) Elements Gaskets, (1) HWLT203 Upper Thermostat and (1) HWLT200 Lower Thermostat					—	—	—	Most Models	EA	1
HWHL203	Open 1-2 on Rise	90-150 (170 Fixed)	30A	25A	12.5A	125	3000	6000	59T SPDT + 66T	EA	1
HWST202	Open 1-2 on Rise	90-150 (170 Fixed)	30A	25A	12.5A	125	3000	6000	59T SPST + 66T	EA	1
HWLT200	Open on Rise	90-150	30A	25A	12.5A	125	3000	6000	59T	EA	1

ACCESSORIES CONT'D

Outdoor Extension Cord

Heavy duty, round, vinyl extension cord designed for industrial use. Orange vinyl jacket protects against oil, grease, ozone, and gives added flexibility at below freezing temperatures. Vinyl plugs and connectors are molded on and won't break or pull off cord.



7-ECC12100



7-ECC16100

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-ECC12100	100' Extension Cord, 12/3 SJTW-A, 15 AMP	EA	3
7-ECC1225	25' Extension Cord, 12/3 SJTW-A, 15 AMP	EA	10
7-ECC1250	50' Extension Cord, 12/3 SJTW-A, 15 AMP	EA	6
7-ECC16100	100' 13 Amp Extension Cord SJTW-A 16/3	EA	6
7-ECC1625	25' 15 Amp Extension Cord SJTW-A 16/3	EA	24
7-ECC1650	50' 15 Amp Extension Cord SJTW-A 16/3	EA	12
7-ECC50725	25' 15 AMP Extension Cord SJTW-A 14/3	EA	14
7-ECC50730	50' 15 AMP Extension Cord SJTW-A 14/3	EA	10
7-ECC50735	100' 13 AMP Extension Cord SJTW-A 14/3	EA	5

Type: SJTW-A U.L. Listed, meets OSHA Requirements.

Metal Guard Trouble Lights

Designed for rugged use by contractors and industrial. Tough plastic handles are heat and shock resistant, with switch and 15A, 125V grounding side outlet.



7-TLC10625

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-TLC10625	25′ Metal Guard Trouble Light	EA	1
7-TLC10630	50′ Metal Guard Trouble Light	EA	1

AWG: 16/3 TYPE: SJTW-A U.L. Listed, meets OSHA Requirements.

Power Blocks

Professional design gives contractors and industrial personnel maximum flexibility in arranging portable power needs at the job site. Vinyl connectors are solid molded for high resistance to breakage and abuse.



7-AD010000

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-AD010000	Triple tap power block adapter converts single 15 AMP 125V U-ground outlet to 3 15A, 125V U-ground outlets	EA	10

Electrical Outlet Boxes, Extensions and Covers

We have 4in. steel square boxes, extensions, and covers available. Conforms to Article 370 of NEC. U.L. Listed.



620-406



620-411



620-403



620-404

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
620-401	2-1/8" Deep, 1/2" and 3/4" K.O.s	EA	25
620-403	1-1/2" Deep, 1/2" K.O.s	EA	50
620-404	1-1/2" Deep, 1/2" and 3/4" K.O.s Extension	EA	50
620-406	Flat Blank Cover	EA	50
620-409	Flat, One Duplex Receptacle Cover	EA	50
620-411	One Switch and One Duplex Receptacle Cover	EA	50

Electrical Outlet Boxes, Extensions and Covers

Standard steel utility (Handy) boxes and covers.



620-252



620-253



620-254



620-255

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
620-200	20A-1 HP 120V, Single Pole, Brown	EA	10
620-201	20A-1 HP 120V, Single Pole, Ivory	EA	10
620-202	20A-1HP 120V Single Pole, White	EA	10
620-252	15A-1/2HP 120V Single Pole, White	EA	10
620-253	15A-1/2 HP 120V, Single Pole, Brown	EA	10
620-254	15A-1/2 HP 120V, Single Pole, Ivory	EA	10

U.L. Listed. C.S.A. Certified. Verified to Federal Spec. WS896E.

Switch Covers

Our switch covers come with gas, oil, or emergency already printed on them.



625-S16

CATALOG NO.	DESCRIPTION	SIZE	TYPE	UOM	ORDER MULTIPLE
625-S17	4" Square Box	4" x 4"	Gas	EA	10
625-S16	Utility/Handy Box	4-1/4" x 2-3/4"	Gas	EA	1
625-S15	Flush Mount	4-1/2" x 2-1/2"	Gas	EA	25
625-S14	4" Square Box	4" x 4"	Oil	EA	1
625-S13	Utility/Handy Box	4-1/4" x 2-3/4"	Oil	EA	1
625-S19	Flush Mount	4-1/2" x 2-1/2"	Oil	EA	1
625-S20	Switch Plate	4-3/4" x 2-1/2"	Emergency	EA	1
625-S18	Switch Guard (Wall plate/switch not included)	3/4"	—	EA	1

ACCESSORIES CONT'D

Plastic Wall Plates

Nonflammable thermoplastic, phenolic or urea material. Color matched 1/2in. long steel mounting screws furnished. Smooth surface – no recessed areas to collect dirt, discolor. Easy to clean. Full weight and thickness provide high dielectric strength, minimum moisture absorption, impact resistance. Warp resistant, fit flush to wall.
U.L. Listed. C.S.A. Approved.



625-2132V

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
625-2132B	Duplex Receptacle Cover – Brown	EA	25
625-2132V	Duplex Receptacle Cover – Ivory	EA	25
625-2132W	Duplex Receptacle Cover – White	EA	10
625-2134V	Single Toggle Cover – Ivory	EA	25
625-2134W	Single Toggle Cover – White	EA	25

Eaton Circuit Breakers - Type BR

Type BR Circuit Breakers are 1-inch per pole plug-on circuit breakers designed for Eaton's Type BR Loadcenters. They are 10 kAIC arc fault circuit interrupters rated for 120VAC or 240VAC applications.



BR120

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
BR115	Single pole, 15A	EA	10
BR120	Single pole, 20A	EA	10
BR130	Single pole, 30A	EA	10
BR215	Two pole, 15A	EA	5
BR220	Two pole, 20A	EA	5
BR230	Two pole, 30A	EA	5
BR240	Two pole, 40A	EA	5
BR250	Two pole, 50A	EA	5
BR260	Two pole, 60A	EA	5
BR2100	Two pole, 100A	EA	5

Switch/Plug Combo

Use with air handlers and condensate pumps. Touch-A-Matic design, with exclusive spring loaded steel ball mechanism for smooth, positive contact movement. Small neon pilot light ON when switch is ON, is built-in to the switch on switch/receptacle.



620-274W

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
620-274W	White 2P 3W Grounding—15A 120V	EA	10

U.L. Listed. C.S.A. Approved.

Eaton Circuit Breakers - Type CH

Type CH Circuit Breakers are 3/4-inch per pole plug-on circuit breakers designed for Eaton's Type CH Loadcenters. They are 10 kAIC arc fault circuit interrupters rated for 120VAC or 240VAC applications.



CH215

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CH215	Two Pole, 15A	EA	5
CH220	Two Pole, 20A	EA	5
CH230	Two Pole, 30A	EA	5
CH240	Two Pole, 40A	EA	5
CH250	Two Pole, 50A	EA	5
CH260	Two Pole, 60A	EA	5

Eaton Circuit Breakers - Type CHF

The Eaton CHF250 Type CH, Two Pole, 50 Amps Circuit Breakers are 3/4 in. per pole plug-on circuit breakers designed for Eaton's Type CH Load centers. They are 10 kAIC arc fault circuit interrupters rated for 120VAC or 240VAC applications and include a mechanical trip flag.



CHF250

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CH250	Two Pole, 50A	EA	5

ACCESSORIES CONT'D

UL Certified Universal Circuit Breakers

These Type CL replacement circuit breakers are classified as direct replacements of brand specified circuit breakers by Underwriters Laboratories. These breakers are tested extensively in numerous Square D® HOMELINE®, General Electric®, Crouse-Hinds®, Thomas & Betts®, Murray® and ITE®/Siemens® Loadcenters.



625-CL240

EATON

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
625-CL115	UL Circuit Breaker 1-pole, 15A, 0.5"	EA	10
625-CL120	UL Circuit Breaker 1-pole, 20A, 0.5"	EA	10
625-CL220	UL Circuit Breaker 2-pole, 20A, 1.0"	EA	5
625-CL230	UL Circuit Breaker 2-pole, 30A, 1.0"	EA	5
625-CL240	UL Circuit Breaker 2-pole 40A, 1.0"	EA	5
625-CL250	UL Circuit Breaker 2-pole, 50A, 1.0"	EA	5

Plastic Thermostat Guards

Use to prevent tampering with thermostats. The covers are clear, allowing complete viewing of the thermostat and current settings. Furnished complete with ring and/or solid base. Includes vent holes for easy airflow across the thermostat. Lockable with universal key. Internal dimensional clearance/sizing for thermostats as noted.



585-TG1

CATALOG NO.	DESCRIPTION	T-STAT CLEARANCE	UOM	ORDER MULTIPLE
585-TG	Clear Plastic w/ Two Bases	8-1/4" x 4-1/2" x 3-1/4"	EA	1
585-TG1	Clear Plastic w/ Two Bases	5-3/4" x 3-1/2" x 2-3/4"	EA	1
585-TG2	Clear Plastic w/ Two Bases	4-3/4" x 4-1/4" x 2-3/4"	EA	1
585-TG5	Clear Plastic w/ Solid Base	3-1/2" x 3-1/4" x 2-1/4"	EA	1
585-TG6	Clear Plastic w/ Two Bases	6-1/4" x 3-3/4" x 1-3/4"	EA	1
585-F336	Key for Thermostat Guard		EA	1

Cross Reference

DIVERSITECH PART NO.	BEKO PART NO.	BRAMEC PART NO.	MARS PART NO.
585-TG	BTG-UK2	13012	70220
585-TG1	BTG-RK	13016	70210
585-TG2	BTG-K	13008	70205
585-TG5	BTG-EK	13004	70201
585-TG6	BTG-DK	13018	70217
585-TG8	BTG-54VLW	13001	70216

Steel Thermostat Guards

Steel thermostat guards are used to prevent tampering with thermostats. The covers are steel, giving complete tamper protection of the thermostat, and physical impact protection. Great for warehouse and industrial locations. Furnished complete with ring and/or solid base as noted. Includes vent holes for easy airflow across the thermostat. Lockable with universal key. Internal dimensional clearance/sizing for thermostats as noted.



585-TG4

CATALOG NO.	DESCRIPTION	T-STAT CLEARANCE	UOM	ORDER MULTIPLE
585-TG3	Beige Steel w/ Solid Base	6" x 4" x 3"	EA	1
585-TG4	Beige Steel w/ Ring Base	6" x 4" x 3"	EA	1
585-TG7	Beige Steel w/ Solid Base	5-1/2" x 3-1/2" x 2-3/4"	EA	1
585-TG8	Beige Steel w/ Ring Base	5" x 3" x 2-3/4"	EA	1
585-TG9	Beige Steel w/ Two Bases	6" x 4" x 3"	EA	1

Cable Clamp PRO

The Cable Clamp PRO is the ultimate reusable cable management tool. Featuring a unique push button release and integrally attached carry handle serrated for easy grip. Carry handle also includes built-in lanyard hole allowing for attachment of rope, wire, or hook. Lanyard hole may be used for tethering of Cable Clamp PRO to cords, cable, and other devices. The medium size is for bundles up to 2-inch and the large size is for bundles up to 3-inch.



CCP-M

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CCP-M	Cable Clamp PRO Display Box with 34 Medium	EA	34
CCP-L	Cable Clamp PRO Display Box with 24 Large	EA	25

ACCESSORIES CONT'D

Toggle Switches

These switches are available in single pole or double pole. They are UL listed and furnished with screw terminals. The ratings are A:20A 125VAC, 20 250 VAC, 1 HP at 120 240 V and B 15A 125/250 VAC, ¾ HP at 240 V.



TS-1

CATALOG NO.	DESCRIPTION	RATING	UOM	ORDER MULTIPLE
TS-1	Toggle Switch – SP-ST – ON/OFF	A	EA	1
TS-3	Toggle Switch – SP-DT-CO – ON/OFF/ON	B	EA	1
TS-4	Toggle Switch – DP-ST – ON/OFF A	A	EA	1

Toggle Switch Cover

Weatherproof body for toggle switches up to 15/16" long.



625-B1

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
625-B1	Toggle Switch Cover	EA	5

Replacement Power Supply Cord

Extends power cords for refrigerators, microwaves, air conditioners and other appliances
Stripped at one end and angled male plug at other end
3-Prong flat cord
125VAC



89223

CATALOG NO.	WIRE GAUGE/ CONDUCTORS	AMPS	LENGTH	UOM	ORDER MULTIPLE
89221	16/3	15	6'	EA	1
89223	14/3	15	6'	EA	50
89224	14/3	15	6'	EA	50

Dryer Cords

Thick vinyl insulation with right angle male plug
4 Wire - 10/4 Round SRDT Wire
NEMA 14-30
30 Amp @ 125V/250V



89231

CATALOG NO.	WIRE GAUGE/CONDUCTORS	LENGTH	UOM	ORDER MULTIPLE
89231	10/4	4'	EA	12
89233	10/4	6'	EA	12

Right Angle Tri-Tap Portable GFCI

For indoor or temporary outdoor use
Provides portable protection on tools, appliances, outdoor equipment, etc.
Great for jobsites, workshops or marinas
3 outlet power cord GFCI protection against hazardous shock
15 Amp 120 Volt
Automatic Reset
Class A GFCI 4-6mA Trip
1875 Watt
Grounded & Open Neutral Protection
Insulation Volts: 1500 V RMS
NEMA 5-15P & (3) 5-15R
2' 12/3 AWG SSJTW Cord
Rainproof
Complies with NEC 305-6
Operating Temperature: -31°F to 151°F (-35°C to 66°C)



89000

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
89000	Right Angle Tri-Tap Portable GFCI	EA	24

Power Supply Cord (Pigtails)

Stranded bare copper conductors
Grounding conductors
PVC jacket
Right and straight angle male plug
110 Volt. 16 AWG x 6' long
SPT 2



625-16-6

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
625-16-6	Power Supply Cord – Straight Plug	EA	50
625-16-690	Power Supply Cord – 90 Degree Plug	EA	50

Generator Power Cord Sets

20 Amp & 30 Amp Cord Sets are designed for use with manual transfer switches, transfer panels and power inlet boxes
One Piece molded Cord Plugs
L14 Twist Lock Male/Female Receptacles
300 Volt SJTOW Rubber Cord
-30°F (-34°C) Outdoor Use & Oil Resistant
L14-20P
L14-20R
L14-30P
L14-30R



89350

CATALOG NO.	AMPS	SIZE	LENGTH	NEMA#	MAX GEN INPUT	UOM	ORDER MULTIPLE
89350	30	10/4	20'	L14-30	7.5 KW	EA	6

ACCESSORIES CONT'D

Range Cords



89236

Thick vinyl insulation with right angle male plug
4 Wire - 6/2 & 8/2 round SRDT Wire
NEMA 14-60
50A @ 125V/250V

CATALOG NO.	WIRE GAUGE/CONDUCTORS	LENGTH	UOM	ORDER MULTIPLE
89236	6/2+8/2	4'	EA	12
89238	6/2+8/2	6'	EA	12

Heavy Duty Tri-Tap Extension Cord - 3 Outlets



89312

Heavy Duty 2 Foot Extension Cord with Prong Plug & Lighted Block Style Receptacles
15A 125V 12/3 STW Cord with Molded Plug Receptacle
Lighted Female End to detect power
Approved under OSHA Standards for Outdoor and Indoor Use

CATALOG NO.	LENGTH	UOM	ORDER MULTIPLE
89312	2'	EA	20

In-Line Tri-Tap Portable GFCI



89006

For indoor or temporary outdoor use
Provides portable protection on tools, appliances, outdoor equipment, etc.
Great for jobsites, workshops or marinas
3 outlet power cord GFCI protection against hazardous shock
15 Amp 120 Volt
Automatic Reset
Class A GFCI 4-6mA Trip
1875 Watt
Grounded & Open Neutral Protection
Insulation Volts: 1500 V RMS
NEMA 5-15P & (3) 5-15R
2' 12/3 AWG SSJTW Cord
Rainproof
Complies with NEC 305-6
Operating Temperature:
-31°F to 151°F (-35°C to 66°C)

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
89006	In-Line Tri-Tap Portable GFCI	EA	24

Single Portable GFCI Adapter



89002

GFCI Protected Plug Only
Fits any standard 3 wire outlet
Provides instant GFCI protection
Immediately detects ground fault from damaged cords or exposure to water and shuts off power to avoid electrocution
15 Amp 120 Volt
Automatic Reset
Class A GFCI 4-6mA Trip
1875 Watt
Grounded & Open Neutral Protection
Insulation Volts: 1500 V RMS
NEMA 5-15P & 5-15R
2' 12/3 AWG SSJTW Cord
Rainproof
Complies with NEC 305-6
Operating Temperature:
-31°F to 151°F (-35°C to 66°C)

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
89002	Single Portable GFCI Adapter	EA	24

4-Outlet GFCI Power Pack



89008

Automatic Reset
Right Angle GFCI Plug with power 'ON' LED indicator
(4) NEMA 5-15R Outlets with separate covers for each outlet
(1) NEMA 5-15P Plug
15 Amp 120 Volt
6' 12/3 SJTW Cord
15A Circuit Breaker
Automatic Reset
Class A GFCI 4-6mA Trip
1875 Watt
Grounded & Open Neutral Protection
Insulation Volts: 1500 V RMS
Complies with NEC 305-6
Operating Temperature: -31°F to 151°F (-35°C to 66°C)

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
89008	4-Outlet GFCI Power Pack	EA	24

Right Angle GFCI Plug - Field Wired



89003

User Attachable
Compatible with 15 Amp U-ground outlets and plugs
Trip Level 4-6 mA
Automatic Reset
Rated for indoor and outdoor use
Class "A" people protection and GFCI
15 Amp 120 Volt
1875 Watts, 60 Hz
LED Power 'ON' Indicator
Open Neutral and Ground Neutral protection
Operating Temperature:
-31°F to 151°F (-35°C to 66°C)
Impact resistant case

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
89003	Right Angle GFCI Plug - Field Wired	EA	63

ACCESSORIES CONT'D

5-Outlet GFCI Shock Buster



89009

GFCI Protected
Plug into any 3-prong dual outlet
Converts electrical outlet into a safety outlet
Ideal for family TV rooms, dens, dormitory rooms, garage workshops and rec-rooms
Protects from damaged electrical cords and hazardous electrical leakage levels
Quick power shut off to avoid electrocution
Built-in sensing device to detect leakage currents as low as 4mA
15 Amp 120 Volt

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
89009	5-Outlet GFCI Shock Buster	EA	60

Hose Clamps



B-4H

Partial stainless, worm drive, adjustable. 300 series stainless steel 1/2" band with plated 5/16" slotted hex head screw and housing, except the B-4H which has a 5/16" band and 1/4" nut. Recommended for most applications. 100% interlock construction features one-piece housing which directly locks into band. Spot weld free design.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
B-4H	No. 4, 7/32" – 5/8" dia., 3/16" – 5/16" hose I.D.	EA	10
B-6H	No. 6, 7/16" – 25/32" dia., 1/4" – 3/8" hose I.D.	EA	10
B-8H	No. 8, 1/2" – 29/32" dia., 5/16" – 1/2" hose I.D.	EA	10
B-10H	No. 10, 9/16" – 1-1/16" dia., 3/8" – 5/8" hose I.D.	EA	10
B-12H	No. 12, 11/16" – 1-1/4" dia., 5/8" – 3/4" hose I.D.	EA	10
B-16H	No. 16, 13/16" – 1-1/2" dia., 3/4" – 1" hose I.D.	EA	10
B-20H	No. 20, 13/16" – 1-3/4" dia., 1" – 1-1/4" hose I.D.	EA	10
B-24H	No. 24, 1-1/16" – 2" dia., 1-1/4" – 1-1/2" hose I.D.	EA	10
B-28H	No. 28, 1-5/16" – 2-1/4" dia., 1-1/4" – 1-3/4" hose I.D.	EA	10
B-32H	No. 32, 1-9/16" – 2-1/2" dia., 1-1/2" – 2" hose I.D.	EA	10
B-36H	No. 36, 1-13/16" – 2-3/4" dia., 1-3/4" – 2-1/4" hose I.D.	EA	10
B-48H	No. 48, 2-9/16" – 3-1/2" dia., 1-3/4" – 2-1/4" hose I.D.	EA	10
B-72H	No. 72, 1-7/8" – 5" dia., 1-3/4" – 2-1/4" hose I.D.	EA	10

Electrical Toggle Switches



620-601

Side wire design with automatic grounding and large binding head terminal screws for fast wiring. Lubricated cam provides smooth lever action. U.L. Listed. C.S.A. Certified. Verified to Federal Spec. WS896E

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
620-600	20A-1 HP 120V, Single Pole, Brown	EA	10
620-601	20A-1 HP 120V, Single Pole, Ivory	EA	10
625-CS120W	20A-1HP 120V Single Pole, White	EA	10
625-1301W	15A-1/2HP 120V Single Pole, White	EA	10
620-604	15A-1/2 HP 120V, Single Pole, Brown	EA	10
620-605	15A-1/2 HP 120V, Single Pole, Ivory	EA	10

U.L. Listed. C.S.A. Certified. Verified to Federal Spec. WS896E.

Electrical Duplex Receptacles

Automatic grounding for fast installation. Heavy duty mounting strap for additional assembly strength. Copper alloy power/ground contacts for optimum continuity. Side wire design with large binding head terminal screws for fast wiring. U.L. Listed. C.S.A. Certified (NEMA 5 15 Type).



620-701 620-700 625-CR15W 620-704

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
620-700	15A, 125V, Brown	EA	10
620-701	15A, 125V, Ivory	EA	10
625-CR15W	15A 125V, White	EA	10
620-702	20A, 125V, Brown	EA	10
620-703	20A, 125V, Ivory	EA	10
625-CR20W	20A 125V, White	EA	10
620-704	15A, 125V, Brown – Residential	EA	10
620-705	15A, 125V, Ivory – Residential	EA	10
625-270W	15A 125V, White – Residential	EA	10

U.L. Listed. C.S.A. Certified (NEMA 5-15 Type).

ACCESSORIES CONT'D

General Purpose 1-part Industrial/ Construction Grade Silicone Sealant



RTV45A

SILCO INCORPORATED

Gen-Sil (RTV 45) is a premium general purpose, one component room temperature vulcanizing RTV acetoxy cure silicone sealant and adhesive. When fully cured, this unique VOC compliant formula offers UV stability to form waterproof and airtight bonds to metal, steel, tile, fiberglass, ceramic, glass, aluminum, painted surfaces, plywood, marble, plus many other common substrates. This product is specifically formulated to offer all weather performance to meet today's Green Building Standards.

Features

Mildew Resistant
VOC Compliant
Weather Resistant
Easy Application
Permanent Flexibility
Waterproof

CATALOG NO.	COLOR	DISCONTINUED PACKARD CATALOG NO.	UOM	OM
RTV45A	Aluminum	PS9980	EA	12
RTV45W	White	PS9981	EA	12
RTV45C	Clear	PS9982	EA	12
RTV6500R	High Temp Red	PS9983	EA	12

Speed Controls



1408A

Century®

Features

Solid State. Infinitely variable adjustment for single speed fan and blowers, kitchen appliances, etc.
Use only with shaded pole and PSC motors
UL Listed

CATALOG NO.	MAX AMPS	VOLTS	MOUNTING	SIZE (IN.)	UOM	OM
1234A	4	120	Panel	—	EA	1
1408A	10	120	Wall	4-1/2 x 4-1/2	EA	1

Steel Shaft Adapter Bushing



1307A

Century®

Features

5 per package

CATALOG NO.	INTERIOR DIAM. (IN.)	OUTSIDE DIAM. (IN.)	LENGTH (IN.)	DIRECT REPLACEMENT FOR	UOM	OM
1231A	1/4	5/16	1	—	EA	1
1302A	5/16	3/8	1-1/16	KIT244	EA	1
1304A	5/16	1/2	1-1/16	—	EA	1
1306A	3/8	1/2	1-1/16	—	EA	1
1487A	1/2	5/8	1-1/16	—	EA	1

*Items in this section are Underwriter's Laboratories listed or recognized under the prime manufacturer's name.

ACCESSORIES CONT'D

Shaft Adapters

Features

5 per package



A80082K

Packard

CATALOG NO.	DIMENSIONS (IN.) I.D.	O.D.	LENGTH	UOM	OM
A80427K	1/4	5/16	1.00	EA	1
A80513K	5/16	3/8	1.00	EA	1
A80082K	3/8	1/2	1.00	EA	1
A60097K *	1/2	5/8	1.50	EA	1

Special Mounting Kit For 3.3″ Diam. to Replace Motor in Nutone Units

Features

Aluminum stand-off bracket for motor blower mounting

Match 3.3 inch mounting pattern



KITH33

FASCO

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
KITH33	Hex Hub Kit	EA	1

Staked Tie Rods

Features

Per rod, includes one staked nut and one regular nut

Standard pack includes 4



KIT220

FASCO

CATALOG NO.	THREAD	ROD LENGTH (IN.)	UOM	OM
KIT220	8-32	8	EA	1
KIT221	10-32	8	EA	1

Rubber Mounting Brackets

Features

Henrite are rubber mounting rings with steel band, used with cradle bases and knife edge motor supports

Packaged (2) per kit



KIT180



KIT184



KIT187

FASCO

CATALOG NO.	HUB RING OD (IN)	HUB RING ROUND ID (IN)	INNER RING	UOM	OM
KIT180	1.8	1.277	Round	EA	1
KIT184	2.5	1.87	Hex	EA	1
KIT187	1.87	1.25	Round	EA	1

Mounting Kit

Features

Provides means to base mount FASCO 4.4" or 5.6" diameter motors

One kit will adapt both ends of motor for base mounting

Includes: qty 2 adapter plates, qty 4 adapter rings, qty 2 resilient rings, qty 16 nuts 8-32

Standard pack (kit assembly): qty 1



KIT200

FASCO

CATALOG NO.	DESCRIPTION	DIRECT REPLACEMENT FOR	UOM	ORDER MULTIPLE
KIT200	Length Adapter Kit	08095	EA	1

ACCESSORIES CONT'D

Nuts and Washers



1618A


Features

Henrite are rubber mounting rings with steel band, used with cradle bases and knife edge motor supports

Packaged (2) per kit

CATALOG NO.	THREAD	SIZE (IN.)	UOM	OM
1618A	8-32	11/32	PK	16
1619A	10-32	3/8	PK	16

Case Studs Kit



1639A

Features

Per stud, includes two nuts and two washers

Standard pack includes 4

CATALOG NO.	THREAD	LENGTH (IN.)	UOM	OM
1639A	8-32	7	PK	4
1640A	10-32	7	PK	4

End Frame Length Adapter Kit



615059-001

Features

Use on 5" & 5-1/2" Century-extended through bolt motors to gain additional length to fit in old base

Fits 5" motors with a 90 degree bolt pattern and 5-1/2" motors with 60-120 degree and 90 degree bolt patterns

Includes: qty 1 adapter plate with mounting ring, qty 4 split rings, qty 8 nuts, qty 4 lock washers

Standard pack (kit assembly): qty 1

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
615059-001	Resilient Ring Kit	EA	1

Resilient Mounting Rings



1182A

Application

For mounting 48 Frame motors in Rheem condensing units

Features

Rubber mounting rings for cradle mounts

2 per package

CATALOG NO.	HUB RING DIAMETER (IN.)	HUB RING LOCKING HEX ID (INCL.)	UOM	OM
1182A	2-1/2	2.55	EA	1
1220A	2-1/4	1.55	EA	1
1255A	2	1.125	EA	1

Anti-Wind Brakes



A60058

Features

Used to stop wind milling of rooftop motors

CATALOG NO.	DIAM. (IN.)	UOM	OM
A60012	1/2	EA	1
A60058	5/8	EA	1

ACCESSORIES CONT'D

Motor Mount – Flex Bracket



DMB-3

Application

Torsion Flex Bracket holds motor securely. Fits 5-1/2" motors. Typically used for Goodman equipment.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DMB-3	5-1/2" Motor Mount Torsion Flex Bracket	EA	1

DiversiTech® Motors Bracket



DMB-1

Application

These brackets help hold the motor securely.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DMB-1	Fixed Lug Assembly for 5-1/2" diameter motors	EA	1

Mounting Brackets




KIT55L

FASCO

CATALOG NO.	DIAM. (IN.)	BOLT CIRCLE (IN.)	BRAND	UOM	OM
A80293	5.5	6-7/8 to 8-1/8	Packard	EA	1
A80295*	5.5	8-1/8 to 12-1/8	Packard	EA	1

Notes: *Has extended lugs

Mounting Brackets



A60048

Packard

Application

Used to mount motor to blower housing

Features

Kit includes: steel bracket with 3 welded legs, 3 steel sleeves, & 3 sets of rubber grommets

CATALOG NO.	DIAM. (IN.)	FRAME	UOM	ORDER MULTIPLE
A60042	5	42	EA	1
A60048	5-5/8	48	EA	1

Flex Mount Bracket Adjustable Diameter



TFM556

Packard

Application

For use with 5" or 5-5/8" diameter motors

Features

Plastic insert allows you to adjust for 5" or 5-5/8" diameter

3-Leg Torsion-Flex Brackets

Designed to effectively isolate and prevent torsional vibrations from reaching blower housing and housing and causing noise

No preassembly; bracket clamps to motor shell. Plastic inserts supplied for adapting bracket to NEMA 42 frame.

CATALOG NO.	DIAM. (IN.)	UOM	OM
TFM556	5 or 5-5/8	EA	1

Universal Lug Mounting Bracket



1410A

Century®

Application

For use with 5-5/8" diameter motors

Features

Two mounting options. Small slots accepts 1/4" bolt. Large hole accepts 3/4" Rubber Grommet Kit (A60049K).

CATALOG NO.	DIAM. (IN.)	BOLT CIRCLE (IN.)	UOM	OM
1410A	5-5/8	6-3/8 to 7-5/8	EA	1

ACCESSORIES CONT'D

Unit Bearing Mounting Bracket



A11602

morrillmotors

CATALOG NO.	SHAFT HEIGHT (IN.)	BRACKET HEIGHT (IN.)	UOM	OM
A11601	4-1/8	2-7/32	EA	1
A11602	4-9/16	2-41/64	EA	1
A11603	5-3/8	3-29/64	EA	1
A11605	6-1/4	4-5/16	EA	1

Flex Mounting Bracket for Rheem

Application

Replaces mounting bracket on direct-drive blowers in Rheem furnaces

Features

Torsion-Flex Bracket Kit
Includes 4 brackets & 8 mounting screws



A61698K

Packard

CATALOG NO.	BRAND	DIRECT REPLACEMENT FOR	UOM	OM
A61698K	Packard	Rheem AE-61698-01 AE-61698-02	EA	1

Three Leg Torsion Flex Mount Brackets

Features

3-Leg Torsion-Flex Brackets
Designed to effectively isolate and prevent torsional vibrations from reaching blower housing and causing noise
No preassembly; bracket clamps to motor shell.
Includes: 3 grommets, 1 bolt, 1 nut, 3 steel washers



TFM55


Packard

CATALOG NO.	DIAM. (IN.)	UOM	OM
TFM50	5	EA	1
TFM55	5-5/8	EA	1

Motor Mounting Bracket for Rheem

Features

Rear-Mount Bracket
Galvanized stamped-steel bracket mounts 5-5/8" diameter motors in Rheem-Ruud condensing units
For NEMA 48 Frame motors



A60306K

Packard

CATALOG NO.	BRAND	DIRECT REPLACEMENT FOR	UOM	OM
A60306K	Packard	Rheem AS-55306-02	EA	1

Lug Mounting Bracket - Long

Features

Kits for 3.3" through 5-5/8" diameter motors



A60058

Century®

CATALOG NO.	MOTOR DIAM. (IN.)	BOLT CIRCLE (IN.)	UOM	OM
1366A	5	6-5/16 to 7-9/16	EA	1

Four Leg Torsion Flex Mount Bracket

Application

For use with 5-5/8" diameter motors

Features

Helps isolate and prevent torsional vibrations from reaching blower housing and causing noise



TFM554

Packard

CATALOG NO.	DIAM. (IN.)	UOM	OM
TFM554	5-5/8	EA	1

ACCESSORIES CONT'D

Fasco Bases

NOTE: The base numbering system uses the first two numbers to indicate shaft height (30 is 3.0" and 35 is 3.5") and the last three numbers represent distance between cradle arms (386 is 3.86")

Example: B35417 has a 3.5" shaft height and 4.17" cradle base



A68004

FASCO

CATALOG NO.	SHAFT HEIGHT (IN.)	CRADLE BASE "B" DIM.	UOM	OM
B30354	3	3.54	EA	1
B30386	3	3.86	EA	1
B30408	3	4.08	EA	1
B35435	3	4.35	EA	1
B30461	3	4.61	EA	1
B30479	3	4.79	EA	1
B30492	3	4.92	EA	1
B30517	3	5.17	EA	1
B30542	3	5.42	EA	1
B30558	3	5.58	EA	1
B30595	3	5.95	EA	1
B30705	3	7.05	EA	1
B35354	3.5	3.54	EA	1
B35386	3.5	3.86	EA	1
B35408	3.5	4.08	EA	1
B35417	3.5	4.17	EA	1
B35461	3.5	4.61	EA	1
B35479	3.5	4.79	EA	1
B35492	3.5	4.92	EA	1
B35517	3.5	5.17	EA	1
B35542	3.5	5.42	EA	1
B35558	3.5	5.58	EA	1
B35595	3.5	5.95	EA	1
B35705	3.5	7.05	EA	1

To achieve the shaft height listed, the 2 1/2" diameter rings must be used.

B dimension is the mounting dimension between mounting rings, center to center.

Direct Drive Blower Mounting Kit

Features

Used on 5-5/8" diameter motors
Includes 3 each: grommets, sleeves and sheet metal screws



A68004

FASCO

CATALOG NO.	DIMENSIONS (IN.)	BOLT CIRCLE (IN.)	UOM	OM
KIT315	5	9.8	EA	1
KIT317	5.6	9.8	EA	1

Evergreen Belly Band Mounting Kit

Features

Two Motors cover most applications
Multi-volt 115/230VAC, 50/60 Hertz
Integrated with HVAC system controls/operation
Four speed selections for heating and cooling
Optimized constant fan speed
1/2" diameter flat shaft
Automatic overload protection
5.5" diameter
Ball bearing
Continuous duty



5K003

genteq

CATALOG NO.	BOLT CIRCLE (IN.)	DIRECT REPLACEMENT FOR	UOM	OM
5K003	10	08025	EA	1
5K004	11	08026	EA	1
5K005	13	08027	EA	1

Motor Bracket

Features

Bracket for 48 Frame motor in York Units
5.5 mounting bracket
11 bolt circle diameter
Kit includes: bracket with 3 welded legs, rubber grommets and mounting hardware



A60459

Packard

CATALOG NO.	BRAND	DIRECT REPLACEMENT FOR	UOM	OM
A60459	Packard	York 326-31459-000 York 02626372000, York 37308073700, York 3730807300	EA	1

ACCESSORIES CONT'D

Condenser Fan Rainshield

Features

Fits NEMA 42, 48 or 56 frame motors
Disc Type



A61000

Packard

CATALOG NO.	DIMENSIONS (IN.) BORE DIA.	O.D.	UOM	OM
A61000	1/2	6.88	EA	1
A61056	5/8	6.88	EA	1

Condenser Fan Rainshield Deep Dish Style

Features

Made of phenolic with internal cooling fins for increased motor efficiency



A80105

Packard

CATALOG NO.	DIMENSIONS (IN.) BORE DIA.	O.D.	UOM	OM
A80105	1/2	7	EA	1

Rainshields - Plastic Deep Dish Style

Applications

Pedestal and window fans, air circulators



1411A

Century®

CATALOG NO.	DIMENSIONS (IN.) BORE DIA.	O.D.	UOM	OM
1411A	1/2	7	EA	1

Shaft Extension Kits

Features

Includes shaft coupler & shaft



A61475K

Packard

CATALOG NO.	DIAM. (IN.)	LENGTH (IN.)	UOM	OM
A61308K	1/4	4-1/2	EA	1
A61310K	5/16	4-1/2	EA	1
A61475K	1/2	4-1/2	EA	1

Shafts

Features

SAE 1018 Cold Rolled Steel
Ground and Polished



A61000

Packard

CATALOG NO.	DIAM. (IN.)	LENGTH (IN.)	UOM	OM
S38220501	5/8	20	EA	1
S38209601	3/4	20	EA	1
S38269301	3/4	35	EA	1
S38209501	1	25	EA	1
S38249201	1	35	EA	1

Rubber Grommet Kit

Features

Used for 3/4 inch slots. Sheet metal screws and sleeves included. 3 per package.



A60049K

Packard

CATALOG NO.	DESCRIPTION	UOM	OM
A60049K	Large Rubber Grommet Kit	EA	1

Rubber Grommet Kit

Features

Used for 1/2 inch slots. 6 per package.



A60047K

Packard

CATALOG NO.	DESCRIPTION	UOM	OM
A60049K	Small Rubber Grommet Kit	EA	1

ACCESSORIES CONT'D

Rubber Vibration Insulators for Coleman Motors



KIT208

FASCO

Features

Used on Coleman motors
Bushing: 1/2" x 1/2"
Quantity 4

CATALOG NO.	STUD DIMENSION (IN.)	THREAD	DIRECT REPLACEMENT FOR	UOM	OM
KIT208	1/2 x 1/2	8-32	FASCO 8768-6000	EA	1

Rubber Vibration Insulators for Coleman Motors



MNT1518

FASCO

Features

Used on Coleman motors
Bushing: 1/2" x 1/2"
Quantity 1

CATALOG NO.	STUD DIMENSION (IN.)	THREAD	DIRECT REPLACEMENT FOR	UOM	OM
MNT1518	1/2 x 1/2	8-32	FASCO 8768-6000	EA	1

Rubber Vibration Insulators



A61519K

Packard

Applications

Eliminates noise and excessive vibration. Used for motors, compressors, fans, pumps, etc.

Features

Used on Coleman motors
4 per package

CATALOG NO.	STUD DIMENSION (IN.)	UOM	OM
A61519K	3/8 x 8-32 x 3/8	EA	1

CATALOG NO.	DIMENSION (IN.) A-INSULATOR DIAM.	B-SCREW DIAM.	C-INSULATOR WIDTH	D-SCREW LENGTH	UOM	OM
A67804K	1	5/16	1	5/8	EA	1
A67805K	1	1/4	3/4	1/2	EA	1

Rheem Mounting Cables



A60325K

Packard

Features

4 per package

CATALOG NO.	LENGTH (IN.)	FOR MOTOR HP	UOM	OM
A60325K	3 1/4	1/6	EA	1

Conduit Box



KIT142

FASCO

Applications

For universal design motors with conduit connector holes only

Features

Mounts on one of the extended motor stud bolts

CATALOG NO.	MOTOR DIAM. (IN.)	UOM	OM
KIT142	3.3	EA	1
KIT144	4.4, 5.0, 5.6	EA	1

Conduit Box with Adjustable Bracket



TACBB1

Packard

Applications

For use on 48 & 42 Frame Motors

Features

Encloses electrical connections
Includes adjustable bracket

CATALOG NO.	DESCRIPTION	UOM	OM
TACBB1	Conduit Box W/ADJ Bracket	EA	1

Adapter Ring



EBM20001

ebmpapst

CATALOG NO.	DESCRIPTION	UOM	OM
EBM20001	Allows the Axial motor assembly to be used in diameters up to 12".	EA	1

ACCESSORIES CONT'D

Conduit Kit

Features

3/8" Conduit Connector
Allen Stevens type, complete with mounting screws
Packaged three per kit



A60102

Packard

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
A60102	Allen Steve Type Conduit Kit	EA	1

Nuts



KIT1032

FASCO

CATALOG NO.	NUT DIMENSIONS (IN)	THREAD	UOM	ORDER MULTIPLE
KIT832	11/32	8-32	PK	32
KIT1032	11/32	10-32	PK	32

Fan Blade & Blower Wheel Puller

Applications

Assists in the removal of a fan blade or blower wheel from a motor shaft

Features

Max depth of 2.4 inches



A89000

Packard

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
A89000	Fan Blade and Blower Wheel Puller	EA	1

Pitch Gauge

Features

To aid in determining pitch of the fan blade



PG5099801

Packard

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PG5099801	Fan Blade Pitch Gauge	EA	1

Straight Plug and Cord

Features

Used with unit bearing motors: plug and cord assembly



PLUG119

Packard

CATALOG NO.	LENGTH (IN)	UOM	ORDER MULTIPLE
PLUG119	25	EA	1

90 Degree Plug and Cord

Features

Used with unit bearing motors: plug and cord assembly



PLUG018

Packard

CATALOG NO.	LENGTH (IN)	UOM	ORDER MULTIPLE
PLUG018	25	EA	1

Compartmented Storage Boxes

These boxes can be used to store your compressor terminals, nylon ties and clamps.



MB21

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
MB21	21 Compartmented Metal Box	EA	1
MB22	21 Compartmented Metal Box w/230 popular items including hi-temp and compressor	EA	1

90 Degree Plug and Cord

Features

Length 7.56"
Cord Material: 18/2 AWM PVC 300V
UL Approved E44588
Stand Pack: Qty 1



2117

FASCO

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
2117	90 Degree Adapter Cord	EA	1

ACCESSORIES CONT'D

Mounting Kit

Features

Special end plate for 3.3" diameter D401 motor
For mounting to Comfort Air Units



KIT214

FASCO

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
KIT214	Special End Plate	EA	1

End Shield Kits

Features

Triangular bracket with grommets for 3.3" diameter motors.
4.38 BCD.



KIT225

FASCO

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
KIT225	End Shield Kit	EA	1

End Shield Kits

Features

Special end plate for 3.3" diameter motors for base mounting
Use with Kit 180 mounting rings



KIT216

FASCO

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
KIT216	End Shield Kit	EA	1

Adapter Plate

Features

Provides rectangular mounting stud pattern on 5 inch or 5 5/8" diameter motors to match Fedders stud motors
Similar to Emerson and RMR rectangular mounting stud patterns



KIT207

FASCO

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
KIT207	Rectangular mounting stud pattern	EA	1

End Shield Kits

Features

Used to mount 3.3" motors to various blower housings



KIT216

FASCO

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
KIT265	End Shield Kit	EA	1

Motor Height Adapter

For use w/EC MAX RM Series

Compatible with

5411EC
5411EC2
5411EC90
5412EC
5414EC



HA5411

EC MAX® RM REFRIGERATION MOTOR

CATALOG NO.	SCREWS	SPACER DIAM. (IN.)	SPACER WIDTH (IN.)	UOM	ORDER MULTIPLE
HA5411	(5) #8-36 x .750	3.188	.365	EA	1

ACCESSORIES CONT'D

24V Universal Humidifier Solenoid



UHS24

CATALOG NO.	DESCRIPTION	DIRECT REPLACEMENT FOR	UOM	OM
UHS24	24V Universal Humidifier Solenoid	Supco SUHS24	EA	1

24V Universal Humidifier Solenoid (1/4" x 1/4")



UHS99

CATALOG NO.	DESCRIPTION	DIRECT REPLACEMENT FOR	UOM	OM
UHS99	24V Universal Humidifier Solenoid 1/4" x 1/4"	—	EA	1

Easy Levelers



EL10

CATALOG NO.	DESCRIPTION	DIRECT REPLACEMENT FOR	UOM	OM
EL10	Easy Levelers (4 legs)	–	EA	1

Gasket Book



GB10

CATALOG NO.	DESCRIPTION	DIRECT REPLACEMENT FOR	UOM	OM
GB10	Gasket Book - 42 gaskets, 1/8" and 1/16"	Supco GB10	EA	1


Expanding Hose



EH50

CATALOG NO.	DESCRIPTION	DIRECT REPLACEMENT FOR	UOM	OM
EH50	Expanding Hose 50' w/ brass fittings plus shut off valve	—	EA	1

Teflon O-rings



TR10-12

CATALOG NO.	DESCRIPTION	DIRECT REPLACEMENT FOR	UOM	OM
TR10-12	Teflon O-rings, set of 3 each of all sizes 3/4", 1, 1-1/4", 1-3/4"	—	PK	12

ACCESSORIES CONT'D

Capacitor Resistor with 1/4″ Female Terminals

Features

With 1/4" female terminals
10 per package



A63106

Packard

CATALOG NO.	OHMS	WATTS	UOM	ORDER MULTIPLE
A63106	15000	2	EA	1

Capacitor Resistor

Features

10 per package



A63105

Packard

CATALOG NO.	OHMS	WATTS	UOM	ORDER MULTIPLE
A63105	15000	2	EA	1

Rubber Boots

Features

Lead protectors for motor run capacitors
5 per package



A63106

Packard

CATALOG NO.	Hole Location	UOM	ORDER MULTIPLE
A76000	1 Hole on End	EA	1
A76001	1 Hole on Top	EA	1
A76002	2 Hole on Top	EA	1
A76003	3 Hole on Side	EA	1

Capacitor Jumpers

Features

With 1/4" female terminals
10 per package



A63006

Packard

CATALOG NO.	LENGTH (IN.)	UOM	ORDER MULTIPLE
A63004	4	EA	1
A63006	6	EA	1

Capacitor Mounting Kit

Features

Bracket dimension: 2-1/8" x 1-1/4"
Cover dimension: 1-5/8"



A60010

Packard

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
A60010	Capacitor Mounting Kit	EA	1

Capacitor Mounting Kit

Features

Bracket dimension: 2-1/8" x 1-1/4"
Cover dimension: 1-5/8"



KIT6001

FASCO

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
KIT6001	Capacitor Mounting Kit	EA	1

ACCESSORIES CONT'D

Cap Guard



A60000

Features

Weather proofs capacitor connections by simply sliding on to the capacitor
Fits oval caps 2 through 17.5MFD 370V and 2 thru 12.5MFD 440V
Sheet metal screws included

CATALOG NO.	BRAND	UOM	OM
A60000	Packard	EA	1

Capacitor Brackets

Features

For motor start capacitors
5 per package



A76501

CATALOG NO.	CAPACITOR LENGTH (IN.)	UOM	OM
A76501	4-3/8	EA	1
A76502	3-3/8	EA	1
A76503	2-3/4	EA	1

Capacitor Brackets - Round

Features

For round motor run capacitors
5 per package



A75500

CATALOG NO.	DIAMETER (IN.)	UOM	OM
A75400	1-3/4	EA	1
A75500	2	EA	1
A75600	2-1/2	EA	1

Capacitor Brackets - Oval

Features

For oval motor run capacitors
5 per package



A75200

CATALOG NO.	DIMENSIONS (IN.) WIDTH X DEPTH	UOM	OM
A75100	1-5/16 x 2-5/32	EA	1
A75200	1-29/32 x 2-29/32	EA	1
A75300	1-31/32 x 3-21/32	EA	1

Capacitor End Caps - Top Lead Hole

Features

For motor start capacitors
Leads exit through bracket
5 per package



A76612

CATALOG NO.	DIAM. (IN.)	UOM	OM
A76611	1-7/16	EA	1
A76612	1-13/16	EA	1
A76613	2-1/16	EA	1
A76614	2-9/16	EA	1

Capacitor End Caps - Bottom Lead Hole

Features

For motor start capacitors
Leads exit opposite bracket
5 per package



A76602

CATALOG NO.	DIAM. (IN.)	UOM	OM
A76601	1-7/16	EA	1
A76602	1-13/16	EA	1
A76603	2-1/16	EA	1
A76604	2-9/16	EA	1

DIRECT REPLACEMENTS FOR:CONT'D

Aaon - OEM - Motors

CATALOG NO.	VOLTS	RPM	AMPS	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	BEAR.	DIA. (IN.)	ENCL.	MOUNT,	CAP.	DIRECT REPLACE. FOR	UOM	OM
OAN470	460/380-415	3200	0.90	CCWLE	1/2 x 3-1/4	5.49	Ball	5-5/8	Open	Horizontal	5MFD/370V	P48470 FS48S08A27	EA	1
OAN1076	460	1075	2.60	CWSE	1/2 x 4.00	6.0	Ball	5-5/8	TEAO	Belly Band	12.5MFD/370V	F48F37A27 F48SP6V9	EA	1
OAN1076V1	460/380-415	1075	2.8-1.8	CWSE	1/2 x 2.825	7.38	Ball	5-5/8	TEAO	Belly Band	12.5MFD/370V	F48K04A27	EA	1
OAN140	460	1075	2.75	CCWLE	1/2 x 4	6.36	Ball	5-5/8	Semi	Vertical Shaft Up with Belly Band	12.5M/370V	P99140 F48R38A27C	EA	1
OAN460	208-230	1075	5.40	CCWLE	1/2 x 3	7.36	Ball	5-5/8	Semi	Vertical Shaft Up	15M/370V	P85460 F48K44A27C	EA	1
OAN747	460	1075	2.00	CCWLE	1/2 x 3-1/4	7.11	Ball	5-5/8	Semi	Vertical Shaft Up with Belly Band	15M/370V	R17470 F48U09A27	EA	1



OAN470

Amana - OEM - Motors and Draft Inducers

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	ENCL.	HERTZ	DIRECT REPLACEMENT FOR	UOM	OM
65337	3/4	120	3000	0.68	1	CCWSE	SP	Sleeve	Open	60	C87131-1	EA	1



65337

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	ENCL.	HERTZ	DIRECT REPLACEMENT FOR	UOM	OM
A286	1/35	208/230	3125	0.6	1	CW	SP	Sleeve	Open	60	11096904 7021-9398	EA	1
A160	1/30	115	3000	1.6	1	CW	SP	Sleeve	Open	60	20044401 7021-8252 7002-2407	EA	1
A158	1/25	115	3450	0.70	1	CW	PSC	Sleeve	Open	60	D98686-7 7062-3151	EA	1
A280	1/25	115	3000	1.5	1	CW	SP	Sleeve	Open	60	D986868 7021-7794	EA	1
A287	1/25	115	3000	1.15	1	CW	SP	Sleeve	Open	60	10585405 7021-9655	EA	1
A129	1/20	115	3250	1.95	1	CW	SP	Sleeve	Open	60	7021-9064 7021-9259	EA	1



82862

Armstrong - OEM - Draft Inducers

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	ENCL.	HERTZ	DIRECT REPLACEMENT FOR	UOM	OM
66404	1/30	115	3300	0.53	1	CWLE	PSC	Ball	Open	60	40404-003 117521-00 7021-12439	EA	1



66404

DIRECT REPLACEMENTS FOR CONT'D

Broan - OEM - Impellars and Motors

CATALOG NO.	BORE (IN.)	DIAM. (IN.)	BORE	DIRECT REPLACEMENT FOR	UOM	OM
A65216FB	3/16	4-1/2	D Shape	99110379	EA	1



A65216FB

CATALOG NO.	STACK SIZE (IN.)	VOLTS	RPM	AMPS	SPEEDS	ROTA.	SHAFT DIM. (IN.)	TYPE	BEARINGS	ENCL.	DIRECT REPLACEMENT FOR	NOTES	UOM	OM
65366	5/8	120	3000	0.50	2	CCWSE	0.185 Splined x 1-1/4	SP	Sleeve	Open	99080365	45 513	EA	1
65216	5/8	120	3000	0.51	1	CCWSE	0.181 x 1-1/2	SP	Sleeve	Open	99080090 99080216	485 491	EA	1
65094	7/8	120	3000	0.75	1	CCWSE	7/32 x 1-1/4	SP	Sleeve	Open	99080094 99080099 99080166	485 491	EA	1
65159	7/8	120	3000	0.71	1	CCWSE	1/4 x 2-5/8	SP	Sleeve	Open	99080159	485 491	EA	1



65366

CATALOG NO.	VOLTS	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BEARINGS	ENCL.	DIRECT REPLACEMENT FOR	UOM	OM
69316	120	1100	3.40	1	CWSE	1/2 x 3-1/16	2 1/4	SP	Sleeve	Open	97009316	EA	1
69317	120	1100	4.30	1	CWSE	1/2 x 2-5/8	2 5/8	SP	Sleeve	Open	97009317 99080267	EA	1



69316

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTA.	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BEAR.	ENCL.	DIRECT REPLACE. FOR	NOTES	UOM	OM
40752	1/40	120	1500	1.30	1	CCWSE	1/4 x 1-7/16	2-1/8	SP	Sleeve	Open	97009752 99080096 99080345	512	EA	1
82152	1/20	120	1550	1.8	1	CWLE	1-3/4 x 5/16 x 1-3/4	3	SP	Sleeve	Open	99080152	42	EA	1
D1087	1/12	115	1050	2.90	1	CW	1/2 x 2-1/3	2-5/8	SP	Sleeve	Open	99080178 7151-3160	—	EA	1



69316

Notes: **42.** Includes Cord and Plug **485.** Includes two prong plug **491.** Has a flatted shaft **513.** Special plug and cord attached

Burnham - OEM - Draft Inducers

CATALOG NO.	VOLTS	RPM	AMPS	SPEEDS	TYPE	BEARINGS	ENCL.	HERTZ	OVERLOAD	INCLUDES	DIRECT REPLACEMENT FOR	UOM	OM
66056	115	3400	0.48	1	PSC	Ball	Open	60	Automatic	Gasket	6116056	EA	1



66056

DIRECT REPLACEMENTS FOR CONT'D

Carrier - OEM - Draft Inducers, Motors and Blower Wheels

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BRG	DIRECT REPLACEMENT FOR	UOM	OM
65230	28 Watts	208-230	3000	0.80	1	CWSE	—	—	SP	Ball	HC24HE230	EA	1



65230

CATALOG NO.	WATTS	VOLTS	RPM	AMPS	SPEEDS	ROT	TYPE	BEARINGS	HERTZ	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
66755	40	115	3300	0.86	1	CWSE	PSC	Ball	60	Automatic	309868-755	EA	1
66756	58	115	3300	0.85	1	CWSE	PSC	Ball	60	Automatic	320725-756	EA	1
66757	58	115	3300	0.85	1	CWSE	PSC	Ball	60	Automatic	320725-757	EA	1
66758	78	115	3400	1.15	1	CWSE	PSC	Ball	60	Automatic	320725-758	EA	1



66756

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	TYPE	BEARINGS	HZ	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
66761	8.2 MHP	115	3000	0.63/0.3	2	CWSE	Shaded Pole	Ball	60	Automatic	326628-761	EA	1
66762	16 MHP	115	3000	1.06/0.28	2	CWSE	Shaded Pole	Ball	60	Automatic	326628-762	EA	1
66763	28 MHP	115	3000	1.32/0.39	2	CWSE	Shaded Pole	Ball	60	Automatic	326628-763	EA	1



66762

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BEARINGS	DIRECT REPLACEMENT FOR	UOM	OM
65569	25 MHP	115	3300	1.80	1	CWSE	1 x 5/16 x 1-7/8	3-3/8	SP	Ball	HC21ZE117B 318984-753	EA	1
65570	25 MHP	230	3000	0.80	1	CWSE	1 x 5/16 x 1-7/8	3-5/8	SP	Ball	HC24HE230	EA	1



65569

Notes: Includes motor, 2 speed plug, cooling fan, blower wheel, mounting bracket, screws & grommets

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	TYPE	BEARINGS	DIRECT REPLACEMENT FOR	UOM	OM
66649	1/16	208-230	3450	0.48	1	CCWSE	PSC	Ball	48GS400106 48GS400649 50DK406815 HC30GB232	EA	1



66649

DIRECT REPLACEMENTS FOR CONT'D

Carrier - OEM - Draft Inducers, Motors and Blower Wheels

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	TYPE	BEARINGS	ENCL.	HZ	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
66815	1/16	208-230	3450	0.48	1	PSC	Ball	Open	60	Automatic	50DK406181	EA	1
66816	1/16	460	3450	0.25	1	PSC	Ball	Open	60	Automatic	50DK406182	EA	1

Notes: **66815 -** 4 MFD/370 capacitor required **66816 -** Includes gasket



66815

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BEARINGS	DIRECT REPLACEMENT FOR	UOM	OM
D1184	1/16	460	3450	0.30	1	CCWSE	5/16 x 3.30	4-3/4	PSC	Ball	HC30GB460 HC30GB462 JF1H091 JF1H101	EA	1
D1182	1/16	208-230	3450	0.57	1	CCWSE	5/16 x 3.30	4-1/2	PSC	Ball	HG30GB230 HG30GB232 JF1H012 JF1H092	EA	1



D1182

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BEARINGS	DIRECT REPLACEMENT FOR	UOM	OM
82180	1/20	115	3300	1.54	1	CCWLE	5/16 x 2-1/8	3-5/8	SP	Sleeve	JA1P053 P251-2307	EA	1



82180

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	TYPE	BEARINGS	ENCL.	HZ	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
66743	1/24	115	3000	1.5	1	Shaded Pole	Sleeve	Open	60	Automatic	D9868602	EA	1



66743

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BEARINGS	DIRECT REPLACEMENT FOR	UOM	OM
65118	1/30	115	2800/2500	1.80/0.60	2	CCWLE	3/4 x 5/16 x 1-5/8	2-3/4	SP	Ball	HC21ZE118	EA	1
82121	1/33	115	3000	1.10	1	CCWLE	5/16 x 2-1/8	3-3/8	SP	Sleeve	JA1M086 P251-2916	EA	1
65123*	1/40	115	3000	1.50	1	CCWLE	3/4 x 5/16 x 1-1/8	2.54	SP	Ball	HC21ZE123A	EA	1

***Notes:** Stack size 1-1/2 inch



65118

DIRECT REPLACEMENTS FOR CONT'D

Carrier - OEM - Draft Inducers, Motors and Blower Wheels

CATALOG NO.	BORE (IN.)	DIAM. (IN.)	WIDTH	DIRECT REPLACEMENT FOR	UOM	OM
A65048BW	5/16	3.82	1-5/8	LA11XA048	EA	1



A65048BW

CATALOG NO.	RPM	VOLTS	FRAME	MODEL NO.	F.L. AMPS	WEIGHT (LBS.)	FRAME LENGTH (IN.)	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	DIRECT REPLACEMENT FOR	UOM	OM
X235	1140	200-230/460	56Y	56T11D5209	6.6-6.0/3.0	36	10-1/2	5/8 x 2-7/8	11.92	Carrier HD52VE214 Marathon 56T11D33	EA	1



X235

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BEAR.	DIRECT REPLACEMENT FOR	UOM	OM
82520	1/15	115/230	3000	2.00/1.00	1	CWSE	1/4 x 2	6	SP	Ball	HC24AU600 HC24AU600B HC24AO701 HC24AU231 HC24AU701 HC30GU208A HC30GU209A HC680001	EA	1
40230	1/8	208-230	1125	0.90	1	CCWSE	1/2 x 4-3/8	3-3/4	PSC	Ball	HC35VE230	EA	1
D847	1/8	208-230	1125	0.90	1	CCWSE	1/2 x 3-1/2	3-3/4	PSC	Sleeve	HC35VE230	EA	1
82210	1/3	208-230	1625	1.80	1	CCWLE	5-5/8 x 1/2 x 5-5/8	4-1/4	PSC	Ball	HC41FB666	EA	1
3S047	1/4	208-230	1100	1.4	1	CW	1/2 x 3	4.3	PSC	Ball	HC39GE226 5KCP39FGY563S 5KCP39FGU997AS	EA	1



40230

CATALOG NO.	HP	RPM	VOLTS	AMPS	SPEEDS	BEARINGS	HZ	ROTATION	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	DIRECT REPLACEMENT FOR	UOM	OM
43405	1/6	1500	208-230	0.9	1	Ball	60	CCWSE	1/2 x 1-3/4	4.25	HC33GE208 OCA1014	EA	1



43405

CATALOG NO.	VOLTS	RPM	AMPS	ROTATION	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BEARINGS	DIRECT REPLACEMENT FOR	UOM	OM
82113	115	1075	11.0	CWSE	1/2 x 2-7/8	5-3/8	PSC	Ball	HC45TE113 5KCP39PGV623CS	EA	1



82113

NOTE: Item numbers in **RED** indicate **Made in the U.S.A.**

DIRECT REPLACEMENTS FOR CONT'D

Coleman Evcon - OEM - Motors and Draft Inducers

CATALOG NO.	STACK SIZE (IN.)	HP	VOLTS	RPM	AMPS	SPEEDS	ROTA.	SHAFT DIM. (IN.)	TYPE	BEARINGS	ENCL.	DIRECT REPLACEMENT FOR	UOM	OM
K629	1	1/85	115	2950	0.67	1	CW	1/4 x 1-1/8	SP	Sleeve	Open	7990-317P 7102-2187	EA	1



K629

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	ENCL.	DIRECT REPLACEMENT FOR	UOM	OM
65475	1/150	115	3315	0.4	1	CCWSE	SP	Ball	—	373-19801-820 373-19801-821	EA	1
A156	1/35	115	3000	1.1	1	CW	SP	Sleeve	Open	7021-10882 7021-8935 2702321P	EA	1
A088	1/25	115	3200	1.3	1	CW	SP	Sleeve	Open	7021-10267 7021-9908 D6868608 7021-5478	EA	1



65475



A156

Consolidated Ind. - OEM - Draft Inducers

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	DIA. (IN.)	DIRECT REPLACEMENT FOR	UOM	OM
A128	1/50	120	3000	0.9	1	CW	SP	Sleeve	3.3	7021-10271 7021-6376 7021-9404 302065	EA	1
82570	1/33	115	3300	0.9	1	CWSE	SP	Sleeve	3.3	401570 JA1P082	EA	1



A128

Copeland - OEM - Motors

CATALOG NO.	WATTS	VOLTS	RPM	AMPS	SPEEDS	ROTA.	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BEAR.	ENCL.	HZ	DIRECT REPLACEMENT FOR	UOM	OM
15020	35	115	1500	1.40	1	CWLE	1/4 x 1/2	3-3/8	SP	Unit	TE	60	050-0267-0	EA	1
65020	35	115	1500	1.40	1	CWLE	1/4 x 1/2	3-3/8	SP	Unit	TE	50/60	050-0267-0	EA	1
15040	50	115	1500	1.70	1	CWLE	3/8 x 1-1/2	3-5/8	SP	Unit	Semi	60	050-0244-01	EA	1
15041	50	230	1500	0.85	1	CWLE	3/8 x 1-1/2	3-5/8	SP	Unit	Semi	60	050-0244-00	EA	1



15020

CATALOG NO.	VOLTS	RPM	AMPS	ROTA.	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BEAR.	ENCL.	DIA (IN.)	HZ	DIRECT REPLACEMENT FOR	UOM	OM
40251	208-230	1550	1.10	CCWSE	1/2 x 3	4	PSC	Sleeve	Open	5-5/8	50/60	998-0251-00 050-0251-00 K55HSJNG-2974	EA	1
40265	208-230	1550	1.10	REV.	1/2 x 3	3-1/2	PSC	Sleeve	Open	5-5/8	50/60	050-0265-00 950-0265-00 K55HXPGP-5104	EA	1
40250	208-230	1625	1.50	CCWSE	1/2 x 3 Dbl Flat	4-1/4	PSC	Sleeve	Open	5-5/8	50/60	950-0250-00 050-0250-00 K55HXJZJ-3126	EA	1



40251

DIRECT REPLACEMENTS FOR CONT'D

Copeland - OEM - Motors



15045

CATALOG NO.	WATTS	VOLTS	RPM	AMPS	ROTA.	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BEAR.	ENCL.	HZ	DIRECT REPLACEMENT FOR	UOM	OM
15045	50	230	1500	0.85	CCWLE	5/16 x 2-1/2	3-3/4	SP	Unit	Open	60	050-0264-0	EA	1
15049*	50	208-230	1500	0.85	CWLE	3/8 x 1-1/2	3-3/4	SP	Unit	Semi	50/60	050-0244-00	EA	1
15460	50	460	1500	0.44	CWLE	3/8 x 1-1/2	3-5/8	SP	Unit	Semi	60	050-0244-02	EA	1
15461	50	460	1500	0.44	CCWLE	5/16 x 2	3-5/8	SP	Sleeve	Open	60	050-0264-03	EA	1
15116	50	115	1500	1.70	CWLE	1/4-20 x .4	4.18	SP	Unit	Open	60	0344-01 050-0344-01 950-0344-01	EA	1
15126	50	208-230	1500	0.85	CWLE	1/4-20 x .4	4.18	SP	Unit	Open	60	0344-10 050-0344-10 950-0344-10	EA	1
15146	50	460	1500	0.44	CWLE	1/4-20 x .4	4.18	SP	Unit	Open	60	0344-03 05-0344-03 950-0344-03	EA	1
65040	50	115	1500	1.70	CWLE	3/8 x 1-1/2	3 5/8	SP	Unit	Semi	50/60	050-0244-01	EA	1
65041	50	230	1500	0.85	CWLE	3/8 x 1-1/2	3 5/8	SP	Unit	Semi	50/60	050-0244-00	EA	1
65045	50	230	1500	0.85	CCWLE	5/16 x 2	4	SP	Unit	Open	50/60	050-0264-0	EA	1

***Notes:** May be used on 208 volt applications.



OCP0108

CATALOG NO.	VOLTS	RPM	AMPS	SPEEDS	ROTA.	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BEAR.	ENCL.	DIA. (IN.)	HZ	DIRECT REPLACEMENT FOR	UOM	OM
OCP0108	208-230	1625	2.6	1	CWLE	1/2 x 2-1/4	5-3/4	PSC	Ball	TE	5-3/5	50/60	050-0108-00 050-0018-00	EA	1

Delfield - OEM - Motor Kits



65514

CATALOG NO.	STACK SIZE (IN.)	VOLTS	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIM. (IN.)	TYPE	BEARINGS	ENCL.	HZ	DIRECT REPLACEMENT FOR	UOM	OM
65514	5/8	120	3000	0.44	1	CWSE	3/16 x 3/4	SP	Sleeve	Open	60	1175-10-4439	EA	1

DIRECT REPLACEMENTS FOR CONT'D

Dunkirk - OEM - Draft Inducers

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	TYPE	BEARINGS	ENCL.	HERTZ	DIRECT REPLACEMENT FOR	UOM	OM
82052	1/50	115	3000	1.00	1	SP	Sleeve	Open	60	433-00-510 98E6101	EA	1



82052

Fedders - OEM - Motors

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	ENCL.	HERTZ	DIRECT REPLACEMENT FOR	UOM	OM
40188	1/20	208-230	1500	0.9	1	CWSE	SP	Sleeve	Open	60	S196-00047-002 S196-00047-003	EA	1



40188

First Company - OEM - Motors and Blower Wheel

CATALOG NO.	HP	Volts	RPM	Amps	Speeds	Rot	Shaft Dim. (In.)	Length Less Shaft (In.)	Type	Bearings	Encl.	Dia. (In.)	Direct Replacement For	UOM	OM
D236	1/10-1/15-1/25	115	1550	3.50-2.40-1.80	3	DS	7-1/2 x 1/2 x 7-1/2	3 3/8	SP	Sleeve	Open	4.4	SD-110021	EA	1
D258*	1/5-1/10	208-230	1550	2.80-1.30	2	CCWLE	8 x 1/2 x 8	3-3/8	PSC	Sleeve	Open	5	M10	EA	1
80010	1/4	208-230	1625	1.65	2	CCWLE	7-1/4 x 1/2 x 7-1/4	4-1/2	PSC	Ball	Open	5-5/8	M10	EA	1
82201	1/4	208-230	1125	1.5	1	CCWSE	1/2 x 7-1/2	4-3/8	PSC	Ball	Open	5-5/8	M201B	EA	1

***Notes:** 5M 370V capacitor included and also comes with 2-1/2" O.D. rubber mounting rings



D236

CATALOG NO.	DIAM. (IN.)	WIDTH (IN.)	ROTATION	BORE (IN.)	MATERIAL	DIRECT REPLACEMENT FOR	UOM	OM
A60200BW	7-11/16	8	CW	1/2	Galvanized Steel	W200	EA	1

Notes: Can be used with motor 82201



A60200BW

Franklin - OEM - Draft Inducers

CATALOG NO.	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	ENCL.	DIAM.	DIRECT REPLACEMENT FOR	UOM	OM
B23617	115/230	3000	0.9/0.45	1	CCW	SP	Sleeve	Open	3.3	303875 7021-10288 7021-5703	EA	1



B23617

DIRECT REPLACEMENTS FOR CONT'D

General Electric - OEM - Motors

CATALOG NO.	STACK SIZE (IN.)	VOLTS	RPM	AMPS	SPEEDS	ROT	SHAFT DIM. (IN.)	TYPE	BEARINGS	ENCL.	DIRECT REPLACEMENT FOR	UOM	OM
65685	1	120	3000/ 1550	0.90	2	CWSE	3/16 x 1-5/8	SP	Sleeve	Open	WB26X45	EA	1



65685

CATALOG NO.	WATTS	VOLTS	RPM	AMPS	SPEEDS	ROT	SHAFT DIM. (IN.)	TYPE	BEAR	ENCL.	HERTZ	DIRECT REPLACEMENT FOR	UOM	OM
65017	9	115	1550	0.55	1	CWLE	1/4 x 1/2	SP	Unit	TE	50/60	5KSM81FFL17	EA	1
65018	5	115	1550	0.34	1	CWLE	1/4 x 1/2	SP	Unit	TE	50/60	5KSM81FFL18	EA	1



65017

CATALOG NO.	VOLTS	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIM. (IN.)	TYPE	BRG	DIA (IN.)	ENCL.	HZ	DIRECT REPLACEMENT FOR	UOM	OM
OTR4513	208-240	1550	0.80-0.90	1	CCWLE	1/2 x 3-1/8	PSC	Sleeve	5	TE	60	5KSP29DK1728S	EA	1
41728	230	1550	1.10	1	CWSE	1/2 x 3	PSC	Sleeve	5	ODP	60/50	5KSP29DK1728S WW94X936PSC	EA	1
D1050FM	230	1550	1.10	1	CW	1/2 x 3	PSC	Sleeve	5	Open	60	5KSP29DK1728S	EA	1



OTR4513

Goodman - OEM - Draft Inducers

CATALOG NO.	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	ENCL.	DIA. (IN.)	DIRECT REPLACEMENT FOR	UOM	OM
48331*	115	3200	1.80	1	CWLE	SP	Ball	Open	C-Frame	5KSB46GF0001S B4833000	EA	1
66003	115	3250	0.92	1	CCWLE	PSC	Ball	Open	3.3	098862-1 11009001 11009003	EA	1
66071**	115	3000	2.80	1	CWLE	SP	Ball	Open	C-Frame	071M00000 22307501S 20190601	EA	1



48331

Notes: *Includes rubber boot **Stack size 1-1/2 inch

DIRECT REPLACEMENTS FOR CONT'D

Goodman - OEM - Draft Inducers

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	TYPE	BEARING	ENCL.	DIA. (IN.)	DIRECT REPLACEMENT FOR	UOM	OM
82483	1/50	115	3000	0.90	1	CWLE	SP	Ball	Open	3.3	B1859000 B1859000S	EA	1
A079	1/50	115	3000	1.10	1	CCW	SP	Sleeve	TE	3.3	B1859000 74-70-21964-03-01 7021-6804	EA	1
A140	1/50	115	3400	1.40	1	CW	SP	Sleeve	Open	3.3	B2833001S B2833001 7021-9000 7021-9087 FB-RFB140	EA	1
66121	1/50	230	3000	0.22	1	CCWSE	PSC	Ball	Open	3	0131M00121P 0131M00121S	EA	1
A162	1/50	208-230	3000	0.50	1	CCW	SP	Sleeve	Open	3.3	B295900 7021-8656	EA	1



A140

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	TYPE	BEARINGS	ENCL.	DIA. (IN.)	DIRECT REPLACEMENT FOR	UOM	OM
A285	1/40	115	3250	1.4	2	CW	SP	Sleeve	Open	3.3	B2833002 7021-9236	EA	1
66002	1/35	115	3000	1.2	1	CWLE	SP	Ball	Open	C-Frame	0131M00002P 0131M00002S	EA	1
A157	1/35	115	3000	1.3	1	CCW	SP	Sleeve	Open	C-Frame	7002-2307	EA	1
A182	1/35	115	3125	1.20	1	CCW	SP	Sleeve	Open	C-Frame	B4059000 7002-3036	EA	1
A184	1/35	115	3125	1.55	1	CCW	SP	Ball	Open	C-Frame	B4059001 7058-0229	EA	1
66005	1/30	115	3000	1.60	1	CWLE	SP	Ball	Open	C-Frame	B1859005 J238-11128	EA	1
66590	1/30	115	3000	1.50	1	CWLE	SP	Ball	Open	C-Frame	B4059000 J238-112-11195	EA	1
A181	1/30	115	3192	1.5	1	CW	SP	Ball	Open	C-Frame	20044403 7058-0136	EA	1



66002

DIRECT REPLACEMENTS FOR CONT'D

Goodman - OEM - Draft Inducers

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	TYPE	BEARINGS	ENCL.	DIA. (IN.)	DIRECT REPLACEMENT FOR	UOM	OM
A284	1/30	208/240	3000	0.59/ 0.5	1	CW	SP	Sleeve	Open	3.3	D9886202 7021-9227	EA	1
A189	1/24	115	3000	1.5	1	CW	SP	Sleeve	Open	3.3	D9868620 7021-7302	EA	1
A290	1/20	115	3200/ 2400	0.7	2	CCW	PSC	Ball	Open	3.3	20245903 7062-5015	EA	1
A188	1/18	115	3250	1.6	1	CW	SP	Sleeve	Open	3.3	B4833000 7021-10958	EA	1



A290

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	ENCL.	DIRECT REPLACEMENT FOR	CAP. REQ.	UOM	OM
OGD1016	1/6	208-230	1075	1.00	1	CCWLE	PSC	Sleeve	Open	B13400-251	5M/ 370V	EA	1
OGD1026	1/4	208-230	1075	1.50	1	CCWLE	PSC	Sleeve	Open	B13400-247	5M/ 370V	EA	1



OGD1016

Greenheck - OEM - Motors

CATALOG NO.	VOLTS	RPM	AMPS	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	BRG	DIA.	ENCL.	MOUNTING	TYPE	DIRECT REPLACEMENT FOR	UOM	OM
90145	115	950	1.15	CWSE	5/16 x 2-5/8	2-3/4	Sleeve	3.3	OAO	Stud	SP	310145	EA	1
90198	115	1050	1.80	CWSE	5/16 x 2-5/8	3	Sleeve	3.3	OAO	Stud	SP	310198	EA	1



90145

CATALOG NO.	WATT	VOLTS	RPM	AMPS	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	BRG	DIA.	ENCL	MOUNT	TYPE	DIRECT REPLACEMENT FOR	UOM	OM
90955	5	115	700	0.19	CWSE	5/16 x 2-3/4	2-1/2	Ball	3.3	TEAO	Stud	PSC	314955	EA	1
90038	3	115	675	0.15	CWSE	5/16 x 2-3/4	2-1/2	Ball	3.3	TEAO	Stud	PSC	315038	EA	1



90955

CATALOG NO.	VOLTS	RPM	AMPS	SPEEDS	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BRG	DIA. (IN.)	MOUNT	DIRECT REPLACEMENT FOR	UOM	OM
90318	115	1550/ 1300/ 1050	2.60	3	CCWSE	1/2 x 2-3/4	3 5/8	PSC Cap Incl.	Ball	5.12	Thru Bolt	308318	EA	1



90318

CATALOG NO.	RPM	VOLTS	FRAME	MODEL NO.	F.L. AMPS	WT (LBS.)	FRAME LENGTH (IN.)	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	DIRECT REPLACEMENT FOR	UOM	OM
X261	825	115	48Y	48A8O151	2.1	13	5-1/2	1/2 x 2-1/2	7.59	300008	EA	1
X260	1140	115	48Y	48A11O251	2.2	13	5-1/4	1/2 x 2-1/2	7.34	300010	EA	1



X261

CATALOG NO.	VOLTS	RPM	AMPS	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	BRG	DIA.	ENCL	MOUNTING	TYPE	DIRECT REPLACEMENT FOR	UOM	OM
90153	115	1725	4.60	CCWLE	1/2 x 2	7 5/8	Ball	5.69	ODP	Stud	Split Phase	309153	EA	1



90153

NOTE: Item numbers in **RED** indicate **Made in the U.S.A.**

DIRECT REPLACEMENTS FOR CONT'D

Heatcraft - Bohn - Larkin - OEM - Motors

CATALOG NO.	STACK SIZE (IN.)	VOLTS	RPM	AMPS	ROT	SHAFT DIM. (IN.)	TYPE	BRG	ENCL.	DIRECT REPLACEMENT FOR	NOTES	UOM	OM
65691	5/8	120	3000	0.64	CWSE	0.181 x 1-5/16	SP	Sleeve	Open	5007S 5018S 5036F	354 472 474	EA	1
65692	5/8	240	3000	0.26	CWSE	0.181 x 1-5/16	SP	Sleeve	Open	5007 5018T 5036G	354 472 474	EA	1



65691

CATALOG NO.	VOLTS	RPM	AMPS	ROT	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BRG	ENCL.	DIRECT REPLACEMENT FOR	NOTES	UOM	OM
41101B	115	1500	1.90	CCWSE	5/16 x 2-1/4	2-3/4	SP	Ball	Open	253-1194	329, 500	EA	1
41103B	208-230	1500	0.93	CCWSE	5/16 x 2-1/4	2-7/8	SP	Ball	Open	253-1195	329, 500	EA	1
41194	115	1550	1.90	CCWSE	5/16 x 2-1/2	2-5/8	SP	Sleeve	Open	253-1194	463	EA	1
41195	208-230	1550	0.89	CCWSE	5/16 x 2-1/2	2-7/8	SP	Sleeve	Open	253-1195	463	EA	1
45036	115	1550	2.10	CWSE	5/16 x 2-1/2	3	SP	Sleeve	Open	5036-SS	500	EA	1
D1101	115	1500	1.90	CCW	5/16 x 2-1/4	2 3/4	SP	Sleeve	Open	253-1194	—	EA	1
D1103	208-230	1500	1.15	CCW	5/16 x 2-1/4	3	SP	Sleeve	Open	253-1195	—	EA	1
D1124	115	1550	2.10	CW	5/16 x 3	3	SP	Sleeve	Open	5008S 5KSM59JSK143S	500	EA	1



D1101

CATALOG NO.	VOLTS	RPM	AMPS	ROT	SHAFT DIM (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BRG	ENCL.	DIRECT REPLACEMENT FOR	NOTES	UOM	OM
35100	115	1550	1.30	CWOSE	5/16 x 2-5/8	4-1/8	ECM	Ball	TE	253-1194	500	EA	1
35101	115	1550	1.30	CCWOSE	5/16 x 2-5/8	4-1/8	ECM	Ball	TE	5008S	500	EA	1
35201	208-230	1550	0.80	CCWOSE	5/16 x 2-5/8	4-1/8	ECM	Ball	TE	5008T	500	EA	1



35101

Notes: **329.** Motor has 4 studs on both ends **472.** Includes stand offs for other Bohn applications **354.** Impedence protected **474.** Used in Bohn commercial evaporators **463.** Identical Bolt Pattern of Larkin **500.** Includes cord and Lyall plug

DIRECT REPLACEMENTS FOR CONT'D

Heatcraft - Bohn - Larkin - OEM - Motors

CATALOG NO.	VOLTS	RPM	AMPS	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BRG	ENCL.	DIRECT REPLACEMENT FOR	NOTES	UOM	OM
41124B	120	1550	2.00	CWSE	5/16 x 3	3-1/2	SP	Ball	Open	5008S	329 500 551	EA	1
41126B	208-230	1550	1.10	CWSE	5/16 x 3	3-1/2	SP	Ball	Open	5008T 5034L	329 500	EA	1
45008SB	115	1550	1.80	CWSE	5/16 x 3	3	SP	Ball	Open	5008S 5034LS	499 500	EA	1
45008TB	208/ 230	1550	1.20- 1.00	CWSE	5/16 x 3	3-1/2	SP	Ball	Open	5008T 5034MS	499 500	EA	1
D1126	230	1550	1.10	CW	5/16 x 3	3-1/2	SP	Sleeve	Open	5008T 5KSM59LS2262AS	500	EA	1
97701	230	1625	0.70	CWSE	5/16 x 2.95	2.85	ECM	Ball	TE	22617701 22617901 25307701 25307901	500 499	EA	1
97801	120	1625	1.20	CWSE	5/16 x 2.95	2.85	ECM	Ball	TE	22617801 22618001 25307801 25308001	500 499	EA	1
9721	115/ 208-230	1550	1.10/ 0.50	Rev.	5/16 x 3 1/4	3-5/8	PSC	Ball	Open	7071061 25309101	189 498 500	EA	1
41125B	208-230	1550/ 1400	0.50	CCWSE	5/16 x 2 5/8	3-1/2	PSC	Ball	Open	5008T	304 500	EA	1
D1125	208-230	1550	0.40	CCW	5/16 x 2 5/8	3-3/4	PSC	Sleeve	Open	7190-0442	42 304	EA	1
49101	115/ 208-230	1550/ 1400	1.10/ 0.50	Rev.	5/16 x 3 1/8	3-5/8	PSC	Ball	Open	7071061 25309101	189 304 498 499 500	EA	1



41124B



97801



49101

Notes: **42.** Includes cord and plug **189.** Includes reversing plug **304.** Run capacitor mounted on motor shell **329.** Motor has 4 studs on both ends **498.** 50/60 Hertz **499.** Identical bolt pattern as OEM motor **500.** Includes cord and Lyall plug **551.** Low temperature oil

Heil-Quaker - OEM - Draft Inducer

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEAR.	ENCL.	HZ	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
A064	1/55	115	3150	0.70	1	CW	SP	Sleeve	Open	60	Automatic	5C085 610672 608971	EA	1



A064

Herman Nelson - OEM - Motors

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTA.	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BEAR.	DIA. (IN.)	DIRECT REPLACEMENT FOR	UOM	OM
D827	1/8	115	700	2.50	1	CCW	1/2 x 2	5-1/2	PSC	Ball	5-5/8	7-150444-02	EA	1



D827

NOTE: Item numbers in **RED** indicate **Made in the U.S.A.**

DIRECT REPLACEMENTS FOR CONT'D

Hill - OEM - Motors

CATALOG NO.	WATTS	VOLTS	RPM	AMPS	ROTA.	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	ENCL.	HERTZ	MOUNTING	DIRECT REPLACEMENT FOR	UOM	OM
65119	5	115	1550	0.34	CWLE	1/4 x 1/2	2-3/8	TE	50/60	Double Foot Pads	PP7577M	EA	1

Notes: Includes straight Lyall plug, low temperature oil



65119

Huebsch - OEM - Motors

CATALOG NO.	HP	RPM	VOLTS	FRAME	MODEL NO.	F.L. AMPS	WT (LBS.)	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	UOM	OM
X602	1/2	1725	115/208-230	56Z	56C17D2102	8.0/4.0-4.0	24	5/8 x 5-5/8	9.85	EA	1
X603	3/4	1725	115/208-230	56Z	56C17D5346	12.0/5.8-6.0	29	3/4 x 5-5/8	9.47	EA	1

Notes: Fixed CCW Rotation, viewing opposite shaft (or lead end) of motor.
Replacements listed may not be an exact duplicate of the original motor.



X602

Hussmann - OEM - Motors

CATALOG NO.	WATTS	VOLTS	RPM	AMPS	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BEAR.	ENCL.	MOUNT	DIRECT REPLACEMENT FOR	UOM	OM
65133*	9	115	1550	0.50	CWLE	1/4 x 1/2	2-1/2	SP	Unit	TE	Single Foot Pad	58698	EA	1
61103*	12	115	1550	0.62	CWLE	1/4 x 1/2	2-11/16	SP	Unit	TE	No Foot Pad	0047000 441-103 0440421 125-01-0615A	EA	1
15546	12	115	1550	0.30	CWLE	1/4-20 x .425	3.13	ECM	Unit	TE	Rear Mount	0477655 4410546	EA	1
15547	13	115	1725	0.30	CWLE	1/4-20 x .425	3.13	ECM	Unit	TE	Rear Mount	0477656 4410547	EA	1

Notes: *Includes straight Lyall plug, Low Temp. Oil



15547

Ice-O-Matic - OEM - Motors

CATALOG NO.	WATTS	VOLTS	RPM	AMPS	ROTATION	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	ENCL.	MOUNTING	HERTZ	DIRECT REPLACEMENT FOR	UOM	OM
15020	35	115	1500	1.40	CWLE	1/4 x 1/2	3-3/8	TE	Double Foot Pads	60	9161078-01	EA	1
15021	35	230	1500	0.70	CWLE	1/4 x 1/2	3-3/8	TE	Double Foot Pads	60	9161078-03 309316-000	EA	1
65020	35	115	1500	1.40	CWLE	1/4 x 1/2	3-3/8	TE	Double Foot Pads	50/60	9161078-01	EA	1
65021	35	230	1500	0.70	CWLE	1/4 x 1/2	3-3/8	TE	Double Foot Pads	50/60	9161078-03 309316-000	EA	1
15041	50	230	1500	0.85	CWLE	3/8 x 1-1/2	3-5/8	Semi Encl.	Double Foot Pads	60	319357-000	EA	1
65041	50	230	1500	0.85	CWLE	3/8 x 1-1/2	3-5/8	Semi Encl.	Double Foot Pads	50/60	319357-000	EA	1



65041

DIRECT REPLACEMENTS FOR CONT'D

ICP - OEM - Draft Inducers



66833

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BRG	ENCL.	DIRECT REPLACEMENT FOR	UOM	OM
66833	28 MHP	115	3000	1.60	1	CWSE	SP	Ball	Open	1010324 1010238P 1013833 4MH28 1010975	EA	1
66338	50 MHP	115	3000	2.40	1	CWSE	SP	Ball	TE	1012002 1013388A 1014338 1013188	EA	1
A174	1/100	115	2350	0.8	1	CW	SP	Sleeve	Open	1010239 7021-9188	EA	1
A301	1/100	115	2350	0.8	1	CW	SP	Sleeve	Open	1010239 1094073	EA	1
A151	1/90	230	2800	0.3	1	CW	SP	Sleeve	Open	1050144 1170870 4MH40 7021-10287	EA	1
A141	1/60	115	2800	1	1	CW	SP	Ball	Open	1094073 1094074 4MH33 7021-10280 7021-8741 7021-8742	EA	1
A179	1/60	115	3300	0.9	1	CW	SP	Sleeve	Open	1006168P 7021-8693	EA	1
A051	1/60	115	3000	1.6	1	CW	SP	Ball	Open	1013833 J238-1393	EA	1
82672	1/60	115	3300	0.90	1	CWSE	SP	Sleeve	Open	1006168 1006168P 7021-8693	EA	1
A148	1/50	208-230	3000	0.50	1	CCW	SP	Sleeve	Open	1054268P 7021-7617 7021-9237 HQ1054268FA	EA	1
66254	1/50	230	3000	0.30	1	CCWLE	PSC	Ball	Open	1110008 1085571 1085571P 7021-10048 7021-10580 119254-00	EA	1
A175	1/40	115	3300	1.0	1	CCW	SP	Sleeve	Open	1708600 7002-1891	EA	1
66529	1/35	115	3000	1.50	1	CCWSE	SP	Ball	—	100011645 10011645 10011945 1014433 1014529	EA	1
A172	1/35	115	3000	1.60	1	CW	SP	Ball	—	1010975 1010975P	EA	1
A178	1/30	115	3400	1.8	1	CW	SP	Ball	Open	1012002 1013188	EA	1

DIRECT REPLACEMENTS FOR CONT'D

ICP - OEM - Draft Inducers



A170

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	TYPE	BRG	ENCL.	DIRECT REPLACEMENT FOR	UOM	OM
82148	1/30	208-230	3000	0.16	1	CCWSE	PSC	Ball	Open	1054268P 1054268 HQ1054268FA	EA	1
A134	1/25	115	3060	1.50	1	CW	SP	Sleeve	Open	1010238P 1010324 1708-607 1708-607P R7-RFB134 7021-7700 7021-8735 7021-8736 7021-9335	EA	1
A176	1/25	115	3100	2.2	1	CW	SP	Ball	—	1011899 7002-2946	EA	1
66350	1/25	115	3350	0.92	1	CCWSE	PSC	Ball	Open	1000814 1001371 1001609 1002543 1007360 1011350 1150474 HQ1011350	EA	1
A170	1/25	115	3400	2.30	1	CCW	SP	Ball	Open	1010312 1010526 1010928 1011095 1011097 1011409 1164280	EA	1
A145	1/25	115	3450	0.7	1	CCW	PSC	Ball	Open	1008695 4MH47 7021-10299 7062-4061	EA	1




A169

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	TYPE	BEARINGS	ENCL.	DIRECT REPLACEMENT FOR	UOM	OM
A171	1/25	115	3450	0.70	1	CCW	PSC	Ball	Open	1010491 1010527P 1011096 1011410	EA	1
A169	1/25	230	2800	0.75	1	CW	SP	Sleeve	Open	1010008 1085571 1110008 7021-10048 7021-10580	EA	1
A307	1/24	115	3450	0.7	1	CW	PSC	Sleeve	Open	7062-5165 1149097 7062-3794 1008416P	EA	1
A067	1/20	115	3000	2.6	1	CW	SP	Ball	Open	1014338 119225-00	EA	1
A173	1/18	115	3450	0.80	1	CCW	PSC	Ball	Open	1011350 HQ1011350 HQ1011350FA R7-RFB350	EA	1

DIRECT REPLACEMENTS FOR CONT'D

IEC - OEM - Motors

CATALOG NO.	HP	VOLTS	RPM	AMPS	TYPE	SPEEDS	ROT	SHAFT DIM. (IN.)	BRG	DIA. (IN.)	A DIM.	DIRECT REPLACEMENT FOR	UOM	OM
D1048	1/20	277	1075	0.5	PSC	3	CW	1/2 x 7-1/4	Sleeve	5	3-7/8	5KCP29FK8132S S89205	EA	1
D1059	1/6	115-127	1450	2.3	PSC	3	DS	8-3/4 x 1/2 x 9	Sleeve	5	3-1/3	5KCP29DK8384S S89208	EA	1



D1048



D1059

Notes: A Dim. equals depth of the motor housing

IMI Cornelius - OEM - Motors

CATALOG NO.	WATTS	VOLTS	RPM	AMPS	ROTA.	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	ENCL.	MOUNT	HERTZ	DIRECT REPLACEMENT FOR	UOM	OM
15050	50	115	1500	1.70	CWLE	5/16 x 3	3-7/8	Open	—	60	ESPOL50EM1B1 134350000	EA	1
15041	50	230	1500	0.85	CWLE	3/8 x 1-1/2	3-5/8	Semi	Double Foot Pads	60	319357-000	EA	1
65041	50	230	1500	0.85	CWLE	3/8 x 1-1/2	3-5/8	Semi	Double Foot Pads	50/60	319357-000	EA	1
15021	35	230	1500	0.70	CWLE	1/4 x 1/2	3-3/8	TE	Double Foot Pads	60	9161078-03 309316-000	EA	1
65021	35	230	1500	0.70	CWLE	1/4 x 1/2	3-3/8	TE	Double Foot Pads	50/60	9161078-03 309316-000	EA	1



65041

Johnson Furnace - OEM - Draft Inducers and Motors

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTA.	TYPE	BEARINGS	ENCL.	DIA. (IN.)	DIRECT REPLACEMENT FOR	UOM	OM
80280	1/60	230	3000	0.55	1	CWLE	SP	Ball	Open	3.3	36HW 48HWC181 36HWC18A 35HC181 36HC241	EA	1
A081	1/40	230	3000	0.5	1	CCW	SP	Ball	—	3.3	36HWC18A 36HWC241 36HW 48HW	EA	1



80280

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BEAR.	ENCL.	DIA. (IN.)	DIRECT REPLACEMENT FOR	UOM	OM
40493	1/6-1/10	208-230	1075	1.40	2	CCWSE	1/2 x 2	4	PSC	Sleeve	Open	5-5/8	3699B	EA	1



40493

NOTE: Item numbers in **RED** indicate **Made in the U.S.A.**

DIRECT REPLACEMENTS FOR CONT'D

Krack - OEM - Motors

CATALOG NO.	VOLTS	RPM	AMPS	SPEEDS	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BEAR.	DIA. (IN.)	MOUNT	DIRECT REPLACEMENT FOR	UOM	OM
41189	115/ 208-230	1350/ 1550	1.60/ 0.80	1	CWSE	5/16 x 1-5/8	3-1/16	SP	Ball	3.3	Lug	11528 11529	EA	1
OKR1503	200-230/ 460	850	4.40-4.00/ 2.00	1	Rev.	5/8 x 3 -1/4	10-1/4	3 phase	Ball	6-1/2	Belly Band	151437 11503	EA	1



41189

L.L. Building - OEM - Motors

CATALOG NO.	VOLTS	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	ENCL.	DIA. (IN.)	CAP. INCL.	DIRECT REPLACEMENT FOR	UOM	OM
99320	120	900	3.40	1	CWSE	1/2 x 2.02	2.27	SP	Open	5.12	—	V909320	EA	1
99371	120	1050	2.80	1	CWSE	1/2 x 2.30	3.08	PSC	Open	5.12	8MFD / 250VAC	V909371 V909336	EA	1
99321	120	1050	3.30	1	CWSE	1/2 x 2.30	3.33	PSC	Open	5.12	10MFD / 250VAC	V909321 V909337	EA	1
99319	120	1050	3.30	1	CWSE	1/2 x 2.30	3.33	PSC	Open	5.12	10MFD / 250VAC	V909319	EA	1



99320

Lennox - OEM - Draft Inducers and Motors

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	TYPE	BRG	ENCL.	HZ	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
A138	1/70	120	3000	0.7	1	CCW	SP	Sleeve	Open	60	Auto	7021-8657 7021-8825	EA	1
A219	1/65	120	3000	0.7	1	CCW	SP	Sleeve	Open	60	Auto	88J3901 7021-9262	EA	1
A320	1/60	115	3000	0.8	1	CCW	SP	Sleeve	Open	60	Auto	27K6101 10115401	EA	1
66401	1/60	120	2800	1.30	1	CWLE	SP	Ball	Open	60	Auto	88K8401 J238-087-8171 43K4101 46K4101 67M5401 67M5401	EA	1
A135	1/60	120	3000	0.7	1	CCW	SP	Sleeve	Open	60	Auto	33J4101 4MH29 7021-10276 7021-8812	EA	1



A320

DIRECT REPLACEMENTS FOR CONT'D

Lennox - OEM - Draft Inducers and Motors



A200

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	TYPE	BRG	ENCL.	HZ	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
66501	1/30	115	3000	1.20	1	CCWSE	SP	Ball	Open	60	Auto	31L5501 101202-01 102359-01 24W95 313L5501 68M26	EA	1
A200	1/30	115	3000	1.35	1	CCW	SP	Sleeve	Open	60	Auto	313L5501 7002-2975	EA	1
A155	1/30	115	3000	1.40	1	CCW	SP	Ball	Open	60	Auto	7021-10046 40425-002	EA	1
A210	1/30	115	3000	1.7	2	CCW	SP	Ball	Open	60	Auto	18M6701 27M1301	EA	1
A201	1/30	208-230	3000	0.65	1	CCW	SP	Ball	Open	60	Auto	41144-001 41144-002 7021-10055 7021-10743	EA	1
A207	1/28	115	3000	1.75	1	CCW	SP	Ball	Open	60	Auto	60M7901 7058-0217	EA	1
A208	1/28	115	3000	1.75	1	CCW	SP	Ball	Open	60	Auto	60M8101 7058-0322	EA	1



A213

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	TYPE	BRG	ENCL.	HZ	OVERLOAD	DIRECT REPLACEMENT FOR	UOM	OM
A206	1/25	115	3000	1.5	1	CW	SP	Sleeve	Open	60	Auto	20J8091 7021-8473	EA	1
A213	1/25	115	3200	2.1	2	CCW	SP	Ball	Open	60	Auto	18L0401 7021-10376	EA	1
66300	1/25	115	3300	1.5	1	CWSE	SP	Sleeve	Open	60	—	7021-8473 20J89	EA	1
A209	1/20	115	3200/2800	0.8	2	CCW	PSC	Ball	Open	60	Auto	38M5001 7062-5441	EA	1
A163	1/20	115	3400	1.80	1	CCW	SP	Ball	Open	60	Auto	7021-9450 67K0401 67K0401P FB-RFB547 36717D1 36717D3 36717D4	EA	1
A204	1/20	115	3400	1.8	1	CCW	SP	Ball	Open	60	Auto	83L4101 7021-11406	EA	1

DIRECT REPLACEMENTS FOR CONT'D

Lennox - OEM - Draft Inducers and Motors

CATALOG NO.	VOLTS	RPM	AMPS	SPEEDS	ROT	TYPE	BRG	ENCL.	HZ	OVERLOAD	CAP. REQ.	DIRECT REPLACEMENT FOR	UOM	OM
A205	120	3000	0.7	1	CCW	SP	Sleeve	Open	60	Auto	—	19J0401 7021-8372 7021-9001 T6-2118	EA	1
A217	230	3000	0.83	1	CCW	SP	Ball	Open	60	Auto	—	25M5501 7021-11231	EA	1
A211	115	3400	2.35	1	CCW	SP	Ball	Open	60	Auto	—	81M1601 7021-11634	EA	1
A324	230	3200	0.44	1	CW	PSC	Ball	Open	60	Auto	Incl	28G6601 7062-1794	EA	1
A330	208-230	3200	0.55	1	CW	PSC	Ball	Open	60	Auto	Incl.	69M3301 97J8201	EA	1
A325	208-230	3200	0.6	1	CW	PSC	Ball	Open	60	Auto	—	98G8701 99K5701	EA	1
A331	460	3200	0.38/0.33	1	CW	PSC	Ball	Open	60	Auto	—	69M3201 97J8101	EA	1



A331

Lennox - OEM - Motor & Torsion Flex Bracket

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BEARINGS	DIRECT REPLACEMENT FOR	UOM	OM
48937K	1/5	115	1050	6.50	3	CCWLE	5-1/2 x 1/2	5	SP	Sleeve	89C37 89C3701PR	EA	1



48937K

Lomanco - OEM - Motors and Fan Blades

CATALOG NO.	VOLTS	RPM	AMPS	SPEEDS	ROTA.	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BEAR.	DIA. (IN.)	ENCL.	MOUNT	DIRECT REPLACEMENT FOR	UOM	OM
70059	115	1100	3.40	1	CWSE	1/2 x 2	2-1/4	SP	Sleeve	5	Open	Lug	AO416B2059 AO510B2389 AO510B2497	EA	1



70059

CATALOG NO.	DIAM. (IN.)	BLADES	HUB LOCATION	BORE	PITCH (°)	ROTATION	NOTE	UOM	OM
FB99100	12	5	Discharge	1/2	33	CW	Used with 70059	EA	1



FB99100

DIRECT REPLACEMENTS FOR CONT'D

Loren Cook - OEM - Motors

CATALOG NO.	WATT	RPM	AMPS	SPEEDS	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BRG	DIA.	ENCL	MOUNT	DIRECT REPLACEMENT FOR	UOM	OM
90254	5	1550	0.25	2	CWSE	5/16 x 2-3/8	2-3/4	PSC	Sleeve	3.3	OAO	Stud	615254	EA	1
90255	15	1550	0.40	2	CWSE	5/16 x 2-3/8	2-3/4	PSC	Sleeve	3.3	OAO	Stud	615255	EA	1
90220	1/114	1500	0.75	2	CWSE	3/8 x 2-3/4	2-3/8	SP	Sleeve	4.4	—	Thru Bolt	220/240	EA	1
90420	1/23	1500	1.50	1	CWSE	3/8 x 2-3/4	2-5/8	SP	Sleeve	4.4	—	Thru Bolt	420	EA	1
90320	1/16	1550	2.20	2	CWSE	3/8 x 2-1/2	2-5/8	SP	Sleeve	4.4	—	Thru Bolt	320/340	EA	1
90520	1/16	1200	1.50	1	CWSE	3/8 x 2-1/4	3	PSC Cap Incl.	Sleeve	5.12	—	Thru Bolt	520	EA	1
90620	1/11	1500	4.60	2	CWSE	1/2 x 6-1/4	3	SP	Sleeve	4.4	—	Lug Mount	620/640	EA	1
90E2A	1/8	1600	1.70	1	CWSE	1/2 x 3	3-1/2	PSC	Ball	5.63	OAO	Stud	C06E2A	EA	1
90720	1/4	1625	3.90	2	CWSE	1/2 x 6-1/4	3-3/8	PSC Cap Incl.	Sleeve	5.12	—	Lug Mount	720/740	EA	1



90255

Manitowoc - OEM - Motors

CATALOG NO.	WATTS	VOLTS	RPM	AMPS	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	ENCL	MOUNTING	HERTZ	DIRECT REPLACEMENT FOR	UOM	OM
15020	35	115	1500	1.40	CWLE	1/4 x 1/2	3-3/8	TE	Double Foot Pads	60	002401591 002412373	EA	1
65020	35	115	1500	1.40	CWLE	1/4 x 1/2	3-3/8	TE	Double Foot Pads	50/60	002401591 002412373	EA	1



65020

CATALOG NO.	WATTS	VOLTS	RPM	AMPS	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	ENCL	MOUNT	HZ	DIRECT REPLACEMENT FOR	UOM	OM
15041	50	230	1500	0.85	CWLE	3/8 x 1-1/2	3-5/8	Semi	Double Foot Pads	60	002412353	EA	1
65041	50	230	1500	0.85	CWLE	3/8 x 1-1/2	3-5/8	Semi	Double Foot Pads	50/60	002412353	EA	1



15041

McQuay - OEM - Motors

CATALOG NO.	HP	VOLTS	RPM	AMPS	ROTA.	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BEARINGS	DIA. (IN.)	DIRECT REPLACEMENT FOR	UOM	OM
D1144	1/25-1/35 -1/65	115	1200	1.10-0.90 - 0.60	CW	3/8 x 5-5/8	4-3/4	PSC	Sleeve	3.3	BA2H015	EA	1



D1144

DIRECT REPLACEMENTS FOR CONT'D

McQuay - OEM - Motors

CATALOG NO.	VOLTS	RPM	AMPS	ROTATION	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BEARINGS	DIA. (IN.)	DIRECT REPLACEMENT FOR	UOM	OM
D1140	115	1500	2.20-2.00 -1.70	Double Shaft	5-5/8 x 3/8 x 5-5/8	4-3/4	PSC	Sleeve	3.3	879-382564B-00	EA	1
D1142	115/ 230	1500	1.70-0.90	CW	5/16 x 2-1/2	3-1/2	SP	Sleeve	3.3	879-382-562-ZB-00	EA	1



D1142

Notes: D1142 has special 3.15" bolt circle

Nordyne - OEM - Draft Inducers and Motors

CATALOG NO.	HP	STACK SIZE (IN.)	VOLTS	RPM	AMPS	SPEEDS	TYPE	BEARINGS	DIRECT REPLACEMENT FOR	UOM	OM
65404	1/100	7/8	120	3000	0.69	1	SP	Ball	903404	EA	1



65404

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	DIA. (IN.)	DIRECT REPLACEMENT FOR	UOM	OM
A131	1/50	115	3000	1.1	1	CW	SP	Sleeve	3.3	4MH26 6212850 6217000 7021-10159	EA	1
A132	1/50	115	3000	1.1	1	CW	SP	Sleeve	3.3	4MH27 6212850 7021-10274 7021-10493	EA	1
A126	1/45	115	3000	1.8	1	CW	SP	Ball	C-Frame	6219500, 7002-3158	EA	1
A121	1/45	240	3000	0.5	1	CW	SP	Sleeve	3.3	6217930 7021-10381	EA	1



A126

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	ENCL	HZ	BEARING	DIRECT REPLACEMENT FOR	UOM	OM
66567	1/33	115	3000	0.43	1	CCWSE	PSC	Open	60	Ball	622567	EA	1

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	DIA. (IN.)	DIRECT REPLACEMENT FOR	UOM	OM
A123	1/18	115	3300	1.95	1	CW	SP	Ball	3.3	622064 7021-11385	EA	1
A122	1/17	115	3000	1.75	1	CW	SP	Sleeve	3.3	6219490 7021-11227	EA	1
A124	1/15	115	3000	1.75	1	CW	SP	Sleeve	3.3	6219290 7021-11379	EA	1



A122

DIRECT REPLACEMENTS FOR CONT'D

Nutone - OEM - Draft Inducers and Motors



65100

CATALOG NO.	STACK SIZE (IN.)	VOLTS	RPM	AMPS	SPEEDS	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BRG	ENCL	DIRECT REPLACEMENT FOR	NOTES	UOM	OM
82423K	1/2	120	2650	0.60	1	CWSE	7/32 x 1-1/2	1-5/8	SP	Sleeve	Open	89423-000	42, 106	EA	1
65100	1/2	120	3000	0.6	1	CCWSE	7/32 x 1-5/8	1-5/8	SP	Sleeve	Open	C65878	42, 105	EA	1
65106	3/4	115	3000	0.70	1	CCWSE	7/32 x 2 3/8	1-3/4	SP	Sleeve	Open	C68627	485	EA	1
65112	5/8	120	3000	0.76	1	CCWSE	7/32 x 1-3/4	1-5/8	SP	Sleeve	Open	—	104, 105	EA	1
65709	5/8	120	3000	0.8	1	CCWSE	7/32 x 2-3/8	1-3/4	SP	Sleeve	Open	C53709	108, 485	EA	1

Notes: **42.** Includes cord and plug **104.** Same as 65100 except mounting screws are on the shaft end
105. Includes A65100FB impeller **106.** Assembled with bracket as illustrated **108.** Has a one shot overload
485. Includes two prong plug



65101

CATALOG NO.	STACK SIZE (IN.)	VOLTS	RPM	AMPS	SPEEDS	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BRG	ENCL	DIRECT REPLACEMENT FOR	NOTES	UOM	OM
65104	3/4	120	3000	0.74	1	CCWSE	7/32 x 1-3/4	1-7/8	SP	Sleeve	Open	C66582	107	EA	1
65894K	3/4	120	3000	0.90	1	CCWSE	7/32 x 2-3/8	1-7/8	SP	Sleeve	Open	82229 K5894	42, 106	EA	1
65103	7/8	120	3000	0.71	1	CCWSE	7/32 x 1-1/4	2	SP	Sleeve	Open	C63675	485	EA	1
65101	7/8	120	3000	0.86	2	CWSE	7/32 x 1-5/16	2	SP	Sleeve	Open	C52367	110	EA	1
65105	7/8	120	3000	0.88	2	CCWSE	7/32 x 1-7/16	2	SP	Sleeve	Open	C27987	110	EA	1
65272	1	120	3000	1	1	CCWSE	7/32 x 1-1/2	2-1/8	SP	Sleeve	Open	C23272	485	EA	1



A65900

CATALOG NO.	BORE (IN.)	DIAM. (IN.)	WIDTH (IN.)	BORE	DIRECT REPLACEMENT FOR	UOM	OM
A65900	1/4	5-3/4	2	D Shape	59000A000	EA	1
A65100FB	7/32	4-9/16	—	D Shape	68920	EA	1

Notes: **41.** 1-1/8" Hubs **42.** Includes cord and plug **482.** Two prong plug and cord attached
529. Complete assembly, motor, mounting flange and blower wheel

DIRECT REPLACEMENTS FOR CONT'D

Oasis - OEM - Motors

CATALOG NO.	WATTS	VOLTS	RPM	AMPS	ROTA.	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	ENCL.	HZ	MOUNTING	DIRECT REPLACEMENT FOR	UOM	OM
10037	5	115	1550	0.34	CWLE	1/4 x 1/2	2-3/8	SP	TE	60	Double Foot Pads	027354-026 027354-037	EA	1



10037

Penn Ventilator - OEM - Motors

CATALOG NO.	HP	VOLTS	RPM	AMPS	ROTA.	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	DIA. (IN.)	ENCL.	DIRECT REPLACEMENT FOR	UOM	OM
D0343	1/40	115	1550/1050	1.40/0.60	CCWLE	1/3 x 5-3/4	2-1/4	SP	3.3	Open	56343-0 JA2M414-T	EA	1
OPV747	1/7-1/11 -1/25	115	1550/1300/ 1050	2.50/2.10 /1.60	CCWLE	1/2 x 2-1/2	4-1/4	PSC	5	Open	63747-0 DE2F7085-T	EA	1
OPV748	1/6-1/12 -1/20	115	1550/1300/ 1050	2.10/1.90 /1.40	CCWLE	1/2 x 2-3/5	4-1/4	PSC	5	Open	63748-0 DE2F7088-T	EA	1
D0746	1/12	115	1550/1300	1.50/0.90	CCWLE	1/3 x 3-1/3	3-5/6	PSC	3.3	Open	63746-0 JE2H057-T	EA	1
D0346	1/4	115	1550/1050	3.60/2.50	CCWLE	1/3 x 5-1/3	4-2/3	PSC	3.3	Open	56346-0 JE2K007-T	EA	1



OPV747

PennVent - OEM - Motors

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	BEARINGS	MOUNTING	DIRECT REPLACEMENT FOR	UOM	OM
D0346	1/14	115	1550	3.6/2.5	2	CWSE	3/8 x 5-3/8	4.74	Sleeve	Bracket	46346 JE2K007	EA	1



D0346

Reznor - OEM - Motors and Blower Wheels

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BRG	ENCL.	DIA. (IN.)	DIRECT REPLACEMENT FOR	UOM	OM
66505	1/10	115/ 208/ 230	3000	1.40/ 0.80	1	Rev.	5/16 x 3-1/4	4-1/4	PSC	Ball	Open	3.3	CW175-40069 CCW505-43424 CCW175-40070 7162-0293 7162-0348 7162-0294 CCW77162-0311 CCW175-43846 CW7162-0224 CW36860	EA	1
82384	1/8	115	1075	2.3	1	CWSE	1/2 x 2-7/8	3-7/8	PSC	Sleeve	TE	4.97	170-45888 319P384	EA	1
40066	1/6	115	1075	2.40	1	Rev.	1/2 x 3-3/8	4 1/2	PSC	Ball	TE	5-5/8	55682	EA	1



40066

DIRECT REPLACEMENTS FOR CONT'D

Rheem - OEM - Transformers, Draft Inducers and Motors


CATALOG NO.	PRIMARY VOLTAGE	VA RATING	SECONDARY RATING	MOUNTING OPTION	CONNECTION	DIRECT REPLACEMENT FOR	UOM	OM
PF12406	120	40VA	24	Foot	Wire Lead	46-24124-06	EA	1
PF85602	120	50VA	24	Foot	Wire Lead	46-102856-02	EA	1



PF12406

CATALOG NO.	PRIMARY VOLTAGE	SECONDARY RATING	OUTPUT OPTION	MOUNTING OPTION	CONNECTION	DIRECT REPLACEMENT FOR	UOM	OM
PF90501	208/240	40VA	24	Foot	1/4" QC Term.	46-101905-01	EA	1

CATALOG NO.	STACK SIZE (IN.)	VOLTS	RPM	AMPS	SPEEDS	ROT	SHAFT DIM. (IN.)	TYPE	BRG.	ENCL.	DIRECT REPLACEMENT FOR	UOM	OM
21964K	3/4	208-230	3000	0.25	1	CWSE	1/4 x 1-1/2	SP	Sleeve	Open	51-21964-11	EA	1
K628	3/4	208-230	3000	0.25	1	CWSE	1/4 x 1-1/2	SP	Sleeve	Open	51-21964-01	EA	1



K628

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	TYPE	BEARINGS	ENCL.	DIRECT REPLACEMENT FOR	UOM	OM
A139	1/55	115	3000	0.95	1	CW	SP	Sleeve	Open	7021-7577	EA	1
66781	1/50	115	3000	0.60	1	CWLE	PSC	Ball	Open	70-101087-81 70-21496-83 70-24157-03 7021-11559	EA	1
A090	1/50	115	3000	1.10	1	CW	SP	Sleeve	Open	74-70-21496-01 7021-5239 JAIM102	EA	1
A240	1/50	115	3000	1.1	1	CCW	SP	Sleeve	Open	7021-8183 70-21496-00	EA	1



66781

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	ENCL.	TYPE	BEARINGS	DIA. (IN.)	DIRECT REPLACEMENT FOR	UOM	OM
A242	1/50	115	3400	1.36	1	CW	Open	SP	Sleeve	3.3	7021-7150 70-22436-01	EA	1
A247	1/40	115	3250/ 3800	0.95	2	CW	Open	PSC	Sleeve	3.3	7062-5519	EA	1
66847	1/30	120	3000	1.70	1	CCWLE	Open	SP	Ball	C Frame	117104-01 117847-07 70-22838-82 70-24157-03	EA	1
A066	1/30	120	3000	1.27	1	CW	Open	SP	Ball	3.3	117847-07 70-24157-03	EA	1
A086	1/25	115	3200	1.3	1	CW	Open	SP	Sleeve	3.3	7021-5990 7021-5853	EA	1



A242

DIRECT REPLACEMENTS FOR CONT'D

Rheem - OEM - Transformers, Draft Inducers and Motors

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	ENCL.	TYPE	BRG.	DIA. (IN.)	DIRECT REPLACEMENT FOR	UOM	OM
82641	1/25	208-230	3200	0.25	1	CWSE	Open	PSC	Ball	3.3	70-23641-81 70-23563-02 70-23586-01 70-23586-81	EA	1
A241	1/25	208-230	3200	0.62	1	CW	Open	SP	Sleeve	3.3	70-23641-81	EA	1
A246	1/20	115	3400/2400	0.85	2	CW	Open	PSC	Ball	3.3	70-24206-01 7062-3925	EA	1
A136	1/20	115	3450	0.75	1	CW	Open	PSC	Sleeve	3.3	7062-3861	EA	1
A244	1/20	208-230	3300	0.85	1	CCW	Open	SP	Ball	3.3	7021-6967 70-42241-01	EA	1
A245	1/15	208-230	3000	.95/.85	1	CW	Open	SP	Ball	3.3	7021-7490 70-42278-02	EA	1



82641

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BRG.	DIA. (IN.)	DIRECT REPLACEMENT FOR	UOM	OM
80825	1/8	208-230	825	1.00	1	Rev.	1/2 x 6-1/2	4	PSC	Ball	5-5/8	21276-02 21276-01 512076-01	EA	1
60825	1/6	208-230	825	1.1-10	1	Rev.	1/2 x 6-1/2	4-1/4	PSC	Ball	5-5/8	51-20760-11 51-20763-01 51-20763-02	EA	1



80825

CATALOG NO.	HP	VOLTS	RPM	AMPS	ROT	SHAFT DIM.(IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BEARINGS	DIA. (IN.)	DIRECT REPLACEMENT FOR	UOM	OM
63382	1/5	208-230	1075	1.4	Rev.	1/2 x 4-3/8	3-3/4	PSC	Ball	5-5/8	51-21853-82 KA55HXMPT-6557 51-20672-01 51-20673-01 51-20674-01 51-20675-01 51-20679-01 51-20680-01 51-20681-01 51-20682-01 51-21826-01	EA	1



63382

DIRECT REPLACEMENTS FOR CONT'D

Rheem - OEM - Transformers, Draft Inducers and Motors


ORM1056

CATALOG NO.	HP	VOLTS	RPM	AMPS	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BRG.	DIA. (IN.)	DIRECT REPLACEMENT FOR	UOM	OM
D743	1/5	208-230	1075	1.20	Rev.	1/2 x 6	3-1/2	PSC	Sleeve	5-5/8	95-3154	EA	1
D2840	1/5	208/230	1075	1.30	CW	1/2 x 4-1/8	3-3/4	PSC	Sleeve	5-5/8	51-21853-82	EA	1
ORM10206V1	1/5	208-230	1075	1.40	Rev.	1/2 x 4-1/4	3-7/8	PSC	Sleeve	5-5/8	KA55HXMPT-6557 51-20672-01 51-20673-01 51-20674-01 51-20675-01 51-20679-01 51-20680-01 51-20681-01 51-20682-01 51-21826-01 51-21827-01 51-21828-01 51-21829-01 51-21830-01 51-21831-01	EA	1
D742	1/4	208-230	1075	2.10	Rev.	1/2 x 6	4	PSC	Sleeve	5-5/8	—	EA	1
ORM1056	1/2	115	1075	5.70	CWSE	1/2 x 3-1/2	4-5/8	PSC	Sleeve	5-5/8	51-22873-01	EA	1
ORM1076	3/4	115	1075	10.5	Rev.	1/2 x 5	5-5/8	PSC	Sleeve	5-5/8	51-22859-01	EA	1
D2850	1-3/4	208-230/460 (60Hz) 200/380-415 (50Hz)	1125/950	4.60/2.30	CW	1/2 x 3.45	6-1/2	PSC	Ball	5-5/8	5KCP39SFL153DS MOT05717 X70671180017 X70670706010 MOT03771	EA	1
D2851	1-3/4	208-230/460 (60Hz) 200/380-415 (50Hz)	1125/950	4.60/2.30	CW	1/2 x 3.45 Keyed	6-1/2	PSC	Ball	5-5/8	5KCP39SFL153DS MOT09188 MOT09192 X7067165301 X70671656010	EA	1

Rheem - OEM - Transformers, Draft Inducers and Motors


X033

CATALOG NO.	RPM	VOLTS	MODEL NO.	CAP. REQ.	F.L. AMPS	WT (LBS.)	FRAME LENGTH (IN.)	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	DIRECT REPLACEMENT FOR	NOTES	UOM	OM
X033	1075/4	115	048A11O1674	5MFD/370V	6.1	16	5	1/2 x 5	5	Rheem Time-Savers, Emerson K55HXMDA-4122 Rheem / Ruud 51-23012-41	31	EA	1

Notes:
31. 5/8″ thru-bolts, shaft end

DIRECT REPLACEMENTS FOR CONT'D

Scotsman - OEM - Motors

CATALOG NO.	WATTS	VOLTS	RPM	AMPS	ROTA.	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	ENCL.	MOUNTING	HERTZ	DIRECT REPLACEMENT FOR	UOM	OM
15001	25	115	1500	1.10	CWLE	1/4 x 1/2	3-3/8	TE	Double Foot Pads	60	18-7200-01	EA	1
65001	25	115	1500	1.10	CWLE	1/4 x 1/2	3-3/8	TE	Double Foot Pads	50/60	18-7200-01	EA	1
15040	50	115	1500	1.70	CWLE	3/8 x 1-1/2	3-5/8	Semi	Double Foot Pads	60	18-5105-11	EA	1
15041	50	230	1500	0.85	CWLE	3/8 x 1-1/2	3-5/8	Semi	Double Foot Pads	60	18-5105-02	EA	1
65040	50	115	1500	1.70	CWLE	3/8 x 1-1/2	3 5/8	Semi	Double Foot Pads	50/60	18-5105-11	EA	1
65041	50	230	1500	0.85	CWLE	3/8 x 1-1/2	3 5/8	Semi	Double Foot Pads	50/60	18-5105-02	EA	1



65041

Skymark - OEM - Draft Inducers

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	ENCL.	DIRECT REPLACEMENT FOR	UOM	OM
A251	1/35	208-230	3000	1.10	1	CCW	SP	Sleeve	Open	MTR136PK 7021-9136	EA	1



A251

State Ind. - OEM - Draft Inducers

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	ENCL.	DIRECT REPLACEMENT FOR	UOM	OM
W9	1/60	115	3000	0.95	1	CW	SP	Sleeve	OFC	0012400500	EA	1
W10	1/20	115	3400	1.80	1	CCW	SP	Sleeve	OFC	0012400540	EA	1



W9

Sterling - OEM - Motors

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTA.	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	BEARINGS	MOUNT	DIRECT REPLACEMENT FOR	UOM	OM
90766	1/20	115	1650	1.9	1	CWSE	5/16 x 3	2.68	Sleeve	Stud	J31-04766	EA	1
90871	1/20	120	1000	1.4	1	CWSE	3/8 x 3-1/2	2.58	Sleeve	Stud	J31-01871	EA	1
90872	1/12	115	1000	2.2	1	CWSE	3/8 x 3-1/2	3.08	Sleeve	Stud	J31-01872	EA	1
90091	1/10	120	1000	2.6	1	CWSE	3/8 x 3	2.58	Sleeve	Stud	J31-04091	EA	1



90766

Sub Zero - OEM - Motors

CATALOG NO.	WATTS	VOLTS	RPM	AMPS	ROTA.	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	MATERIAL	HZ	MOUNTING	DIRECT REPLACEMENT FOR	UOM	OM
65740	2.3	115	1300	0.2	CWLE	1/4 x 1/2	2.48	Alum.	50/60	Double Foot Pads	4200740	EA	1

Notes: Uses pin terminals for quick and easy connection



65740

DIRECT REPLACEMENTS FOR CONT'D

Tappan - OEM - Draft Inducers

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	DIA. (IN.)	DIRECT REPLACEMENT FOR	UOM	OM
A073	1/40	115/ 230	3000	0.7/0.35	1	CCW	SP	Ball	3.3	82932 11429-32 HQ6D1023UN 8251560133 4MH13	EA	1



A073

Tecumseh - OEM - Draft Inducers

CATALOG NO.	WATTS	VOLTS	RPM	AMPS	ROTATION	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BEAR.	ENCL.	HZ	DIRECT REPLACEMENT FOR	UOM	OM
15020	35	115	1500	1.40	CWLE	1/4 x 1/2	3-3/8	SP	Unit	TE	60	810M035A29	EA	1
65020	35	115	1500	1.40	CWLE	1/4 x 1/2	3-3/8	SP	Unit	TE	50/60	810M035A29	EA	1
15021	35	230	1500	0.70	CWLE	1/4 x 1/2	3-3/8	SP	Unit	TE	60	810M035A21 810M035A28	EA	1
65021	35	230	1500	0.70	CWLE	1/4 x 1/2	3-3/8	SP	Unit	TE	50/60	810M035A21 810M035A28	EA	1
15045	50	230	1500	0.85	CCWLE	5/16 x 2-1/2	3-3/4	SP	Unit	Open	60	810M050A62	EA	1
65045	50	230	1500	0.85	CCWLE	5/16 x 2 1/2	4	SP	Unit	Open	50/60	810M050A62	EA	1



15020

CATALOG NO.	HP	VOLTS	RPM	AMPS	ROTA.	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BEAR	DIA. (IN.)	ENCL.	HZ	DIRECT REPLACEMENT FOR	UOM	OM
OTC6004	1/20	230	1500	1.11	CCWSE	5/16 x 2-1/2	3-1/16	SP	Sleeve	5	Open	50/60	810S037B01	EA	1
OTC6001	1/15	230	1500	1.30	CCWLE	5/16 x 2-3/4	3-1/16	SP	Sleeve	5	Open	50/60	810S050A99	EA	1



OTC6004

CATALOG NO.	HP	VOLTS	RPM	AMPS	ROTA.	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BEAR	DIA. (IN.)	ENCL.	HZ	DIRECT REPLACEMENT FOR	UOM	OM
OTC1862	1/4	230	1625	1.90	CWLE	1/2 x 2-3/4	4-3/8	PSC	Ball	5-5/8	Open	50/60	TFM1862 8330 KA55HXKGD8330	EA	1
OTC1864	1/4	460	1625	0.95	CWLE	1/2 x 2-3/4	4-3/8	PSC	Ball	5-5/8	Open	50/60	TFM1864 8331 KA55HGE8331	EA	1



OTC1864

Tradewinds -OEM - Motors

CATALOG NO.	HP	VOLTS	RPM	AMPS	ROTA.	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BEARINGS	DIA. (IN.)	DIRECT REPLACEMENT FOR	UOM	OM
82324	1/25	115	1550	2.10	CWLE	1-7/8 x 5/16 x 1-7/8	3	SP	Sleeve	3.3	19-09-215 324	EA	1


Note: 1-1/8" hubs



82324

DIRECT REPLACEMENTS FOR CONT'D

Trane - OEM - Draft Inducers and Motors



A270

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	TYPE	BEARINGS	HERTZ	DIRECT REPLACEMENT FOR	UOM	OM
A270	1/15	208-230	3350/2800	0.42/0.5	2	CCW	PSC	Ball	50/60	X38040369010 7062-5033	EA	1
A272	1/12	208-230	3500	0.65	2	CW	PSC	Ball	50/60	X38040309-01 7062-3971	EA	1
A273	1/8	208-230	3500	0.62	2	CW	PCS	Ball	50/60	X38040310-01 7062-3972	EA	1

Trane - OEM - Draft Inducers and Motors



A271

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	HERTZ	DIRECT REPLACEMENT FOR	UOM	OM
A193	1/35	208-240	3480	0.59/0.5	1	CCW	SP	Ball	60	X38040050010 7021-8591	EA	1
A360	1/25	115	2700	1.0	2	CW	SP	Ball	60	D341663P01 7002-2532 D341095P01 7002-3274	EA	1
A196	1/25	115	3200	1.35	1	CW	SP	Sleeve	60	X38040313060 X38040313027 D342094P02	EA	1
A274	1/24	208-230	3500	0.28	1	CW	PSC	Ball	50/60	X38040311-01 7062-3973	EA	1
A368	1/20	115	3200	0.8	2	CW	PSC	Sleeve	60	D340623P01 7062-3782	EA	1
A130	1/20	115	3450	0.7	1	CW	PSC	Sleeve	60	X38040313037 D330757P03 D330757P035 21D340365P03	EA	1
A271	1/18	208-230	3500	0.62	2	CW	PSC	Ball	50/60	X38040308-01 7062-3969	EA	1
A195	1/16	115	3400	1.75	1	CW	SP	Ball	—	X38040313070 D342094P03 D330757P03	EA	1

DIRECT REPLACEMENTS FOR CONT'D

Trane - OEM - Draft Inducers and Motors

CATALOG NO.	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	DIRECT REPLACEMENT FOR	UOM	OM
66787	120	3100	1.3	1	CCWLE	SP	Ball	BLW473 21C138126 210330673 21D330673 210340125 787P01	EA	1



66787

Note: Includes special plug

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	DIRECT REPLACEMENT FOR	UOM	OM
A146	1/100	115	3000	1.0-0.35	2	CW	SP	Sleeve	7021-7986 X3804276047 7021-8925 7002-2531	EA	1



A146

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	TYPE	BEARINGS	ENCL.	DIRECT REPLACEMENT FOR	UOM	OM
66362	1/100	115	3000	1/0.35	2	CWSE	SP	Sleeve	Open	7021-8925 BLW00362	EA	1



A279

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	TYPE	BEARINGS	DIRECT REPLACEMENT FOR	UOM	OM
A370	1/100	208-230	2920	0.18	2	CCW	PSC	Ball	C664099P01 7062-3918	EA	1
A194	1/80	115	3000/1950	1.0/0.5	2	CW	SP	Sleeve	X38020420017 7021-9561 D330900P01 7021-9511	EA	1



A370

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	TYPE	BEARINGS	DIRECT REPLACEMENT FOR	UOM	OM
A198	1/45	115	3000	1.75	1	CW	SP	Ball	D342077P01 7058-0259	EA	1
A260	1/45	115	3250	1.0	1	CW	SP	Ball	D342077P03 7058-0261	EA	1



A198

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	HERTZ	DIRECT REPLACEMENT FOR	UOM	OM
A369	1/45	208-230	2800	0.34	2	CCW	PSC	Ball	60	C663946P01 7062-3915	EA	1
A361	1/42	115	3000	1.6	1	CW	SP	Ball	60	D330787P01 7002-2558	EA	1



A361

DIRECT REPLACEMENTS FOR CONT'D

Trane - OEM - Draft Inducers and Motors

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	DIRECT REPLACEMENT FOR	UOM	OM
A197	1/70	33-110	1500/ 4700	1.0	VAR	CW	3 Phase	Ball	X38010571010 D342097P01 7092-0238	EA	1
A069	1/70	208-230	3000	0.5	1	CCW	SP	Sleeve	38040252 X3804025202 7021-10259 X38040252017	EA	1
A276	1/55	115	3000	1.0	1	CW	SP	Sleeve	D330757P01 7021-9011	EA	1
A143	1/50	115	3000	0.95	1	CW	SP	Sleeve	210330673 R7-RFB143 210340125 7021-8428 X38040305017 D330809P01	EA	1



A197

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	HZ	DIRECT REPLACEMENT FOR	UOM	OM
A362	1/42	115	3000	1.6	1	CW	SP	Ball	60	D341663P05 7002-3273	EA	1
82057	1/40	115	3000	1.00	1	CCWSE	SP	Ball	60	X38040253057 7021-8569	EA	1
A192	1/40	115	3000	1.00	1	CCW	SP	Ball	60	7021-8569 X38040253057	EA	1
A150	1/35	208-230	3000	0.50	1	CCW	SP	Sleeve	60	C661452P01 21C729631P1 X38080029010 BLW-451	EA	1
A269	1/35	208-230	2500/ 3000	0.58/0.6	1	CCW	SP	Ball	50/60	X38040363010 7021-11054	EA	1
A373	1/35	208-230	3000	0.6	1	CCW	SP	Ball	60	C665662P01 7021-9396	EA	1



82057

CATALOG NO.	HP	VOLTS	RPM	AMPS	ROT	SHAFT DIM. (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BRG.	DIA. (IN.)	CAP. REQ.	DIRECT REPLACEMENT FOR	UOM	OM
D895	1/8	208-230	1650	0.80	CW	1/2 x 1-1/2	3-1/4	PSC	Sleeve	5-5/8	—	5KCP39BGR426S MOT6363	EA	1
OTR4513	1/8	208-240	1550	0.80-0.90	CCWLE	1/2 x 3-1/8	3-3/8	PSC	Sleeve	5	Incl.	5KSP29DK1728S MOT-3438	EA	1
41728	1/8	230	1550	1.10	CWSE	1/2 x 3	3-1/8	PSC	Sleeve	5	Incl	WW94X236SP WW94X936PSC MOT-3438	EA	1
D1050FM	1/8	230	1550	1.10	CW	1/2 x 3	3-1/4	PSC	Sleeve	5	Incl	WW94X236SP WW94X936PSC	EA	1



D895

DIRECT REPLACEMENTS FOR CONT'D

Ventline - OEM - Motors

CATALOG NO.	STACK SIZE (IN.)	VOLTS	RPM	AMPS	SPEEDS	ROT	SHAFT DIM. (IN.)	TYPE	BEAR.	ENCL.	HERTZ	DIRECT REPLACEMENT FOR	UOM	OM
65110K	1/2	120	3000	0.41	1	CWSE	Splined	SP	Sleeve	Open	60	J238-050-5330	EA	1

Notes: Includes 6 1/2" fan blade. Used on ventline found in many mobile homes



65110K

Whirlpool - OEM - Motors

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIMENSION (IN.)	LENGTH LESS SHAFT (IN.)	TYPE	BEARINGS	DIA. (IN.)	UOM	OM
82516PK	1/15	115	1550	2.50	3	CCWLE	3-1/4 x 5/16 x 3-1/4	3-1/4	SP	Sleeve	3.3	EA	1



82516PK

Williamson - OEM - Draft Inducers

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	DIA. (IN.)	DIRECT REPLACEMENT FOR	UOM	OM
A080	1/45	115	3000	1.1	1	CW	SP	Sleeve	3.3	D6996403 D6996404 7021-10263	EA	1
A118	1/15	115	3000	1.8	1	CW	SP	Sleeve	3.3	7021-6999 7021-7042	EA	1



A080

York - OEM - Draft Inducers

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	TYPE	BRG	ENCL.	HZ	DIRECT REPLACEMENT FOR	UOM	OM
82702	1/50	115	3000	1.2	—	CCWSE	SP		Open	60	373-10337-702 7021-8612	EA	1



82702

CATALOG NO.	HP	VOLTS	RPM	AMPS	TYPE	ENCL.	BRG	HERTZ	DIRECT REPLACEMENT FOR	UOM	OM
66067	1/30	115	3000	1.13	SP	Open	Ball	60	326-32067-000	EA	1



66067

CATALOG NO.	H.P.	VOLTS	RPM	AMPS	SPEEDS	ROT.	TYPE	BRG	ENCL.	DIRECT REPLACEMENT FOR	UOM	OM
A144	1/40	208-230	3000	0.5	1	CW	SP	Sleeve	Open	7021-6770 024-24115-014	EA	1
A221	1/40	208-230	3000	0.55	1	CCW	SP	Sleeve	Open	026-30614-700 026-31221-700 026-32067-700	EA	1
A222	1/35	115	3000	1.05	1	CCW	SP	Ball	Open	026-32067-000 026-32067-700 7021-7481	EA	1



A144

NOTE: Item numbers in **RED** indicate **Made in the U.S.A.**

DIRECT REPLACEMENTS FOR CONT'D

York- OEM - Draft Inducers and Blower Wheels

CATALOG NO.	H.P.	VOLTS	RPM	AMPS	SPEEDS	ROT.	TYPE	BRG	ENCL.	DIRECT REPLACEMENT FOR	UOM	OM
A226	1/35	115	3000	1.7	1	CW	SP	Ball	—	024-34490-000 7058-0266	EA	1
A154	1/30	115	3000	1.2	1	CW	SP	Sleeve	Open	024-27519-000 7021-10300 7021-9428	EA	1
82999	1/30	208-230	3200	0.65	1	CWSE	SP	Sleeve	Open	026-33999-001 7021-10096 7021-9656	EA	1
A223	1/30	208-230	3200	0.64	1	CW	SP	Sleeve	Open	026-33999-001 7021-10096 7021-9656	EA	1
A229	1/25	115	3000	1.75	1	CW	SP	Ball	—	024-32052-000 024-32085-000 7058-0267	EA	1
A228	1/25	115	3000	2.0	1	CW	SP	Ball	—	024-31957-000, 024-32085-000 7002-3285 7002-2941	EA	1
A137	1/25	115	3450	0.70	1	CW	PSC	Sleeve	Open	024-25007-000 024-25007-700 024-25057-000	EA	1
A165	1/25	115	3450	0.70	1	CW	PSC	Ball	Open	024-25960-000 7062-3958	EA	1
A227	1/25	115	3450	0.7	1	CW	PSC	Sleeve	Open	024-27641-000 373-20717-001	EA	1



A226

CATALOG NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROT	TYPE	BRG	ENCL.	DIRECT REPLACEMENT FOR	UOM	OM
A168	1/20	115	3450	0.7	1	CW	PSC	Ball	Open	20000101 7062-1881 7062-3136	EA	1
A230	1/20	115	3450	0.8	2	CW	PSC	Sleeve	Open	024-31953-000 7021-5094	EA	1
A225	1/15	115	3200	2.25	1	CW	SP	Ball	Open	024-34558-000 17503 7021-11577 7021-11830	EA	1
A234	1/12	208-230	3200	0.5	1	CW	PSC	Ball	Open	026-39532-000 7062-5155 7062-5267	EA	1



A225

CATALOG NO.	DIA. (IN.)	WIDTH (IN.)	ROTATION	BORE (IN.)	MAX RPM	DIRECT REPLACEMENT FOR	UOM	OM
BW16626	3.82	2.05	CW	3/8	3600	026-32626-700	EA	1
BW16623	4	1	CCW	1/4	3600	026-32623-700 S1-02632623700	EA	1

Notes: Stainless steel



BW16626

CATALOG NO.	DIAM.	DIRECT REPLACEMENT FOR	UOM	OM
A60459	11 Bolt Circle	326-31459-000 02626372000 37308073700 3730807300	EA	1



A60459

TOOLS













TUBE WORKING

Flaring Tools	323-324
Swaging Tools	325
Tube Bending	326
Tube Cutting	327-328
Accessories	328

MANIFOLD GAUGES AND HOSES

Manifolds	329-330
Manifold Gauges	331-332
Hoses	332
Ball Valve Hoses	333
Hose Adapters	333
Valve Core Removal	334

SERVICE TOOLS

General Tools	334-337
Brushes	337-338
Compressor Tote	339
Fin Tools	339
Inspection Mirrors	339
Purge Tools	339
Reamers	340
Thermometers	341

GASSES AND TORCHES

Gasses	341
Torches	342
Replacement - Recovery Cylinders	342

SHEET METAL TOOLS

Snips	343-344
Bending and Braking	344-345
Crimping	345

TOOLS STORAGE AND CASES

Storage Containers	346-349

CONDENSOR AND COIL CLEANING TOOLS

Sprayers	350-352
Mini-Split Bibs	352-353
Sprayer Accessories	353-355

HAND TOOLS

Hex Keys	355-356
Multitools	356-357
Nut Drivers	357-360
Screwdrivers	360-361
Utility Knives	362
Wrenches and Pliers	362-366

DRAIN LINE CLEANING AND CLEARING

Drain Gun and Cartridges	366
Refillable, Portable, and Other Drain Line Clearing Accessories	367

SERVICE EQUIPMENT

Lineset Cleaner	368
Vacuum Gauges	368-369
Refrigerant Scales	369
Leak Detection	370
Vacuum Pumps	371
Recovery Machines	371

WORK LIGHTING

Work Lights	372-373

FLARING TOOLS

SPIN® Tools

SPIN® Flaring and Swaging bits deliver the best flares and swages in seconds! Gives you consistent sizes on flares and swages, every time. Using an innovative technology, SPIN® tools are designed to quickly flare or swage virtually any copper or aluminum tube. Perfect for mini-splits and ductless A/C copper and aluminum tubes, it keeps the tubing thickness for high pressure refrigerant fluids such as R410A, R22, etc. Available in sets from 4 up to 6 pieces for HVAC/R applications; and 3 pieces for plumbing applications.



F1034

Spin TOOLS

FLARING

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
F4000	4 pc Flaring Set - 1/4", 3/8", 1/2", 5/8"	PK	1
F5000	5 pc Flaring Set - 1/4", 3/8", 1/2", 5/8", 3/4"	PK	1
F6000	6 pc Flaring Set - 1/4", 3/8", 1/2", 5/8", 3/4", 7/8"	PK	1
F1014	Flaring Tool, 1/4", Individual	EA	1
F1516	Flaring Tool, 5/16", Individual	EA	1
F1038	Flaring Tool, 3/8", Individual	EA	1
F1012	Flaring Tool, 1/2", Individual	EA	1
F1058	Flaring Tool, 5/8", Individual	EA	1
F1034	Flaring Tool, 3/4", Individual	EA	1
F1078	Flaring Tool, 7/8", Individual	EA	1

SWAGING

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
S4000	4 pc Swaging Set - 1/4", 3/8", 1/2", 5/8"	PK	1
S5000	5 pc Swaging Set - 1/4", 3/8", 1/2", 5/8", 3/4"	PK	1
S6000	6 pc Swaging Set - 1/4", 3/8", 1/2", 5/8", 3/4", 7/8"	PK	1
S1014	Swaging Tool, 1/4", Individual	EA	1
S1516	Swaging Tool, 5/16", Individual	EA	1
S1038	Swaging Tool, 3/8", Individual	EA	1
S1012	Swaging Tool, 1/2", Individual	EA	1
S1058	Swaging Tool, 5/8", Individual	EA	1
S1034	Swaging Tool, 3/4", Individual	EA	1
S1078	Swaging Tool, 7/8", Individual	EA	1

PLUMBING

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
S3000	3 pc Plumbing Set - 1/2", 3/4", 1"	EA	1

Orbital Flare

The hilmor Orbital Flare was designed to produce quality flares – again and again. A tube-stop arrow allows precise positioning and placement so you can keep that nickel in your pocket. Plus, a clutch mechanism stops the flare to eliminate cracking the tube.



1838952



hilmor

Features & Benefits

Precise Flares, Every Time: An off-center mounted cone spins on an axis to effectively produce quality flares.
No Cracked Tubes: A clutch mechanism stops the flaring when the job is done.
Simple Setup: A clothespin-inspired, spring-loaded block grips the tube securely.
Easy to Position: A tube-stop arrow slides to set correct height and positioning while ball detents allow for easy flaring cone alignment.
Extra Confidence: A leak-proof blank-off valve isolates the pump from the system for accurate vacuum readings and easy oil change without losing a vacuum.

CATALOG NO.	DESCRIPTION	TUBE SIZES (O.D.)	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1838952	Orbital Flare - 45°	3/16", 1/4", 5/16", 3/8", 1/2", 5/8", 3/4"	8-1/2" x 4-5/8" x 5-1/4"	3.8 lbs.	EA	1

Orbital Flare Kit with Tubing Cutter and Deburring Tool

The hilmor Orbital Flare Kit comes with everything you need to produce quality flares – again and again. The kit includes hilmor's Large Diameter Tubing Cutter (item #1885384) for easy kink-free cuts, a Pocket Size Deburring Tool (item #1891258) to smooth things over and, of course, our industry-leading Orbital Flare (item #1838952).



1937685

hilmor

Features & Benefits

Storage: Kit included for convenient storage.
Precise Flares, Every Time: An off-center mounted cone spins on an axis to effectively produce quality flares.
No Cracked Tubes: A clutch mechanism stops the flaring when the job is done.
Accurate Cutting: A unique, four-roller tracking system keeps the tube from threading.
Professional Deburring: Conveniently deburr tubes and fittings 1/4" nominal and larger.

CATALOG NO.	DESCRIPTION	TUBE SIZES (O.D.)	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1937685	Orbital Flare with Large Diameter Tubing Cutter and Pocket Size Deburring Tool	3/16", 1/4", 5/16", 3/8", 1/2", 5/8", 3/4"	9" x 12-1/2" x 2-1/2"	5.8 lbs.	EA	1

FLARING TOOLS CONT'D

Large Basic Flare



1838955

The hilmor Large Basic Flare has all the advantages of hilmor flaring tools with the bulked-up size to handle 3/4" to 1-1/8" tubes. And it can fit into spaces other flaring and swaging tools can't.

Features & Benefits

Durable: The cast steel yoke and hardened flaring bar are made to be knocked around.
Control: Steel wing nuts make it easy to hold pipe secure.
Quality Flares: An extra-long handle provides more leverage and self-centers for a consistent quality flare.

CATALOG NO.	DESCRIPTION	TUBE SIZES (O.D.)	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1838955	Large Basic Orbital Flare - 45°	3/4", 7/8", 1-1/8"	7" x 6" x 5-1/4"	3.7 lbs.	EA	1

Basic Flare



1838956

The hilmor flaring tools are the no-muss, no-fuss way to flare. Our Basic Flare handles 1/8" to 3/4" tubes.

Features & Benefits

Durable: The cast steel yoke and hardened flaring bar are made to be knocked around.
Control: Steel wing nuts make it easy to hold pipe secure.
Quality Flares: An extra-long handle provides more leverage and self-centers for a consistent quality flare.

CATALOG NO.	DESCRIPTION	TUBE SIZES (O.D.)	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1838956	Basic Orbital Flare - 45°	1/8", 3/16", 1/4", 5/16", 3/8", 1/2", 5/8", 3/4"	8-3/4" x 5-1/4" x 4-1/4"	2.4 lbs.	EA	1

Quick-Engage Flare and Swage Kit



1838947



Extra appendages are hard to come by these days. Instead, opt for the all-new hilmor Quick-Engage Flare and Swage. Simple setup, precise positioning and a secure hold allow you to quickly conquer and move on to the next job.

Features & Benefits

Less Work: Allows for faster flares and swages because it requires fewer rotations.
Simple Setup: A clothespin-inspired, spring-loaded block grips the tube securely.
Easy to Position: A tube-stop arrow slides to set correct height and positioning, while ball detents allow for easy flaring cone alignment.

Product Specifications

1 Bar - 45°, 1 Quick-Engage Yoke, 1 Flare Cone 3/16" to 3/4", 5 Swage Heads

CATALOG NO.	DESCRIPTION	TUBE SIZES (O.D.)	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1838947	Quick-Engage Flare and Swage Kit	3/16", 1/4", 5/16", 3/8", 1/2", 5/8", 3/4"	8-1/2" x 4-5/8" x 7-1/2"	3.5 lbs.	EA	1

Large Flare/Swage



1838948



When you need a precise, quality flare or swage, the hilmor Large Flare/Swage delivers. Its compact design allows it to fit where others can't. And, with a long handle for additional leverage, it can help give you a leg up on any job.

Features & Benefits

Durable: The cast steel yoke and hardened flaring bar are made to be knocked around.
Control: Steel wing nuts make it easy to hold pipe secure.
Small Space Capable: A compact design allows it to be used even in cramped spaces.
Quality Flares: An extra-long handle provides more leverage and self-centers for a consistent quality flare.

CATALOG NO.	DESCRIPTION	TUBE SIZES (O.D.)	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1838948	Large Flare/Swage - 45°	3/4", 7/8", 1-1/8"	7" x 6" x 6"	6.4 lbs.	EA	1

Basic Flare/Swage Kit



1937684

The hilmor Basic Flare/Swage Kit has the no-muss, no-fuss tools to flare AND swage tubes in a variety of sizes. The small Basic Flare bar handles 1/8" to 7/16" tubes, while the large Basic Flare bar helps you take on 1/2" to 3/4" tubes. Swage head attachments for sizes 1/8" to 3/4" make an entirely new tool for tube working.

Features & Benefits

Durable: The cast steel yoke and hardened flaring bars are made to be knocked around.
Control: Steel wing nuts make it easy to securely hold tube.
Small Space Capable: A compact design allows it to be used even in cramped spaces.
Quality Flares: An extra-long handle provides more leverage and self-centers for a consistent quality flare.

Product Specifications

2 Bars - 45°, 1 Basic Flare/Swage Yoke, 1 Flaring Head, 5 Swage Heads

CATALOG NO.	DESCRIPTION	TUBE SIZES (O.D.)	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1937684	Basic Flare/Swage Kit	1/8", 3/16", 1/4", 5/16", 3/8", 7/16", 1/2", 5/8", 3/4"	9" x 12-1/2" x 2-1/2"	5.0 lbs.	EA	1

SWAGING TOOLS

Compact Swage Tool Kit



1839015



The hilmor Compact Swage Tool is taking swaging to the next level. It has the power to swage 2-1/8" tubing and the control to swage 1/4" tubing without a crack. With its small, pistol-shape design, it can fit in the smallest of spaces. This patented design can reduce on-the-job fatigue with its easy setup and one-handed operation made possible by an innovative hydraulic mechanism and release button. It's even equipped for multiple sizes.

Features & Benefits

Picture-Perfect Swaging: Simply select the correct head, place it on the tool and make a quality swage.
Less Effort, More Control: The power to swage 7/8" tubing and the control to swage 3/8" without splitting the tube.
Small Space Capable: A compact design allows it to be used even in cramped spaces.
One-handed Operation: The lever mechanism and release button allow for one-handed swaging without the fatigue.

Product Specifications

3/8", 1/2", 5/8", 3/4", 7/8" Expander Heads, Deburrer, Compact Swage Tool

CATALOG NO.	DESCRIPTION	TUBE SIZES (O.D.)	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1839015	Compact Swage Tool Kit	3/8", 1/2", 5/8", 3/4", 7/8"	9" x 1-3/4" x 5"	8.5 lbs.	EA	1

Expander Heads & Replacement Parts		
Item Numbers	**Descriptions**	**Sizes**
1964042	CSEH14 Expander Head	1/4"
1839016	CSEH516 Expander Head	5/16"
1839017	CSEH38 Expander Head	3/8"
1839018	CSEH12 Expander Head	1/2"
1839019	CSEH58 Expander Head	5/8"
1839020	CSEH34 Expander Head	3/4"
1839021	CSEH78 Expander Head	7/8"

Item Numbers	**Descriptions**	**Sizes**
1839022	CSEH118 Expander Head	1-1/8"
1839023	CSEH138 Expander Head	1-3/8"
1839024	CSEH158 Expander Head	1-5/8"
1964043	CSEH218 Expander Head	2-1/8"
1839025	CSB Compact Swage Body Kit	N/A
1891258	Pocket Size Deburring Tool	N/A
Recommended Replacement Hydraulic Fluid		HV-15

Deluxe Compact Swage Tool Kit



1964041

Thoughtfully designed to fit into the smallest of spaces, the hilmor Compact Swage Tool can knock out the picture-perfect swage in just one shot. An patented hydraulic mechanism and release button let you take care of any job single-handedly.

Features & Benefits

Picture-perfect Swaging: Simply select the correct head, place it on the tool and make a quality swage.
One-handed Operation: The lever mechanism and release button allow for one-handed swaging without the fatigue.

Product Specifications

1/4", 5/16", 3/8", 1/2", 5/8", 3/4", 7/8", 1-1/8", 1-3/8", 1-5/8" Expander Heads, Pocket Size Deburring Tool, Compact Swage Tool

CATALOG NO.	DESCRIPTION	TUBE SIZES (O.D.)	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1964041	Deluxe Compact Swage Tool Kit	1/4", 5/16", 3/8", 1/2", 5/8", 3/4", 7/8", 1-1/8", 1-3/8", 1-5/8"	9" x 1-3/4" x 5"	8.5 lbs.	EA	1

Additional Expander Heads		
Item Numbers	**Descriptions**	**Sizes**
1964043	CSEH516 Expander Head	2-1/8"

Punch Swage Set



1839008

Get the sizes you need, right when you need them, with the hilmor 5-piece Punch Swage Set. Punches are available in a set with 1/4", 5/16", 3/8", 1/2" and 5/8".

CATALOG NO.	DESCRIPTION	TUBE SIZES (O.D.)	DIMENSIONS	WEIGHT	UOM	ORDER MUL.
1839008	Punch Swage Set	1/4", 5/16", 3/8", 1/2", 5/8"	1/4" - Dia: 1/2"; H: 3" 5/16" - Dia: 2/3"; H: 3" 3/8" - Dia: 2/3"; H: 3" 1/2" - Dia: 7/8"; H: 3-3/4" 5/8" - Dia: 7/8"; H: 3-3/4"	3 oz.	EA	1

Multi-Swage Punch



1839009

One punch. Multiple tube sizes. The hilmor Multi-Swage Punch is designed to fit 1/4" to 5/8" tubes. Made of steel and chrome-coated for a durable design with less friction against the tube.

CATALOG NO.	DESCRIPTION	TUBE SIZES (O.D.)	DIMENSIONS	WEIGHT	UOM	ORDER MUL.
1839009	Multi-Swage Punch	1/4" to 5/8" (1/4", 5/16", 3/8", 1/2", 5/8")	Dia: 7/8"; H: 5-1/4"	6 oz.	EA	1

TUBE BENDING

Compact Bender Kits



1926598

hilmor

Small in size. Big on advantages. The hilmor Compact Bender will help you get the job done right – from start to finish. Small-space capabilities, one-handed operation and precise bends – you get it all. A universal crossbar and color-coded mandrels provide simple setup and easy size identification. An advanced mandrel design and quick-release mechanism allow for an easy tube release. You can count on precise bends of 1/4", 5/16", 3/8", 1/2", 5/8", 3/4" and 7/8" tubing up to 90°.

Features & Benefits

Simple Setup: Universal crossbar and color-coded mandrels make identifying and changing sizes quick and easy.

One-handed Operation: A ratcheting mechanism and innovative release lever allow for bending with one hand.

Small Space Capable: A compact design allows it to fit where others can't.

Product Specifications

1839032 Compact Bender Kit
Body and crossbar for 1/4" to 7/8", 1/4", 5/16", 3/8", 1/2", 5/8", 3/4" and 7/8" mandrels.

1926598 Compact Bender Kit with Reverse Bending Attachment
Body and crossbar for 1/4" to 7/8", 1/4", 5/16", 3/8", 1/2", 5/8", 3/4", 7/8" mandrels and Reverse Bending Attachment

CATALOG NO.	DESCRIPTION	TUBE SIZES (O.D.)	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1839032	Compact Bender Kits	1/4", 5/16"	16-3/8" x 12-1/4" x 3-1/4"	8.8 lbs.	EA	1
1926598	Compact Bender Kit with Reverse Bending Attachment	1/4", 5/16"	16-3/8" x 12-1/4" x 3-1/4"	10.8 lbs.	EA	1

Replacement Parts

Item Numbers	Descriptions	Sizes
1839035	Compact Bender Mandrel	1/4"
1839036	Compact Bender Mandrel	5/16"
1839037	Compact Bender Mandrel	3/8"
1839038	Compact Bender Mandrel	1/2"

Replacement Parts cont'd

Item Numbers	Descriptions	Sizes
1839039	Compact Bender Mandrel	5/8"
1839040	Compact Bender Mandrel	3/4"
1839041	Compact Bender Mandrel	7/8"

Tri-Tube Benders



1839026



1839027

hilmor

From start to final bend, the hilmor Tri-Tube Benders have you covered.

Features & Benefits

Precise Angles: Calibrated markings for making accurate bends up to 180°.

Comfortable Grip: Non-slip grip.

Lighten Your Load: Constructed out of lightweight die-cast aluminum.

Indexing Handle: Compact design for tight access (1839026 only).

Product Specifications

Tube Materials: Soft Tubing Only - Copper, Steel, Aluminum, Brass

CATALOG NO.	DESCRIPTION	TUBE SIZE (O.D.)	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1839026	Tri-Tube Bender	3/16", 1/4", 5/16", 3/8"	2-1/2" x 6" x 12-1/2"	1.8 lbs.	EA	1
1839027	Tri-Tube Bender	3/16", 1/4", 3/8", 1/2"	3-1/2" x 7-1/2" x 7"	2.5 lbs.	EA	1

Spring Benders



1839031

hilmor

Getting an accurate bend by hand isn't always easy. But, our Spring Benders can help simplify things. Four different benders are included to fit 1/4", 3/8", 1/2" and 5/8" tubing. Simply slip the Spring Bender over soft copper or aluminum tubing, and count on the spring to keep the tube from kinking.

Product Specifications

Tube Materials: Soft Tubing Only - Copper, Steel, Aluminum, Brass

CATALOG NO.	DESCRIPTION	TUBE SIZES (O.D.)	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1839031	Spring Benders	1/4", 3/8", 1/2", 5/8"	1/4" - 11-1/3" 3/8" - 11-1/3"" 1/2" - 11-1/3" 5/8" - 11-1/3"	5 oz.	EA	1

TUBE CUTTING

Kut-All Plastic Tube and Hose Cutter



PK-2

Tough, durable nylon. Blade closes into its own handle for safe handling. Replaceable high carbon, teflon coated steel blades. Ideal for cutting up to 1-1/8" I.D. plastic tubing, reinforced plastic tubing, rigid plastic pipe, and rubber hose.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PK-2	Kut-All Plastic Tube and Hose Cutter	EA	1

One-Handed PVC/Hose Cutter



6-T1191

The ratchet system holds the blade in place while you adjust your grip to increase the pressure. The high carbon steel blade maintains sharpness and resists chipping. These cutters can be used for cutting PVC, CPVC, Polyethylene, PEX, and ABS tubing. The cutters have a quick-blade reset and can be used as a one handed operation. With the handle locking strap for safe storage, the easy replacing blade feature, and the ergonomically designed handle, these cutters are a perfect addition to any tool box.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-T1191	Capacity: 1/8" to 1-5/8"; Length: 8-1/4" (210mm)	EA	1

Small Diameter Tubing Cutters



1885381 1885382 1885383

When you're in a tight space, this tool can definitely cut it. hilmor's ruggedly durable Small Diameter Tubing Cutters offer precision cuts with minimal burrs.

Features & Benefits

Rugged and Durable: An ergonomic, cast-zinc body and shock-resistant steel wheel reduce burrs while increasing life and durability.
Small Space Capable: Compact design allows this tool to fit where others can't.
Maximum Protection: A full-stop threading system offers maximum protection for cutting wheels.
Precision Flare Cutting: A flare-cutting groove allows for precision removal of material. Item 1885383 only.
Spare Blade Storage: A bonus blade comes with the tool and can be stored easily in the handle. Items 1885382 & 1885383 only.

CATALOG NO.	DESCRIPTION	DIAMETERS	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1885381	Small Diameter Tubing Cutter	1/8" - 5/8"	1-3/8" x 3/4" x 1-3/4"	4 oz.	EA	1
1885382	Small Diameter Tubing Cutter	1/8" - 1"	1-3/4" x 3/4" x 2-3/8"	6 oz.	EA	1
1885383	Small Diameter Tubing Cutter	1/8" - 1"	2" x 1" x 3"	8 oz.	EA	1

Large Diameter Tubing Cutters



1885385



1885384

This cutter can talk the talk without walking the walk. hilmor's Large Diameter Tubing Cutters feature a four-roller tracking system to keep the tube from threading. All the while, a shock-resistant steel wheel cuts through the tube like a knife through butter.

Features & Benefits

Rugged and Durable: An ergonomic, cast-zinc body and shock-resistant steel wheel reduce burrs while increasing life and durability.
Precision Flare Cutting: A flare-cutting groove allows for precision removal of material. Item 1885383 only.
Maximum Protection: A full-stop threading system offers maximum protection for cutting wheels.
Spare Blade Storage: A bonus blade comes with the tool and can be stored easily in the handle.
Accurate Cutting: A unique, four-roller tracking system keeps the tube from threading.
Professional Deburring: Conveniently deburr tubes with a replaceable machinist's reamer.

CATALOG NO.	DESCRIPTION	DIAMETERS	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1885384	Large Diameter Plastic Tubing Cutter	1/8" - 1-3/8"	2-3/4" x 1-3/4" x 6-1/4"	1.4 lbs.	EA	1
1885385	Large Diameter Tubing Cutter	1/8" - 1-3/4"	3" x 1-3/4" x 7-7/8"	1.7 lbs.	EA	1

TUBE CUTTING CONT'D

Plastic Tubing Cutter

We've cut out the unnecessary complexity so you can cut plastic. hilmor's Plastic Tubing Cutter gets the job done with ease. Simple design and intuitive features allow you to get a handle on any cut.

Features & Benefits

Rugged and Durable: An ergonomic, cast-aluminum body and stainless steel blade increase life and durability.
Comfortable Grip: A rubberized handle makes it easier to use in wet and dirty environments.
Easy to Open and Close: A conveniently positioned locking latch allows for true one-handed operation.



1885388



CATALOG NO.	DESCRIPTION	DIAMETER	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1885388	Plastic Tubing Cutter	1-5/16" MAX OD	11" x 5-1/2" x 1-2/5"	13 oz.	EA	1
1885390	Plastic Tubing Cutter Rep Blade	NA	NA	NA	EA	1

Ratcheting Plastic Tubing Cutters

1885393 Features & Benefits

Rugged and Durable: An ergonomic, cast-aluminum body and stainless steel blade increase life and durability.
Comfortable Grip: A rubberized handle makes it easier to use in wet and dirty environments.
Easy to Open and Close: A conveniently placed release button allows for true one-handed operation, while a locking tab secures the blade in place.

1885395 Features & Benefits

Rugged and Durable: An ergonomic, cast-aluminum body and high-carbon steel blade increase life and durability.
Comfortable Grip: Simply pull both handles apart to quickly start the next cut.



1885393



1885395

CATALOG NO.	DESCRIPTION	DIAMETER	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1885393	Ratcheting Plastic Tubing Cutter	1-5/8" MAX OD	9" x 1-1/8" x 4-1/8"	1.0 lbs.	EA	1
1885395	Ratcheting Plastic Tubing Cutter	2-3/8" MAX OD	13-1/8" x 1-1/3" x 6"	2.5 lbs.	EA	1

ACCESSORIES

Small Tubing Cutter Wheels



1885386



1885387

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
1885386	Small Tubing Cutter Wheels - 2 Pack (Fits 1885381, 1885382)	PK	1
1885387	Tubing Cutter Wheels - 2 Pack (Fits 1885383, 1885384, 1885385)	PK	1
21024TCD	Replacement Deburrer for 1885384, 1885385	EA	1

MANIFOLDS

4-Valve Aluminum Manifold

We know that manifolds are your lifeline. So, when we decided to retool the features and design, we were meticulous down to the last detail.

Features & Benefits


Extra Confidence:	Built to last with a forged aluminum body. Designed to be leak-resistant with replaceable stainless steel valve seats, SAE-style O-rings and a securely seated, large sight glass.
Quick on the Job:	Get faster vacuum pulls with a true 3/8" bore throughout the valve.
Comfortable Grip:	A rubberized handle makes it easier to use in wet and dirty environments.
Glows in the Dark:	Light-activated paint illuminates, so you won't be left in the dark.
Built-in Pressure Reminder:	A pressure reminder allows you to set the pressure ring and reference it later.

Product Specifications

Accuracy:	Class 1 - 1% Accuracy (full scale)
Gauge Connection Type:	1/8" NPT Male Fitting
Valve Type:	Double O-ring Piston Style
Valve Seat (Orifice):	Replaceable Stainless Steel (SAE-style straight thread with O-ring)
Sight Glass:	Bonded steel with SAE-style straight thread with O-ring
Vacuum Port:	3/8" full bore (quantity 1)
Charge Ports:	1/4" (quantity 3)



1839130



1839131

hilmar

CATALOG NO.	DESCRIPTION	REFRIGERANTS	DIMENSIONS (LXWXH) W/O HOOK	WEIGHT	TEMP.	PRESSURE RANGE LOW	PRESSURE RANGE HIGH	UOM	ORDER MUL.
1839109	4-Valve Aluminum Manifold w/60" Hoses and Ball Valve Adapters	R410A	8-7/8" x 4" x 7-1/8"	7.1 lbs.	F/C	-30" HG/ 300/500 psi	0/800 psi	EA	1
1839128	4-Valve Aluminum Manifold w/60" Hoses and Ball Valve Adapters	HP22-407C-410A (Heat Pump)	8-7/8" x 4" x 7-1/8"	7.1 lbs.	NA	0/800 psi	0/800 psi	EA	1
1839130	4-Valve Aluminum Manifold w/60" Hoses and Ball Valve Adapters	R22-404A-410A	8-7/8" x 4" x 7-1/8"	7.1 lbs.	F	-30" HG/ 300/500 ps	0/800 psi	EA	1
1839111	4-Valve Aluminum Manifold w/o Hoses	R410A	8-7/8" x 4" x 7-1/8"	3.4 lbs.	F/C	-30" HG/ 300/500 psi	0/800 psi	EA	1
1839129	4-Valve Aluminum Manifold w/o Hoses	HP22-407C-410A (Heat Pump)	8-7/8" x 4" x 7-1/8"	3.4 lbs.	NA	0/800 psi	0/800 psi	EA	1
1839132	4-Valve Aluminum Manifold w/o Hoses	R22-404A-410A	8-7/8" x 4" x 7-1/8"	3.4 lbs.	F	-30" HG/ 300/500 psi	0/800 psi	EA	1
1839110	4-Valve Aluminum Manifold w/60" Hoses, Dual Readout Thermometer and Ball Valve Adapters	R410A	8-7/8" x 4" x 7-1/8"	7.3 lbs.	F/C	-30" HG/ 300/500 psi	0/800 psi	EA	1
1839131	4-Valve Aluminum Manifold w/60" Hoses, Dual Readout Thermometer and Ball Valve Adapters	R22-404A-410A	8-7/8" x 4" x 7-1/8"	7.3 lbs.	F	-30" HG/ 300/500 psi	0/800 psi	EA	1

MANIFOLDS CONT'D

2-Valve Aluminum Manifold



1839134

The rough-and-tumble durability of our 4-Valve with the simplicity of a 2-Valve design.

Features & Benefits

Extra Confidence: Built to last with a forged aluminum body. Designed to be leak-resistant with replaceable stainless steel valve seats, SAE-style O-rings and a securely seated, large sight glass.
Comfortable Grip: A rubberized handle makes it easier to use in wet and dirty environments.
Easy to Read: Improved graphics and high-contrast colors deliver precise readings at a glance
Glows in the Dark: Light-activated paint illuminates, so you won't be left in the dark
Built-in Pressure Reminder: A pressure reminder allows you to set the pressure ring and reference it later.

Product Specifications

Accuracy: Class 1 - 1% Accuracy (full scale)
Gauge Connection Type: 1/8" NPT Male Fitting
Valve Type: Double O-ring Piston Style
Valve Seat (Orifice): Replaceable Stainless Steel (SAE-style straight thread with O-ring)
Sight Glass: Bonded steel with SAE-style straight thread with O-ring
Charge Ports: 1/4" (quantity 3)

CATALOG NO.	DESCRIPTION	REFRIGERANTS	DIMENSIONS (LXWXH) W/O HOOK	WEIGHT	TEMP.	PRESSURE RANGE LOW	PRESSURE RANGE HIGH	UOM	ORDER MUL.
1839126	2-Valve Aluminum Manifold	R22-134A-404A	8-7/8" x 1-3/4" x 7-1/8"	7.1 lbs.	F	-30" HG/120/350 psi	0/500 psi	EA	1
1839134	2-Valve Aluminum Manifold	R22-404A-410A	8-7/8" x 1-3/4" x 7-1/8"	7.1 lbs.	F	-30" HG/120/500 psi	0/800 psi	EA	1

2-Valve Basic Manifold



1932650

The hilmor 2-Valve Basic Manifold with 60" Hoses provides all the features you've come to expect from a standard manifold, and then some. It has a durable design, improved accessibility and smart functionality.
The 3-1/8" gauges have been optimized for greater readability with improved graphics, high-contrast color and glow-in-the-dark functionality. Sold with hilmor 60" hoses.

Features & Benefits

Easy to Read: Improved graphics and high-contrast colors deliver precise readings at a glance.
Glows in the Dark: Light-activated paint illuminates, so you won't be left in the dark.
Comfortable Grip: A rubberized handle makes it easier to use in wet and dirty environments.

Product Specifications

Accuracy: Class 1 - 1% Accuracy (full scale)
Gauge Connection Type: 1/8" NPT Male Fitting
Valve Type: Double O-ring Piston Style
Charge Ports: 1/4" (quantity 3)
Hoses Included: 1839153 Hose 60" - Set of 3

CATALOG NO.	DESCRIPTION	REFRIGERANTS	DIMENSIONS (L X W X H) W/O HOOK	WEIGHT	TEMP.	PRESSURE RANGE LOW	PRESSURE RANGE HIGH	UOM	ORDER MUL.
1839114	2-Valve Basic Manifold with 60" Hoses	R410A	7-1/4" x 3" x 6"	3.9 lbs.	F/C	-30" HG/ 300/500 psi	0/800 psi	EA	1
1932650	2-Valve Basic Manifold with 60" Hoses	R22-404A-410A	7-1/4" x 3" x 6"	3.9 lbs.	F	-30" HG/ 300/500 psi	0/800 psi	EA	1

Manifold Replacement Parts

CATALOG NO.	DESCRIPTION	LOCATION	UOM	ORDER MUL.
1932944	Analog Manifold Hook	1	EA	1
1932949	Manifold Valve Handle - Blue	2	EA	1
1932951	Manifold Valve Handle - Yellow	3	EA	1
1932950	Manifold Valve Handle - Red	4	EA	1
1932945	2-Valve Seat Assembly (2-1/4")	5	EA	1
1932946	4-Valve Seat Assembly (3-1/4", 1-3/8")	6	EA	1



MANIFOLD GAUGES

Manifold Gauge

DiversiTech's MG-1 Manifold Gauge provides the technician with a precision diagnostic and monitoring analog gauge set complete with hoses.
The Manifold Gauge and Hose Set includes:

- 2 valve brass manifold
- 5' long high pressure hose set
- For use with the following refrigerants:
  - R-410A
  - R-22
  - R-407C
- Detailed gauge readings in PSI and °F



MG-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
MG-1	Manifold Gauge and Hose Set	EA	1
MG-RGB	Replacement Gauge - Blue	EA	1
MG-RGR	Replacement Gauge – red	EA	1

Leak Test Gauge

This Gas gauge test is ideal for teasing all new installations of or leaks and passing inspection code. The special sensitive diaphragm gauges for more accurate low pressure readings.



TG-30

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
TG-05	Leak Test Gauge – 3/4" FPT., 15 psi	EA	1
TG-30-12	Leak Test Gauge – 1/2" FPT. Conn., 30 psi	EA	1
TG-30	Leak Test Gauge – 3/4" FPT. Conn., 30 psi	EA	1
TG-30-1	Leak Test Gauge – 1" FPT. Conn., 30 psi	EA	1

Regulators

Rehvac nitrogen and CO_2 regulators feature a machined brass piston with internal bleed-down safety. This design makes the Rehvac regulator long lasting and reliable.



CT-475M

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CA-252C	Rehvac Adjustable Regulator, 0-250psi	EA	1
CT-475M	Regulator, N/CO2 – 0-475 psi	EA	1

Gauges

Rehvac replacement gauges are reliable and easy to read.



GA-06

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
GA-06	Rehvac 600 psi Low Pressure Replacement Gauge	EA	1
GA-30	Rehvac 3000 psi High Pressure Replacement Gauge	EA	1

Analog Gauges

You need accurate readings, and you need them at a glance. hilmor gauges were made for just that. Simply choose the gauge you need, and put it to work.

Features & Benefits

Easy to Read: Improved graphics and high-contrast colors deliver precise readings at a glance.
Rugged and Durable: High-impact protective boots and steel construction mean dropping it won't ruin your day.

Product Specifications

Accuracy: Class 1 - 1% Accuracy (full scale)
Size: 3-1/8" (80mm) Gauge
Fitting: 1/8" NPT Male connection
Included Parts: Protective boot and dial indicator ring





hilmor

CATALOG NO.	DESCRIPTION	REFRIGERANTS	DIMENSIONS (DEPTH, DIAMETER)	WEIGHT	TEMP.	PRESSURE RANGE	UOM	ORDER MUL.
1839082	Analog Gauge - Low Side (Blue)	R410A	1-3/4", 3-5/8"	6 oz.	F/C	-30" HG/ 300/500 psi	EA	1
1839088	Analog Gauge - Low Side (Blue)	R22-134A-410A	1-3/4", 3-5/8"	6 oz.	F	-30" HG/ 120/350 psi	EA	1
1839090	Analog Gauge - Low Side (Blue)	HP22-407C-410A	1-3/4", 3-5/8"	6 oz.	F	0/800 psi	EA	1
1839092	Analog Gauge - Low Side (Blue)	R22-404A-410A	1-3/4", 3-5/8"	6 oz.	F	-30" HG/ 300/500 psi	EA	1
1839083	Analog Gauge - High Side (Red)	R410A	1-3/4", 3-5/8"	6 oz.	F/C	0/800 psi	EA	1
1839089	Analog Gauge - Low Side (Red)	R22-134A-410A	1-3/4", 3-5/8"	6 oz.	F	0/500 psi	EA	1
1839091	Analog Gauge - Low Side (Red)	HP22-407C-410A	1-3/4", 3-5/8"	6 oz.	F	0/800 psi	EA	1
1839093	Analog Gauge - Low Side (Red)	R22-404A-410A	1-3/4", 3-5/8"	6 oz.	F	0/800 psi	EA	1

MANIFOLD GAUGES CONT'D

Analog Gauge Replacement Parts

CATALOG NO.	DESCRIPTION	LOCATION	UOM	ORDER MUL.
1932986	Analog Gauge Lens	1	EA	1
1932947	Low Side Analog Gauge Boot w/Ring	2	EA	1
1932948	High Side Analog Gauge Boot w/Ring	3	EA	1



HOSES

Hoses

Rehvac hoses are designed specifically for air, nitrogen, or CO_2 service. Featuring a 600 psi working pressure and a 2200 psi burst pressure, Rehvac hoses are abrasion resistant and long lasting.



CW-30

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CW-15	Rehvac 15" Whip Hose	EA	1
CW-30	Rehvac 30" Whip Hose	EA	1

Refrigeration Hoses

The hilmor 36" and 60" hoses are designed with smart features including an extra abrasion-resistant layer for tough environments.



1839159

hilmar

Features & Benefits

Superior Protection: An extra abrasion-resistant layer for the tough environments of HVAC/R.

Handles High Pressure: Rated for 800 PSI working pressure to work with high-pressure refrigerants.

Product Specifications

Max. Allowable Working Pressure: 800 PSI
Burst Pressure: 4000 PSI
Operating Temp.: -20°F to 180°F
End Connection: Straight by 45 degree

CATALOG NO.	DESCRIPTION	WEIGHT	DIAMETER	UOM	ORDER MUL.
1839156	36" Hose - Blue	6 oz.	1/4"	EA	1
1839158	36" Hose - Set of 3	6 oz.	1/4"	EA	1
1839159	36" Hose - VAC	6 oz.	3/8"	EA	1
1839150	60" Hose - Red	8 oz.	1/4"	EA	1
1839151	60" Hose - Blue	8 oz.	1/4"	EA	1
1839152	60" Hose - Yellow	8 oz.	1/4"	EA	1
1839153	60" Hose - Set of 3	8 oz.	1/4"	EA	1
1839154	60" Hose - VAC	8 oz.	3/8"	EA	1

Stainless Steel Evacuation Hoses

When pulling a vacuum, use hilmor Stainless Steel Evacuation Hoses to help prevent permeation and outgassing for a faster evacuation.



1950568, 1950569, 1980570, 1950651


hilmar

Product Specifications

Max. Working Pressure: 800 PSI
Burst Pressure: 4000 PSI

CATALOG NO.	DESCRIPTION	DIAMETER	CONNECTION SIZE	UOM	ORDER MUL.
1950568	36" Stainless Steel Evacution Hose	1/4"	1/4" x 1/4"	EA	1
1950569	36" Stainless Steel Evacution Hose	3/8"	1/4" x 3/8"	EA	1
1950570	60" Stainless Steel Evacution Hose	1/4"	1/4" x 1/4"	EA	1
1950651	60" Stainless Steel Evacution Hose	3/8"	1/4" x 3/8"	EA	1

Refrigeration Hose Replacement Parts



CATALOG NO.	DESCRIPTION	LOCATION	UOM	ORDER MUL.
1932984	Hose Gaskets (3/8", Pack of 10)	1	EA	1
1932982	Hose Gaskets (1/4", Pack of 12)	2	EA	1
1932985	Hose Threaded Depressors, Pack of 6	3	EA	1

BALL VALVE HOSES

Refrigeration Hoses with Ball Valve Extensions

Rated for 800 PSI working pressure to work with high-pressure refrigerants. Includes an easy-turn valve for added control of refrigerant loss.



1839143

hilmor

Features & Benefits

Superior Protection: An extra abrasion-resistant layer for the tough environments of HVAC/R.
Handles High Pressure: Rated for 800 PSI working pressure to work with high-pressure refrigerants.

Product Specifications

Max. Allowable Working Pressure: 800 PSI
Burst Pressure: 4000 PSI
Operating Temp.: -20°F to 180°F
Hoses End Connection: Straight by Straight Ball Valve Extension
Connection: Straight by 45°

CATALOG NO.	DESCRIPTION	DIAMETER	WEIGHT	UOM	ORDER MUL.
1839140	60" Hose w/Ball Valve Ext - Red	1/4"	15 oz.	EA	1
1839141	60" Hose w/Ball Valve Ext - Blue	1/4"	15 oz.	EA	1
1839142	60" Hose w/Ball Valve Ext - Yellow	1/4"	15 oz.	EA	1
1839143	60" Hose w/Ball Valve Ext - Set of 4	1/4" & 3/8"	3.8 lbs.	EA	1

CATALOG NO.	DESCRIPTION	DIAMETER	WEIGHT	UOM	ORDER MUL.
1839144	60" Hose w/Ball Valve Ext - VAC	3/8"	1.3 lbs.	EA	1
1935930	72" Hose w/Ball Valve Ext - Set of 3	1/4"	3.0 lbs.	EA	1
1936001	72" Hose w/Ball Valve Ext - VAC	3/8"	1.5 lbs.	EA	1
1936002	72" Hose w/Ball Valve Ext - Set of 4	1/4" & 3/8"	4.5 lbs.	EA	1

Refrigeration Hoses with Ball Valve Ends

Our retooled hoses includes an easy turn valve for added control of refrigerant loss. Features an extra abrasion-resistant layer for superior protection in tough conditions. All of our hoses are rated for 800 PSI working pressure to work with the newest high-pressure refrigerants.



1935917

hilmor

Features & Benefits

Minimize Refrigerant Loss: Easy-turn valve for added control of refrigerant loss.
Handles High Pressure: Rated for 800 PSI working pressure to work with high-pressure refrigerants.
Small Space Capable: A compact design allows it to be used even in cramped spaces.

Product Specifications


Max. Allowable Working Pressure: 800 PSI
Burst Pressure: 4000 PSI
Operating Temp.: -20°F to 180°F
Hoses End Connection: Straight by 45 degrees

CATALOG NO.	DESCRIPTION	DIAMETER	WEIGHT	UOM	ORDER MUL.
1935917	48" Hose w/Ball Valve Ext - Set of 3	1/4"	1.8 lbs.	EA	1
1935918	48" Hose w/Ball Valve Ext - Vacuum	3/8"	1.8 lbs.	EA	1
1935924	60" Hose w/Ball Valve Ext - Set of 3	1/4"	1.8 lbs.	EA	1
1935925	60" Hose w/Ball Valve Ext - Set of 4	1/4" & 3/8"	1.8 lbs.	EA	1
1935926	60" Hose w/Ball Valve Ext - Ball Valve	3/8"	1.8/1.0 lbs.	EA	1

HOSE ADAPTERS

Ball Valve Extensions

We all know that controlling refrigerant loss on the jobsite is a big deal. And the hilmor Ball Valve Extension is here to help. It is designed with an extra 6" of hose for additional length.



1839148, 1839149

hilmor

Features & Benefits

Superior Protection: An extra abrasion-resistant layer for the tough environments of HVAC/R.
Handles High Pressure: Rated for 800 PSI working pressure to work with high-pressure refrigerants.

Product Specifications

Max. Allowable Working Pressure: 800 PSI
Burst Pressure: 4000 PSI
Operating Temp.: -20°F to 180°F
End Connection: Straight by 45 degree

CATALOG NO.	DESCRIPTION	LENGTH	WEIGHT	DIAMETER	UOM	ORDER MUL.
1839148	Ball Valve Ext - Set of 3	8"	4 oz.	1/4"	EA	1
1839149	Ball Valve Ext - VAC	8"	4 oz.	3/8"	EA	1

VALVE CORE REMOVAL

Valve Core Removal Tool

Valve Core Removal Tools are designed to make work more efficient, but there's nothing efficient about losing tools or equipment. The hilmor Valve Core Removal Tool has a built-in rare earth magnet on the back of the plunger for convenient jobsite storage. After removing the core for evacuation or change-out, the plunger and valve core can be stored on the side of the unit. The tool comes in both 1/4" and 5/16" sizes. The hilmor Valve Core Removal Tool uses a spring gripper, as opposed to an O-ring to grab valve cores, increasing the life of the tool.



1947967 1947968

Features & Benefits

Jobsite Storage:	Built-in rare-earth magnet for convenient plunger storage, minimizing lost parts on the job.
Superior Versatility:	Vacuum tested to 20 microns and tested to 800 PSI working pressure.
Reliable Core Gripper:	Securely and confidently remove valve cores for unrestricted flow.
Vacuum Gauge Port:	1/4" side flare to easily connect a vacuum gauge.

Product Specifications

Max. Allowable Working Pressure:	800 PSI
Burst Pressure:	4000 PSI
Operating Temp.:	-20°F to 180°F

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	CONNECTION SIZE	UOM	ORDER MUL.
1947967	Valve Core Removal Tool	2-1/2" x 5-3/4" x 7-7/8"	8 oz.	1/4"	EA	1
1947968	Valve Core Removal Tool	2-1/2" x 5-3/4" x 7-7/8"	8 oz.	5/16"	EA	1

Valve Core Removal Tool

Designed to remove and replace valve cores without losing the refrigerant charge. Connects to any 1/4" male flare fitting. Saves time, saves refrigerant.



301

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
301	Valve Core Removal Tool	EA	1
VCRT-1	Valve Core Removal Tool	EA	1

GENERAL TOOLS

Hydrogauge

Economical Pressure measurements.

- Replaces ordinary U-tube manometers
- Measures gas pressure easily and efficiently
- Direct reading, no plus or minus readings to add together as in old fashioned U-tubes
- Fills like a glass of water, no more air bubbles
- Strong magnet for mounting
- Heavy-duty construction
- Made of industrial grade, flexible PVC plastic
- Lightweight; Easy to use
- 6-HG15 water column height: 15"
- Plastic: 30" to 36" of industrial grade flexible plastic
- Hose fitting: All brass



6-HG15

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-HG15	Hydrogauge Manometer	EA	1

Gas Pressure Test Kit

Rugged, Heavy Duty Field Use.

- Measure Natural gas (methane) or LP gas pressure across appliance manifolds.
- Test gas stoves, furnaces, dryers and other gas appliances. Can also be used for other non-corrosive gases.
- Large 2" sensitive diaphragm gauge is calibrated in inches of water column, also shows ounces per square inch
- Magnified lens
- Easier to use than a manometer
- Range: 0 to 35 inches of water column (in. H_2O) 0 to 20 ounces per square inch (oz./in^2)



6-GPK035

Includes: 2" sensitive diaphragm gauge; 3' of rubber tubing; brass fitting for quick connection to the appliance manifold 3/8" NPT; molded hard case.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-GPK035	Gas Pressure Test Kit	EA	1

GENERAL TOOLS

007 Control Checker



TC-007

A lifetime tool for monitoring and checking safety controls and operating controls. One unit for all voltages 24-460 VAC or DC without switching dials or meters. Compact, 4 oz, reliable. Saves troubleshooting. For normally closed controls, 007 connects in parallel with safety control. When the safety control opens in response to a problem in the system, 007 red LED turns on and remains on until reset manually. With intermittent problem, the LED remains on indicating the control is open. For operating controls, 007 verifies the status of all types indicating if there is power to the holding coil, the NC contact is open or closed, the thermostat contacts are open or closed, there is power to the contactor or starting holding coil, the overloads are open or closed, or there is a bad connection either on control or power side. NOTE: May use with lockout relays. Features battery check and reset switch. Includes 9-volt battery. 007 may be used over and over.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
TC-007	007 Control Checker	EA	1

U.S. Pat. No. 4,092,625.

Refractometer

The Refractometer can measure the freezing point of coolants, glycol and the Charge Condition of Batteries.



6-REF401

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-REF401	Refractometer	EA	1

Liquid Charger



LC500

Liquid low side charging adapter. For use with all CFC, HCFC and HFC refrigerants on 1/2 ton and larger units. 1/4" female SAE flare inlet , 1/4" male SAE flare outlet.

Features & Benefits

Less Work: Eliminates the need to heat the refrigerant.

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
LC500	Liquid Charger	4.4" x 1" x 1"	0.65 lbs.	EA	1

Tattle-Tale Control Monitor



TT-24

Identifies open controls in seconds. A single use monitoring device for determining which, safety control has opened in response to a malfunction. Saves wasted hours tracing a safety control shutdown, even if intermittent. A quick, inexpensive way to visually spot where the problem is. Simply install in parallel with each safety control. When a control opens, the red indicator flag pops up. You will know immediately which area of the system is experiencing problems. Disposable, safe, simple to use, and pocket sized. Monitors safety controls, fuses, overload relays, motor protectors, freeze controls, limit controls, safety switches, fusible links, or steam control. CAUTION: Not to be used with lockout relays, use TC-007.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
TT-120	Tattle-Tale Control Monitor - 120 Volt AC or DC, pack of 3	PK	1
TT-24	Tattle-Tale Control Monitor - 24 Volt AC or DC, pack of 3	PK	1
TT-240	Tattle-Tale Control Monitor - 240 Volt AC or DC, pack of 3	PK	1

Tolerance on all voltages shown is ± 20%. U.S. Pat. No. 4,250,480.

Deluxe Hi-Tension Hacksaw



540-278HX0002



540-278BM0024

Hackframe featuring handle and end pieces made of die cast aluminum. Lightweight yet rigid and highly tensioned (up to 25,000 psi) for cleaner, surer cut. Permanent blade pins feature versatile angling (up to 55°) for flush cutting. Blade can be inserted in handle to be used as compass saw. Frame will fit most standard tool boxes.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
540-278HX0002	Hacksaw Frame with Blade	EA	1
540-278BM0024	Replacement Blades for Hacksaw Frame 12" x 24T	EA	10

Cable Tie Tensioning Tool



1891190

The hilmor Cable Tie Tensioning Tool can relieve the stress of the job. It seamlessly tightens heavy and lightweight cable, and cuts excess material with its easy-to-use lever.

Features & Benefits

Versatility: Works with both light and heavy-duty nylon cable ties.

Clean Cut: Easy-to-use cutting lever allows for flush cutting of excess material.

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891190	Cable Tie Tensioning Tool	7-5/8" x 3-7/8" x 5/8"	10 oz.	EA	1

GENERAL TOOLS CONT'D.

T-50 Series Staples and Staple Guns

The #1 selling staple gun in the world! Used extensively by building contractors, home do-it-yourselfers and specialty trade applications for tacking insulation, ceiling tile, window screening, cornerite, and 1001 other jobs ranging from light to heavy duty work. The T-50 Outward Clinch Staple Gun is ideal for fiberglass ductwork.



540-T50MOC

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
540-506	3/8" Leg Staples for T50 Staple Guns (1,250)	EA	4
540-508	1/2" Leg Staples for T50 Staple Guns (1,250)	EA	4
540-509	9/16" Leg Staples for T50 Staple Guns (1,250)	EA	4
540-T50M	T50M Heavy Duty Staple Gun Tacker	EA	1
540-T50MOC	T50MOC Outward Clinch Staple Gun	EA	1

Bi-Metal Reciprocating Saw Blades

Premium high speed steel with a flexible alloy back. Bi-metal blades fit all reciprocating saws with 1/2" shank.



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
540-R8CCRF	Cast Iron-Ceramic Tile Carbide Grit 8" Long	EA	1
540-RB125W	12" x 6T Wood and Nail 3/4" x 12" x .050	EA	5
540-RB414M	4" x 14T Short Metal Cutting 3/4" x 4" x .035	EA	5
540-RB418M	4" x 18T Short Metal Cutting 5/8" x 4" x .035	EA	5
540-RB610H-DM	6" x 10T HD Metal Cutting 3/4" x 6" x .035	EA	5
540-RB614H-DM	6" x 14T HD Metal Cutting 3/4" x 6" x .035	EA	5
540-RB618H-DM	6" x 18T HD Metal Cutting 3/4" x 6" x .035	EA	5
540-RB624H-DM	6" x 24T HD Metal Cutting 3/4" x 6" x .035	EA	5
540-RB636DW	Drywall Cutting with V Head 5/8" x 6" x .035	EA	5
540-RB636W	6" x 6T Wood and Nail Slope 3/4" x 6" x .050	EA	5
540-RB656WS	6" x 6T Wood and Nail Scroll 3/4" x 6" x .050	EA	5
540-RB810H-DM	8" x 10T HD Metal Cutting 3/4" x 8" x .035	EA	5
540-RB814H-DM	8" x 14T HD Metal Cutting 3/4" x 8" x .035	EA	5
540-RB956W	9" x 6T Wood and Nail 3/4" x 9" x .050	EA	5

Magjumper

Magjumper from DiversiTech is a magnetic jumper for low voltage troubleshooting. It features a 20" length with magnetic tips that won't pop off like alligator clips sometimes can. It stays flexible even in cold weather and is perfect for recessed terminals. Magjumper is ideal for use on control boards, zone panels, thermostats, hydronics and automation controllers.



CT800

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
MAG-1	Magjumper Terminal Kit	EA	1

4-Piece Hook and Pick Set

For separating wires, removing small fuses, "O" rings, retrieving washers and loose parts too small to pick up with your fingers. Bright-dipped, anodized hex-shaped aluminum handles with powerful magnet on end. Handy screw-in hook, pick, point and scribe. High carbon polished needle steel. All in a compact zip-lock vinyl pouch that fits in your shirt pocket! Set includes four screw-in tips plus handle.



MHP-4

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
MHP-4	4-Piece Hook and Pick Set	EA	1

Test Leads

Alligator clips are covered by pure vinyl boots for flexibility at any temperature without cracking.



FTL3

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
ACK4	2 Red and 2 Black Boots w/4 Alligator Clips	EA	1
FTL3	Pair, Red and Black – 36"	EA	1
FTL3D	Pair, Red and Black – Super Heavy Duty – 36"	EA	1

Multi Color Test Leads

Easy to use multi-colored test leads. 5 colors (white, red, black, yellow, green) with 2 connections each for easy testing on the job. Wire is 18 gauge, 18" long.



CT800

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CT800	Multi Color Test Leads	EA	1

Test Cord (Female)

Heavy duty red and black boots are on this cord. The cord has large clips, 3 wires, and is 24 in. With this cord, you can get power in remote areas without an 110V outlet. The voltage is 3 to 20V and has 125 AMPs. The wire gauge is 16 and the weight is .36 lb.



6-CT700F

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-CT700F	Test Cord (Female)	EA	1

Blind Rivet Tools

Heavy duty hand rivet tool that offers long handles to increase leverage and to secure the rivet in the nosepiece while the tool is in use. Powerful riveting capacity with 4 standard nosepieces to set 3/32", 1/8", 5/32", and 3/16" blind rivets.



5107

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5107	Heavy-duty tool; 4 interchangeable nose pieces to accommodate 3/32", 1/8", 5/32", 3/16" steel or aluminum rivets	EA	1

GENERAL TOOLS CONT'D

Test Leads

These are replacement leads.



5031

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5031	Low Voltage test Leads; eight 22" long, color-coded leads with fully insulated alligator chips	EA	1
5041	Small Hook Type Low Voltage Test Leads; retractable hooks, 36" thermoplastic 22 gauge wire, nylon body/plunger, red/black	EA	1
5042	Large Hook Type Low Voltage Test Leads; retractable hooks, 36" PVC insulated 20 gauge wire, nylon body/plunger, red/black	EA	1
5046	Flexible Test Leads; steel alligator clips with vinyl red and black insulators; 36" 20 gauge wire; extremely flexible	EA	1

Clips

The clips are alligator clips and have vinyl red and black insulators.



5033

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5033	Steel Alligator Clips for use with test probes (.075"-.080"); 1-31/32" long; jaws open 5/16" max., pack of 2 red, 2 black, 4 clips	PK	1
5035	Copper Alligator Clips; 1-31/32" long; jaws open 5/16" max.; crimper slotted screw connection, pack of 2 red, 2 black, 4 clips	PK	1
5036	Steel Test Clips; 20A, 2-7/16" long; jaws open 5/8" max.; crimper slotted screw connection, pack of 1 red, 1 black, 2 clips	PK	1

Cable Markers

Cable markers come in books of 450 markers with matching terminal markers. Markers are mounted on dispenser cards in the book. Cable markers are suitable for above and below ground applications. Books are made of vinyl impregnated cloth that resists moderate amounts of dirt, oil and heat. The blank Write-On Markers (WM1014) are made of durable vinyl film that resists water, oils, and fungus. They can also withstand extremes in temperature.



WM1002

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
WM1002	Alpha-Numeric Cable Marker Book; contains 10 each: A-Z, 0-15, +, -, /	EA	36
WM1003	Numeric Cable Marker Book; contains 10 each: 1-45	EA	36
WM1009	Line and Terminal Cable Marker Book; contains 45 each: 1, 2, 3, A, B, C; contains 30 each: T1, T2, T3, L1, L2, L3	EA	24
WM1014	180 Blank Write-On Markers, 1/2" x 1-1/2"	EA	12

Grease Fittings

Case hardened steel fittings plated with yellow dip chromate and built-in ball checks. Assortment available in clear plastic box.



6311



6322

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6311	Grease Fittings: 1/4"-28 Tapered Thread; straight, pack of 8	PK	1
6312	Grease Fittings: 1/8" Pipe Thread; straight, pack of 5	PK	1
6321	Grease Fittings: 1/4"-28 Tapered Thread; 90°, pack of 3	PK	1
6322	Grease Fittings: 1/8" Pipe Thread; 90°, pack of 3	PK	1
6310X	Assortment includes: 6311, 6312, 6321, 6322	PK	1

BRUSHES

Chip Brushes

100% pure bristle, wood handle. Poly sleeve over bristles. Inexpensive (use once and throw away). Excellent for applying duct adhesive.



B-501

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
B-501	Chip Brush – 1"	EA	36
B-502	Chip Brush – 1-1/2"	EA	36
B-503	Chip Brush – 2"	EA	24
B-504	Chip Brush – 2-1/2"	EA	12
B-505	Chip Brush – 3"	EA	12

Welder's Brush

Stainless steel bristles used for cleaning all metals. Great for cleaning aluminum prior to soldering.



B-4

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
B-4	Welder's Brush	EA	12

Tin Handle Acid Brushes

Manufactured with electrolyte tin plate and filled with 100% pure stiff horsehair, tied with a steel staple. This combination gives lasting qualities when used with heat and acids or other cleaning agents.



B-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
B-1	Tin Handle Acid Brush 3/8"	EA	144
B-2	Tin Handle Acid Brush 1/2"	EA	144

Refrigerator Coil Brush

Clean refrigerator coils, fan blades and areas under and behind appliances. 27-1/2" in length with 11-3/4" brush length. Bristles are 3/4" on the end tapering to 1-1/2" toward the handle.



B-27

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
B-27	Refrigerator Coil Brush	EA	1

BRUSHES CONT'D

Fin Whisk

A plastic handled whisk for cleaning condenser and evaporator fins.



B-26

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
B-26	Fin Wisk Brush	EA	12

2-in-1 Copper Tube Cleaning Brush

Easy to hold combination tool that really works. One end cleans the fitting. The other cleans the tube.



B-998

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
B-998	2-in-1 Copper Tube Cleaning Brush – 3/4" ID (7/8" OD)	EA	1

Carbon Steel Curved Handle Scratch Brush

Carbon Steel Curved Handle Scratch Brushes are used for general purpose cleaning.



B-10

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
B-10	Carbon Steel Curved Handle Scratch Brush	EA	1

Condenser/Heat Exchanger Brushes

Ideal for cleaning mineral deposits from inside metal tubes. Especially recommended for use with power tools, although handle for manual use is available.



B-622

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
B-622	Condenser/Heat Exchanger Brush – 3/4" Brass 12-24 Female	EA	1

Parts Cleaning Brush

The heavy duty black polypropylene bristles are secured in a strong plastic handle.



542-25015

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
542-25015	Parts Cleaning Brush	EA	12

Duct Cleaning Brush

These brushes are made of black fiber bristles twisted in wire. They are 1-1/8" diameter by 7" brush x 48" overall length. These are idea for cleaning hard to reach areas in duct work.



542-76220

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
542-76220	Duct Cleaning Brush	EA	1

Copper Tube Fitting Brushes

Highest quality brushes to clean fittings faster, easier and more safely. Made with strong, resilient, rustproof stainless steel bristles secured in a 4-ply wire with easy-to-grip plastic handle. Economy models feature same quality stainless steel, but secured in 2-ply wire.



B-927

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
B-124	Copper Tube Fitting Brush – Economy 1/4" O.D., 9/32" Brush Dia.	EA	6
B-125	Copper Tube Fitting Brush – Economy 3/8" O.D., 13/32" Brush Dia.	EA	6
B-126	Copper Tube Fitting Brush – Economy 1/2" O.D., 17/32" Brush Dia.	EA	6
B-127	Copper Tube Fitting Brush – Economy 5/8" O.D., 11/16" Brush Dia.	EA	6
B-128	Copper Tube Fitting Brush – Economy 3/4" O.D., 13/16" Brush Dia.	EA	6
B-129	Copper Tube Fitting Brush – Economy 7/8" O.D., 15/16" Brush Dia.	EA	6
B-131	Copper Tube Fitting Brush – Economy 1-1/8" O.D., 1-1/4" Brush Dia.	EA	6
B-132	Copper Tube Fitting Brush – Economy 1-3/8" O.D., 1-1/2" Brush Dia.	EA	6
B-924	Copper Tube Fitting Brush – Economy 1/4" O.D., 9/32" Brush Dia.	EA	1
B-925	Copper Tube Fitting Brush – Economy 3/8" O.D., 13/32" Brush Dia.	EA	1

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
B-926	Copper Tube Fitting Brush – Economy 1/2" O.D., 17/32" Brush Dia.	EA	1
B-927	Copper Tube Fitting Brush – Economy 5/8" O.D., 11/16" Brush Dia.	EA	1
B-928	Copper Tube Fitting Brush – Economy 3/4" O.D., 13/16" Brush Dia.	EA	1
B-929	Copper Tube Fitting Brush – 7/8" O.D., 15/16" Brush Dia.	EA	1
B-930	Copper Tube Fitting Brush – 1" O.D., 1-1/8" Brush Dia.	EA	1
B-931	Copper Tube Fitting Brush – 1-1/8" O.D., 1-1/4" Brush Dia.	EA	1
B-932	Copper Tube Fitting Brush – 1-3/8" O.D., 1-1/2" Brush Dia.	EA	1
B-934	Copper Tube Fitting Brush – 1-5/" O.D., 1-3/4" Brush Dia.	EA	1
B-935	Copper Tube Fitting Brush – 2-1/8" O.D., 2-1/4" Brush Dia.	EA	1

COMPRESSOR TOTE

Compressor Tote

Makes light work of a heavy job. Powder coated, strong steel construction. Recommended for use with all compressors up to 5 tons. Compatible with high efficiency compressors. Pick up a compressor from its box. Carry a compressor up a ladder. Now with black protective finish.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
ACT-6	Compressor Tote	EA	6



ACT-6

FIN TOOLS

Fin Straightening Tools

A condensor should work as efficiently as you. These tools make it easy to remove debris and straighten fins.

CATALOG NO.	DESCRIPTION	SIZES	DIMENSIONS (L X W X H)	UOM	ORDER MUL.
T-100	Fin Tool Kit	8, 9, 10, 11, 12, 14 FPI	5-3/4" x 2" x 1-1/2"	EA	1
T-101	Fin Tool Kit	13, 15, 16, 17, 18, 20 FPI	5-3/4" x 2" x 1-1/4"	EA	1
T-300	Fin Tool	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 20 FPI	12-1/4" x 4" x 1-1/2"	EA	1
T-400	Fin Tools - Set of 6	8 & 10, 9 &15, 11 & 13, 12 & 14, 16 & 17, 18 & 20 FPI	7-1/2" x 2-3/4" x 1-1/4"	EA	1
T-412	Fin Comb	12 and 14 FPI	8-3/4" x 2-1/4" x 1/2"	EA	1
T-417	Fin Comb	16 and 17 FPI	8-3/4" x 2-1/4" x 1/2"	EA	1
T-418	Fin Comb	18 and 20 FPI	8-1/2" x 2-1/4" x 1/2"	EA	1



Fin Whisk

A plastic handled whisk for cleaning condenser and evaporator fins.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
B-26	Brush, Fin Whisk	PK	12



B-26

INSPECTION MIRRORS

Inspection Mirrors

Leaks can't hide anymore with hilmor Inspection Mirrors. With handles that extend, the telescoping inspection mirrors truly do go above and beyond.



CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
M-1	1-1/4" Circular Telescoping Mirror, Handle Extends 6-1/4" to 18-1/4"	10" x 1/4" x 2-1/2"	3.2 oz.	EA	1
M-2	2-1/4" Circular Telescoping Mirror, Handle Extends 10" to 14"	12-1/2" x 1/4" x 3-1/4"	2.2 oz.	EA	1
M-3	2-1/8" x 3-1/2" Rectangular Telescoping Mirror, Handle Extends 11-1/4" to 15-1/4"	14-1/2" x 1/2" x 4"	3.8 oz.	EA	1
M-5	1" x 2" Oval Telescoping Mirror, Handle Extends 8" to 21"	9-3/4" x 3/4" x 2-1/4"	3.2 oz.	EA	1

PURGE TOOLS

Nitrogen Purge Tool

The Nitrogen Purge Tool is a quick and easy way to purge copper pipes with nitrogen. Then, with a turn of the dial, quickly switch to a very low flow of nitrogen to properly braze the copper. It has a durable aluminum design so you can just throw it into your tool bag when you are done.



DP-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DP-1	Nitrogen Purge Tool	EA	1

Nitrogen Purge Tool

The hilmor Nitrogen Purge Tool is rugged and durable - a lot like you.

Features & Benefits

Regulates Nitrogen Flow: Designed to regulate flow with 50 PSI inlet pressure. Maximum pressure of 200 PSI.
Quick Change Dial: No flow indicator valve needed. Purge setting = 25-35 scfh @ 50 PSI, Braze setting = 3-6 scfh @ 50 PSI.



HMNPT01

hilmor

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
HMNPT01	Nitrogen Purge Tool	2" x 3" x 2"	1 lb.	EA	1

REAMERS

Deburring Tool

Whether they're inside or outside, copper or plastic, hilmor Deburring Tool can smooth things over. Our Pocket Size Deburring Tool lets you put your silky-smooth signature on even the smallest pieces of tubing.



1891258

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891258	Deburring Tool	5-1/2" x 3/8" x 3/8"	7 oz.	EA	1

Deburrer, 1/4 in. - 5/8 in.

Whether they're inside or outside, copper or plastic, hilmor Deburring Tools can smooth things over. With steel blades, the standard Deburrer works flawlessly on OD tubing from 1/4" to 1-5/8".



1839052

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X D)	WEIGHT	UOM	ORDER MUL.
1839052	Deburring Tool	5" x 9" x 2.38"	0.14 lb	EA	1

Swivel Head Deburring Tool

This Swivel Head Deburring Tool has the professional quality and the performance of a higher price deburring tool without the price tag. This product has two interchangeable blades.



6-T482

CATALOG NO.	DESCRIPTION	HANDLE LENGTH	UOM	ORDER MUL.
6-T482	Swivel Head Deburring Tool	5-1/8" (130mm)	EA	1

Deburring Tool

The rotary style blade is perfect for removing burrs from holes and edges. Large ergonomic handle reduces user fatigue. Ships complete with two heavy duty blades - extra blade stores inside the handle. For copper, steel, aluminum, zinc, cast iron, brass and plastic tubing.



210-F

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
210-F	Rotary Deburring Tool	1.05" x 2.4" x 8.4"	0.95 lb.	EA	1

Inner/Outer Reamer

Reams both inside and outside edges of tube at a 60° included angle with hardened cutting blades. Deburrs both clockwise and counterclockwise. For 3/16" to 1-1/2" (5 mm to 38 mm) O.D. copper, aluminum and brass tubing.



208-F

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
208-F	Inner/Outer Reamer	1" x 1" x 1"	1 lb.	EA	1
208-FSS	SS Inner/ Outer Reamer	3.15" x 2.25" x 2.2"	0.63 lb.	EA	1

THERMOMETERS

Digital Thermometer

Temperature range from -40°F to 230°F.



541-300

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
541-300	Digital Thermometer	EA	1

Deluxe Digital Pocket Thermometer

Deluxe Digital Pocket Thermometers are water and drop resistant and have a rugged construction. There is an auto power off and an F/C Switch. The probe is 2.5 in. and the range is from -40 degrees F to 300 degrees F or -40 degrees C to 150 degrees C. This thermometer comes with a protective cover with clip.



6-HDT304K

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-HDT304K	Deluxe Digital Pocket Thermometer	EA	1

Horizontal Refrigerator/ Freezer Analog Thermometer

With this analog thermometer, you can use it either hanging or free standing. The easy to ready display can be seen with a horizontal reading. Both F and C scales are reflected on the thermometer and the range is -40° to 80°F (-40° to 27°C).



6-FT80H

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-FT80H	Horizontal Refrigerator/Freezer Analog Thermometer	EA	1

Analog Pocket Thermometer with Magnifying Lens

- Range 6-320: -40° to 160°F
- Range 6-321: -0° to 220°F
- Rugged stainless steel probe

Includes: Protective sheath with pocket clip.



6-321

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-321	Analog Pocket Thermometer: Range - 0 deg. to 220 deg. F	EA	1

THERMOMETERS CONT'D

Refrigerator/Freezer Analog Thermometer

This analog thermometer is stainless steel and can be used either hanging or free standing. The easy to read round dial is in F only. There are temperature indicators with a range -20° to 80°F (-29° to 27°C).

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-FT80R	Refrigerator/Freezer Analog Thermometer	EA	1



6-FT80R

Dual Readout Thermometer

Features & Benefits

Makes Calculations Easier: The industry's only manifold-compatible compact thermometer with two readings to help simplify the calculation of superheat and subcool.
Superior Versatility: Use it on any gauge set, or remove it and use it independently.
Reads Temperatures Quickly: Two easy-to-use, K-style tube-clamp thermocouples get you to the temperature reading quickly.



1839106

Product Specifications

Two Thermocouples: 1839108 TCC Thermocouple Clamp Included
Batteries: AA x 1 (included)
Battery Life: 151 hours
Connection Type: K
Temperature: -76°F to 999.9°F
Resolution: .10° F/C
Accuracy: +-2.0 C°/+-3.6°F
Operating Temperature Range: 0°C to +50°C (LCD)



hilmar

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1839106	Dual Readout Thermometer	1-3/4" x 1-5/8" x 3-7/8"	11 oz.	EA	1

Thermocouple Clamp

Get right to it on up to 1-1/8" tubing with hilmor's Thermocouple Clamp. A K-style connection offers a secure fit and is easy to use with other devices. It is a perfect pairing for the hilmor Dual Readout Thermometer. When the job is done, it is easy to stow it away. Simply wrap the thermocouple wire around the handle, and secure the plug into the clamp.



1839108

hilmar

Features & Benefits

Fast, Precise Readings: Gets right to the temperature reading up to 1-1/8" tubing.
Secure Connection: K-style connection provides a tight fit and easy use with other devices.
Secure Storage: Stow it away simply by wrapping the thermocouple wire around the clamp and securing the plug.

Product Specifications

Connection Type: K
Accuracy: +-2.0°C/+-3.6°F
Operating Temperature (plastic): -40°F to 250°F

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1839108	Thermocouple Clamp	5-1/4" x 7/8" x 3-1/4"	3 oz.	EA	1

GASSES

Map-Pro and Propane

Map-Pro and Propane Gas are tanks that can be used to weld products.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
525-MT1	Map-Pro Gas - 14 oz.	EA	12
525-PT1	Propane Gas - 14.1 oz.	EA	12



525-MT1 525-PT1

TORCHES

Portable Hand Torch

Self igniting hand torch eliminates the need for a flint lighter. Lightweight and portable, this flame tool can be operated with Propane or Map-Pro (Propylene). Features trigger lock with instant safety release, full size comfort grip and 360° swivel tip. Operates in any position, even upside down. Includes swirl combustion tip end.



525-TORCH

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
525-TORCH	Portable Hand Torch	EA	1

Spark-Key Torch Ignitor

A safe, easy and reliable way to ignite a torch. No batteries needed, works with all gas torches, lights first time and every time, and good for over 100,000 strikes.



580500

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
580500	Spark-Key Torch Ignitor	EA	1
580512	Spark-Key Torch Ignitors, Pack of 12	EA	1

REPLACMENT - RECOVERY CYLINDERS

Refrigerant Recovery Cylinders

Rehvac aluminum nitrogen cylinders from DiversiTech are commonly used in the HVAC industry for line cleaning and purging, pressure testing and braze purging. Made in the USA.



02053 02100

CATALOG NO.	DESCRIPTION	DOT CLASS	3/4" NPT PLUG	FLOAT SWITCH	WATER CAP.	TARE WT.	UOM	ORDER MULTIPLE
02033	30 lb.	4BA400	YES	NO	26.2 lbs.	17 lbs.	EA	1
02053	50 lb.	4BA400	YES	NO	47.7 lbs.	28 lbs.	EA	1
02100	100 lb.	4BW400	NO	NO	123 lbs.	48 lbs.	EA	1
02255	250 lb.	4BW260	YES	NO	239 lbs.	85 lbs.	EA	1

Caution: Never overfill cylinders. Maximum refrigerant capacity is limited to 80% of the water capacity of the cylinder in lbs. (see table above). DOT requires cylinders to be retested every five years. Some recovery equipment uses weight scales to cut off refrigerant fill at 80% of capacity. Be sure cylinder tare weight is correct for this type of equipment.

DOT Classification Example: 4BA400: 400 psi working pressure; 800 psi test pressure (double the working pressure); 1,600 psi minimum burst pressure (double the test pressure). Pressure relief/safety valve is set to release at between 75-100% of the test pressure. For example, in the 4BA400 tanks which have a 800 psi test pressure, the relief valve opens at between 600 psi and 800 psi.

Nitrogen Cylinders

Rehvac aluminum nitrogen cylinders from DiversiTech are commonly used in the HVAC industry for line cleaning and purging, pressure testing and braze purging. Made in the USA.



N20-SD

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
N20-SD	Rehvac Nitrogen Cylinder 57 cu ft	EA	1

CO_2 Cylinders

Rehvac aluminum CO_2 cylinders from DiversiTech are commonly used in the HVAC industry for condensate line cleaning.



C10

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
C10	Rehvac 10# Aluminum Cylinder	EA	1
C1-2-6	Rehvac 1.2# Cylinder	EA	1
C20	Rehvac 20# Aluminum Cylinder	EA	1
C2-5	Rehvac 2.5# Cylinder	EA	1
C5	Rehvac 5# Aluminum Cylinder	EA	1

SNIPS

Aviation Snips



1891135

Cut sheet metal, duct, stainless steel. Oh, and time. hilmor Aviation Snips feature color-coded handles that make finding the right tool quick and easy. Plus, they have a comfortable grip and durable blades.

Features & Benefits

Rugged and Durable: High-carbon steel blades and a reinforced chrome silicon spring increase life and durability.
Quick Identification: Color-coded handle inserts and splines make identification simple.
Comfortable Grip: Over-molded handles reduce hand fatigue and won't slip or twist.

CATALOG NO.	DESCRIPTION	CAPACITY CRS	CAPACITY SS	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891133	Left Cut Aviation Snip	18ga	22ga	10-3/8" x 3-1/2" x 7/8"	1.1 lbs.	EA	1
1891134	Right Cut Aviation Snip	18ga	22ga	10-3/8" x 3-1/2" x 7/8"	1.1 lbs.	EA	1
1891135	Straight Cut Aviation Snip	18ga	22ga	10-3/8" x 3-1/2" x 7/8"	1.1 lbs.	EA	1
1891172	Left/Right/Straight Cut Aviation Snip	18ga	22ga	10-3/8" x 9-1/2" x 9-1/2"	3.3 lbs.	EA	1
1891136	Bulldog Aviation Snip	16ga	20ga	9-1/2" x 3-1/2" x 7/8"	1.0 lbs.	EA	1
1891137	Left Cut Offset Aviation Snip	18ga	22ga	10-1/4" x 3-1/4" x 1"	1.1 lbs.	EA	1
1891138	Right Cut Offset Aviation Snip	18ga	22ga	10-1/4" x 3-1/4" x 1"	1.1 lbs.	EA	1

Aluminum Handle Snips



1891173

If longer, cleaner cuts are your thing, this pair of snips is for you. It's lightweight, aluminum composition makes this tool easy to handle and comfortable in your hands.

Features & Benefits

Rugged and Durable: Lightweight aluminum construction and replaceable blades increase life and durability.
Less Work: A 3-1/2" cut length requires fewer cuts to complete the job.
Added Versatility: Use either right or left hand to easily make cuts.

CATALOG NO.	DESCRIPTION	CAPACITY - CRS	CAPACITY - SS	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891173	Aluminum Handle Snips	24ga	28ga	13" x 4" x 1/2"	1.2 lbs.	EA	1
1891174	Replacement Blade	NA	NA	NA	NA	EA	1

V-Notcher



1891180

This tool puts the V-notch in HVAC/R. It's perfect for making clean 30° V-shaped cuts in sheet metal without distorting or crimping the material.

Features & Benefits

Rugged and Durable: High-carbon steel blades and a reinforced chrome silicon spring increase life and durability.
Comfortable Grip: Over-molded handles reduce hand fatigue and won't slip or twist.
V-Notcher: Cuts V-shaped notch in sheet metal.

CATALOG NO.	DESCRIPTION	CAPACITY - CRS	CAPACITY - SS	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891180	V-Notcher	18ga	22ga	9-1/4" x 3" x 7/8"	1.2 lbs.	EA	1

Snap Lock Punch



1891182

You've heard the saying. A screw is temporary, but the Snap Lock Punch is forever. This tool can join sheet metal, duct or pipe in a snap for a hold that lasts a lifetime.

Features & Benefits

Rugged and Durable: Stainless steel blades and a reinforced chrome silicon spring increase life and durability.
Comfortable Grip: Over-molded handles reduce hand fatigue and won't slip or twist.
Snap Lock Punch: For joining sheet metal, duct and pipe.

CATALOG NO.	DESCRIPTION	CAPACITY - CRS	CAPACITY - SS	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891182	Snap Lock Punch	18ga	22ga	8-7/8" x 3" x 7/8"	1.1 lbs.	EA	1

SNIPS CONT'D

Hole Cutters



Power and precision. Cut holes in sheet metal like a knife through butter, and make them precise with metric and standard scales. Handles 2" to 20" holes.

Features & Benefits

Rugged and Durable: Includes a lightweight aluminum frame, with a milled bit for life and durability.
Added Versatility: Get two-in-one capabilities with both inch and metric scales.
Perfect Fit: Fits into any corded or cordless drill with a 1/4" or larger chuck.

CATALOG NO.	DESCRIPTION	SIZES	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891191	Hole Cutter	2" to 12"	7" x 3" x 1"	1.1 lbs.	EA	1
1891192	Hole Cutter	2" to 20"	11" x 3" x 1"	1.5 lbs.	EA	1
1891193	Hole Cutter Replacement Bit	NA	NA	NA	EA	1

Duct Slitting Tool



Don't let its unassuming design fool you. The Duct Slitting Tool can pierce, slit or scribe with the best of them.

Features & Benefits

Comfortable Grip: Over-molded handle reduces hand fatigue and won't slip or twist.
Extra Versatility: Designed to scribe lines or pierce and enlarge holes in sheet metal.

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1890990	Duct Slitting Tool	9-3/8" x 1-1/4" x 1-1/4"	6 oz.	EA	1

Duct Knife



It's time to cut ties with your old knife. The hilmor Duct Knife's hardened stainless steel blade can cut through duct board with silky, smooth precision.

Features & Benefits

Rugged and Durable: A hardened stainless steel blade increases life and durability.
Comfortable Grip: Over-molded handle reduces hand fatigue and won't slip or twist.
Added Versatility: Serrated and standard cutting edges made to cut duct board and flexible duct.
Simple Storage: A puncture-resistant nylon sheath with a belt loop allows for quick and easy storage.

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891331	Duct Knife	11-5/8" x 5/8" x 1-3/8"	10 oz.	EA	1

BENDING AND BRAKING

Pocket Brake



The hilmor Pocket Brake is a portable sheet metal scoring tool that permits quick and precise, on the job, sheet metal fabrication.

Features & Benefits

Flexibility & Speed: Save time by performing onsite sheet metal fabrication.
Jobsite Fabrication: Ambidextrous design with twin metal scoring wheels provides a stable and accurate sheet metal scoring tool.
Ergonomic Design: Ergonomic design permits ambidextrous use.

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
HPB1701	Pocket Brake	4.33" x 2.90" x 2.85"	2 lbs.	EA	1

BENDING AND BRAKING CONT'D

Hand Seamers



They can bend sheet metal. Flatten it. And flat-out get the job done. 1/4" depth marks ensure an accurate bend, and a reinforced spring stands the test of time.

Features & Benefits

Rugged and Durable: Stainless steel blades and a reinforced chrome silicon spring increase life and durability.
Comfortable Grip: Over-molded handles reduce hand fatigue and won't slip or twist.
Quick Identification: 1/4" depth marks on the blades allow for quick bends.
Seamer: For bending and flattening sheet metal.

CATALOG NO.	DESCRIPTION	SIZES	CAPACITY - CRS	CAPACITY - SS	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891185	Hand Seamers	3"	18ga	22ga	9-3/4" x 3-1/8" x 7/8"	1.5 lbs.	EA	1
1891183	Hand Seamers	3" Offset	18ga	22ga	8-1/4" x 5" x 3-1/4"	1.4 lbs.	EA	1
1891184	Hand Seamers	6"	18ga	22ga	10" x 6" x 3-1/2"	2.2 lbs.	EA	1

Folding Tools



This tool can fold without folding on the job. From end caps to folds for drive cleats, hilmor Folding Tools can handle it all. Strength meets precision with sight holes for depth alignment.

Features & Benefits

Folding Tool: Built for both 3/8" (10mm) and1" (25mm) folds.
Accurate Folding: Equipped with sight holes for proper depth alignment.

CATALOG NO.	DESCRIPTION	CAPACITY - CRS	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891146	12" Folding Tool	18ga	12" x 3-1/4" x 1/5"	1.4 lbs.		
1890985	18" Folding Tool	18ga	18" x 3-1/4" x 1/5"	2.1 lbs.		
1890986	24" Folding Tool	18ga	24" x 3-1/4" x 1/5"	2.8 lbs.		

Duct Stretcher



Two ducts. One hand. Bring it all together with the hilmor Duct Tool. Large gaps are no match. Its sleek aluminum body maintains a low profile to get into tight spaces.

Features & Benefits

Rugged and Durable: An all-aluminum body increases life and durability.
Small Space Capable: Features a low profile for use in tight spaces.
Added Versatility: Additional spacing holes allow wheels to be adjusted for use on large gaps.
Comfortable Grip: A cushion grip for reduced hand fatigue.

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1890987	Duct Stretcher	16" x 1/4" x 1-1/2"	11 oz.		
1890988	Rep Wheels - 2PK	NA	NA		

CRIMPING

Hand Crimpers



A crimping tool that won't cramp your style. Or your hand. hilmor Hand Crimpers come standard with contoured rubber grips that fit comfortably in your hands. Happy crimping!

Features & Benefits

Rugged and Durable: High-carbon steel blades and a reinforced chrome silicon spring increase life and durability.
Comfortable Grip: Over-molded handles reduce hand fatigue and won't slip or twist.
Hand Crimper: For crimping round metal pipe.

CATALOG NO.	DESCRIPTION	CAPACITY - CRS	CAPACITY - SS	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891186	Hand Crimpers	18ga	22ga	9-3/4" x 3" x 7/8"	1.0 lbs.		
1891187	Hand Crimpers	18ga	22ga	9-3/4" x 3" x 7/8"	1.2 lbs.		

STORAGE CONTAINERS

Metal Parts Boxes

Metal Parts Boxes are prime cold rolled steel with baked gray enamel finish. The finish is rust and acid resistant. Each box comes with high impact plastic tray, positive pull down catch, and stick back parts labels for lid interiors.



8200M

CATALOG NO.	DESCRIPTION	NO. OF COMPARTMENTS	DIMENSIONS (L X W X D)	UOM	ORDER MUL.
8200M	Metal Parts Box	21	13-3/8" x 9-1/4" x 2"	EA	1
8220M	Metal Parts Box	24	18" x 12" x 3"	EA	1

Polypropylene Parts Boxes

This box is ideal for holding your different sized nuts and bolts along with your additional bits. It can be stored in a tool box as well.



8203C

CATALOG NO.	DESCRIPTION	NO. OF COMP.	DIMENSIONS (L X W X D)	UOM	ORDER MUL.
8201C	Polypropylene Parts Box - Translucent	13	11" x 6-3/4" x 1-1/4"	EA	1
8203C	Polypropylene Parts Box - Translucent	24	13-1/8" x 9" x 2-5/8"	EA	1

Satchel Style Case

Parts box made from rugged copolymer material with high impact translucent lid and handle on the side. 15 removable dividers allow up to 24 compartments.



8233

CATALOG NO.	DESCRIPTION	NO. OF COMPARTMENTS	DIMENSIONS (L X W X D)	UOM	ORDER MUL.
8233	Satchel Style Case	Up to 24	15" x 11-3/4" x 2-1/2"	EA	1

HVAC/R Tote

The hilmor HVAC/R Tote is your go-to tool storage and transport solution. It includes 27 exterior and interior pockets, 18 bands and clips for your keys so you can store your tools safely and find them quickly.

Features & Benefits

Keep Organized: 27 pockets and 18 bands. 14 exterior pockets and 13 interior pockets.
Rugged and Durable: Designed to last with water-resistant bottom and reinforced rivets.
Secure Storage: Stow your meter away safely in the padded pocket in the interior of the tote Use the tape measure clip, key clip and tape holder loop to secure the rest of the items you need.
Helps with the Heavy Lifting: This tote has room for multiple tools and is tested up to 50 lbs. The padded shoulder strap makes carrying more comfortable.

Product Specifications

Extra Features: Key Clip; Tape Loop; Shoulder Strap



1839078
*Tools not included

hilmar

CATALOG NO.	DESCRIPTION	INTERIOR POCKETS	EXTERIOR POCKETS	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1839078	HVAC/R Tote	13	14	7-1/2" x 7-1/2" x 13"	3.3 lbs.	EA	1

Backpack Tool Bag

The hilmor Backpack Tool Bag is your jobsite sidekick with 19 exterior and interior pockets. Its sturdy rubber, water-resistant bottom means rain or shine, the contents inside won't be damaged. And while it's spacious enough to hold up to 50 lbs., padded shoulder straps and a back air vent make hauling it a little more comfortable and leave your hands free to safely climb a ladder.

Features & Benefits

Secure Storage: Stow your meter away safely in either of the two padded zipper pockets on the exterior sides of the tote.
Superior Versatility: Hang your manifold from the bag's metal loop for easy transport to the jobsite.
Helps with the Heavy Lifting: This bag has room for multiple tools and is tested up to 50 lbs. The padded shoulder straps and air vent back make carrying more comfortable.

Product Specifications

Extra Features: Clear Vinyl ID Window Pocket; Shoulder Strap; Double-Grip Handles; Steel "U" Ring; Airflow Ventilator Pads



1839080
*Tools not included

hilmar

CATALOG NO.	DESCRIPTION	INTERIOR POCKETS	EXTERIOR POCKETS	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1839080	Backpack Tool Bag	11	8	6" x 14" x 16"	4.5 lbs.	EA	1

STORAGE CONTAINERS CONT'D

Tool Center Bag



1839079
*Tools not included

The hilmor Tool Center Bag is your total tool storage solution. It includes 24 exterior and interior pockets and three zippered pouches so you can store your tools safely and find them quickly.

Features & Benefits

Keep Organized: 24 pockets and three zippered pouches.
Secure Storage: Stow your meter away safely in either of the two padded pockets on the exterior sides of the tote.
Helps with the Heavy Lifting: This bag has room for multiple tools and is tested up to 50 lbs. The padded shoulder strap makes carrying more comfortable.
Rugged and Durable: Designed to last with a hard plastic, water-resistant bottom and a padded aluminum carrying handle.

Product Specifications

Extra Features: Clear Vinyl ID Window Pocket; Shoulder Strap; Cover Flap

CATALOG NO.	DESCRIPTION	INTERIOR POCKETS	EXTERIOR POCKETS	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1839079	Tool Center Bag	13; 18 Tool Loops	11	13-1/2" x 8-1/2" x 9"	4.5 lbs.	EA	1

HVAC/R Refrigerant Tank & Utility Backpack



1891628

Give yourself a hand with the Utility Backpack. Comfortably carry refrigerant or recovery tanks, or up to 50 lbs. of whatever the job calls for.

Features & Benefits

Superior Versatility: Can carry up to 30-lb. refrigerant or recovery cylinders and serves as a knapsack to transport other materials to and from the jobsite.
Secure Transport: A drawstring with a cord lock and flap with latch securely hold your materials in place during transport.
Stay Organized: 8-carabiner loops, a see-through pocket to display OSHA refrigerant labels and a pocket keep you together.
Helps with the Heavy Lifting: Padded shoulder straps and back pads allow you to comfortably carry up to 50 lbs.
Rugged and Durable: Designed to last with heavy-duty nylon thread, and puncture and abrasion-resistant nylon fabric.

Product Specifications

Extra Features: External Pocket; See-Through Pocket; 8 Carabiner Loops

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891628	HVAC/R Refrigerant Tank & Utility Backpack	20" x 12" x 12"	2.4 lbs.	EA	1

HVAC/R Carrying Strap



1891625

Let this Strap do some of your lifting. Clip on and carry refrigerant or recovery tanks comfortably and easily.

Features & Benefits

Rugged and Durable: Heavy-duty nylon fabric and slip-resistant padding helps prevent the strap from sliding.
Less Wasted Time: Steel carabiners easily clip to carry refrigerant or recovery cylinders and other essential materials to save trips and give you an extra arm.
Helps with the Heavy Lifting: Shoulder strap is designed and tested to hold up to 50 lbs.

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891625	HVAC/R Carrying Strap	50-1/2" x 3-3/4" x 1/2"	14 oz.	EA	1

STORAGE CONTAINERS CONT'D

Zipper Pouch



1839081

The hilmor Zipper Pouch is your best bet for keeping track of all the small stuff on the jobsite – from small tools and accessories to receipts and other paperwork.

Features & Benefits

Keep Organized: The hilmor Zipper Pouch can conveniently fit many hilmor tools, including the Punch Swage Set or Dual Readout Thermometer with two Thermocouple Clamps.

Rugged and Durable: Designed with an inner liner to protect from water damage and a rivet on the outside so it can be clipped where it's needed.

CATALOG NO.	DESCRIPTION	INTERIOR POCKETS	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1839081	Zipper Pouch	1	10-1/2" x 1/8" x 7"	3 oz.	EA	1

HVAC/R General Purpose Gloves



1891624

No matter what the task, get a grip and protect your hands with these ruggedly reinforced gloves made to take on any job.

Features & Benefits

Rugged and Durable: Stands up to HVAC/R applications with a breathable-fabric design, featuring a reinforced thumb, palm and fingertips to increase life and durability.

Extra Comfort: A wrist strap easily adjusts for comfort while a form-fitting design provides fit and flexibility.

CATALOG NO.	DESCRIPTION	SIZES	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891606	HVAC/R General Purpose Gloves	Medium	9-3/4" x 4-3/8" x 1/2"	5 oz.	EA	1
1891607	HVAC/R General Purpose Gloves	Large	9-7/8" x 4-7/16" x 1/2"	5 oz.	EA	1
1891624	HVAC/R General Purpose Gloves	X-Large	10" x 4-5/8" x 1/2"	5 oz.	EA	1

HVAC/R Sheet Metal Gloves



1891592

No matter what the task, get a grip and protect your hands with these ruggedly reinforced gloves made to take on any job.

Features & Benefits

Rugged and Durable: Stands up to HVAC/R applications with a breathable-fabric design, featuring a reinforced thumb, palm and fingertips to increase life and durability.

Extra Comfort: A wrist strap easily adjusts for comfort while a form-fitting design provides fit and flexibility.

CATALOG NO.	DESCRIPTION	SIZES	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891463	HVAC/R Sheet Metal Gloves	Medium	9-3/4" x 4-3/8" x 1/2"	5 oz.	EA	1
1891469	HVAC/R Sheet Metal Gloves	Large	9-7/8" x 4-7/16" x 1/2"	5 oz.	EA	1
1891592	HVAC/R Sheet Metal Gloves	X-Large	10" x 4-5/8" x 1/2"	5 oz.	EA	1

STORAGE CONTAINERS CONT'D

HVAC/R Starter Kit

Get started on the right foot with a few of hilmor's most forward-thinking tools.



1890995

hilmar

Product Specifications

Dual Readout Thermometer 1839106
hilmor's Dual Readout Thermometer is the industry's first to offer two digital readouts to help simplify the calculation of superheat and subcool.
2-Valve Aluminum Manifold 1839134
This ruggedly durable Aluminum Manifold features a forged aluminum body and high-impact gauge boots.
60" Hose Set of 3 1839153
Our hoses are bulked up with an extra abrasion-resistant layer and designed to work with the newest high-pressure refrigerants.
Quick-Engage Flare and Swage 1838947
Finally, a flaring tool that doesn't require a third arm. Two hands are all it takes to flare or swage in seconds.
Tri-Tube Bender 1839027
From start to final bend, the hilmor Tri-Tube Bender has you covered. Color-coded sizing makes it simple to bend 1/4", 3/8" and 1/2" tubes.
Service Wrenches 1839042, 1839046
Smart features that save your knuckles and your time. Plus, a Hex Key Adapter for liquid-and suction-based valves.
Folding Hex Key Set 1839048
Get full socket contact with our slip-resistant Folding Hex Key Set. Sizes include 5/64" to 1/4".
Inspection Mirror 1839051
Leaks can't hide anymore. With a handle that extends from 7-3/4" to 21-1/2", this telescoping mirror goes above and beyond.
3" Quick-Change Magnetic Nut Driver 1839054
Don't get driven nuts. Just drive them. This Nut Driver lets you quickly switch between 1/4" and 5/16", the two most common sizes.
9 in 1 Multi-Tool 1839053
Tackle any on-the-job challenge with square, hex and Phillips bits. Not to mention a handy valve core remover.
Backpack Tool Bag 1839080
The hilmor Backpack Tool Bag includes 19 exterior and interior pockets. Plus, its sturdy, water-resistant bottom holds up in any climate.

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1890995	HVAC/R Starter Kit	20" x 15-1/4" x 16-1/2"	21.7 lbs.	EA	1

Mini-Split Install Tools Kit

The Mini-Split Install Tools Kit includes the tools you need to install a typical mini-split system. Tools to help you install with no sweat. Tools to help you flare connections without needing a third arm, setting proper torque with the digital adjustable torque wrench, hex key sets, the most useful 9-in-1 tool on the market, and a manifold set with hoses to handle superheat and subcool calculations. All with the goal of helping you get in, get out and get on to the next install job.



CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
MSITK-DD	Mini-Split Install Tools Kit			EA	1

SPRAYERS

Compression Sprayers

Acid impervious poly design with a 36" (91cm) reinforced hose, shut-off with lock-on feature for continuous spraying, a 2-piece nozzle that's detachable for easy clean up and fits directly to the shut-off or extension wand. The Hand-Held Sprayer has a 48 oz. (1.4 l) capacity, perfect for small areas. All sprayers have a full 5 year warranty.



1002



2601

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
1002	Hand Held Sprayer	EA	1
2601	1 Gallon Wand Sprayer	EA	1
2602	1 Gallon Wand Sprayer	EA	1
2603	1 Gallon Wand Sprayer	EA	1

Hot Water Hose

High burst strength. 500 PSI. Withstands hot water up to 160°F. EPDM tube. Heavy duty solid brass couplings.



5-HW5850

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-HW5850	5/8" x 50' Hot Water Hose	EA	5

Pistol Grips & Water Nozzle

Pistol Grip – 540-572 Insulated:
For spraying hot or cold water. Heavy-duty, self adjusting "duck" packing for lifetime proof seal.
Water Nozzle – 540-573 Un-insulated:
Heavy-duty and holds open clip for continuous spraying. Self-adjusting "duck" for leak proof seal.



540-572



540-573


CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
540-572	Insulated Pistol Grip	EA	12
540-573	Uninsulated Water Nozzle	EA	12

CoilShot® Condenser Coil-Cleaning Tool

Tablet-based system saves wasted coil cleaner and space over bulky coil cleaner bottles. One pack of tablets replaces an entire case of coil cleaner. Use with CoilShot wand for best results - to help get behind coils for superior cleaning every time. CoilShot attaches to a standard garden hose, uses pre-measured tablets and switches from foaming cleaner to water with easy mixing valve. 2 tables equals 1 gallon of cleaner.



SC-CS-100



*Shown with Optional Wand SC-CS-Wand

SPEEDCLEAN

Product Specifications

Output Pressure	Up to 70 PSI
Output Flow	Up to 3 GPM
Water Source	External
Dimensions	10" x 2.25" x 8"
Weight (Dry)	1 Lbs.
Warranty	90 Days

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SC-CS-100	CoilShot® Condenser Coil Cleaning Tool	EA	1

Dial-a-Mix Sprayer

Save time and money by dialing in the exact mix ratio to properly clean the coil. This sprayer features 5 mix ratios (1:3, 1:4, 1:6, 1:9, 1:10), a 1/2 gallon capacity bottle and a quick disconnect for fast and easy rinsing.



540-GUN

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
540-GUN	Dial-a-Mix Sprayer	EA	6

All Purpose Sprayers

Lightweight, versatile gallon size bottle has a 28" flexible hose and easy-to-carry handle. Best for big jobs in hard- to-reach places. Adjustable nozzle will atomize any low viscosity liquid. Adjusts from a mist to a 12' jet stream or anything in between. One pint container has a measured ounce guide. Ideal for water-based chemicals.



BS-32

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
BS-32	Quart Size Sprayer	EA	12

Garden Hose

High quality product priced for high volume sales. Soft-Flex formulation makes the 5 ply Hose easy to handle. Withstands 500 psi water pressure. Heavy duty solid brass couplings and collar. Full Lifetime Guarantee!



5-IG5850

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-IG5850	Green Flexon 5-Ply Forever Garden Hose	EA	5

CoilJet® CJ-200E

CoilJet is the perfect way to effectively clean rooftop units, evaporators, condenser coils and refrigeration coils. With 220 psi and a continuous water supply, it offers a lot of power to clean thicker, dirtier coils without damaging fins. CoilJet has an integrated water and chemical tank, on-board gun and power cord storage, convenient strap, and standard hose connector for the ultimate convenience in coil cleaning.



CJ-200E



SPEEDCLEAN

Product Specifications

Output Pressure	220 PSI (15.1 BAR)
Output Flow	0.5 GPM
Capacity (Water)	3.375 Gallons
Capacity (Chemicals)	0.4375 Gallons
Chemical Ratio Range	30:1 - 4:1
Water Source	Onboard or External
Pump Type	Diaphram
Motor	0.2 HP
Input Power	115V, 60 Hz, 1.5A
Power Cord Length	15 Ft.
Dimensions	18" x 10" x 19"
Weight (Dry)	20 Lbs.
Weight (Full)	55 Lbs.
Warranty	1 Year

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CJ-200E	CoilJet® Coil Cleaner	EA	1

NOTE: Item numbers in **RED** indicate **Made in the U.S.A.**

SPRAYERS CONT'D


CoilJet® CJ-125

When water and power may be inaccessible, such as rooftops and attics, the CoilJet CJ-125 portable coil cleaner is ideal. CJ-125 includes integrated water, chemical tanks, and a long-life rechargeable battery. Includes 2 standard spray nozzles, spray gun with quick connect, smart charger, rechargeable battery, shoulder strap and optional spray wands.



CJ-125

*Shown with optional accessories



SPEEDCLEAN

Product Specifications

Output Pressure	125 PSI (8.5 BAR)
Output Flow	0.7 GPM
Capacity (Water)	3.375 Gallons
Capacity (Chemicals)	0.4375 Gallons
Chemical Ratio Range	30:1 - 4:1
Water Source	Onboard
Pump Type	Diaphram
Motor	0.2 HP
Input Power	12V, 60 Hz, 1.5A
Power Cord Length	15 Ft.
Dimensions	18" x 10" x 19"
Weight (Dry)	20 Lbs.
Weight (Full)	55 Lbs.
Warranty	1 Year

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CJ-125	CoilJet® Coil Cleaner	EA	1

FlowJet™

FlowJet provides high flow cleaning with chemical injection, allowing you to make quick work of cleaning debris and grime from thick condenser and evaporator coils. Powerful 400 PSI at 2.5 gpm washes even the dirtiest coils with a continuous spray of water and cleaning chemical – without damaging sensitive fins. Professional results from compact, portable solution. Includes: FlowJet, 2 standard spray nozzles, 12' hose, 25' power cord with GFCI protection, spray gun, and 18" lance assembly. Optional 90° spray nozzle forces dirt and debris back in the direction it entered.



FLOWJET-60



SPEEDCLEAN


Product Specifications

Output Pressure	400 PSI (27.2 BAR)	Soap Siphon Dilution Ratio	10:1
Output Flow	2.2 GPM	Pump Type	Axial
Water Source	External 2.5 GPM	Motor	.75 HP
Max. Inlet Water Pressure	100 PSI (6.8 BAR)	Input Power	115V, 60 Hz, 12.5A
Max. Inlet Water Temperature	125°F (52°C)	Power Cord Length	25'
Max. Ambient Operational Temperature	104°F (40°C)	Plug Type	14-3 GFCI
		Dimensions	30" x 12" x 13"
		Weight (Dry)	35 Lbs.
		Warranty	1 Year

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
FLOWJET-60	FlowJet™ Coil Cleaner	EA	1

Condenser Needle

Blast dirt and debris from condenser coils, without damaging delicate fins, using Condenser Needle. Designed to clean from the backside of the coil, Condenser Needle reaches inside units with its swivel handle and quickly cleans the entire coil bed. Attach it to a standard garden hose and use the 36" wand to easily clean most types of units. Exclusive spray tip delivers 90 degrees spray pattern up to 3+ gallons per minute.



CN-03



SPEEDCLEAN

Product Specifications

Output Pressure	100 PSI (6.9 BAR)
Output Flow	3.3 GPM
Water Source	External
Max. Inlet Water Pressure	100 PSI (6.8 BAR)
Chemical Ratios	0 - 16:1
Spray Wand Length	36"
Spray Wand Tip	90"
Dimensions	48" x 3" x 3"
Weight (Dry)	5 Lbs.
Warranty	1 Year

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CN-03	Condenser Needle	EA	1

SPRAYERS CONT'D

Dry Steam Coil and Surface Cleaner



SC-VSC-7000

The SC-VSC-7000 steam cleaner is your answer to cleaning dirty, greasy coils and other surfaces without harsh, damaging chemicals. It works excellent on air handlers, mini-splits, condensers, exhaust vents, oily commercial kitchen ducts and more. The power of steam combined with 65 psi pressure goes deep into coils, cracks, and crevices, lifting and removing stubborn dirt and soils. The small and portable unit is lightweight and comes complete with a hose and full accessory kit to clean even the toughest to reach areas. It sanitizes surfaces killing bacteria, fungus, mold, mildew and other microorganisms on contact leaving coils and other surfaces clean and sparkling! With it's easy-to-fill tank, quality stainless steel boiler, strong 1500 Watt power and full accessory kit, it offers the complete solution for cleaning heavily soiled commercial equipment.



Product Specifications

Steam Flow Regulation	Manual
Output Pressure	65 PSI (4.5 BAR)
Steam Production	0.43 Gallon/Hr
Boiler Capacity	0.7 Gallons
Max. Temperature @ Nozzle	235°F (113°C)
Steam Hose Length	10 Ft.
Input Power	115V, 13.5 Amps, 60 Hz, 1550 Watts
Power Cord Length	13 Ft.
Dimensions	13" x 13" x 19"
Weight	15.6 Lbs. (Dry)
Warranty	1 Year

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SC-VSC-7000	Dry Steam Coil and Surface Cleaner	EA	1

BucketDescaler®



SC-DS-5

Eliminate limescale and other deposits from water passages in just minutes. The BucketDescaler features a durable acid-proof pump and fittings, extra-long hoses, and optional re-circulation valve kit. Perfect for tankless and tanked water heaters and other small heat exchangers. Features 6' inlet and outlet hoses and purge valve to reduce cleanup time.



Product Specifications

Inlet Hose Length	6 Ft.	Motor	.17 HP
Outlet Hose Length	6 Ft.	Input Power	115V, 60 Hz, 1A
Output Flow	3.0 GPM	Power Cord Length	12 Ft.
Capacity	4 Gallons	Dimensions	19" x 14"
Maximum Head	69 Ft.	Weight (Dry)	11 Lbs.
Temperature Range	0°F - 130°F (54°C)	Warranty	1 Year
Pump Type	Diaphram		

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SC-DS-5	BucketDescaler®	EA	1

MINI-SPLIT BIBS

Mini-Split Bib Kit 360



MSB-360-KIT

The Mini-Split Bib Kit 360 is the most complete way to clean ductless mini-split coils, blower wheels and more. This kit allows you to safely and quickly clean virtually any mini-split system the correct way using pressurized water on coils, blower wheels and more. The patented technology keeps water away from walls, ceilings and other surroundings and directs it into the 5-gallon bucket for disposal, so it's clean and safe all around. Mini-Split Bib Kit 360 protects the walls, ceilings and surroundings from water and overspray. Quick set up and easy to move from job-to-job. Reusable bib system is a lower cost per use. Includes 8-foot drain line for high mounts.

Product Specifications

Fits Duct Fan Units	Up to 44" Wide
Drain Line Length	8 Ft.
Bib Material Thickness	4 Mil
Dimensions	36" x 16"
Weight	1.5 Lbs.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
MSB-360-KIT	Mini-Split Bib Kit 360	EA	1

MINI-SPLIT BIBS CONT'D

Mini-Split Bib Kit

Quickly and safely clean virtually any mini-split system (30" to 44") the correct way, by using pressurized water on coils and fans. This patented technology keeps water away from walls and other surroundings while directing it into the 5-gallon bucket for disposal. Easy to set up and move from job to job. Includes 8' drain line for high mounted evaporators.

Product Specifications

Fits Duct Fan Units	Up to 44" Wide
Drain Line Length	8 Ft.
Bib Material Thickness	4 Mil
Dimensions	36" x 16"
Weight	1.5 Lbs.



MSB-KIT



SPEEDCLEAN

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
MSB-KIT	Mini-Split Bib Kit	EA	1

Mini-Split Bib Kit, Extra Large

Extra-large bib kit fits virtually any commercial brand ductless fan unit 45" to 60" wide. Complete kit includes: bib, adjustable mounting brackets, 1 roll of protective tape, 2 deflector plates (XL Kit includes 3) and 5 gallon bucket.

Product Specifications

Fits Duct Fan Units	44" - 66" Wide
Drain Line Length	8 Ft.
Bib Material Thickness	4 Mil
Dimensions	52" x 16"
Weight	1.5 Lbs.



MSB-KIT-XL

SPEEDCLEAN

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
MSB-KIT-XL	Mini-Split Bib Kit, Extra Large	EA	1

Mini-Split Cassette Bib Kit

Cleaning ductless ceiling cassettes is a daunting task, but we've just made it a whole lot easier. Using pressurized water and coil cleaner is the key to a good coil cleaning. Our ductless cassette bib kit installs in seconds and quickly creates a funnel where all your water and cleaner is safely deposited into a bucket. Super easy to use and incredibly effective. Features six access points to clean coils. Complete kit includes: cassette bib, adjustable bungee cord, 10' drain line, mounting hooks and a five gallon bucket. Optional stand available.

Product Specifications


Fits Duct Fan Units	Up to 48" Wide
Drain Line Length	10 Ft.
Bib Material Thickness	4 Mil
Dimensions	48" x 48"
Weight	1.1 Lbs.

Optional Equipment

Cassette Bib Stand	SC-CB-STAND
Carrying Bag	CSB-010



SC-CB




SPEEDCLEAN

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SC-CB	Mini-Split Cassette Bib Kit	EA	1

SPRAYER ACCESSORIES

Mini-Split Cassette Bib Stand

Expand your reach! The portable Cassette Bib Stand keeps your bib in place when cleaning high ceilings.



SC-CB-STAND

SPEEDCLEAN

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SC-CB-STAND	Cassette Bib Stand	EA	1

BucketDescaler® Recirculation Valve Kit

Increase descaling power for larger water heaters.



SC-DS-5-VLV-KIT

SPEEDCLEAN

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SC-DS-5-VLV-KIT	Recirculation Valve Kit	EA	1

Mini-Split Cassette Bib Carrying Bag

Make carrying your Bib Stand easier, in this durable canvas bag.

CSB-010



SPEEDCLEAN

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CSB-010	Carrying Bag	EA	1

BucketDescaler® 6' Extension Hoses



SC-DS-5-EXTHOSE

SPEEDCLEAN

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SC-DS-5-EXTHOSE	Extension Hoses - 6'	EA	1

SPRAYER ACCESSORIES CONT'D

CoilShot® Condenser Coil-Cleaning Wand



SC-CS-WAND

3 ft. wand is specially designed to quickly connect to CoilShot cleaning tool. 90° nozzle creates powerful cleaning spray to clean coils from the inside out. The wand features a slim profile that fits between the grate, so you don't have to remove the top fan and housing. The Wand features a quick connect fitting, heavy-duty aluminum wand, a unique wand tip to backflush coils, and a swivel handle that easily adjusts direction of water jet.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SC-CS-WAND	CoilShot® Condenser Coil Cleaning Wand	EA	1

FlowJet® 36" Two Piece Extendable Wand with 90°Spray Tip



SC-WWSS-HF

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SC-WWSS-HF	Two Piece Wand, Extendable, 36" with 90° Spray Tip	EA	1

CoilJet® 90° Spray Wand



CJ-WWSS

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CJ-WWSS	3 ft Sectional Stainless Steel 90° Spray Wand	EA	1
CJ-WWSS-EXT	16" Extension for CJ-WWSS	EA	1

CoilJet® Battery Chargers



CJ2-24

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CJ2-24	Battery Charger, Plug into Unit for CJ-125	EA	1
CJ2-25	Battery Charger with Lugs to Charge CJ-125 Battery Outside of Unit	EA	1

CoilShot® Cleaning Tablets

The revolutionary CoilShot® Cleaning Tablets are designed to offer fast and easy cleaning of residential and commercial single-pass HVAC coils without the strain and bulkiness of using liquid coil cleaners. Each tablet is equal to approximately one half gallon of coil cleaner. CoilShot Cleaning Tablets are safe for all coils, are plant friendly, non-acidic and non-caustic.



SC-CS-TABS



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SC-CS-TABS	CoilShot® Cleaning Tablets, 8 per box	PK	1

CoilJet® 90° Spray Wand



8945-24

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
8945-24	90° Spray Wand, 24"	EA	1
8945	90° Spray Wand, 36"	EA	1
8945-48	90° Spray Wand, 48"	EA	1
8945-60	90° Spray Wand, 60"	EA	1

CoilJet® Spray Flex Wand



8945-FLEX-24

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
8945-0-DEG-FW12	0° Spray Wand 12"	EA	1
8945-0-DEG-FLEX	0° Spray Wand 24"	EA	1
8945-FLEX-24	90° Spray Wand 24"	EA	1

CoilJet® Quick Disconnect Adapters



CJ-QDN-45

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CJ-QDN-45	45° Quick Disconnect Adapter	EA	1
CJ-QDN-90	90° Quick Disconnect Adapter	EA	1

SPRAYER ACCESSORIES CONT'D

CoilJet® Foaming Nozzle



CJ-9619

SPEEDCLEAN

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CJ-9619	Foaming Nozzle Assembly	EA	1

CoilJet® Mini-Split Accessory Kit



CJ-MSB-ACC-KIT

SPEEDCLEAN

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CJ-MSB-ACC-KIT	CoilJet Mini-Split Accessory Kit	EA	1

CoilJet® Vehicle Adapter



8944

SPEEDCLEAN

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
8944	Vehicle Adapter for Battery Charger	EA	1

CoilJet® Extension Lance



CJ-9656

SPEEDCLEAN

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CJ-9656	Extension Lance Assembly 24"	EA	1
CJ-9657	Extension Lance Assembly 36"	EA	1
CJ-9658	Extension Lance Assembly 48"	EA	1
CJ-9659	Extension Lance Assembly 60"	EA	1

Replacement Nozzles



CJ-QDN-0004R

SPEEDCLEAN

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CJ-QDN-0004R	0° Pinpoint Replacement Nozzle for CJ-125	EA	1
CJ-QDN-1504Y	15° Replacement Nozzle for CJ-125	EA	1
CJ-QDN-2508G	25° Replacement Nozzle for CJ-200E (green)	EA	1
CJ-QDN-15025Y	15° Replacement Nozzle for CJ-200E (yellow)	EA	1

CoilJet® Battery



CJ-9613

SPEEDCLEAN

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CJ-9613	12V Replacement Deep Cycle Lead Acid Battery for CJ-125	EA	1

HEX KEYS

Hex Key Sets

Hex head screws have nowhere to hide. hilmor Hex Key Sets have standard and metric sizes covered. They're slip-resistant so you never lose your grip and always keep your cool.



1839049 1937816

hilmor

CATALOG NO.	DESCRIPTION	SIZES	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1839049	Ball End Hex Key Set Inch	.05", 1/16", 5/64", 3/32", 7/64", 1/8", 9/64", 5/32", 3/16", 7/32", 1/4", 5/16", 3/8"	7-1/4" x 2-3/4" x 3/4"	13 oz.	EA	1
1937816	Ball End Hex Key Set Metric	1.5 mm, 2 mm, 2.5 mm, 3 mm, 4 mm, 5 mm, 6 mm, 8 mm, 10 mm	7" x 2-1/2" x 3/4"	12 oz.	EA	1

Hex Key Sets

You don't fold on the job. Luckily, this set does for easy, convenient storage. Available in inch and metric.



1839048 1891472

hilmor

CATALOG NO.	DESCRIPTION	SIZES	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1839048	Folding Hex Key Set Inch	5/64", 3/32", 7/64", 1/8", 9/64", 5/32", 3/16", 7/32", 1/4"	4-1/4" x 7/8" x 1-5/8"	5 oz.	EA	1
1891472	Folding Hex Key Set Metric	1.5 mm, 2 mm, 2.5 mm, 3 mm, 4 mm, 5 mm, 6 mm, 8 mm, 10 mm	4-1/4" x 7/8" x 1-5/8"	5 oz.	EA	1

HEX KEYS CONT'D

T-Handle Hex Key Set



1891471 1937817

hilmar

T for toughness. The hilmor T-Handle Hex Key Set features hardened, nickel chrome-plated shafts, yet ergonomic handles make sure this tool isn't too tough on your hands.

Features & Benefits

Rugged and Durable: Hardened, nickel chrome-plated shafts increase life and durability.
Comfortable Grip: Ergonomic molded handles reduce hand fatigue and won't slip or twist.
Quick Identification: Easy-to-read size markings make identification simple.
Added Versatility: A 6" shaft works well in tight spaces, while the 1/2" shaft gives you more leverage.

CATALOG NO.	DESCRIPTION	SIZES	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891471	T-Handle Hex Key Set Inch	3/32", 5/32", 7/64", 3/16", 1/8", 7/32, 9/64", 1/4", 5/16", 3/8"	8-3/4" x 7-3/4" x 5-3/8"	2.8 lbs.	EA	1
1937817	T-Handle Hex Key Set Metric	2 mm, 2.5 mm, 3 mm, 4 mm, 5 mm, 6 mm, 8 mm, 10 mm	8" x 6-3/4" x 5-1/4"	2.2 lbs.	EA	1

MULTITOOLS

Pocket 4-in-1 Mini Screwdriver



6-T744

This screwdriver set is ideal for technicians, hobbyists, and do it yourselfers. There are 2 double-ended vanadium blades. You can change blades instantly and the blades are held in the carrier handled. The dimensions are 1/16 in. and 1/8 in. slotted tips and #1 and #00 cross point. The Mini Screwdriver comes in with a convenient pocket clip and capped ends.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-T744	Pocket 4-in-1 Mini Screwdriver - Length: 5-1/8" (130mm)	EA	1

Ratcheting 9 in 1 Multi-Tool



1891259

hilmar

A simple twist of the hand can drive a screw, nut or bolt in no time. Nine different bits are at your disposal. A ratcheting mechanism and an ergonomic rubber grip comes standard.

Features & Benefits

Rugged and Durable: Designed with a high-torque ratcheting mechanism and thick shaft walls for long life and less stripping.
More Torque: A slip-resistant grip allows for maximum leverage.
Simple Setup: Easily change between forward, reverse and locked positions.

Product Specifications

Bit Sizes: #1 & #2 Phillips, 3/16" & 1/4" Slotted, #2 Square, 1/4", 5/16", and 3/8" Nut Drivers, and Valve Core Remover.

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891259	Ratcheting 9 in 1 Multi-Tool	8-1/2" x 1-1/4" x 1-1/4"	12 oz.	EA	1

Combination Screwdrivers



5-61

Multiple bits in one handy screwdriver. No need for a toolbox for those quick jobs. Lifetime guarantee.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-41	4-in-1 with #1 and #2 Phillips, 3/16" and 5/16" Slotted	EA	12
5-61	6-in-1 with #1 and #2 Phillips, 3/16" and 5/16" Slotted 1/4" Nut Driver, and 5/16" Nut Driver	EA	12

9 in 1 Multi-Tool



1937819



1839053

hilmar

When you've got a lot of jobs but not a lot of time, the 9 in 1 Multi-Tool from hilmor can save the day. It features a slip-resistant grip for more torque and a thick-walled shaft for more durability.

Features & Benefits

Rugged and Durable: Designed with thick shaft walls for long life and less stripping.
More Torque: A slip-resistant grip allows for maximum leverage.

Product Specifications

Bit Sizes: #1 & #2 Phillips, 3/16" & 1/4" Slotted, #2 Square, 1/4", 5/16", and 3/8" Nut Drivers, and Valve Core Remover.

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1839053	3" 9 in 1 Multi-Tool	7-1/4" x 1-1/3" x 1-1/4"	7 oz.	EA	1
1937819	6" 9 in 1 Multi-Tool	10-1/2" x 1-1/8" x 1-1/8"	10 oz.	EA	1

MULTITOOLS CONT'D

6 in 1 Stubby Multi-Tool



1891351

Small spaces come standard in HVAC/R. That's why you need the hilmor 6 in 1 Stubby Multi-Tool. Its compact design fits right in, giving you the necessary torque to tighten or loosen a screw or nut.

Features & Benefits

Small Space Capable: A compact design allows for use in tight spaces.
More Torque: A slip-resistant grip allows for maximum leverage.
Simple Setup: Easily change between six different drivers – 3/16" and 1/4" Slotted, #1 and #2 Phillips, 1/4" and 5/16" Nut Drivers.

Product Specifications

Bit Sizes: 3/16" and 1/4" Slotted, #1 and #2 Phillips, 1/4" and 5/16" Nut Drivers.

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891351	6 in 1 Stubby Multi-Tool	4-7/8" x 1-1/4" x 1-1/4"	3 oz.	EA	1

Fast Connect Bit Extension



1937919

Built for serious impact. And impact drivers. The hilmor Fast Connect Bit Extension gives you more versatility and maximum durability. All it takes is one hand to quickly release the bit and move on to the next job.

Features & Benefits

Impact Compatible: Extension is specially manufactured for use with impact drivers.
1/4" Shank: Jaw design is compatible with all 1/4" hex shank accessories, including insert bits, while the 1/4" Fast Connect shank is designed for use in impact drivers and rotary drills.
Protection: A black oxide coating resists corrosion.

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1937919	Fast Connect Bit Extension	2-1/4" x 3/4" x 3/4"	2 oz.	EA	1

Impact Fastener Bits



1937913



1937914



1937915



1937916



1937917



1937918

Small but mighty. hilmor Impact Fastener Bits are built to stand the test of time. They fit right in with the aggressive nature of impact drivers. Heavy-duty, high-grade steel will withstand extremely high torque output.

Features & Benefits

Impact Compatible: Bits are specially manufactured for use with impact drivers.
Rugged and Durable: Bits are built to last, manufactured from high-grade steel and coated with black oxide to resist corrosion.
Secure Fit: Precision tip geometry allows for a better fit and reduced stripping.
1/4" Shank: The 1/4" quick-change shank is designed for use in impact drivers and rotary drills.

CATALOG NO.	DESCRIPTION	BIT SIZE	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1937913	Impact Fastener Bit	#1 Phillips	7/8" x 1/4" x 1/4"	1 oz.	EA	1
1937914	Impact Fastener Bit	#2 Phillips	7/8" x 1/4" x 1/4"	1 oz.	EA	1
1937915	Impact Fastener Bit	#1 Square Bit	7/8" x 1/4" x 1/4"	1 oz.	EA	1
1937916	Impact Fastener Bit	#2 Square Bit	7/8" x 1/4" x 1/4"	1 oz.	EA	1
1937917	Impact Fastener Bit	4-5 Slotted Bit	7/8" x 1/4" x 1/4"	1 oz.	EA	1
1937918	Impact Fastener Bit	6-8 Slotted Bit	7/8" x 1/4" x 1/4"	1 oz.	EA	1

NUT DRIVERS

Magnetic Hex Chucks



DE15

Magnetic Hex Chucks may be used with an electric drill to drive hex head screws.

CATALOG NO.	DESCRIPTION	SIZE	DIA	LENGTH	UOM	ORDER MUL.
DE13	Magnetic Hex Chuck	1/4"	7/16"	1-3/4"	EA	1
DE14	Magnetic Hex Chuck	5/16"	1/2"	1-3/4"	EA	1
DE15	Magnetic Hex Chuck	3/8"	9/16"	1-7/8"	EA	1
DE23	Magnetic Hex Chuck	1/4"	7/16"	2-9/16"	EA	1
DE24	Magnetic Hex Chuck	5/16"	1/2"	2-9/16"	EA	1
DE33**	Magnetic Hex Chuck	1/4"	7/16"	3"	EA	1

**Magnetic insert bit holder with a "C" ring retainer

NUT DRIVERS CONT'D

Reversible Magnetic Nut Drivers



The hilmor Reversible Magnetic Nut Drivers incorporate a high performance socket design that drives the fastener from the flats, not the corners, minimizing slippage. Making it the most fun you can have without stripping!

Features & Benefits

Reduced Stripping: High performance socket design drives the fastener from the flats, not the corners, minimizing slippage.
Tapered Design: Tapered socket design for improved access in tight spaces.

CATALOG NO.	DESCRIPTION	SIZE	WEIGHT	UOM	ORDER MUL.
1937881	3 Pack Reversible Magnetic Hex Driver w/flippable 1/4" x 5/16" Socket (Impact Rated)	2-3/4"	0.1 lbs.	EA	1
1937882	3 Pack Reversible Magnetic Hex Driver w/flippable 1/4" x 5/16" Socket (Impact Rated)	4"	0.2 lbs.	EA	1
1937883	3 Pack Reversible Magnetic Hex Driver w/flippable 1/4" x 5/16" Socket (Impact Rated)	6"	0.22 lbs.	EA	1
1937887	Reversible Magnetic Hex Driver w/Flippable 1/4" x 5/16" Socket (Impact Rated)	2-3/4"	0.1 lbs.	EA	30
1937888	Reversible Magnetic Hex Driver w/Flippable 1/4" x 5/16" Socket (Impact Rated)	4"	0.2 lbs.	EA	30
1937889	Reversible Magnetic Hex Driver w/Flippable 1/4" x 5/16" Socket (Impact Rated)	6"	0.22 lbs.	EA	30

Fast Connect Magnetic Nut Driver Set



The nut driver has evolved. The set features a 3" and 6" hilmor Fast Connect Magnetic Nut Driver. The name alone says it all. They're lightning fast and allow for one-handed quick release for fast and easy bit changes.

Features & Benefits

Simple Setup: A quick-change mechanism allows for easy change-out of standard bits with 1/4" hex shank.
Added Versatility: Set includes both stubby and 4" handles, ensuring you have the right size tool for the job.
Secure Hold: A rare-earth magnet helps maintain a secure hold to keep fasteners firmly in place.
Reduced Stripping: Designed to drive fasteners on the side instead of on the corners, reducing breakage and stripping.
Quick Identification: A color-coded band makes size identification simple.
Convenient Storage: Soft storage pouch with additional bit storage keeps everything organized.

Product Specifications

Kit Contents: 2-1/2" Fast Connect Bit Extension for 1/4", 1-7/8" Magnetic Nutsetters for 1/4", 5/16", 3/8", #1 x 2" Phillips Impact Bit, #2 x 2" Phillips Impact Bit, #1 x 2" Square Impact Bit, #2 x 2" Square Impact Bit, 4-5 x 2" Slotted Impact Bit, 6-8 x 2" Slotted Impact Bit

CATALOG NO.	DESCRIPTION	DIMENSIONS	WEIGHT	UOM	ORDER MUL.
1937911	Fast Connect Magnetic Nut Driver Set	4" x 4" x 1-3/4"	11 oz.	EA	1

Magnetic Nutsetters



Choose a size. Lock in your bit. And get right to it. The hilmor Magnetic Nutsetters can do work in seconds flat. They feature magnetic tips and a lobular design to grab any bit.

Features & Benefits

Secure Hold: A rare-earth magnet helps maintain a secure hold to keep fasteners firmly in place.
Impact Compatible: Bits are specially manufactured for use with impact drivers.
Quick ID: A color-coded band makes size identification simple.
Reduced Stopping: Designed to drive fasteners on the side instead of on the corners, reducing breakage and stripping.
1/4" Shank: The 1/4" quick-change shank is designed for use in impact drivers and rotary drills.
Rugged and Durable: Bits are built to last, manufactured from cold-forged, high-grade steel and coated with black oxide to resist corrosion.

CATALOG NO.	DESCRIPTION	SIZE	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1937872	Magnetic Nutsetter	1/4"	6" x 3/8" x 3/8"	2 oz.	EA	1
1937873	Magnetic Nutsetter	5/16"	6" x 5/16" x 5/16"	2 oz.	EA	1
1937874	Magnetic Nutsetter	3/8"	6" x 1/2" x 1/2"	3 oz.	EA	1
1885435	Magnetic Nutsetter	1/4" - Set of 3	1-7/8" x 3/8" x 3/8"	2 oz.	EA	1
1885436	Magnetic Nutsetter	5/16" - Set of 3	1-7/8" x 5/16" x 5/16"	3 oz.	EA	1
1885437	Magnetic Nutsetter	3/8" - Set of 3	1-7/8" x 1/2" x 1/2"	3 oz.	EA	1
1937871	Magnetic Nutsetter	1/4", 5/16", 3/8"	1-7/8" x NA x NA	3 oz.	EA	1
1937875	Magnetic Nutsetter	1/4", 5/16", 3/8"	6" x NA x NA	2 oz.	EA	1

NUT DRIVERS CONT'D

Fast Connect Screwdriver Bit Set

Fumbling around with bits is a waste of time. The hilmor Fast Connect Screwdriver Bit Set is definitely not. The set features the Fast Connect Bit Extension that's impact driver ready. Quickly swap out bit sizes in seconds flat.



1937912

hilmar

Features & Benefits

Impact Compatible: Extension and bits are specially manufactured for use with impact drivers.
1/4" Shank: The 1/4" quick-change shank is designed for use in impact drivers and rotary drills.
Secure Fit: Precision tip geometry allows for a better fit and reduced stripping.
Secure Hold: A rare-earth magnet helps maintain a secure hold to keep fasteners firmly in place.
Reduced Stripping: Designed to drive fasteners on the side instead of on the corners, reducing breakage and stripping.
Convenient Storage: Compact kit box included for quick and easy storage.

Product Specifications

Kit Contents: 2-1/2" Fast Connect Bit Extension for 1/4", 1-7/8" Magnetic Nutsetters for 1/4", 5/16", 3/8", #1 x 2" Phillips Impact Bit, #2 x 2" Phillips Impact Bit, #1 x 2" Square Impact Bit, #2 x 2" Square Impact Bit, 4-5 x 2" Slotted Impact Bit, 6-8 x 2" Slotted Impact Bit

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1937912	Fast Connect Screwdriver Bit Set	4" x 4" x 1-3/4"	11 oz.	EA	1

Magnetic Nut Drivers

All sizes to conquer jobs big and small. The hilmor Magnetic Nut Drivers give you a secure hold when and where you need it.



1839076

1839057

1839077



1839065

hilmar

Features & Benefits

Secure Hold: A magnetic tip keeps fasteners firmly in place.
Quick Identification: A color-coded insert makes size identification simple.
More Torque: A slip-resistant grip and wrench flats allow for maximum leverage. Wrench flat items 1839076 and 18839077 only.
Big Bolt Capable: A hollowed shaft allows for use on long bolts.
Rugged and Durable: Designed to last with a durable chrome-vanadium steel construction.

CATALOG NO.	DESCRIPTION	SIZE	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1839055	1-1/2" Magnetic Nut Driver	1/4"	3-1/2" x 1-1/4" x 1-1/4"	2 oz.	EA	1
1839056	1-1/2" Magnetic Nut Driver	5/16"	3-1/2" x 1-1/4" x 1-1/4"	2 oz.	EA	1
1839057	1-1/2" Magnetic Nut Driver	Set of 2 - 1/4" & 5/16"	3-1/2" x 1-1/4" x 1-1/4"	2 oz.	EA	1
1839059	3" Magnetic Nut Drivers	1/4"	6-7/8" x 1-1/4" x 1-1/4"	3 oz.	EA	1
1839060	3" Magnetic Nut Drivers	5/16"	6-7/8" x 1-1/4" x 1-1/4"	3 oz.	EA	1
1839063	3" Magnetic Nut Drivers	7/16"	7-1/4" x 1-3/8" x 1-3/8"	6 oz.	EA	1
1839065	3" Magnetic Nut Drivers	Set of 7	6-7/8" x 1-1/4" x 1-1/4" 7-1/4" x 1-3/8" x 1-3/8"	1.7 lbs.	EA	1
1839066	3" Magnetic Nut Drivers	Set of 2 - 1/4" & 5/16"	6-7/8" x 1-1/4" x 1-1/4"	6 oz.	EA	1
1839076	18" Magnetic Nut Drivers	1/4"	22" x 1-1/4"	6 oz.	EA	1
1839077	18" Magnetic Nut Drivers	5/16"	22" x 1-1/4"	6 oz.	EA	1

NUT DRIVERS CONT'D

Quick-Change Magnetic Nut Drivers



It's as if 1/4" to 5/16" had an HVAC/R baby. The hilmor Quick-Change Magnetic Nut Driver is two tools in one, so you can switch from 1/4" to 5/16" with ease. A color-coded handle makes for quick identification. A magnetic tip keeps fasteners firmly in place.

Features & Benefits

Secure Hold:	A magnetic tip on both ends keeps fasteners firmly in place.
Added Versatility:	Quickly switch between 1/4" and 5/16", the two most common sizes.
Quick Identification:	A color-coded insert on the bands and bottom makes size identification simple.
Big Bolt Capable:	A hollowed shaft allows for use on long bolts.
Rugged and Durable:	Designed to last with a durable chrome-vanadium steel construction.

CATALOG NO.	DESCRIPTION	SIZES	SHAFT LENGTH	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1937818	Quick-Change Magnetic Nut Drivers	1/4", 5/16"	1-1/4"	3-1/4" x 1-1/4" x 1-1/4"	3 oz.	EA	1
1839054	Quick-Change Magnetic Nut Drivers	1/4", 5/16"	3"	7-1/2" x 1-1/3" x 1-1/3"	6 oz.	EA	1
1891260	Quick-Change Magnetic Nut Drivers	1/4", 5/16"	6"	10-3/8" x 1-1/3" x 1-1/3"	6 oz.	EA	1

SCREWDRIVERS

Keystone Tip Demolition Screwdrivers



It's a screwdriver on steroids. Pounding, prying, chiseling – no problem. A metal strike cap and through shaft can handle just about everything you put in front of it.

Features & Benefits

Rugged and Durable:	Designed to last with a heat-treated, chrome-plated through shaft and metal strike cap.
More Torque:	A slip-resistant grip allows for maximum leverage.
Secure Fit:	A machined tip allows for a better fit.

CATALOG NO.	DESCRIPTION	SHAFT LENGTH	TIP TYPE/ SIZE	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891395	Keystone Tip Demolition Screwdriver	4"	1/4"	8" x 1" x 1"	6 oz.	EA	1
1891396	Keystone Tip Demolition Screwdriver	7"	5/16"	11-1/8" x 1-1/8" x 1-1/8"	6 oz.	EA	1

Keystone Tip and Cabinet Tip Screwdrivers



Driven to perform. Everything about these screwdrivers says get work done. They're designed to last with a heat-treated, chrome-plated shaft, yet they wouldn't dare strip out your screws.

Features & Benefits

More Torque:	A slip-resistant grip allows for maximum leverage.
Quick Identification:	Easy-to-read tip markings on the handle make identification quick and easy.
Rugged and Durable:	Designed to last with a heat-treated, chrome-plated shaft.

CATALOG NO.	DESCRIPTION	SHAFT LENGTH	TIP TYPE/ SIZE	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891355	Keystone Tip Screwdriver	1-1/2"	1/4"	3-1/4" x 1-1/4" x 1-1/4"	2 oz.	EA	1
1891352	Keystone Tip Screwdriver	4"	1/4"	8-1/8" x 1" x 1"	4 oz.	EA	1
1891356	Keystone Tip Screwdriver	4"	1/4"	8" x 1-1/8" x 1-1/8"	4 oz.	EA	1
1891358	Keystone Tip Screwdriver	6	5/16"	10-1/2" x 1-1/4" x 1-1/4"	6 oz.	EA	1
1891286	Keystone Tip Screwdriver	8	3/8"	12-1/2" x 1-3/8" x 1-3/8"	8 oz.	EA	1
1891287	Cabinet Tip Screwdriver	3"	3/16"	6-1/2" x 1" x 1"	3 oz.	EA	1
1891288	Cabinet Tip Screwdriver	6"	3/16"	9-1/2" x 1" x 1"	3 oz.	EA	1
1891289	Cabinet Tip Screwdriver	6"	1/4"	10-1/4" x 1" x 1"	4 oz.	EA	1

SCREWDRIVERS CONT'D

Terminal Block Screwdriver



1891397

A unique screw calls for a unique screwdriver. The Terminal Block Screwdriver is one-of-a-kind with a heat-treated shaft and super-comfortable grip.

Features & Benefits

More Torque: A slip-resistant grip allows for maximum leverage.
Quick Identification: Easy-to-read tip markings on the handle make identification quick and easy.
Rugged and Durable: Designed to last with a heat-treated, chrome-plated shaft.
Secure Fit: A machined tip allows for a better fit.

CATALOG NO.	DESCRIPTION	SHAFT LENGTH	TIP TYPE/SIZE	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891397	Terminal Block Screwdriver	4"	Terminal Block	7-1/8" x 7/8" x 1"	2 oz.	EA	1

Phillips Tip Screwdrivers



1891290

Forget screws that won't strip. You need a screwdriver that won't strip them. Introducing the hilmor Phillips Tip Screwdriver featuring machined tips for a precise fit. A rugged shaft and comfortable handle round out this tool nicely.

Features & Benefits

More Torque: A slip-resistant grip allows for maximum leverage.
Quick Identification: Easy-to-read tip markings on the handle make identification quick and easy.
Rugged and Durable: Designed to last with a heat-treated, chrome-plated shaft.
Secure Fit: A machined tip allows for a better fit.

CATALOG NO.	DESCRIPTION	SHAFT LENGTH	TIP TYPE/ SIZE	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891290	Phillips Tip Screwdriver	3"	1PH	6-1/2" x 1" x 1"	3 oz.	EA	1
1891391	Phillips Tip Screwdriver	1-1/2"	2PH	3-1/2" x 1-1/4" x 1-1/4"	2 oz.	EA	1
1891392	Phillips Tip Screwdriver	4"	2PH	8" x 1" x 1"	4 oz.	EA	1
1891393	Phillips Tip Screwdriver	7"	2PH	11" x 1" x 1"	5 oz.	EA	1
1891394	Phillips Tip Screwdriver	6"	3PH	10-1/2" x 1-1/4" x 1-1/4"	6 oz.	EA	1

Screwdriver Sets



1891087



1891088

Tip markings on the handle for quick ID. Heat-treated shafts for extra durability. There are thousands of screwdrivers to choose from, but only one set says hilmor. Available in 5-piece or 7-piece sets.

Features & Benefits

More Torque: A slip-resistant grip allows for maximum leverage.
Quick Identification: Easy-to-read tip markings on the handle make identification quick and easy.
Rugged and Durable: Designed to last with a heat-treated, chrome-plated shaft.
Secure Fit: A machined tip allows for a better fit.

Product Specifications

Includes:
5-piece Set: #2 Phillips Tip Round Shank 4", 3/16" Cabinet Tip Round Shank 6", 1/4" Cabinet Tip Round Shank 6", 1/4" Keystone Tip Square Shank 4", 5/16" Keystone Tip Round Shank 6"
7-piece Set: #1 Phillips Tip Round Shank 3", #2 Phillips Tip Round Shank 4", 3/16" Cabinet Tip Round Shank 3", 3/16" Cabinet Tip Round Shank 6", 1/4" Cabinet Tip Round Shank 6", 1/4" Keystone Tip Square Shank 4", 5/16" Keystone Tip Round Shank 6"

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891087	5-Piece Screwdriver Set	10-1/4" x 1-1/4" x 1-1/4"	1.4 lbs.	EA	1
1891088	7-Piece Screwdriver Set	10-1/2" x 1-1/4" x 1-1/4"	1.7 lbs.	EA	1

Precision Screwdriver Set



1891089

When the job calls for precision, reach for hilmor. The Precision Screwdriver Set features machined tips and rotating heads. Plus, a convenient storage pouch keeps you organized.

Features & Benefits

Comfortable Grip: Over-molded handles reduce hand fatigue and won't slip or twist.
Maximum Precision: A rotating head allows for precise adjustments while giving you greater control.
Quick Identification: Easy-to-read tip markings on the handle make identification quick and easy.
Storage: Pouch included for quick and easy storage.

Product Specifications

Includes: 1/16" x 2" Slotted, #0 x 3" Phillips, 3/32" x 3" Slotted, 1/8" x 4" Slotted, 1/8" x 6" Slotted

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1891089	Precision Screwdriver Set	10-1/4" x 5" x 1/8"	10 oz.	EA	1

UTILITY KNIVES

Snap-Off Utility Knife



535-42047

Lightweight and easy to use, this Utility Knife is an ideal general-purpose knife for the shop, garage, and around the house. The fully retractable blades lock in any position for safe cutting. When the blade gets dull, break off a segment for a sharp, new edge. The Knives accept universal replacement blades and is made from high impact polystyrene for durability. Includes: 1-piece large snap-off knife with 8 sharp points per blade; plus built-in blade breaker.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
535-42047	Snap-Off Utility Knife	EA	10
535-42330	Replacement Blades	PK	1

Retractable Utility Knife



1885434

hilmar

This is a great knife to have by your side. Quick cuts come standard with a unique trigger grip. Plus, you've got a few spare blades in the handle when you need them.

Features & Benefits

Rugged and Durable: An all-metal body increases life and durability.
Secure Storage: Conveniently store up to five extra blades in the handle.
Easy to Change: Change your blade quickly and easily without the use of a separate tool.
Easy to Cut: Get easier cutting on the pull with a unique trigger grip.

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1885434	Retractable Utility Knife	1-3/4" x 1" x 6-3/4"	6 oz.	EA	1
1885432	Utility Knife Blades - 5 Pack	NA	NA	EA	1

Folding Utility Knife



1885433

hilmar

hilmor's Folding Utility Knife stands up to the test with an all-metal body. It's your new knife.

Features & Benefits

Rugged and Durable: An all-metal body increases life and durability.
Securely Locks Blade: A blade-locking mechanism prevents the blade from coming out during use.
One-handed Operation: A liner-lock for one-handed operation and extra safety.
Superior Versatility: A built-in wire-stripping channel for up to 10-gauge wire is there when you need it.
Belt Clip: A belt clip keeps knife close for easy access.

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1885433	Retractable Utility Knife	1-3/4" x 1" x 6-3/4"	6 oz.	EA	1
1885432	Utility Knife Blades - 5 Pack	NA	NA	EA	1

WRENCHES AND PLIERS

Cable Tie Tensioning Tool



1891190

The hilmor Cable Tie Tensioning Tool can relieve the stress of the job. It seamlessly tightens heavy and lightweight cable, and cuts excess material with its easy-to-use lever.

Features & Benefits

Versatility: Works with both light and heavy-duty nylon cable ties.
Clean Cut: Easy-to-use cutting lever allows for flush cutting of excess material.

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	UOM	ORDER MUL.
1891190	Cable Tie Tensioning Tool	7-5/8" x 3-7/8" x 5/8"	EA	1

WRENCHES AND PLIERS

Tongue and Groove Pliers



545-440 545-430

These patented design pliers have permalock fasteners with a reinforcing edge. Pliers adjust smoothly between jaw positions without the distance in the handle growing wider. Lever action allows for maximum force transmission. The grips are also dipped in plastic for a more comfortable hold. Made in the USA.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
545-426	6-1/2" Tongue and Groove Pliers	EA	1
545-420	9-1/2" Tongue and Groove Pliers	EA	1
545-422	9-1/2" Curved Jaw Tongue and Groove Pliers	EA	1
545-430	10" Tongue and Groove Pliers	EA	1
545-440	12" Tongue and Groove Pliers	EA	1
545-442	12" Curved Jaw Tongue and Groove Pliers	EA	1
545-460	16" Tongue and Groove Pliers	EA	1

Adjustable Wrenches



545-804

Channelock® Adustable Wrenches are rugged with chrome vanadium steel construction. They feature measurement scales that are laser engraved (in. on front, mm. on reverse) and handy for sizing nuts, pipe, nd tube diameters. They also have an optimal head width and non-protruding jaws that allow accessibility for hard to reach applications. The precise 4-thread knurl improves adjustment accuracy.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
545-804	4" Channellock Adj. Wrench, 1/2" Cap., Chrome	EA	1
545-804N	4" Channellock Adjustable Wrench, Black Oxide	EA	1
545-804S	4" Channellock Adjustable Wrench, Slim Jaw	EA	1

Digital Adjustable Torque Wrench



1963826

Tightening to true torque when working on mini-splits is serious business. Under tightening could result in refrigerant leaks, while overtightening could mean burst tubing. That's why the hilmor Digital Adjustable Torque Wrench is critical to perfecting torque time and time again. The 9 factory memory settings make it quick to set common torque values, while the digital display shows the amount of force applied to the flare nut. And if that didn't make the job easy enough, lights and buzzers illuminate and sound when the desired torque is achieved.

Features & Benefits

Lighten Your Load: Adjustable jaw eliminates the need to carry around extra heads.
Easy To Use: Nine programmable memory settings allow for quick access to the most common torque levels.
Precise Readings: Digital adjustments help ensure torque measurement accuracy.
Extra Confidence: LED lights and buzzer indicate that desired torque has been reached.

Product Specifications

Jaw Capacity: 1/4" (5mm) to 1-1/16" (27mm) to accomodate up to 5/8" flare nuts
Accuracy: +/3%
Batteries: AA (x2)
Warranty: 2 lbs.

Technical Specifications

Torque Range (N-m): 6.8 - 135
Torque Range (Ft-lbs): 5 - 99.5
Torque Range (In-lbs): 60 - 1,195
Torque Range (kg-cm): 69 - 1,378
Battery Saver: Automatic Shutdown after 4 Minutes of Inactivity

Measurement Increments: 0.1 (N-m, Ft-lb)
Operation Modes: Track, Peak
Memory Presets: 9
Operating Temperature: 14°F to 140°F

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W)	WEIGHT	UOM	ORDER MUL.
1963826	Digital Adjustable Torque Wrench	17" x 2-3/8"	2 lbs.	EA	1

Service Wrenches



1839042

1839043

Smart features that save your knuckles and your time. Our Straight Service Wrench makes changing sizes quick and easy. Our Offset Service Wrench makes maneuvering around cramped spaces second nature. The reversible Ratchet Wrench has square openings of 1/4" and 3/16" on one end and 3/8" and 5/16" on the other end. And, when it comes to accessing liquid- and suction-based valves, reach for our Hex Key Adapter. It works on 3/16" and 5/16" hex valves.

CATALOG NO.	DESCRIPTION	SQUARE SIZES	HEX SIZES	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1839042	Service Wrench	1/4", 3/16", 3/8", 5/16"	NA	5-1/2" x 1/2" x 7/8"	3 oz.	EA	1
1839043	Service Wrench	1/4", 3/16", 3/8", 5/16"	NA	5-1/4" x 3/4" x 7/8"	3 oz.	EA	1
1839045	Service Wrench	1/4", 3/16"	1/2", 9/16"	6-1/4" x 1/2" x 1"	5 oz.	EA	1
1839046	Hex Key Adapter	3/16", 5/16"	NA	1/2" x 2/5" x 2/5"	1 oz.	EA	1

Adjustable Wrenches



1885422

1885421

1885370

1885369

Take your pick of imperial or metric scales. They come standard on all of our Adjustable Wrenches. They're made to fit in your hand with ergonomic grips and made to last by hilmor.

Features & Benefits

Comfortable Grip: Over-molded handles reduce hand fatigue and won't slip or twist.
Added Versatility: Get two-in-one capabilities with both inch and metric scales.

CATALOG NO.	DESCRIPTION	SIZES	JAW CAPACITY UP TO:	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1885369	Adjustable Wrenches	6"	1"	6-3/8" x 1-3/4" x 1/2"	6 oz.	EA	1
1885370	Adjustable Wrenches	8"	1-1/8"	8-1/4" x 1" x 5/8"	12 oz.	EA	1
1885421	Adjustable Wrenches	10"	1-1/4"	10" x 2-5/8" x 3/4"	1.1 lbs.	EA	1
1885422	Adjustable Wrenches	12"	1-1/2"	12-1/8" x 2-7/8" x 3/4"	1.7 lbs.	EA	1

Quick-Adjusting Tongue & Groove Pliers



We've made an adjustment to standard pliers. Our Quick-Adjusting Tongue and Groove Pliers feature a simple push button to give you a quick precision grip on pipes, fasteners and more.

Features & Benefits

Simple Sizing: A push button allows for quick adjustments while multiple grooves guarantee precise positioning.
Comfortable Grip: Over-molded handle reduces hand fatigue and won't slip or twist.
Strong Hold: Machined jaws increase grip on the material every time.

CATALOG NO.	DESCRIPTION	LENGTH	JAW CAPACITY	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1890996	Quick-Adjusting Tongue and Groove Pliers	8"	1-1/2"	8-1/4" x 5/8" x 1-3/4"	9 oz.	EA	1
1890997	Quick-Adjusting Tongue and Groove Pliers	10"	1-3/4"	10-1/8" x 3/4" x 2-1/4"	13 oz.	EA	1
1890998	Quick-Adjusting Tongue and Groove Pliers	12"	2-3/16"	12-1/4" x 3/4" x 2-1/2"	1.4 lbs.	EA	1

Tongue & Groove Pliers



Like a snapping turtle, these pliers grab hold and won't let go. Machined jaws guarantee a lock-tight grip, and over-molded handles won't slip or twist. 12" model adjusts to a 2-1/16" jaw capacity.

Features & Benefits

Comfortable Grip: Over-molded handles reduce hand fatigue and won't slip or twist.
Strong Hold: Machined jaws increase grip on the material every time.

CATALOG NO.	DESCRIPTION	SIZES	JAW CAPACITY	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1885366	Tongue and Groove Pliers	8"	1"	8" x 2-1/2" x 3/4"	10 oz.	EA	1
1885367	Tongue and Groove Pliers	10"	1-11/16"	10-1/4" x 3-1/4" x 3/4"	1.1 lbs.	EA	1
1885368	Tongue and Groove Pliers	12"	2-1/16"	12" x 3-1/4" x 7/8"	1.5 lbs.	EA	1

Multi-Function Pliers



The hilmor Multi-Function Pliers bring 5 tools into one! They feature a long nose for grabbing and looping wire. The stripper portion can strip 8 AWG to 18 AWG. The curved cutting blade effectively and efficiently cuts through larger wire sizes. The forged alloy steel provides maximum tool strength and durability and the hot-riveted joint ensures a smooth action and reduced hand wobble.

Features & Benefits

Comfortable Grip: Over-molded handles reduce hand fatigue and won't slip or twist.
Strong Hold: Forged alloy steel with hot rivet joint provides maximum tool strength and smooth action.
Stays Sharp: Wire stripper strips 8 AWG to 18 AWG (solid wire), 10 AWG to 20 AWG (stranded wire).

Product Specifications

Screw Sizes (Shearing): 6-32, 8-32

CATALOG NO.	DESCRIPTION	DIMENSIONS (D X W X H)	UOM	ORDER MUL.
1885391	Multi-function Pliers	10.1" x 3.05" x 1"	EA	1

Lineman's Pliers



Grab. Twist. Cut. Repeat. Over and over again. A laser-hardened cutting edge stays sharp longer, and cross-cut knurled jaws guarantee a strong grip time after time. hilmor Lineman's Pliers will last.

Features & Benefits

Stays Sharp: A laser-hardened cutting edge will stay sharper for longer.
Strong Hold: Cross-cut knurled jaws increase grip on the material every time.
Comfortable Grip: Over-molded handles reduce hand fatigue and won't slip or twist.

CATALOG NO.	DESCRIPTION	SIZES	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1885399	Lineman's Pliers	8-1/2"	8-3/4" x 2" x 7/8"	13 oz.	EA	1
1885411	Lineman's Pliers	9-1/2"	9-1/2" x 2-1/4" x 7/8"	1.0 lbs.	EA	1

Diagonal Cutting Pliers



What's our angle? To make a great pair of pliers. The Diagonal Cutting Pliers stay sharp as a samurai sword with a laser-hardened cutting edge.

Features & Benefits

Stays Sharp: A laser-hardened cutting edge will stay sharper for longer.
Comfortable Grip: Over-molded handles reduce hand fatigue and won't slip or twist.

CATALOG NO.	DESCRIPTION	SIZES	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1885412	Diagonal Cutting Pliers	6"	6-3/4" x 2-1/8" x 3/4"	4 oz.	EA	1
1885362	Diagonal Cutting Pliers	7"	7-1/4" x 2-1/8" x 3/4"	8 oz.	EA	1
1885363	Diagonal Cutting Pliers	8"	8" x 2-1/8" x 3/4"	12 oz.	EA	1

NOTE: Item numbers in **RED** indicate **Made in the U.S.A.**

Long Nose Pliers


1885398

1885397

It's tough to beat a good pair of pliers. A laser-hardened cutting edge, cross-cut knurled jaws and over-molded handles make hilmor Long Nose Pliers pretty darn tough to beat.

Features & Benefits

Stays Sharp: A laser-hardened cutting edge will stay sharper for longer.
Strong Hold: Cross-cut knurled jaws increase grip on the material every time.
Comfortable Grip: Over-molded handles reduce hand fatigue and won't slip or twist.

CATALOG NO.	DESCRIPTION	SIZES	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1885397	Long Nose Pliers	6"	6-7/8" x 2-1/8" x 5/8"	4 oz.	EA	1
1885398	Long Nose Pliers	8"	8-5/8" x 2-1/8" x 3/4"	8 oz.	EA	1

Self-Adusting Wire Stripper


1885423

All wire strippers are not created equal. These come with the ability to crimp insulated and non-insulated terminals 10-22AWG. Plus, clearly marked indicators mean you can strip without damage.

Features & Benefits

Added Versatility: Crimp insulated and non-insulated terminals 10-22 AWG.
Comfortable Grip: Over-molded handles reduce hand fatigue and won't slip or twist.
Maximum Control: An adjustable stop controls the length of wire being stripped.
Precise Stripping: A micro-adjusting knob allows for stripping down to 30 AWG and up to 8 AWG.
Self-Adjusting: Automatically adjusts to strip and cut wire 10-24 AWG.

Product Specifications

Capacity: Wire: 10-24AWG
Insulated Terminals: 10-22AWG
Non-insulated Terminals: 10-22AWG

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1885423	Self-Adjusting Wire Stripper	8-3/8" x 3-1/2" x 5/8"	13 oz.	EA	1

Wire Strippers


1885424


1885426


1885427

The hilmor Wire Strippers feature easy-to-read size markings, which means you can strip wires with ease and without damage. Electrical work is no laughing matter, and these Wire Strippers are no joke.

Features & Benefits

Comfortable Grip: Over-molded handles reduce hand fatigue and won't slip or twist.
Quick ID: Easy-to-read size markings on the jaws make identification simple.
Bolt Cutting: Cuts 4-40, 5-40, 6-32, 8-32, 10-24, 10-32 bolts and screws to desired size.*1885424 Only.

CATALOG NO.	DESCRIP.	SIZES	CAPACITY	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1885427	Wire Strippers	6"	10-20AWG	6-1/2" x 2-1/4" x 5/8"	5 oz.	EA	1
1885426	Wire Strippers	7"	10-20AWG	7-1/4" x 2-1/8" x 5/8"	6 oz.	EA	1
1885424	Wire Strippers	8"	10-20AWG	8" x 2-5/8" x 5/8"	8 oz.	EA	1

Crimping Tool


1885429

Crimp. Cut. We've got you covered. The hilmor Crimping Tool handles both insulated and non-insulated terminals. Over-molded handles and a hardened cutting edge come standard, too.

Features & Benefits

Stays Sharp: A hardened cutting edge will stay sharper for longer.
Comfortable Grip: Over-molded handles reduce hand fatigue and won't slip or twist.

Product Specifications

Capacity:
Wire: 10-22AWG
Insulated Terminals: 10-22AWG
Non-Insulated Terminals: 10-22AWG

CATALOG NO.	DESCRIPTION	SIZE	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1885429	Crimping Tool	10"	9-7/8" x 2-1/4" x 3/4"	1.1 lbs.	EA	1

In-Line Wire Strippers


1885425

Eliminate the awkward side pull and strip wires with power and confidence. The ergonomic, in-line orientation is designed to strip wire with ease using a natural pulling motion. A Patented 90-degree angled head fits into tight spaces and features a curved cutting edge that will stay sharper and longer. Electrical work has never been this easy.

Features & Benefits

Ergonomic Design: 90° angled head provides a natural, in-line, wire stripping orientation and movement.
Strong Hold: 90° Angled Head – Designed to Fits into Tight Spaces
Stays Sharp: A hardened cutting edge will stay sharper for longer.
Wire Gauge Capacity: Strip and cut wire 6-12 AWG. [1885428]
Strip and cut 12/2 14/2 dual conductor wire. [1885425]

Product Specifications

1885425: Strips and Cuts: 12/2, 12/2 Dual NM-B, 12, 14 AWG
Screw Shearing: 6-32, 8-32
Cutter Type: Curved
1885428: Strips and Cuts: 6, 8, 10, 12, 14 AWG Solid
8, 10, 12, 14 Stranded
Screw Shearing: 6-32, 8-32
Cutter Type: Curved

CATALOG NO.	DESCRIPTION	SIZES	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1885425	In-Line Wire Strippers	10"	10" x 3.9" x 1"	.5 lbs.	EA	1
1885428	Heavy Duty In-Line Wire Strippers	10"	10" x 3.9" x 1"	.5 lbs.	EA	1

WRENCHES AND PLIERS CONT'D

Locking Pliers Pinch-Off Tool



1937673

The hilmor Locking Pliers Pinch-Off Tool is rugged and durable – a lot like you. Made from high-grade, heat-treated alloy steel, this tool is built to handle whatever you throw at it. The pinch-off mechanism locks on to tubing so your hands are free to get the real job done.

Features & Benefits

Rugged and Durable: Pliers are built to last, manufactured from high-grade, heat-treated alloy steel for durability.

Added Versatility: Designed to pinch off and lock on to 1/8" to 5/8" diameter tubing, leaving both hands free to do other work.

Product Specifications

Sizes: 1/8" - 5/8"

CATALOG NO.	DESCRIPTION	DIMENSIONS (D X W X H)	WEIGHT	UOM	ORDER MUL.
1937673	Locking Pliers Pinch-Off Tool	7-1/4" x 2-1/4" x 1"	12 oz.	EA	1

Refrigerant Recovery Tool



RRT100

Smart features that save refrigerant and time. Our Refrigerant Recovery Tool makes evacuation equipment quick and easy.

Features & Benefits

Added Convenience: Self-adjusting for 1/4" and 1/2" lines.

Secure Fit: Securely locks and seals.

Rugged and Durable: Stainless Steel Piercing Valve. Made from high carbon, heat treated steel jaws.

Product Specifications

Sizes: 1/8" - 5/8"

CATALOG NO.	DESCRIPTION	DIMENSIONS (D X W X H)	WEIGHT	UOM	ORDER MUL.
RRT100	Refrigerant Recovery Tool	1-1/2" x 5" x 11-1/2"	0.55 lbs.	EA	1

DRAIN GUN AND CARTRIDGES

SWOOSH® Drain Gun® Double Shot™ - 20g SWOOSH® CO_2 Cartridges & Case



SG-2KIT

The SG-2 SWOOSH Drain Gun® Double Shot allows you to clear drain lines better than before. The SG-2 SWOOSH Drain Gun® Double Shot can use a single 20g cartridge. To unleash the full capacity of the SG-2, load two 20g cartridges for 2.5X more SWOOSH! The SWOOSH Drain Gun® Double Shot features indicators that provide visual reference of pressurized chambers and the safety lock prevents accidental discharge. The SWOOSH Drain Gun® Double Shot easily stores cartridges inverted in either chamber when not in use. The SG-2KIT features the SG-2 Drain Gun® Double Shot, two 20 gram SWOOSH cartridges, a reinforced vinyl hose that's equipped with a tapered fitting to work on 3/8" - 3/4" drain openings, and a universal adapter for multiple drain line clearing accessories. It comes packaged in a blow-molded case with removable EVA foam.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SG-2KIT	SWOOSH® Drain Gun® Double Shot™ with 2 20g Cartridges & Case	EA	6

SWOOSH® Drain Gun® BIG SHOT™ - 20g SWOOSH® CO_2 Cartridges



SG-1



SGC-12

The SWOOSH® Drain Gun® BIG SHOT™ uses new larger 20 gram SWOOSH® cartridges that provide 25% more capacity to better remove clogs, gunk and debris from drain lines. And the SWOOSH® Drain Gun® BIG SHOT™ includes a flexible hose with tapered fitting to easily connect with drain line opening for fast and easy clearing.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SG-1	SWOOSH® Drain Gun® BIG SHOT™	EA	6
SGC-12	SWOOSH® 20g CO_2 Cartridges, pack of 12	PK	1

Drain Gun® - 16g SWOOSH® CO_2



GG-1

Clears condensate drains with a SWOOSH! A lightweight (3 oz.) portable tool designed to clean out drain lines instantly. New larger SWOOSH CO_2 cartridges now deliver 800 PSI of oil free air to clear the line. Each unit comes equipped with a tapered fitting to work on 3/8" – 3/4" drain openings. Flexible hose assembly maneuvers through cabinets, coils and hard to reach drains. Cartridges are environmentally safe and recyclable. No need for air or nitrogen tanks. Reduces labor costs and time on service calls.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
GG-1	Drain Gun® for A/C Condensate Lines	EA	6
GGC-12	SWOOSH® 16g CO_2 Cartridges, pack of 12	PK	1

REFILLABLE, PORTABLE AND OTHER DRAIN LINE CLEARING

DrainDawg™

The DrainDawg™ is a complete condensate drain cleaning kit, including the CT-475M deluxe nitrogen / CO_2 0-475 psi regulator, the TG-10 & BS-25 ten foot hose and blowgun assembly, and the CW-15 fifteen inch whip hose. Also included is the AP-DD DrainDawg™ Accessory Fitting Kit which contains the DF-75 DrainDawg™ inflatable tip, the CK-141 3/4"-1" cone fitting, the FA-02 CO_2 to nitrogen adapter, the QN-S3 needle tip, and the TC-25 tire chuck. Made in the USA.



CB-2

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CB-2	DrainDawg™ Kit	EA	3

DrainKat™

The DrainKat™ is an over-the-shoulder refillable, nitrogen or CO_2 mini drain cleaning kit. Featuring a small cylinder that holds 9 cubic feet of nitrogen or 2-1/2 pounds of CO_2. The cylinder includes an integral mounted regulator for quick and easy adjustment of discharge pressure. Get exactly the amount of pressure you need with a quick adjustment on the regulator. Furnished complete with an 87" hose and drain gun kit, the CW-15 whip hose, and the AP-DK DrainKat™ Accessory Fitting Kit which contains the DF-75 DrainDawg™ inflatable tip, the CB-03 3/4"-1" cone fitting, the FA-01 male to male CO_2 to nitrogen adapter, the FA-03 CO_2 trans-fill adapter, and the the QN-S3 needle tip. Made in the USA.



MBK-6

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
MBK-6	DrainKat™ Kit	EA	2

ACCESSORIES

Drain Gun® - 16g SWOOSH® CO_2 Accessories

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
GG-1A	Drain Gun® Adapter Kit	EA	1
GG-1H	Drain Gun® Hose Assembly	EA	1
GG-1TF	Drain Gun® Replacement Tip	EA	1
GG-1BOR	Drain Gun® Bottom O-Ring, Pack of 5	PK	1



GG-1A

DrainDawg™ and DrainKat™ Fittings

The DrainDawg™ and DrainKat™ products are compatible with a series of fittings to connect to condensate drain lines and hoses. The fittings are available individually, or as kits for the DrainDawg™ and DrainKat™.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
AP-DD	DrainDawg™ Accessory Pack	EA	1
AP-DK	DrainKat™ Accessory Pack	EA	1
BS-25	Blow Gun with Safety Tip for DrainDawg™ or DrainKat™	EA	1
CB-03	3/4" Cone Tip with Female Thread for DrainDawg™ or DrainKat™ Blow Gun	EA	1
CK-141	3/4" Cone with Male Thread for Use with Whip Hose for DrainDawg™ or DrainKat™	EA	1
CW-15	15" Whip Hose for DrainDawg™ or DrainKat™	EA	1
DF-75	DrainDawg™ Inflatable Tip for Drain Line Blowout	EA	1
FA-01	Nitrogen to CO_2 Adapter, Male by Male for DrainKat™	EA	1
FA-02	Nitrogen to CO_2 Adapter, Female by Female for DrainDawg™	EA	1
FA-03	CO_2 Transfill Adapter for DrainKat™	EA	1
QN-S3	Needle Tip with Female Thread for DrainDawg™ or DrainKat™ Blow Gun	EA	1
TC-25	Tire Chuck for DrainDawg™	EA	1
TG-10	120" Blow Gun Hose for DrainDawg™	EA	1
1TG-87A	87" Blow Gun Hose for DrainKat™	EA	1



AP-DD

LINESET CLEANER

Lineset Cleaner

The hilmor Lineset Cleaner uses a pressurized source to launch a foam puck into the line set to wipe the pipe clean of contaminants and remaining refrigerants.

Features & Benefits

Picture-Perfect Cleaning: Simply connect the correct nozzle, chamber the corresponding pig size, connect to a regulated compressed nitrogen source, and pull the trigger for a perfectly clean lineset.

Twice the Versatility: One tool that has the ability to effectively wipe contaminants and remaining oil from linesets ranging from 3/8" to 7/8".

Premium Care: The rinseable/reusable foam cleaning pigs are specially formulated and manufactured to flow through normal lineset configurations and most deformations.

Product Specifications

Max PSI 60 PSI

Connector Size for Pressure Inlet: 1/4" SAE male, 1.02 lbs



HLC007



HLP078, HLP034, HLP058, HLP012, HLP038

CATALOG NO.	DESCRIPTION	SIZES	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
HLC007	Lineset Cleaner	NA	16.5" x 3.2" x 12.4"	7 lbs.	EA	1
HLP038	Foam Pig	3/8"	NA	NA	EA	1
HLP012	Foam Pig	1/2"	NA	NA	EA	1
HLP058	Foam Pig	5/8"	NA	NA	EA	1
HLP034	Foam Pig	3/4"	NA	NA	EA	1
HLP078	Foam Pig	7/8"	NA	NA	EA	1
HLP099	Assorted Foam Pigs - 2 EA	NA	NA	NA	EA	1
HLP095	95 Piece Contractor Pig Pack	NA	NA	NA	EA	1

VACUUM GAUGES

Wireless Vacuum Gauge

Easy positioning. Easier readings. Easily, the best vacuum gauge.

Features & Benefits

Easy to Read: LED backlit screen for easy to read display.

Long Battery Life: 80 hour battery life for Remote Sensor and Handheld.*

Added Convenience: Programmable audible micron alarm with high and low settings.

Added Versatility: Includes foldable hook and magnet to easily attach to any unit.

*measured with LED backlight turned off



1950217

Product Specifications

Contents: 1 - Remote Sensor with 3 AAA Batteries
1 - Handheld Display with 3 AA Batteries
1 - 1/4'' Female Flare Adaptor
1 - Protective Case

Accuracy: +/- 5% of Reading, +/- 10 microns

Units: micron, mTorr, Torr, mmhg, mBar, kPa and Pa

Wireless Range: 33 Feet (10 meters) Unobstructed

Resolution: 5 to 2,000 microns - 1 micron
2,001 to 5,000 - 100 microns
5,001 to 10,000 - 250 microns
10,001 to ATM - 1,000 microns

Refresh Rate: 0.5 Seconds

Battery Life: 80 Hours (Without Backlight)

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1950217	Wireless Vacuum Gauge	16.5" x 3.2" x 12.4"	7 lbs.	EA	1
1950219	Vacuum Gauge Sensor	NA	NA	EA	1
1950531	Vacuum Gauge Sensor and Transmitter	NA	NA	EA	1

VACUUM GAUGES

Compact Vacuum Gauge



CVG1200

hilmor

The hilmor Compact Vacuum Gauge is an all-in-one micron gauge that is durably constructed for everyday use and abuse. An easy to read backlit display provides readings and the two button operation simplifies field use.

Features & Benefits

Easy to Read: Backlit LCD makes reading in the dark easy.
Convenient Storage: Protective case keeps the gauge safe and quick to grab.
Added Versatility: Full range readings lets you see the progress right away.
Superior Protection: Handles 800 psi momentarily if a mistake is made.

Product Specifications

Contents: 1 - Vacuum Gauge
1 - Protective Case
1 - AAA Batteries
Units: microns, mBar & mmHg
Accuracy: 5% ±10 microns (1 to 1,000 microns) at 25°C
20% (1,000 to 5,000 microns)at 25°C

Resolution: 1 micron (1 to 2,000 microns)
100 microns (2,000 to 20,000 microns)
1000 microns (20,000 to 100,000 microns)
10000 microns (100,000 to 300,000 microns)

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	UOM	ORDER MUL.
CVG1200	Wireless Vacuum Gauge	4.8" x 2.2" x 1.2"	EA	1

REFRIGERANT SCALES

Wireless Refrigerant Scale



RSWL220

hilmor

Rugged & durable to handle all terrains. Use inside the case for added protection from the elements. The hilmor Wireless Refrigerant Scale remote provides the user with a market leading 130 foot wireless range to help tackle those challenging locations.

Features & Benefits

Accurate Readings: Provides readings in 0.2 oz increments.
Easy to Read: Backlit LED display is easy to read.
Added Versatility: Scale can be used in or out of the protective case.
Long Range: Wireless remote keeps working up to 130 ft away.

Product Specifications

Contents: 1 - Wireless Refrigerant Scale
1 - Remote
5 - AAA Batteries
5 - AA Batteries
1 - Protective Case
Units: kg or lbs. & oz.

Battery Life Duration: 40 hours
Resolution: 0.2 oz. (5 g)
Capacity: 220 lbs. (100 kg)
Wireless Range: 130 ft. (40m)
Operating Temperature: -10° to 40°C (14° to 104°F)

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
RSWL220	Wireless Refrigerant Scale	18" x 14-3/4" x 3-1/2"	10.6 lbs.	EA	1

Refrigerant Scale



RSW220

hilmor

Rugged & durable to handle all terrains. Use inside the case for added protection from the elements.

Features & Benefits

Accurate Readings: Provides readings in 0.2 oz increments.
Easy to Read: Backlit LED display is easy to read.
Added Versatility: Scale can be used in or out of the protective case.
Secure: Rubberized surface provides tank stability and protects scale.

Product Specifications

Contents: 1 - Refrigerant Scale
5 - AAA Batteries
1 - Protective Case
Battery Life Duration: 40 hours
Resolution: 0.2 oz. (5 g)
Capacity: 220 lbs (100 kg)

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
RSW220	Wireless Refrigerant Scale	18" x 14-3/4" x 3-1/2"	10.6 lbs.	EA	1

LEAK DETECTION

Heated Diode Refrigerant Leak Detector



LDHD250

Tight Space? No problem. Find leaks fast with the flexible probe that allows access to all of those hard-to-reach areas.

Features & Benefits

Added Convenience:	Audible and visual notification.
Easy to Read:	LED screen for easy to read display.
Added Versatility:	Works on all halogenated refrigerants.
Small Space Capable:	Flexible probe allows access to the hard-to-reach areas.

Product Specifications

Contents:	1 - Leak Detector 1 - Accessory Case 3 - AA Batteries
Battery Life:	6 hours
Warranty:	2 Year Limited

Technical Specifications

Sensor Type:	Semi-Conductive Sensor (Heated Diode)
Sensor Life:	5 years (Typical)
Maximum Sensitivity:	(0.14 oz) 4 grams/year
Response Time:	3 Seconds
Warm-Up Time:	30 Seconds
Operating Environment:	32°F (0°C) to 104°F (40°C) at <75% RH (non-condensing)
Display Method	LED Display
Notification Mode	LED Display and Audio
Battery	(3) 1.5V AA
Battery Saver:	Automatic Shutdown after 10 Minutes of inactivity
Working Time:	6 Hours
Certifications:	SAE J1627, SAE J2791, SAE J2913, EN14624: 2012
Refrigerants:	It will detect all halogenated (including Chlorine or Fluorine) refrigerants. This includes, but is not limited to:
Detected:	CFC: R12, R11, R500, R503 HCFC: R22, R123, R124, R502 HFC: R134A, R404A, R410A, R407C

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
LDHD250	Heated Diode Refrigerant Leak Detector	10-1/4" x 2-1/4" x 2-1/4"	14 oz. (397g)	EA	1

Infrared Refrigerant Leak Detector



LDIR150

This detector is in it for the long haul. The 10-year sensor life will keep up with all of your daily demands.

Features & Benefits

Extra Confidence:	Built to last with a 10-year sensor life.
Easy to Read:	The TFT LCD screen provides a clear visual confirmation of the leak location.
Added Convenience:	Audible and visual notification for leak detection.
Added Versatility:	Works on all halogenated refrigerants.

Product Specifications

Contents:	Dimensions:
1 - Leak Detector	Length: 7.9"
1 - 10 pack of filters	Width: 3.3"
1 - Charger	Height: 1-1/2"
1 - Cable	Weight: 14.6 oz. (415g)
1 - Accessory Case	

Technical Specifications

Sensor Type:	Infrared Spectrum Absorption
Sensor Life:	10 years (Typical)
Maximum Sensitivity:	(0.14 oz) 4 grams/year
Response Time:	3 Seconds
Warm-Up Time:	30 Seconds
Operating Environment:	32°F (0°C) to 104°F (40°C) at <75% RH (non-condensing)
Display Method:	TFT LCD Display
Notification Mode:	TFT LCD Display and Audio
Battery:	Built-in Rechargeable Lithium Battery
Battery Saver:	Automatic Shutdown after 10 Minutes of inactivity
Working Time:	6 Hours
Charging Time:	4 Hours
Certifications:	SAE J1627, SAE J2791, SAE J2913, EN14624: 2012
Refrigerants	It will detect all halogenated (including Chlorine or Fluorine) refrigerants.
Detected:	This includes, but is not limited to: CFC: R12, R11, R500, R503 HCFC: R22, R123, R124, R502 HFC: R134A, R404A, R410A, R407C CH: R600A

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
LDIR150	Infrared Refrigerant Leak Detector	7.9" x 3.3" x 1-1/2"	14.6 oz. (415g)	EA	1

VACUUM PUMPS

Vacuum Pumps

Your days of messing around with clunky, unreliable pumps are over. These two-stage rotary vane vacuum pumps have been retooled with features to make pulling vacuum down to 25 microns a breeze.



1950532

hilmar

Features & Benefits

Hands-Free Carry: Two durable hoist points make transporting the vacuum pump easier. Compatible with the hilmor HVAC/R Carrying Strap.

Drains Oil Quickly: A sloped and channeled housing helps oil drain fast.

Extra Confidence: A leak-proof valve isolates the pump from the system for accurate vacuum readings and easy oil change without losing a vacuum.

Easy To Check Oil: Quickly identify oil level and detect oil contamination through a large sight glass.

High Efficiency: 2-Stage rotary vane pump achieves a lower vacuum and a higher volumetric flow rate

CATALOG NO.	DESCRIPTION	CFM	MOTOR HP	POWER REQ.	MOTOR SPEED	INTAKE FITTING	ULTIMATE VACUUM	OIL CAPACITY	COMPLIANCE	WARRANTY	DIMENSIONS (L X W X H)	NET WEIGHT	UOM	ORDER MUL.
1947970	Vacuum Pump	3	1/3	4.5A, 120V, 60Hz	1720 RPM	1/4", 3/8"	25 Microns	11 oz.	CSA	2 Year Limited	13.6" x 5.5" x 10.7"	19.7 lbs.	EA	1
1948121	Vacuum Pump	5	1/2	7.5A, 120V, 60Hz	3440 RPM	1/4", 3/8", 1/2"	25 Microns	11oz.	CSA	2 Year Limited	13.6" x 5.5" x 10.7"	19.7 lbs.	EA	1
1948122	Vacuum Pump	9	1	5.5A, 120V, 60Hz	1720 RPM	1/4", 3/8", 1/2"	25 Microns	15 oz.	CSA	2 Year Limited	15.9" x 5.9" x 11.2"	36.2 lbs.	EA	1
1950532	Vacuum Pump	12	1	7.6A, 120V, 60Hz	2500 RPM	1/4", 3/8", 1/2"	25 Microns	15oz.	CSA	2 Year Limited	15.6" x 5.7" x 10.1"	25.5 lbs.	EA	1

Vacuum Pump Oil

Working in basements and crawlspaces all day, you're bound to get dirty. And so is your vacuum pump oil. Oil is the lifeblood of a vacuum pump and filters moisture and contaminants from the system. Clean oil means longer life for your pump and deeper, faster vacuum pulls.



1948212

1948211

hilmar

CATALOG NO.	DESCRIPTION	VOLUME	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1948211	Vacuum Pump Oil	Quart (Case of 12)	2-5/8" x 4-1/8" x 8-7/8"	3 lbs.	EA	1
1948212	Vacuum Pump Oil	1 Gallon (Case of 6)	4-1/8" x 7" x 12"	8 lbs.	EA	1

RECOVERY MACHINES

Recovery Machine

Pulls like a powerhouse. Lifts like a feather. The recovery machine designed for you.



1950536

hilmar

Features & Benefits

Quick, Easy Access: Conveniently located hose ports make connecting hoses easier and reduces strain

Accurate, Easy to Read: Digital LCD Screen provides accurate and easy to read pressure readings.

Superior Security: High- and low-pressure automatic shutoff protects machine and helps ensure safety.

Convenient Storage: Dedicated power cord wrap protects the cord and secures the plug.

Product Specifications

Compatible Refrigerants: R-12, R-134A, R-401C, R-406C, R-500
R-401A, R-412A, R-22, R-407C, R-509
R-409A, R-411A, R-411B, R-402B
R-401B, R-407B, R-502, R-408AR-401A, R-412A, R-22, R-407C, R-509
R-409A, R-411A, R-411B, R-402B
R-401B, R-407B, R-502, R-408A
R-407A, R-402A, R-407B, R-404A
R-507, R-410AR-407A, R-402A, R-407B, R-404A
R-507, R-410A

Compliance: CSA , FCC , AHRI740-1998 UL Verified

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
1950536	Recovery Machine	9.2" x 4.9" x 12-1/2"	17-1/2 lbs.	EA	1
1950537	Intake Filter, O-Ring	NA	NA	EA	1

WORK LIGHTS

PIVOT™

The PIVOT™ is a light that has a 360° swivel hook with 240 lumens and magnetic base and back. Three AA batteries included.



111114

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
111114	PIVOT™ Pivoting Work Light	EA	9

PIVOT™ 33

The Pivot™ 33 is a light that has a 360° swivel hook with 160 lumens and magnetic back and pivoting base. Lights on front and top with three AA batteries included. Available in yellow or camo.



24-458

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
24-458	PIVOT™ 33 Work Light	EA	9
24-460	PIVOT™ 33 Work Light, Camo	EA	9

Clip-On Zoom

The Clip-On Zoom Light provides 150 lumens, 90° pivoting capability coupled with the ability to zoom from broad to narrow. It includes a magnetic base and includes three AAA batteries.



111128

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
111128	Clip-On Zoom Work Light	EA	8

HEMImini™

The HEMImini™ has up to 1000 lumens of power (4 hours - full power) with a 4400 mAh lithium-ion rechargable battery. It includes a 180 degree swivel hook with an optional magnetic cover.



114301 410239

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
114301	HEMImini™ Work Light	EA	1
410239	Magnetic Cover for HEMImini™ Work Light	EA	1

Flex Light

The Flex Light provides 120 lumens of lighting for tight spaces with the ability to bend 90 degrees backwards and forwards. Designed with flexibility in mind, this light comes with a magnetic base and three AAA batteries.



111131

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
111131	Flex Pocket Work Light	EA	8

PIVOT™ mini

The PIVOT™ mini is a light that has a 360° swivel hook with 120 lumens and magnetic back and base. Lights on front and top with three AAA batteries included. Available in yellow or camo.



111115

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
111115	PIVOT™ mini Pivoting Work Light	EA	12
111117	PIVOT™ mini Pivoting Work Light, Camo	EA	12

PIVOT™ Tough-Light

The PIVOT™ Tough Light has 150 lumens with a hanging hook and magnetic base. It also has 180 degree pivoting capability with three AAA batteries included.



111123

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
111123	PIVOT™ Tough-Light Work Light	EA	8

Cliplight Extends

The Cliplight Extends has 120 lumens at the top and 140 lumens in the front with a pivoting head. The light comes with a telescopic system and magnetic base. Four AAA batteries included.



111130

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
111130	Cliplight Extends Work Light	EA	8

HEMIPLUS™ 2

The HEMIPLUS™ 2 has up to 1200 lumens of power (4 hours - full power) with a 4400 mAh lithium-ion rechargable battery. It includes a metal hook and removable magnetic cover.



114302

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
114302	HEMIPLUS™ 2 Work Light	EA	1

Curve Light

The Curve Light provides 300 lumens of lighting using chip-on board technology. Desgined with a curved shape to protect the lens and rubber bumper for durability. It is rugged yet sleek. A hanging hook, magnetic base and three AA batteries are included.



111133

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
111133	Curve Heavy Duty Work Light	EA	6

SEEKERmax™

High powered UV light with rechargable 2200 mAh lithium-ion battery with no UV enhancing glasses required. Finds leaks day or night. 4 hours of continuous use.



87DCPLUS

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
87DCPLUS	SEEKERmax™ UV LED Worklight	EA	1

NOTE: Item numbers in **RED** indicate **Made in the U.S.A.**

WORK LIGHTS CONT'D

Clipstrip™ / Clipstrip 2™

Clipstrip™ is a powerful pocket light with 140 lumens and includes a pivoting magnetic clip. It is available in yellow or camo with three AAA batteries included.



111112

111118

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
111112	Clipstrip™ Pocket Light	EA	12
111116	Clipstrip™ Pocket Camo Light	EA	12
111118	Clipstrip 2™ Pocket Light	EA	9

Work Light

Just because you could do it with your eyes closed, doesn't mean you should have to. Bring light to the HVAC/R problems at hand so you can do what you do best, solve them.



HMWL1200

Product Specifications
Two Power Modes: 1200 Lumens (3 Hrs), 600 Lumens (5 Hrs)

Lithium Ion Rechargeable Battery
Magnetic Stand for Secure Positioning
Adjustable Joints

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
HMWL1200	Work Light	7" x 7" x 8-1/2"	3.9 lbs.	EA	1

Portable Work Light

You're always on the move but your light source must be steady. Designed to prevent shadows and hotspots, the Portable Work Light offers precise light dispersal for the perfect view of whatever moving target you're hitting.



HMPWL1200

Product Specifications
Two Power Modes: 1200 Lumens (4 Hrs), 600 Lumens (8 Hrs)

Wide Circular Beam
Secure Hold
Rechargeable Battery

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
HMPWL1200	Portable Work Light	10-1/4" x 2" x 1-1/2"	1.35 lbs.	EA	1

Compact Work Light

Bright light. Small work space. Designed to fit in your pocket and stick to metal, you can see whatever you need to with ease when you have this little number.



HMCWL150

Product Specifications
150 Lumens Array
3 AAA Batteries Included
Rotating Hook for Hands-Free Use
Magnetic Base for Precise Positioning

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
HMCWL150	Compact Work Light	5-1/5" x 1-1/2" x 2-1/2"	1.0 oz.	EA	1

Clipstrip™ Aqua

Clipstrip™ Aqua is a waterproof light with 180 lumens and includes a magnetic clip and floats. It is available in yellow and comes with a rechargable 2200 mAh lithium-ion battery. Sold individually.



111113

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
111113	Clipstrip™ Aqua Light	EA	1

Mini Work Light

A little light goes a long way when you're working under a tricky unit. Small but mighty, our Mini Work Light gives you 600 and 1200 lumens for dark and darker conditions.



HMMWL600

Product Specifications
Two Power Modes: 600 Lumens (1.5 Hrs), 300 Lumens (3 Hrs)

Magnetic Base
Adjustable Joint For Different Angles
Rechargeable Li-Ion Battery

CATALOG NO.	DESCRIPTION	DIMENSIONS (DIA. X H)	WEIGHT	UOM	ORDER MUL.
HMMWL600	Mini Work Light	3" x 2"	0.3 lbs.	EA	1

Pivoting Work Light

For light here, there and everywhere you want it. The Portable Work Light lets you shine light on the problems at hand … without the use of your hands. Because let's face it, your hands are busy.



HMPWL240

Product Specifications
240 Lumen Array
Pivoting Work Light
Magnetic Attachment Points on Back and Base
3 AA Batteries Included

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
HMPWL240	Pivoting Work Light	8-1/5" x 2-1/4" x 2"	9.6 oz.	EA	1

Pocket Work Light

You need light and possibly a third hand. That's why we'll skip giving you another thing to hold. The Pocket Work Light lives and works right on your pocket to illuminate any and all things HVAC/R.




HMPWL180

Product Specifications
180 Lumens
180° Swivel Magnetic Clip
3 AAA Batteries Included

CATALOG NO.	DESCRIPTION	DIMENSIONS (L X W X H)	WEIGHT	UOM	ORDER MUL.
HMPWL180	Pocket Work Light	6-1/4" x 1" x 3/4"	2.4 oz.	EA	1

COMPONENTS & CONSUMABLES






LINESET COVERS AND FITTINGS

EasyGuard® 375-376
SpeediChannel® 376-379

VENTILATION PRODUCTS

Concentric Vent 380
Duct Booster 380
Duct Smoke Testers 381
Roof Flashings 381
Concentric Vents 381-382

LINESETS AND FITTINGS

Access Fittings 383-384
Brass Fittings 384-385
Copper Fittings 386-387
Linesets 388
Refrigerant Tubing 389-390

DUCT STRAPS AND HANGING

Cable Ties 390-391
Hanging Wire 391
Metal Duct Strap 392
Plastic Duct Strap 392

TAPES AND SEALANTS

Foam Sealant 392
Sealants 393-394
Tapes 395-396

INLINE COMPONENTS

Line Taps 397
Driers 398-399
Labeling and Identification 399
Refrigerant Safety Caps 400-401
Tubing Insulation 401-402

HEATING PRODUCTS

CO and Smoke Alarms 403
Gas Connectors 403-404
General Heating Products 405
Heat Resistant Cloth 405
Heating Cables 405
Igniters 405-406
Flame Sensors 406
Iron Fittings 407-408

GENERAL INDUSTRIAL

Abrasive Cloths 408
Batteries 409
Contact Cleaners 409
Degreasers 410
Hand Cleaners 410
Drop Cloths and Surface Protection 410
Lubricants 411-412
Industrial Towels 412
Sheet Metal Screws 412-413
Markers, Paints, and Primers 414

SAFETY AND CONSUMABLES

Coveralls 414
Disposable Gloves 414
Work Gloves 415
Hand Warmers 416
Personal Protection Equipment 416
Disposable Towels 416-417
Shoe Covers 417
Safety Supplies 417
Insect Killers 417


HVAC MAINTENANCE CHEMICALS

Maintenance Chemicals Solution Quick Reference Guide 418-419
Coil Cleaners 420-422
System Flushes 422
Leak Detection 423
AC Sealants 424
System Additives 425
Deodorizers 426
Disinfectants 426
Drain Pan Repair 426
Coil Protectant 427
Glycols 427

EASYGUARD®

EasyGuard®

The DiversiTech EasyGuard® is available in two widths, both in 6-1/2 feet lengths. It's made of UV resistant PVC material to resist the elements and provide lasting protection.



EG-D3W EG-D4W

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
EG-D3W	3" EasyGuard® - 6-1/2" long	EA	1
EG-D4W	4" EasyGuard® - 6-1/2" long	EA	1

Channel must ship LTL.

Soffit Fittings

Ideal for outdoor applications where the EasyGuard® runs up an exterior wall and enters the house vertically through the soffit. Its large flat surface area easily covers the rough opening cut in the soffit. Furnished in two parts, the Soffit Fitting easily snaps onto the EasyGuard® for a clean installation.



EG-SF3W

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
EG-SF3W	3" Soffit Fitting	EA	1
EG-SF4W	4" Soffit Fitting	EA	1

90° Inside Elbow

90° inside elbows are used to route the EasyGuard® around an inside corner. Each elbow is individually packed, and is furnished complete with stainless steel screws.



EG-EB3W

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
EG-EB3W	3" 90 degree Inside Elbow	EA	1
EG-EB4W	4" 90 degree Inside Elbow, Brown	EA	1

Union Coupling

Used for joining two pieces of EasyGuard®- each cover being the same size. Each coupling is individually packed, and is furnished complete with stainless steel screws.



EG-CP3W

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
EG-CP3W	3" Union Coupling	EA	1
EG-CP4W	4" Union Coupling	EA	1

T-Joint

Used for creating a tee connection between three pieces of EasyGuard® – all covers being the same size. The tee can be combined with the reducing coupling to join SpeediChannel®s of different sizes. Each tee is individually packed, and is furnished complete with stainless steel screws.



EG-TJ4W

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
EG-TJ3W	3" T-Joint	EA	1
EG-TJ4W	4" T-Joint	EA	1

Wall Covers

The EasyGuard® wall cover is used to transition through a wall penetration. The wall sleeve creates a clean hole through the wall and the lineset is covered by the wall cover. Each wall cover is individually packed and includes stainless steels screws to attach the wall cover to the base.



EG-WC3W

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
EG-WC3W	3" Wall Penetration Cover	EA	1
EG-WC4W	4" Wall Penetration Cover	EA	1

90° Flat Bend

90° flat bends are used to route the EasyGuard® around an obstacle. Each bend is individually packed, and is furnished complete with stainless steel screws.



EG-FB3W

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
EG-FB3W	3" 90 degree Flat Bend	EA	1
EG-FB4W	4" 90 degree Flat Bend	EA	1

90° Outside Elbow

90° outside elbows are used to route the EasyGuard® around an outside corner. Each elbow is individually packed, and is furnished complete with stainless steel screws.



EG-EIN3W

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
EG-EIN3W	3" 90 degree Outside Elbow	EA	1
EG-EIN4W	4" 90 degree Outside Elbow	EA	1

Flex Hose Connection Kit

A flexible hose kit of EasyGuard® that protects the line set from the condensing unit to the wall. Also provides a quick easy connection between two lengths of channel over or around obstacles. The kit comes with everything needed for a clean professional installation.



EG-FH3W

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
EG-FH3W	3" Flex Hose Connection Kit	EA	1
EG-FH4W	4" Flex Hose Connection Kit	EA	1

Reducer Coupling

Used for joining two pieces of EasyGuard®- each cover being a different size. Each coupling is individually packed, and is furnished complete with stainless steel screws.



EG-TC34W

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
EG-TC34W	3" x 4" Reducer Coupling	EA	1

EASYGUARD® CONT'D

Duct End

The duct end is used to terminate a run of EasyGuard® to a small opening – just large enough for the line set and condensate drain line to pass through. Gives a neat/clean installation.




EG-DE3W

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
EG-DE3W	3" Duct End	EA	1
EG-DE4W	4" Duct End	EA	1

SPEEDICHANNEL®

SpeediChannel®

The DiversiTech SpeediChannel® is available in three widths, all in 6-1/2 feet lengths. Includes pack of SpeediClips™.



230-D3W 230-D4W 230-D6W



230-D3B



230-D3A



230-D3W

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-D3A	3" SpeediChannel®	EA	6
230-D3B	3" SpeediChannel®, Brown	EA	6
230-D3W	3" SpeediChannel®, White	EA	6
230-D4A	4" SpeediChannel®	EA	6
230-D4B	4" SpeediChannel®, Brown	EA	6
230-D4W	4" SpeediChannel®, White	EA	6
230-D6	6" SpeediChannel®	EA	5
230-D6W	6" SpeediChannel®, White	EA	5

Channel must ship LTL.

Adjustable Flat Bend

Adjustable flat bends flex from 45 to 90 degrees and make it easy to route the SpeediChannel® around an obstacle. Each adjustable bend is individually packed and includes stainless steel screws.



230-AFB3

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-AFB3	3" Adjustable Flat Bend	EA	10
230-AF-B3W	3" Adjustable Flat Bend, White	EA	10
230-AFB4	4" Adjustable Flat Bend	EA	10
230-AF-B4W	4" Adjustable Flat Bend, White	EA	10

Soffit Fittings

Ideal for outdoor applications where the SpeediChannel® runs up an exterior wall and enters the house vertically through the soffit. Its large flat surface area easily covers the rough opening cut in the soffit. Furnished in two parts, the Soffit Fitting easily snaps onto the SpeediChannel® for a clean installation.



230-SF3 230-SF4

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-SF3	3" Soffit Fitting	EA	10
230-SF3W	3" Soffit Fitting, White	EA	10
230-SF4	4" Soffit Fitting	EA	10
230-SF4W	4" Soffit Fitting, White	EA	10

Wall Penetration

Wall sleeves and penetration covers are used to transition from the SpeediChannel® system to a through wall penetration. The wall sleeve creates a neat hole through the wall, and the line set is covered by the wall cover. DiversiTech's wall covers are designed to allow for easy installation - even after the line set has been installed. A unique hooking and fastening arrangement allows for quick and easy installation. Each wall cover is individually packed, and is furnished complete with stainless steel screws to attach the wall cover to the base. Three screws (supplied by others) are needed to fasten the wall cover to whatever type of wall construction the system is being installed on.



230-WC3





230-WS2

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-WC3	3" Wall Penetration Cover	EA	10
230-WC3B	3" Wall Penetration Cover, Brown	EA	10
230-WC3W	3" Wall Penetration Cover, White	EA	10
230-WC4	4" Wall Penetration Cover	EA	10
230-WC4B	4" Wall Penetration Cover, Brown	EA	10
230-WC4W	4" Wall Penetration Cover, White	EA	10
230-WC6	6" Wall Penetration Cover	EA	10
230-WC6W	6" Wall Penetration Cover, White	EA	10
230-WS2	2-1/2" Wall Sleeve	EA	10

SPEEDICHANNEL® CONT'D

90° Flat Bend

90° flat bends are used to route the SpeediChannel® around an obstacle. Each bend is individually packed, and is furnished complete with stainless steel screws.



230-FB3



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-FB3	3" 90 degree Flat Bend	EA	10
230-FB3B	3" 90 degree Flat Bend, Brown	EA	10
230-FB3W	3" 90 degree Flat Bend, White	EA	10
230-FB4	4" 90 degree Flat Bend	EA	10
230-FB4B	4" 90 degree Flat Bend, Brown	EA	10
230-FB4W	4" 90 degree Flat Bend, White	EA	10
230-FB6	6" 90 degree Flat Bend	EA	10
230-FB6W	6" 90 degree Flat Bend, White	EA	10

90° Long Radius Bend

90° long radius flat bends are used to route the SpeediChannel® around an obstacle. The long radius of the elbow allows a gentle bending radius on the copper line set. Each elbow is individually packed, and is furnished complete with stainless steel screws.



230-LFB4

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-LFB3	3" 90 degree Long Radius Bend	EA	10
230-LFB3B	3" 90 degree Long Radius Bend, Brown	EA	10
230-LFB3W	3" 90 degree Long Radius Bend, White	EA	10
230-LFB4	4" 90 degree Long Radius Bend	EA	10
230-LFB4B	4" 90 degree Long Radius Bend, Brown	EA	10
230-LFB4W	4" 90 degree Long Radius Bend, White	EA	10
230-LFB6	6" 90 degree Long Radius Bend	EA	10
230-LFB6W	6" 90 degree Long Radius Bend, White	EA	10

90° Outside Elbow

90° outside elbows are used to route the SpeediChannel® around an outside corner. Each elbow is individually packed, and is furnished complete with stainless steel screws.



230-EIN3



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-EIN3	3" 90 degree Outside Elbow	EA	10
230-EIN3B	3" 90 degree Outside Elbow, Brown	EA	10
230-EIN3W	3" 90 degree Outside Elbow, White	EA	10
230-EIN4	4" 90 degree Outside Elbow	EA	10
230-EIN4B	4" 90 degree Outside Elbow, Brown	EA	10
230-EIN4W	4" 90 degree Outside Elbow, White	EA	10
230-EIN6	6" 90 degree Outside Elbow	EA	10
230-EIN6W	6" 90 degree Outside Elbow, White	EA	10

45° Flat Bend

45° flat bends are used to route the SpeediChannel® around an obstacle. Each bend is individually packed, and is furnished complete with stainless steel screws.



230-FB453

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-FB453	3" 45 degree Flat Bend	EA	10
230-FB453B	3" 45 degree Flat Bend, Brown	EA	10
230-FB453W	3" 45 degree Flat Bend, White	EA	10
230-FB454	4" 45 degree Flat Bend	EA	10
230-FB454B	4" 45 degree Flat Bend, Brown	EA	10
230-FB454W	4" 45 degree Flat Bend, White	EA	10
230-FB456	6" 45 degree Flat Bend	EA	10
230-FB456W	6" 45 degree Flat Bend, White	EA	10

90° Inside Elbow

90° inside elbows are used to route the SpeediChannel® around an inside corner. Each elbow is individually packed, and is furnished complete with stainless steel screws.



230-EB3



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-EB3	3" 90 degree Inside Elbow	EA	10
230-EB3B	3" 90 degree Inside Elbow, Brown	EA	10
230-EB3W	3" 90 degree Inside Elbow, White	EA	10
230-EB4	4" 90 degree Inside Elbow	EA	10
230-EB4B	4" 90 degree Inside Elbow, Brown	EA	10
230-EB4W	4" 90 degree Inside Elbow, White	EA	10
230-EB6	6" 90 degree Inside Elbow	EA	10
230-EB6W	6" 90 degree Inside Elbow, White	EA	10

Union Coupling

Used for joining two pieces of SpeediChannel® — each cover being the same size. Each coupling is individually packed, and is furnished complete with stainless steel screws.



230-CP3



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-CP3	3" Union Coupling	EA	10
230-CP3B	3" Union Coupling, Brown	EA	10
230-CP3W	3" Union Coupling, White	EA	10
230-CP4	4" Union Coupling	EA	10
230-CP4B	4" Union Coupling, Brown	EA	10
230-CP4W	4" Union Coupling, White	EA	10
230-CP6	6" Union Coupling	EA	10
230-CP6W	6" Union Coupling, White	EA	10

SPEEDICHANNEL® CONT'D

T-Joint

Used for creating a tee connection between three pieces of SpeediChannel® – all covers being the same size. The tee can be combined with the reducing coupling to join SpeediChannel's different sizes. Each tee is individually packed, and is furnished complete with stainless steel screws.



230-TJ4



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-TJ4	4" T-Joint	EA	10
230-TJ4B	4" T-Joint, Brown	EA	10
230-TJ4W	4" T-Joint, White	EA	10
230-TJ6	6" T-Joint	EA	10
230-TJ6W	6" T-Joint, White	EA	10

Reducer Coupling

Used for joining two pieces of SpeediChannel® — each cover being a different size. Each coupling is individually packed, and is furnished complete with stainless steel screws.



230-TC34



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-TC34	3" x 4" Reducer Coupling	EA	10
230-TC34W	3" x 4" Reducer Coupling, White	EA	10
230-TC46	4" x 6" Reducer Coupling	EA	10
230-TC46W	4" x 6" Reducer Coupling, White	EA	10

Cap

Used to cap the end of a SpeediChannel® run. Easily snaps into the end of the SpeediChannel®.



230-DC3

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-DC3	3" Cap	EA	10
230-DC3W	3" Cap, White	EA	10
230-DC4	4" Cap	EA	10
230-DC4W	4" Cap, White	EA	10
230-DC6	6" Cap	EA	10
230-DC6W	6" Cap, White	EA	10

Flex Joint

An accordion style piece of SpeediChannel®, the flex joint can be extremely flexible routing a SpeediChannel® system around virtually any type of obstacle. Each joint is 20" long and can be combined together for longer flex runs. Unlike competitor systems, the DiversiTech flex joint does NOT require the use of a union coupling. The DiversiTech flex joint slides tightly inside the SpeediChannel® system.



230-FJ3

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-FJ3	3" Flex Joint	EA	10
230-FJ3W	3" Flex Joint, White	EA	10
230-FJ4	4" Flex Joint	EA	10
230-FJ4W	4" Flex Joint, White	EA	10

Duct End

The duct end is used to terminate a run of SpeediChannel® to a small opening – just large enough for the line set and condensate drain line to pass through. Gives a neat/clean installation.



230-DE3 230-DE4



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-DE3	3" Duct End	EA	10
230-DE3B	3" Duct End, Brown	EA	10
230-DE3W	3" Duct End, White	EA	10
230-DE4	4" Duct End	EA	10
230-DE4B	4" Duct End, Brown	EA	10
230-DE4W	4" Duct End, White	EA	10
230-DE6	6" Duct End	EA	10
230-DE6W	6" Duct End, White	EA	10

Flat Wall Escutcheon

Typically used to cover a rough opening in a soffit, wall, or ceiling penetration. One side of the escutcheon is flat to allow for a SpeediChannel® run going along a wall, and penetrating through an adjacent wall or ceiling. This is the most common type of wall penetration. Furnished in two parts, the escutcheon easily snaps onto the SpeediChannel®.



230-FR3



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-FR3	3" Flat Wall Escutcheon	EA	10
230-FR3W	3" Flat Wall Escutcheon, White	EA	10
230-FR4	4" Flat Wall Escutcheon	EA	10
230-FR4W	4" Flat Wall Escutcheon, White	EA	10
230-FR6	6" Flat Wall Escutcheon	EA	10
230-FR6W	6" Flat Wall Escutcheon, White	EA	10

SPEEDICHANNEL® CONT'D

Wall Escutcheon

Typically used to cover a rough opening in a wall or ceiling penetration. The hole in the escutcheon is centered to allow for a free standing SpeediChannel® to penetrate through a wall or ceiling. This is the fairly un-common type of wall or ceiling penetration. Check carefully, as you may need the Flat Wall Escutcheon. Furnished in two parts, the escutcheon easily snaps onto the SpeediChannel®.



230-WR3



CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-WR3	3" Wall Escutcheon	EA	10
230-WR3W	3" Wall Escutcheon, White	EA	10
230-WR4	4" Wall Escutcheon	EA	10
230-WR4W	4" Wall Escutcheon, White	EA	10
230-WR6	6" Wall Escutcheon	EA	10
230-WR6W	6" Wall Escutcheon, White	EA	10

SpeediChannel® Kits

The SpeediChannel® Fitting Kit provides a simple mix of the basic fittings used in a typical SpeediChannel® installation job. Included are one coupling, one wall penetration, one inside elbow, one long radius flat bend, and one pack of ten SpeediClips and 11" cable ties. The 230-IKC3 and 230-IKC4 Installation Kits include three 48" pieces of channel and selected fittings.



230-IKC3W

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-IKC3	3" SpeediChannel® Installation Kit	EA	1
230-IKC3W	3" SpeediChannel® Installation Kit, White	EA	1
230-IKC4	4" SpeediChannel® Installation Kit	EA	1
230-IKC4W	4" SpeediChannel® Installation Kit, White	EA	1

Roof Inlets

"Roof entrance" adapters for linesets are the ultimate solution for a professional flat roof installation. Manufactured from UV weather resistant plastics or painted aluminum, the Roof Inlet combines a series of features:

- The Roof Inlet body part is equipped with a slope avoiding possible damage to the insulation and preventing kinks into the copper tubes.
- The Roof Inlet base holes allow a steady fixation (depending on the roof surface type and composition).
- The Roof Inlet cap is firmly fixed to the body with stainless steel bolts.



230-INJ465

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-INJ465	SpeediChannel® Roof Inlet – 5" x 5" PVC	EA	1
230-INJ462	SpeediChannel® Roof Inlet – 10" x 5" PVC	EA	1
230-INJ463A	SpeediChannel® Roof Inlet – 3" x 3" PVC	EA	1
230-INJ465A	SpeediChannel® Roof Inlet – 5" x 5" PVC	EA	1
230-INJ462A	SpeediChannel® Roof Inlet – 5" x 10" PVC	EA	1

SpeediChannel® Accessories

A variety of accessories that are complementary or required for installing DiversiTech's SpeediChannel® system.



230-DCLIP-10

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-DCLIP-10	SpeediClip™ and 11" Cable Ties, pack of 10	PK	1
230-DCLIP	SpeediClip™, pack of 50	PK	1
230-DSCREW	SpeediChannel® screws, pack of 100	PK	1

SpeediChannel® Flex Hose Kits

A flexible hose kit of SpeediChannel that protects the line set from the condensing unit to the wall. Also provides a quick easy connection between two lengths of channel over or around obstacles. The kit comes with everything needed for a clean professional installation.



230-FH3-KIT

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-FH3-KIT	3" Flex Hose Kit	EA	1
230-FH3W-KIT	3" Flex Hose Kit, White	EA	1
230-FH4-KIT	4" Flex Hose Kit	EA	1
230-FH4-KITW	4" Flex Hose Kit, White	EA	1

Universal Pump Elbow

The Universal Pump Elbow lets an installer use any mini pump of their choice and install it with SpeediChannel. Includes pump elbow and reservoir mounting brackets to fit most mini-split pumps.



230-PFB3

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-PFB3	Universal Pump Elbow	EA	1

Line Set Cover Cutter

The 230-CUTTER is designed to easily cut lineset covers that protect linesets and insulations in HVAC applications. The 230-CUTTER has a ratcheting cutting blade that makes cutting lineset covers easy and clean. It has cutting capacity for various duct sizes, ranging from 1.38" x 1.18" up to 3.54" x 2.55".

- Easy to open and close
- Cut cleanly with ratcheting blade
- Strong metal body and handle
- Safety hook to keep blade closed
- Lightweight and easy to carry



230-CUTTER

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
230-CUTTER	Lineset Cover Cutter	EA	1

CONCENTRIC VENTS

Concentric Vents


Concentric vents make it easier to have a two pipe installation for high efficiency furnaces. These vents simplify installation and only require one hole through the wall or roof where the pipes terminate. Without using these vents, the installation would require cutting two holes through the home, one for each pipe. These vents save time and money by reducing the amount of work required. Available in 2", 3" or 4" intake vent sizes.



CVENT-2 **CVENT-4**
CVENT-3

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CVENT-2	2" Concentric Vent	EA	1
CVENT-3	3" Concentric Vent	EA	1
CVENT-4	4" Concentric Vent	EA	1
CVENTCAP2	Replacement cap for CVENT-2	EA	1
CVENTCAP3	Replacement cap for CVENT-3	EA	1
CVENTCAP4	Replacement cap for CVENT-4	EA	1
CVS-2	Vent screen for CVENT-2	EA	1
CVS-3	Vent screen for CVENT-3	EA	1
CVENT-2AB	Accelerator Bushing for 2" CVENT	EA	1

Concentric Vent Flexible Installation

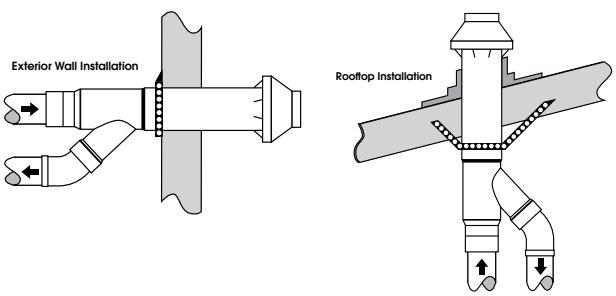

Extended Lengths for Concentric Vents

Concentric vents make it easier to have a two-pipe installation for high efficiency furnaces. These vents simplify installation and only require one hole through the wall or roof where the pipes terminate. Without using these vents, the installation would require cutting two holes through the home, one for each pipe. These vents save time and money by reducing the amount of work required. The extended length of these vents help to maintain clearance above the anticipated snow level to meet local code requirement.



CVENT-2-EXT
CVENT-3-EXT

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CVENT-2-EXT	2" Concentric Vent Kit, 60" Overall Ext. Length	EA	1
CVENT-3-EXT	3" Concentric Vent Kit, 60" Overall Ext. Length	EA	1

Horizontal Vent Termination Kits

Horizontal vent kits for use in venting high efficiency fossil fuel appliances. The low profile kit hides the vent from view.



HVENT-2

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
HVENT-2	Horizontal Termination Kit - 2"	EA	6
HVENT-3	Horizontal Termination Kit - 3"	EA	6


DUCT BOOSTERS

Duct Fans

Features electrical junction box for UL and code compliant electrical connection. An efficient way to increase air circulation, keep room temperatures consistent, and lower heating and cooling costs. Metal construction, powerful no-maintenance motors and a one-use thermal fuse mean these fans will be up to the task for years. Straight forward installation into any 120V system with detailed instructions, templates, and diagrams. Available in many sizes. A great way to give slow vents a boost. Conforms to UL STD 507, Certified to CSA STD C22.2 #113



625-AF6

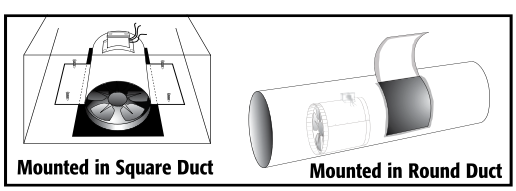

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
625-AF6	Duct Fan 6" dia., 240 CFM, 37W	EA	4
625-AF8	Duct Fan 8" dia., 420 CFM, 37W	EA	4
625-AF10	Duct Fan 10" dia., 650 CFM, 35W	EA	4
625-AF12	Duct Fan 12" dia., 975 CFM, 65W	EA	2
625-AF14	Duct Fan 14" dia., 1350 CFM, 65W	EA	1

DUCT SMOKE TESTERS

Smokeys

Smoke emitter cartridges provide effective, low cost leak testing of heat exchangers, air ducts, tanks and boilers. Visual air balancing of HVAC systems. Cartridges produce clean, oil free smoke through chemical reaction. Use also for fire drills as well as the placement and testing of smoke alarms/detectors.



14175

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
14145	45 second burn time, 150 cu. ft., pack of 10	PK	1
14175	75 second burn time, 600 cu. ft., pack of 10	PK	1
14250	2-1/2 minute burn time, 1,100 cu. ft., pack of 5	PK	1
14340	4 minute burn time, 2,500 cu. ft., pack of 5	PK	1

ROOF FLASHINGS

No-Caulk Roof Flashing

These No-Caulk Roof Flashings provide a watertight seal for vent pipes. They are available for all common pipe sizes with either a galvanized steel or thermoplastic base. Easy to install. Slides over pipe for pitch to 40° - 45°. Made either of rust-proof, stamped 28 gauge galvanized steel or non-fading, non-cracking rigid black thermoplastic. Non-fading sealing collar. Approved for Type B installations. Do not use paint or petroleum-based products on plastic bases or rubber collar.



5-11830

Oatey

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-11830	Roof Flashing - 1/2"- 3/4"-1"	EA	12
5-11840	Roof Flashing - 1-1/4" - 1-1/2"	EA	12
5-11853	Roof Flashing - 2"	EA	12
5-11866	Roof Flashing - 3"	EA	12
5-11879	Roof Flashing - 4"	EA	12
530-11908	Roof Flashing, Thermoplastic, 1-1/4" - 1-1/2"	EA	12
530-11909	Roof Flashing, Thermoplastic, 2"	EA	12
530-11910	Roof Flashing, Thermoplastic, 3"	EA	12
530-11911	Roof Flashing, Thermoplastic, 4"	EA	12
530-11919	Roof Flashing, Thermoplastic, 1-1/2" - 3"	EA	12

VENTS

Periscope Connection Kit

For tight space duct venting. Contains one male snap lock fitting and one draw band with clamp. Adjustable 17" to 28".



650-020

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
650-020	4" Periscope Kit	EA	9

Metallic Duct – 2 Ply

2 ply metallic duct — aluminum outside, polyester inside. Ideal for bath fan ducting and all purpose venting.



FM0450

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
FM0450	4" x 50' 2 Ply Metallic Duct	EA	1

VENTS CONT'D

Versa Cap® Flue and Hot Stack Caps

Non-clogging positive draft design, recommended for flue or hot stack installation. Clamp fitting adjustable for all standard sizes. Aluminum model. U.L. Listed.



6-3050

CATALOG NO.	PIPE O.D.	DOUBLE WALL	SINGLE WALL	J-M TRANS. SITE	HEIGHT/ OVERALL DIAMETER	UOM	ORDER MUL.
6-3050	2-7/8" - 5"	3 & 4	3 & 4	3 & 4	4-1/2" x 6-5/8"	EA	12
6-5070	4-7/8" - 7"	5 & 6	5 & 6	5 & 6	4-3/4" x 9-1/2"	EA	12
6-7090	6-7/8" - 9"	7 & 8	7 & 8	7 & 8	5-7/8" x 11-5/8"	EA	12
6-9011	8-7/8" - 11"	9 & 10	9 & 10	9 & 10	6-1/2" x 12-3/4"	EA	6
6-1200	11-7/8" - 14-1/2"	12	12 & 14	12	8-11/16" x 17-9/16"	EA	2

Flue Caps

PVC Flue Caps are an affordable way to protect today's high efficiency furnaces from dirt, moisture and other debris.



EC-1

- Protection for high efficiency furnaces
- Universal flue cap fits 1.5", 2" and 3" PVC pipe
- Reduces draft inducer motor rust
- Helps to eliminate pressure switch service calls
- Resistant to UV radiation and oxidative degradation
- CSA approved for use in 90% AFUE heating applications

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
EC-1	E Cap Flue Cap	EA	12

Aluminum Dryer Vent Hoods, Kits, and Fittings

Aluminum vent hood with flange plate.



650-001

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
650-001	4" Aluminum Hood	EA	24
650-002	3" Aluminum Hood	EA	24
650-003	4" Hood / 8' Tubing	EA	24
650-038	4" Aluminum Wide Mouth	EA	10

Plastic Wide Mouth Dryer Vent Hood

Hood, aluminum pipe and collar.



650-012

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
650-031	3" White Hood - Assembled	EA	12
650-012	4" White Hood - Assembled	EA	12
650-013	4" White Hood - Unassembled	EA	18
650-023	4" Brown Hood - Assembled	EA	12

Metallic Duct – 5 Ply

Pure aluminum 5 ply multi layered flexible metallic duct. U.L. 181 Listed. Will contain a fire up to 265°F.



FUL0425

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
FUL0425	4" x 25' 5 Ply Metallic Duct	EA	4
FUL0625	6" x 25' 5 Ply Metallic Duct	EA	4

Roof Louver

Unique interior louver design, eliminating the need for a screen. The square hood has been designed for maximum air movement. Large nailing flange for easy installation. U.L. Listed.




6-R50A

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-R50A	Roof Louver - Aluminum	EA	10

Egg Crate Louvers – Air Return Diffusers

White polystyrene 1/2" open cell grid louvers are beneficial for air return.



650-300

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
650-300	Egg Crate Louvers - 2' x 2' x 1/2"	EA	20
650-200	Egg Crate Louvers - 2' x 4' x 3/8"	EA	15
650-100	Egg Crate Louvers - 2' x 4' x 1/2"	EA	10

Dryer Vent Hose

High quality flexible white vinyl tubing. Available in 3" or 4" diameters. One 50' roll per box.



650-005

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
650-005	Dryer Vent Hose - 3" x 50'	EA	1
650-006	Dryer Vent Hose - 4" x 50'	EA	1

Semi-Rigid Aluminum

8ft. length compressed to 28".



650-011

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
650-011	4" x 8' Flexible Aluminum Duct	EA	9
650-021	3" x 8' Flexible Aluminum Duct	EA	14
650-074	6" x 8' Flexible Aluminum Duct	EA	3

Dryer Hose Clamps

Available for 3" or 4" dryer vent hose. Steel screw design or convenient spring action design.



650-008



650-010

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
650-008	Steel Screw Clamp for 4" Hose	EA	50
650-010	Spring Clamp for 4" Hose	EA	500

Louvered Dryer Vent Hood

Louvered vent hoods are available with aluminum pipe and collar or hood only. Ideal for dryer and bathroom fan exhausts.



650-014

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
650-014	4" Hood Only - White	EA	12
650-016	4" Hood, Pipe and Collar - White (Assembled)	EA	12
650-017	4" Hood, Pipe and Collar - White (Unassembled)	EA	18
650-036	3" Hood, Pipe and Collar - White (Assembled)	EA	12

ACCESS FITTINGS

Access Fittings

A convenient low-cost port for refrigeration servicing. May be installed in any position on either high or low side for charging, purging, quick testing or pressure checking. DiversiTech's access fittings have 1/4" SAE male flare access ports and include a quick seal cap and a stainless and brass special refrigerant valve core.



CATALOG NO.	DESCRIPTION	CONNECTION	QTY PER PACK	UOM	ORDER MUL.
VA-3-346	3 Way Solder Type, pack of 6	For 3/16" O.D. tube or 1/4" and 3/8" solder fitting	6	PK	1
VA-34	Straight Solder Type, pack of 6	3/16" O.D.S. x 1/4" O.D.F.	6	PK	1
VAU-24	Half Union, pack of 6	1/8" MPT	6	PK	1
VAU-45	Half Union, pack of 6	1/4" MPT	6	PK	1
VAX-2	Extended Copper Tube	1/8" O.D. tube	6	PK	1
VAX-3	Extended Copper Tube	3/16" O.D. x 1/8" I.D.	6	PK	1
VAX-4	Extended Copper Tube	1/4" O.D. x 3/16" I.D.	6	PK	1
VAX-5	Extended Copper Tube	5/16" O.D. x 1/4" I.D.	3	PK	1
VAX-6	Extended Copper Tube	3/8" O.D. x 5/16" I.D.	3	PK	1
VS-4	Swivel Nut w/Depressor, pack of 6	1/4" female flare forged swivel nut	6	PK	1
VST-4	Swivel Tee w/Permanent Depressor, pack of 3	1/4" Access on run x 1/4" female flare w/depressor on female swivel branch end	3	PK	1
VST-44	Swivel Tee w/Perm. Depressor, pack of 3	1/4" Access on run x 1/4" access on "T" - female swivel on run	3	PK	1
VTS-10	Solder Tee Type	5/8" O.D. tube	1	EA	1
VTS-12	Solder Tee Type	3/4" O.D. tube	1	EA	1
VTS-14	Solder Tee Type	7/8" O.D. tube	1	EA	1
VTS-46	Solder Tee Type, pack of 3	1/4" O.D.S. x 5/16" O.D.F.	3	PK	1
VTS-56	Solder Tee Type, pack of 3	5/16" O.D.S. x 3/8" O.D.F.	3	PK	1
VTS-68	Solder Tee Type, pack of 3	3/8" O.D.S.	3	PK	1
VTS-810	Solder Tee Type, pack of 3	1/2" O.D.S.	3	PK	1
VC-4	Flare Cap, pack of 12	1/2" O.D.S.	3	PK	1
VC-4R	Flare Cap w/Core Remover, pack of 12	1/2" O.D.S.	3	PK	1
VVC-1	Valve Core, pack of 6	1/2" O.D.S.	3	PK	1

Brass Adapters

The MSA-45 is used on the new R410 Mini Split systems that have the larger unique fitting on the service valve. The description of that fitting is 1/2" Acme Male-20 UN. This adapter will screw onto the 1/2" Acme Male-20 UN fitting and allow you to connect a standard 1/4 service hose to it.


MSA-45

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
MSA-45	1/4" Male flare x 1/2" - 20 UNF Female	EA	1

ACCESS FITTINGS CONT'D

Insta-Charge

Faster, safer and more economical method for charging LIQUID refrigerant through the low pressure side of an air conditioning or refrigeration system, without damaging the compressor. Insta-Charge's unique internal restrictor reduces liquid flow to a level below the capacity of the compressor. Converts liquid refrigerant to a saturated vapor for fast entry. Insta-Charge connects directly to the refrigerant can or cylinder valve. Adds liquid tracing dye faster. Eliminates heating of refrigerant cylinder. Made of light weight aluminum. Sold at a fraction of the cost of other fast charging devices.



RC-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
RC-1	Insta-Charge	EA	1

BRASS FITTINGS

Compression Sleeve



D60A-4

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
D60A-4	1/4" Compression Sleeve	EA	100
D60A-8	1/2" Compression Sleeve	EA	100
D60A-10	5/8" Compression Sleeve	EA	100

Compression Nut



D61A-8

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
D61A-4	1/4" Compression Nut	EA	10
D61A-8	1/2" Compression Nut	EA	10

Compression Union



D62A-66

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
D62A-44	1/4" Compression Union	EA	10
D62A-66	3/8" Compression Union	EA	10
D62A-1010	5/8" Compression Union	EA	10

Flare x MIP Elbow



DE1-6C

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DE1-6C	3/8" Flare x 3/8" MIP Elbow	EA	10

Compression Connector



D68A-4B

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
D68A-4B	1/4" x 1/4" Compression Connector	EA	10
D68A-6C	3/8" x 3/8" Compression Connector	EA	10

Compression Elbow



D69A-8D

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
D69A-4A	1/4" x 1/8" Compression Elbow	EA	10
D69A-8D	1/2" x 1/2" Compression Elbow	EA	10

Compression Tee



D64A-44

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
D64A-44	1/4" Compression Tee	EA	10
D64A-66	3/8" Compression Tee	EA	10

Flare x MIP Reducing Elbow



DE1-6B

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DE1-6B	3/8" Flare x 1/4" MIP Reducing Elbow	EA	10
DE1-6D	3/8" Flare x 1/2" MIP Reducing Elbow	EA	10
DE1-10D	5/8" Flare x 1/2" MIP Reducing Elbow	EA	10

BRASS FITTINGS CONT'D

Short Nut



DN1-6

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DN1-3	3/16" Short Nut	EA	10
DN1-4	1/4" Short Nut	EA	10
DN1-6	3/8" Short Nut	EA	10
DN1-10	5/8" Short Nut	EA	10

Cap



DN5-4

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DN5-4	1/4" Cap	EA	10
DN5-6	3/8" Cap	EA	10

Short Forged Flare Nut



DNS4-10

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DNS4-4	1/4" Short Forged Flare Nut	EA	10
DNS4-6	3/8" Short Forged Flare Nut	EA	10
DNS4-8	1/2" Short Forged Flare Nut	EA	10
DNS4-10	5/8" Short Forged Flare Nut	EA	10
DNS4-12	3/4" Short Forged Flare Nut	EA	10
DNS4-14	7/8" Short Forged Flare Nut	EA	5

Plug



DP2-6

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DP2-4	1/4" Plug	EA	10
DP2-6	3/8" Plug	EA	10
DP2-8	1/2" Plug	EA	10
DP2-10	5/8" Plug	EA	10

Flare x FIP Union



DU3-6C

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DU3-6D	3/8" x 1/2" Flare x FIP Union	EA	10
DU3-10E	5/8" x 3/4" Flare x FIP Union	EA	10

Flare Tee



DT2-4

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DT2-4	1/4" Flare Tee	EA	10
DT2-6	3/8" Flare Tee	EA	10
DT2-8	1/2" Flare Tee	EA	10
DT2-10	5/8" Flare Tee	EA	5

Flare x MIP Union



DU1-6B

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DU1-4B	1/4" Flare x 1/4" MIP Union	EA	10
DU1-6B	3/8" Flare x 1/4" MIP Union	EA	10
DU1-6C	3/8" Flare x 3/8" MIP Union	EA	10
DU1-6D	3/8" Flare x 1/2" MIP Union	EA	10
DU1-6E	3/8" Flare x 3/4" MIP Union	EA	10
DU1-8B	1/2" Flare x 1/4" MIP Union	EA	10
DU1-8D	1/2" Flare x 1/2" MIP Union	EA	10
DU1-8E	1/2" Flare x 3/4" MIP Union	EA	10
DU1-10D	5/8" Flare x 1/2" MIP Union	EA	10
DU1-10E	5/8" Flare x 3/4" MIP Union	EA	10
DU1-12D	3/4" Flare x 1/2" MIP Union	EA	10


Flare Union



DU2-6

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DU2-4	1/4" Flare Union	EA	10
DU2-6	3/8" Flare Union	EA	10
DU2-8	1/2" Flare Union	EA	10
DU2-10	5/8" Flare Union	EA	10
DU2-12	3/4" Flare Union	EA	10

Flare x Flare Swivel Union




DUS4-6

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DUS4-4	1/4" Flare x 1/4" Flare Swivel Union	EA	10
DUS4-6	3/8" Flare x 3/8" Flare Swivel Union	EA	10

COPPER FITTINGS

Male Adapter C x M



C101-0050

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MUL.
C101-0050	5/8" x 1/2"	1/2" x 1/2"	EA	25
C101-0100	7/8" x 3/4"	3/4" x 3/4"	EA	25
C101-0150	1-1/8" x 1"	1" x 1"	EA	10

90 Degree Ell C x C



C235-0100

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MUL.
C235-0002	3/8"	1/4"	EA	25
C235-0025	1/2"	3/8"	EA	25
C235-0050	5/8"	1/2"	EA	25
C235-0090	3/4"	5/8"	EA	25
C235-0100	7/8"	3/4"	EA	25
C235-0150	1-1/8"	1"	EA	10
C235-0215	1-3/8"	1-1/4"	EA	10

90 Degree Street Ell Ftg. x C



C254-0100

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MUL.
C254-0002	3/8"	1/4"	EA	25
C254-0100	7/8"	3/4"	EA	25
C254-0150	1-1/8"	1"	EA	10


90 Degree Long Turn Ell C x C



C242-0025

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MUL.
C242-0001	1/4"	1/8"	EA	25
C242-0002	3/8"	1/4"	EA	25
C242-0025	1/2"	3/8"	EA	25
C242-0050	5/8"	1/2"	EA	25
C242-0090	3/4"	5/8"	EA	25
C242-0100	7/8"	3/4"	EA	10
C242-0150	1-1/8"	1"	EA	10
C242-0215	1-3/8"	1-1/4"	EA	35
C242-0295	1-5/8"	1-1/2"	EA	25
C242-0390	2-1/8"	2"	EA	12

Female Adapter C x F



C105-0150

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MUL.
C105-0057	5/8" x 3/4"	1/2" x 3/4"	EA	25
C105-0100	7/8" x 3/4"	3/4" x 3/4"	EA	25
C105-0150	1-1/8" x 1"	1" x 1"	EA	10
C105-0215	1-3/8" x 1-1/4"	1-1/4" x 1-1/4"	EA	10

90 Degree Long Turn Street Ell Ftg. x C



C272-0090

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MUL.
C272-0002	3/8"	1/4"	EA	25
C272-0025	1/2"	3/8"	EA	25
C272-0050	5/8"	1/2"	EA	25
C272-0090	3/4"	5/8"	EA	25
C272-0100	7/8"	3/4"	EA	10
C272-0150	1-1/8"	1"	EA	10
C272-0215	1-3/8"	1-1/4"	EA	10

45 Degree Ell C x C



C290-0050

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MUL.
C290-0002	3/8"	1/4"	EA	25
C290-0025	1/2"	3/8"	EA	25
C290-0050	5/8"	1/2"	EA	25
C290-0090	3/4"	5/8"	EA	25
C290-0100	7/8"	3/4"	EA	25
C290-0150	1-1/8"	1"	EA	10
C290-0215	1-3/8"	1-1/4"	EA	60

45 Degree Street Ell Ftg. x C




C295-0090

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MUL.
C295-0002	3/8"	1/4"	EA	25
C295-0090	3/4"	5/8"	EA	25
C295-0100	7/8"	3/4"	EA	25
C295-0150	1-1/8"	1"	EA	10

COPPER FITTINGS CONT'D


Coupling (Socket) with Rolled Tube Stop C x C



C165-0090

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MUL.
C165-0001	1/4"	1/8"	EA	25
C165-0002	3/8"	1/4"	EA	25
C165-0025	1/2"	3/8"	EA	25
C165-0050	5/8"	1/2"	EA	25
C165-0090	3/4"	5/8"	EA	25
C165-0100	7/8"	3/4"	EA	25
C165-0150	1-1/8"	1"	EA	10
C165-0215	1-3/8"	1-1/4"	EA	10
C165-0295	1-5/8"	1-1/2"	EA	60
C165-0390	2-1/8"	2"	EA	40

Reducer Coupling w/Stop C x C



C165-0223

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MUL.
C165-0007	3/8" x 1/4"	1/4" x 1/8"	EA	25
C165-0032	1/2" x 3/8"	3/8" x 1/4"	EA	25
C165-0058	5/8" x 1/2"	1/2" x 3/8"	EA	25
C165-0093	3/4" x 5/8"	5/8" x 1/2"	EA	25
C165-0107	7/8" x 5/8"	3/4" x 1/2"	EA	25
C165-0149	7/8" x 3/4"	3/4" x 5/8"	EA	25
C165-0159	1-1/8" x 7/8"	1" x 3/4"	EA	10
C165-1498	1-1/8" x 3/4"	1" x 5/8"	EA	10
C165-0222	1-3/8" x 1-1/8"	1-1/4" x 1"	EA	10
C165-0223	1-3/8" x 7/8"	1-1/4" x 3/4"	EA	10
C165-0304	1-5/8" x 1-1/8"	1-1/2" x 1"	EA	10

Copper Coupling w/ Dimple Stop



C170-0003

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MUL.
C170-0003	5/16"	1/4"	EA	25

Copper Coupling w/No Stop



C172-0100

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MUL.
C172-0090	3/4"	5/8"	EA	25
C172-0100	7/8"	3/4"	EA	25
C172-0150	1-1/8"	1"	EA	10
C172-0215	1-3/8"	1-1/4"	EA	10

Fitting Reducer Coupling Ftg. x C



C410-0093

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MUL.
C410-0032	1/2" x 3/8"	3/8" x 1/4"	EA	25
C410-0058	5/8" x 1/2"	1/2" x 3/8"	EA	25
C410-0093	3/4" x 5/8"	5/8" x 1/2"	EA	25
C410-0107	7/8" x 5/8"	3/4" x 1/2"	EA	25
C410-0149	7/8" x 3/4"	3/4" x 5/8"	EA	25
C410-0159	1-1/8" x 7/8"	1" x 3/4"	EA	10
C410-0222	1-1/8" x 1-1/8"	1" x 1"	EA	10

Cap



C154-0100

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MUL.
C154-0100	7/8”	3/4”	EA	25

U-Type Strap



CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MUL.
C947-0025	1/2"	3/8"	EA	25
C947-0050	5/8"	1/2"	EA	25
C947-0100	7/8"	3/4"	EA	25
C947-0150	1-1/8"	1"	EA	25
C947-0215	1-3/8"	1-1/4"	EA	100
C947-0295	1-5/8"	1-1/2"	EA	100
C947-0390	2-1/8"	2"	EA	50

Tee C x C x C



C460-0090

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MUL.
C460-0002	3/8"	1/4"	EA	25
C460-0025	1/2"	3/8"	EA	25
C460-0050	5/8"	1/2"	EA	25
C460-0090	3/4"	5/8"	EA	25
C460-0100	7/8"	3/4"	EA	10
C460-0150	1-1/8"	1"	EA	10

P-Traps



C533-0050

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MUL.
C533-0050	5/8"	1/2"	EA	5
C533-0150	1-1/8"	1	EA	3

NOTE: Item numbers in RED indicate Made in the U.S.A.

LINESETS

Linesets



DiversiTech Linesets are individually packaged in sturdy corrugated cardboard, designed and tested for individual parcel shipment. Linesets are designed for air conditioning and refrigeration systems. The copper tube is refrigeration grade tubing to ASTM B280. The suction line is pre-insulated with Armaflex AP pipe insulation. This insulation is a black flexible elastomeric thermal insulation. The expanded closed-cell structure makes it an efficient insulation. It is manufactured without the use of CFC's, HFC's or HCFC's. AP Armaflex contains Microban® antimicrobial product protection for added defense against mold on the insulation. DiversiTech Mini-Split Linesets are similar to Standard Linesets but come with additional insulation on the liquid line and flared line ends. Copper tubing complies with ASTM B280 for Seamless Copper Tube for ACR.
AP Armaflex insulation meets ASTM C534, Type I – Tubular Grade 1, ASTM E84, NFPA 255, UL723, CAN/ULC S102, UL94 5V-5A, V-O (E55798), NFPA 90A/90B, UL181, ASTM G21/C1338, ASTM G22, ASTM D1056 2B1, MIL-P-15280J form T, MIL-C-3133C grade SBE3, MEA 96-85-M, and City of LA RR7642.



D61210250



D40680250B3B6

STANDARD LINESETS

CATALOG NO.	LENGTH	INSULATION WALL	SUCTION LINE	LIQUID LINE	UOM	ORDER MUL.
D61220250	25'	1/2"	3/4"	3/8"	EA	1
D61220300	30'	1/2"	3/4"	3/8"	EA	1
D61220350	35'	1/2"	3/4"	3/8"	EA	1
D61220400	40'	1/2"	3/4"	3/8"	EA	1
D61220500	50'	1/2"	3/4"	3/8"	EA	1
D61230250	25'	3/4"	3/4"	3/8"	EA	1
D61230400	40'	3/4"	3/4"	3/8"	EA	1
D61230500	50'	3/4"	3/4"	3/8"	EA	1
D61280250	25'	3/8"	3/4"	3/8"	EA	1
D61280300	30'	3/8"	3/4"	3/8"	EA	1
D61280350	35'	3/8"	3/4"	3/8"	EA	1
D61280400	40'	3/8"	3/4"	3/8"	EA	1
D61280500	50'	3/8"	3/4"	3/8"	EA	1
D61420250	25'	1/2"	7/8"	3/8"	EA	1
D61420300	30'	1/2"	7/8"	3/8"	EA	1
D61420350	35'	1/2"	7/8"	3/8"	EA	1
D61420400	40'	1/2"	7/8"	3/8"	EA	1
D61420500	50'	1/2"	7/8"	3/8"	EA	1
D61430300	30'	3/4"	7/8"	3/8"	EA	1
D61430350	35'	3/4"	7/8"	3/8"	EA	1
D61430400	40'	3/4"	7/8"	3/8"	EA	1
D61430500	50'	3/4"	7/8"	3/8"	EA	1
D61480250	25'	3/8"	7/8"	3/8"	EA	1
D61480300	30'	3/8"	7/8"	3/8"	EA	1
D61480350	35'	3/8"	7/8"	3/8"	EA	1
D61480400	40'	3/8"	7/8"	3/8"	EA	1
D61480500	50'	3/8"	7/8"	3/8"	EA	1
D61820250	25'	3/8"	1-1/8"	1/2"	EA	1
D61820500	50'	3/8"	1-1/8"	1/2"	EA	1
D61830250	25'	3/4"	1-1/8"	3/8"	EA	1
D61830300	30'	3/4"	1-1/8"	3/8"	EA	1
D61830350	35'	3/4"	1-1/8"	3/8"	EA	1
D61830400	40'	3/4"	1-1/8"	3/8"	EA	1
D61880250	25'	3/8"	1-1/8"	3/8"	EA	1
D61880300	30'	3/8"	1-1/8"	3/8"	EA	1
D61880400	40'	3/8"	1-1/8"	3/8"	EA	1
D61880500	50'	3/8"	1-1/8"	3/8"	EA	1
D61210250	25'	1"	3/4"	3/8"	EA	1
D61210300	30'	1"	3/4"	3/8"	EA	1
D61210350	35'	1"	3/4"	3/8"	EA	1
D61210400	40'	1"	3/4"	3/8"	EA	1
D61210500	50'	1"	3/4"	3/8"	EA	1
D61410250	25'	1"	7/8"	3/8"	EA	1
D61410300	30'	1"	7/8"	3/8"	EA	1
D61410350	35'	1"	7/8"	3/8"	EA	1
D61410400	40'	1"	7/8"	3/8"	EA	1
D61410500	50'	1"	7/8"	3/8"	EA	1
D61810250	25'	1"	1-1/8"	3/8"	EA	1
D61810400	40'	1"	1-1/8"	3/8"	EA	1
D61810500	50'	1"	1-1/8"	3/8"	EA	1

MINI-SPLIT LINESETS

CATALOG NO.	LENGTH (FT.)	INSULATION WALL	SUCTION LINE	LIQUID LINE	UOM	ORDER MUL.
D40680250B3B6	25'	3/8"	3/8"	1/4"	EA	1
D40680350B3B6	35'	3/8"	3/8"	1/4"	EA	1
D40680500B3B6	50'	3/8"	3/8"	1/4"	EA	1
D40880250B3B6	25'	3/8"	1/2"	1/4"	EA	1
D40880350B3B6	35'	3/8"	1/2"	1/4"	EA	1
D40880500B3B6	50'	3/8"	1/2"	1/4"	EA	1
D41080250B3B6	25'	3/8"	5/8"	1/4"	EA	1
D41080350B3B6	35'	3/8"	5/8"	1/4"	EA	1
D41080500B3B6	50'	3/8"	5/8"	1/4"	EA	1
D61080250B3B6	25'	3/8"	5/8"	3/8"	EA	1
D61080350B3B6	35'	3/8"	5/8"	3/8"	EA	1
D61080500B3B6	50'	3/8"	5/8"	3/8"	EA	1
D40620250B3B6	25'	1/2"	3/8"	1/4"	EA	1
D40620350B3B6	35'	1/2"	3/8"	1/4"	EA	1
D40620500B3B6	50'	1/2"	3/8"	1/4"	EA	1
D40820250B3B6	25'	1/2"	1/2"	1/4"	EA	1
D40820350B3B6	35'	1/2"	1/2"	1/4"	EA	1
D40820500B3B6	50'	1/2"	1/2"	1/4"	EA	1
D41020250B3B6	25'	1/2"	5/8"	1/4"	EA	1
D41020350B3B6	35'	1/2"	5/8"	1/4"	EA	1
D41020500B3B6	50'	1/2"	5/8"	1/4"	EA	1
D61020250B3B6	25'	1/2"	5/8"	3/8"	EA	1
D61020350B3B6	35'	1/2"	5/8"	3/8"	EA	1
D61020500B3B6	50'	1/2"	5/8"	3/8"	EA	1

If ordering by pallet, 15 line sets are packed per pallet.

Lineset Box™



LSB10-W


The Lineset Box is a rough-in box for new construction lineset protection for all types of HVAC installations. The architecturally pleasing and professional looking Lineset Box is easy to install and provides superior protection of refrigerant linesets and condensate drain lines. Provides a clean termination point for new construction projects and reserves the bay for the HVAC system installation. The Lineset Box also protects the lineset from damage during construction. It helps to eliminate damage such as kinks that can drastically increase HVAC installation time.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
LSB10-W	Lineset Box™ - White	EA	1
LSB10-BL	Lineset Box™ - Black	EA	1

REFRIGERANT TUBING

DiversiTech Tear-Resistant Linesets

Designed for air conditioning and refrigeration systems, the new DiversiTech Tear-Resistant Linesets include a durable flexible polymeric jacket that minimizes insulation damage and easily conforms to bends. Simplifying installation and saving technician time, an expanded closed-cell structure and unique formation resists moisture vapor intrusion and UV damage. No field-applied coating or jacket translates to more installs in a day. Refrigeration grade copper tubing conforms to ATSM B280. These new Tear-Resistant Standard Linesets are available in a wide range of sizes and lengths to serve all standard application requirements.



D612K0250

CATALOG NO.	LENGTH	INSULATION WALL	SUCTION LINE	LIQUID LINE	UOM	ORDER MUL.
D612K0250	25'	1/2"	3/4"	3/8"	EA	1
D612K0300	30'	1/2"	3/4"	3/8"	EA	1
D612K0350	35'	1/2"	3/4"	3/8"	EA	1
D612K0400	40'	1/2"	3/4"	3/8"	EA	1
D612K0500	50'	1/2"	3/4"	3/8"	EA	1
D614K0250	25'	1/2"	7/8"	3/8"	EA	1
D614K0350	35'	1/2"	7/8"	3/8"	EA	1
D614K0400	40'	1/2"	7/8"	3/8"	EA	1
D614K0500	50'	1/2"	7/8"	3/8"	EA	1
D618K0250	25'	1/2"	1-1/8"	3/8"	EA	1
D614K0300	30'	1/2"	1-1/8"	3/8"	EA	1
D618K0400	40'	1/2"	1-1/8"	3/8"	EA	1
D618K0500	50'	1/2"	1-1/8"	3/8"	EA	1
D612L0250	25'	3/4"	3/4"	3/8"	EA	1
D612L0300	30'	3/4"	3/4"	3/8"	EA	1
D612L0350	35'	3/4"	3/4"	3/8"	EA	1
D612L0400	40'	3/4"	3/4"	3/8"	EA	1
D612L0500	50'	3/4"	3/4"	3/8"	EA	1
D614L0250	25'	3/4"	7/8"	3/8"	EA	1
D614L0350	35'	3/4"	7/8"	3/8"	EA	1

CATALOG NO.	LENGTH	INSULATION WALL	SUCTION LINE	LIQUID LINE	UOM	ORDER MUL.
D614L0400	40'	3/4"	7/8"	3/8"	EA	1
D614L0500	50'	3/4"	7/8"	3/8"	EA	1
D618L0250	25'	3/4"	1-1/8"	3/8"	EA	1
D614L0300	30'	3/4"	1-1/8"	3/8"	EA	1
D618L0400	40'	3/4"	1-1/8"	3/8"	EA	1
D618L0500	50'	3/4"	1-1/8"	3/8"	EA	1
D612M0250	25'	1"	3/4"	3/8"	EA	1
D612M0300	30'	1"	3/4"	3/8"	EA	1
D612M0350	35'	1"	3/4"	3/8"	EA	1
D612M0400	40'	1"	3/4"	3/8"	EA	1
D612M0500	50'	1"	3/4"	3/8"	EA	1
D614M0250	25'	1"	7/8"	3/8"	EA	1
D614M0300	30'	1"	7/8"	3/8"	EA	1
D614M0350	35'	1"	7/8"	3/8"	EA	1
D614M0400	40'	1"	7/8"	3/8"	EA	1
D614M0500	50'	1"	7/8"	3/8"	EA	1
D618M0250	25'	1"	1-1/8"	3/8"	EA	1
D618M0300	30'	1"	1-1/8"	3/8"	EA	1
D618M0400	40'	1"	1-1/8"	3/8"	EA	1
D618M0500	50'	1"	1-1/8"	3/8"	EA	1

DiversiTech Tear-Resistant Mini-Split Linesets

Designed for Mini-Split air conditioning systems, DiversiTech offers a new line of Tear-Resistant Linesets that simplify installation and save technician time with no field-applied coating required. A durable polymeric jacket minimizes installation damage and easily conforms to bends, and an expanded closed-cell structure and unique formulation resists moisture vapor intrusion and UV damage. Refrigeration grade copper tubing conforms to ATSM B280. These new Mini-Split Tear-Resistant Linesets are available in a wide range of sizes and lengths. Available with or without fittings.



D406K0250B386



CATALOG NO.	LENGTH	INSULATION WALL	SUCTION LINE	LIQUID LINE	UOM	ORDER MUL.
D406K0250B3B6	25'	1/2"	3/8"	1/4"	EA	1
D406K0350B3B6	35'	1/2"	3/8"	1/4"	EA	1
D406K0500B3B6	50'	1/2"	3/8"	1/4"	EA	1
D408K0250B3B6	25'	1/2"	1/2"	1/4"	EA	1
D408K0350B3B6	35'	1/2"	1/2"	1/4"	EA	1
D408K0500B3B6	50'	1/2"	1/2"	1/4"	EA	1
D410K0250B3B6	25'	1/2"	5/8"	1/4"	EA	1
D410K0350B3B6	35'	1/2"	5/8"	1/4"	EA	1
D410K0500B3B6	50'	1/2"	5/8"	1/4"	EA	1
D610K0250B3B6	25'	1/2"	5/8"	3/8"	EA	1
D610K0350B3B6	35'	1/2"	5/8"	3/8"	EA	1
D610K0500B3B6	50'	1/2"	5/8"	3/8"	EA	1
D406L0250B3B6	25'	3/4"	3/8"	1/4"	EA	1
D406L0350B3B6	35'	3/4"	3/8"	1/4"	EA	1
D406L0500B3B6	50'	3/4"	3/8"	1/4"	EA	1
D408L0250B3B6	25'	3/4"	1/2"	1/4"	EA	1
D408L0350B3B6	35'	3/4"	1/2"	1/4"	EA	1
D408L0500B3B6	50'	3/4"	1/2"	1/4"	EA	1

CATALOG NO.	LENGTH	INSULATION WALL	SUCTION LINE	LIQUID LINE	UOM	ORDER MUL.
D410L0250B3B6	25'	3/4"	5/8"	1/4"	EA	1
D410L0350B3B6	35'	3/4"	5/8"	1/4"	EA	1
D410L0500B3B6	50'	3/4"	5/8"	1/4"	EA	1
D610L0250B3B6	25'	3/4"	5/8"	3/8"	EA	1
D610L0350B3B6	35'	3/4"	5/8"	3/8"	EA	1
D610L0500B3B6	50'	3/4"	5/8"	3/8"	EA	1
D406M0250B3B6	25'	1"	3/8"	1/4"	EA	1
D406M0350B3B6	35'	1"	3/8"	1/4"	EA	1
D406M0500B3B6	50'	1"	3/8"	1/4"	EA	1
D408M0250B3B6	25'	1"	1/2"	1/4"	EA	1
D408M0350B3B6	35'	1"	1/2"	1/4"	EA	1
D408M0500B3B6	50'	1"	1/2"	1/4"	EA	1
D410M0250B3B6	25'	1"	5/8"	1/4"	EA	1
D410M0350B3B6	35'	1"	5/8"	1/4"	EA	1
D410M0500B3B6	50'	1"	5/8"	1/4"	EA	1
D610M0250B3B6	25'	1"	5/8"	3/8"	EA	1
D610M0350B3B6	35'	1"	5/8"	3/8"	EA	1
D610M0500B3B6	50'	1"	5/8"	3/8"	EA	1

If ordering by pallet, 15 linesets are packed per pallet.

REFRIGERANT TUBING CONT'D

White Pipe™

White Pipe™ pre-insulated refrigerant line is ideal for a variety of installation jobs and works for every air conditioning application including ductless mini-split, heat pump and centralized air ducted units. Available in a variety of sizes and lengths.



WP-1214-50

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
WP1214-50	White Pipe, 1/4" x 1/2" x 50'	EA	13
WP1238-50	White Pipe, 3/8" x 1/2" x 50'	EA	11
WP1212-50	White Pipe, 1/2" x 1/2" in x 50'	EA	10
WP1258-50	White Pipe, 5/8" x 1/2" in x 50'	EA	7
WP1234-50	White Pipe, 3/4" x 1/2" in x 50'	EA	5
WP1278-50	White Pipe, 7/8" x 1/2" in x 50'	EA	5
WP1214-164	White Pipe, 1/4" x 1/2" in x 164'	EA	5
WP1238-164	White Pipe, 3/8" x 1/2" in x 164'	EA	4
WP1212-164	White Pipe, 1/2" x 1/2" in x 164'	EA	4
WP1258-164	White Pipe, 5/8" x 1/2" in x 164'	EA	3
WP1234-82	White Pipe, 3/4" x 1/2" in x 82'	EA	3

CABLE TIES

Heavy Duty Cable Ties

6.6 nylon, the heavy duty duct straps feature smooth insertion, and a locking mechanism that gives ductwork a firm hold. Accommodates 7 to 15 inch duct. Tensioning tool for 32 in. plus allows operator to adjust strap to any desired tension.



7-P24

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
7-P24	24" Long - Fits up to 6" Duct - 175 lb. Tensile	EA	50
7-P36	36" Long - Fits up to 10" Duct - 175 lb. Tensile	EA	50
7-P36B	36" Long - Black - Fits up to 10" Duct - 175 lb. Tensile	EA	50
7-P48	48" Long - Fits up to 14" Duct - 175 lb. Tensile	EA	50
7-P48B	48" Long - Black - Fits up to 14" Duct - 175 lb. Tensile	EA	25
7-L300	Tensioning Tool for 120-175 lb. Ties	EA	1

Black Nylon Cable Tie Assortment

Black ties are weather and UV resistant. Items in this section are Underwriters' Laboratories listed or recognized under the prime manufacturer's name.



62000AX

CATALOG NO.	DESCRIPTION	LENGTH	COLOR	MAX BUNDLE DIA.	TENSILE STRENGTH	UOM	ORDER MUL.
62000AX	Assortment	7-1/2" 11"	Black Black	1-3/4" 3"	50 lb. 50 lb.	PK	1
WTB11C	Assortment	11"	Black	3"	50 lb.	PK	1

Heavy Duty Nylon Cable Ties

Black ties are weather and UV resistant. Items in this section are Underwriters' Laboratories listed or recognized under the prime manufacturer's name.



6266BLX

CATALOG NO.	DESCRIPTION	LENGTH	COLOR	MAX BUNDLE DIA.	TENSILE STRENGTH	UOM	ORDER MUL.
6265BLX	Nylon; Heavy-duty, pack of 50	14"	Black	4"	175 lb.	PK	1
6265BCX	Nylon; Heavy-duty, pack of 100	14"	Black	4"	175 lb.	PK	1
6266BLX	Nylon; Heavy-duty, pack of 50	36"	Black	11"	175 lb.	PK	1

Nylon Cable Clamps

These cable clamps are perfect for securing wire or pipes.




5384

CATALOG NO.	DESCRIPTION	FITS PIPE OUTER DIA.	THICK-NESS	WIDTH	UOM	ORDER MUL.
5381	Nylon Cable Clamps, pack of 54	1/8"	.050"	3/8"	PK	1
5382	Nylon Cable Clamps, pack of 48	1/4"	.050"	3/8"	PK	1
5383	Nylon Cable Clamps, pack of 41	3/8"	.050"	3/8"	PK	1
5384	Nylon Cable Clamps, pack of 35	1/2"	.050"	3/8"	PK	1
5385	Nylon Cable Clamps, pack of 21	5/8"	.060"	1/2"	PK	1
5380AX	Assortment	1/8"-1"			EA	1

CABLE TIES CONT'D

Nylon Cable Ties

Black Cable ties are weather and UV resistant. Items in this section are UL listed or recognized under the prime manufacturer's name.



6262LX 6262BLX

CATALOG NO.	DESCRIPTION	LENGTH	COLOR	MAX BUNDLE DIA.	TENSILE STRENGTH	UOM	ORDER MUL.
6267MX	Nylon Cable Ties, pack of 1,000	4"	Natural	13/16"	18 lb.	PK	1
6261CX	Nylon Cable Ties, pack of 100	6"	Natural	1-3/8"	18 lb.	PK	1
6261BCX	Nylon Cable Ties, pack of 100	6"	Black	1-3/8"	18 lb.	PK	1
6268BMX	Nylon Cable Ties, pack of 1,000	6"	Black	1-3/8"	30 lb.	PK	1
6262LX	Nylon Cable Ties, pack of 50	7-1/2"	Natural	1-3/4"	50 lb.	PK	1
6262CX	Nylon Cable Ties, pack of 100	7-1/2"	Natural	1-3/4"	50 lb.	PK	1
6262MX	Nylon Cable Ties, pack of 1,000	7-1/2"	Natural	1-3/4"	50 lb.	PK	1
6262BLX	Nylon Cable Ties, pack of 50	7-1/2"	Black	1-3/4"	50 lb.	PK	1
6262BCX	Nylon Cable Ties, pack of 100	7-1/2"	Black	1-3/4"	50 lb.	PK	1
6262BMX	Nylon Cable Ties, pack of 1,000	7-1/2"	Black	1-3/4"	50 lb.	PK	1
6263LX	Nylon Cable Ties, pack of 50	11"	Natural	3"	50 lb.	PK	1
6263CX	Nylon Cable Ties, pack of 100	11"	Natural	3"	50 lb.	PK	1
6263DX	Nylon Cable Ties, pack of 500	11"	Natural	3"	50 lb.	PK	1
6263BLX	Nylon Cable Ties, pack of 50	11"	Black	3"	50 lb.	PK	1
6263BCX	Nylon Cable Ties, pack of 100	11"	Black	3"	50 lb.	PK	1
6263BDX	Nylon Cable Ties, pack of 500	11"	Black	3"	50 lb.	PK	1
60265LX	Nylon Cable Ties, pack of 50	14"	Natural	4"	50 lb.	PK	1
60265BLX	Nylon Cable Ties, pack of 50	14"	Black	4"	50 lb.	PK	1

HANGING WIRE

Hanging Wire

The 18 gauge galvanized can be used to hang HVAC duct work.



710-182G

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
710-182G	2# Roll - 330' - 18 Gauge Galvanized	EA	8
710-185G	5# Roll - 830' - 18 Gauge Galvanized	EA	8

Cable Tie Mounts

Approximately 1" square adhesive backed. These mounts can be mounted with a screw and will accept up to 75 lb. ties.



6269

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6269	Cable Tie Mounts; 1" square; adhesive backed, pack of 11	PK	1
6269LX	Cable Tie Mounts; 1" square; adhesive backed, pack of 50	PK	1
6269MX	Cable Tie Mounts; 1" square; adhesive backed, pack of 1,000	PK	1

Nylon Cable Ties with Mounting Hole

Black ties are weather and UV resistant. Items in this section are Underwriters' Laboratories listed or recognized under the prime manufacturer's name.



60264CX

60264BCX

CATALOG NO.	DESCRIPTION	MTG. HOLE	LENGTH	COLOR	MAX BUN. DIA.	TENSILE STRGTH.	UOM	ORDER MUL.
60264CX	Tie w/mtg. hole, pack of 100	#8	6"	Natural	1-3/8"	30 lb.	PK	1
60264BCX	Tie w/mtg. hole, pack of 100	#8	6"	Black	1-3/8"	30 lb.	PK	1
6264LX	Tie w/mtg. hole, pack of 50	#10	7"	Natural	1-3/4"	50 lb.	PK	1
6264CX	Tie w/mtg. hole, pack of 100	#10	7"	Natural	1-3/4"	50 lb.	PK	1
6264BCX	Tie w/mtg. hole, pack of 100	#10	7"	Black	1-3/4"	50 lb.	PK	1
60263CX	Tie w/mtg. hole, pack of 100	#10	11"	Natural	3"	50 lb.	PK	1
60263BLX	Tie w/mtg. hole, pack of 50	#10	11"	Black	3"	50 lb.	PK	1
60263BCX	Tie w/mtg. hole, pack of 100	#10	11"	Black	3"	50 lb.	PK	1

METAL DUCT STRAPS

Strapping Hanger Iron

Galvanized 3/4 in. vent strapping, hanger iron, plumber's tape, pipe hanger tape and many other uses. 1/4 in. centers for bolts or nails.



710-A1710

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
710-A1710	Hanger Iron (Galv.) - 10" Rolls - 28 Gauge	EA	50
710-A1650	Hanger Iron (Galv.) - 50" Rolls - 28 Gauge	EA	10
710-A16100	Hanger Iron (Galv.) - 100" Rolls - 28 Gauge	EA	6

Plastic Hanger Strap

Flexible, non-conductive. 3/4" wide x .050" thick. Load tested to 120 lbs.



710-P100

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
710-P100	3/4" x 100' Roll	EA	20

Duct Strap – Metallic – Roll

Galvanized duct strap in a convenient cardboard dispenser is not only easy to drill or nail, but also solid strapping. Plenum rated.



710-001

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
710-001	Metallic Duct Strap - 26 Gauge - 1" x 100'	EA	1
710-002	Metallic Duct Strap - 30 Gauge - 1" x 100'	EA	1
710-003	Metallic Duct Strap - 30 Gauge - 1-1/2" x 100'	EA	1
710-004	Metallic Duct Strap - 26 Gauge - 1-1/2" x 100'	EA	1
710-005	Metallic Duct Strap - 22 Gauge - 1" x 100'	EA	1

PLASTIC DUCT STRAPS

Plenum Duct Strap – UL Rated



710-104

Woven Polypropylene Hanging Straps meet the UL 2043 requirement and are suitable for use in air handling spaces. They have a high tensile strength of 400 lbs minimum and 460 lbs maximum. These straps are resistant to both abrasion and chemicals. They are easy to cut and staple to joists.

- Plenum rated, meets UL 2043 requirement
- High tensile strength
- Resistant to abrasion and chemicals
- Lightweight & easy to cut and staple

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
710-104	Plenum Duct Strap, Woven, 1-3/4" x 100 Yards - Black UL	EA	24
710-105	Plenum Duct Strap, Woven, 1-3/4" x 100 Yards - Silver UL	EA	24
710-106	Plenum Duct Strap, Woven, 3" x 100 Yards - Black UL	EA	8

Duct Strap – Woven Polypropylene



710-100

Webbed duct strap possessing high tensile and abrasion resistance. This can be used for flex duct as it is easy to cut and staple to joists. The product is chemical resistant and tested to meet UL Standard 2043. 710-104 through 710-106 are UL rated.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
710-100	Duct Strap - 1-3/4" x 100 Yards - Black	EA	24
710-101	Duct Strap - 1-3/4" x 100 Yards - Silver	EA	24
710-102	Duct Strap - 3" x 100 Yards - Black	EA	8
710-103	Duct Strap - 3" x 100 Yards - Silver	EA	8

FOAM SEALANT

Foam Sealant

One component closed-cell expanding polyurethane foam sealant for lineal caulking applications. Air-moisture cure. Tack free in 20 minutes; fully cured in 12 hours. Paintable. Use for insulating and sealing around windows, doors, pipes, ducts and vents. Non-toxic when cured. Paint to protect from UV exposure. "R" value 4.7 (1" thickness). Foam contains fire retarding chemical and is U.L. Listed but not rated as a firestop product. Environmental concerns have led us to replace CFC's and HCFC's with hydrocarbon material in our one component foam products. See instructions on each product to ensure safe use and quality results.



01714

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
01714	Foam Sealant – 12 oz. Can – Yields 275' (3/8" bead)	EA	12
01724	Foam Sealant – 20 oz. Can – Yields 460' (3/8" bead)	EA	12

SEALANTS

Wagner Adhesive Sealant



CAS-2712

For refrigerant sealing. Eliminates fastener loosening, leakage, and corrosion. Cures between thread flanks to seal against leakage and prevents thread corrosion. Offers sealing with maximum solvent resistance to the action of refrigerant (11, 12 and 22), ammonia and sulfur dioxide. Withstands corrosive liquids used in metal finishings and process industries. Ideal sealant for refrigeration, A/C, and process equipment using corrosive chemicals.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CAS-2712	Wagner Adhesive Sealant - 0.34 fl. oz.	EA	12

Fast Cure Epoxy



DEP8001

An easy-to-use, two part putty you simply mix and mold like clay. No complicated weighing or measuring required. Easy 1:1 cut-what-you-need mix ratio. Form it into any shape. It hardens in one hour and makes a final, steel-hard cure in 12 hours and can be sanded, drilled, machined, sawed and painted. Use on metal, wood, brick, stone, concrete, fiberglass, porcelain, tile and mot plastics. Cures under water. 1.0 lb.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DEP8001	Gray Epoxy Putty - 1 lb. Kit	EA	24
DEP8002	White Epoxy Putty - 1 lb. Kit	EA	24

Flexi-Patch™



FP-36

Flexi-Patch™ is an easy to use flexible repair patch ideal for repairing almost any surface. It cures quickly using only UV light from sunlight or a UV flashlight for a long lasting, permanent repair. Flexi-Patch is a fiberglass-reinforced polyester ideal for use on PVC, plastics, metal, wood, concrete and more. It's the easy way to permanently patch almost any surface. It dries hard for permanent repair. Can be drilled, tapped and painted once dry.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
FP-36	Flexi-Patch fiberglass patch	EA	20

Sure-Stick Heavy Duty Adhesive Spray



315-20

Wide web spray adhesive ideal for both temporary or permanent bonding. Waterproof, transparent and non¬staining. Use for the toughest adhesive applications with leather, cardboard, most plastics, polyethylene sheeting and insulation in HVAC applications. Cleans with mineral spirits. Not for use on vinyl.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
315-20	Sure-Stick Adhesive Spray	EA	12

Thread Sealant with PTFE



7-80632

General purpose sealant with the lubricity of PTFE for metal pipes. Won't shred like PTFE Tape. Allows easy disassembly. Resists common shop fluids. 60° to 400°F temp. resistance.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
7-80632	Thread Sealant - 1/4 Pint Brush Can	EA	12
7-80633	Thread Sealant - 1 Pint Brush Can., 12 per pack	EA	12

Super Glue



DEP052

This adhesive can be used on dirty, greasy surfaces and the medium viscosity penetrates into preassembled and close fitting parts. It can be used on aluminum, metal, rubber, and most plastics for most tough jobs.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DEP052	Super Glue - 2 Gram Tube	EA	12

Firestop Products for Class A Buildings



16491

U.L. Classified. Code Approved. Seal penetrations of plumbing, refrigeration and AC lines, ducts, vents and electrical cable through fire-rated floors, walls and ceilings. Easy-to-use, non-shrinking, non-toxic and permanently flexible. Blocks fire, gas, smoke, air and water migration. Use ceramic fiber filler together with putty or caulk for thick penetrations. Technical bulletins available.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
16491	Firestop Caulk - Red - 10.3 fl. oz. cartridge	EA	12

Caulk Gun



7-100



7-200

Caulk guns can be used to hold the sealant to seal duct work.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
7-100	Caulk Gun - Super Ratchet Type	EA	12
7-200	Caulk Gun - Standard Duty	EA	1

DiversiGum Sealing Compound



6-202-2

Non-hardening, gray compound. For plugging openings through foundations or around refrigeration tube entry.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-202-1	DiversiGum Sealing Compound - 1 lb. Slug	EA	24
6-202-2	DiversiGum Sealing Compound - 2 lb. Slug	EA	20
AG-25	DiversiGum Sealing Compound - 3/8" x 25" Caulking Cord	EA	12

SEALANTS CONT'D

High Temp Red Silicone Sealant



7-4300

A one part non-slumping paste that cures to a tough, rubbery solid at room temperature. Formulated to perform at temperatures ranging from -85°F to 500°F for continuous operation, and to 600°F for intermittent exposure. Tack free cure time – 15 minutes. Full cure time – 24 hours.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
7-4300	High Temp Red Silicone Sealant - 10.1 oz. Cartridge	EA	12

25 Year Acrylic Latex Painter's Caulk



7-4500

For both interior and exterior use. DiversiTech's 25 Year Acrylic Latex Painter's Caulk forms a tough, paintable resilient bond to all building material surfaces. Excellent resistance to water, weathering and moisture vapor.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
7-4500	White Acrylic Latex Caulk - 10.1 oz. Cartridge	EA	12

Pro-Air Industrial Grade Spray Adhesive



GP1-40BL



GN-23H

A clear, pressure sensitive aerosol adhesive with exceptional tack and shear strength characteristics. An excellent choice for most permanent adhesive applications: duct liner and wrap, sheet aluminum, fiberglass insulation board, and much more. The aerosol package offers a specially designed web spray pattern for even, controlled distribution. Flammability meets aerosol flame extension test requirements. Coverage is approximately 90-100 square feet per pound.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
GP1-40BL	Pro-Air Spray Adhesive - 38 lb. Disposable Cylinder	EA	1

Silicone Sealant



7-4000

Food grade 100% RTV Silicone Sealant. Can be used in applications for continuous use to 450°F. UV and water resistant. Long-term flexibility. Non-paintable. Available in 10.3 fl. oz. tube for use in standard caulk gun or in 3 fl. oz. squeeze tube.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
7-4000	Clear Silicone Sealant - 10.3 fl. oz. Tube	EA	12
7-4001	Clear Silicone Sealant - 3 fl. oz. Squeeze Tube	EA	48
7-4100	White Silicone Sealant - 10.3 fl. oz. Tube	EA	12
7-4200	Aluminum Silicone Sealant - 10.3 fl. oz. Tube	EA	12
7-80045	Pipe Joint Compound - 6 fl. oz. Tube	EA	12

Pro-Air Duct Sealant – UL 181 AM-BM Listed



800-008



800-009

Water-based fiber-reinforced white duct sealant/mastic formulated for indoor/outdoor use. Meets U.L. Class 1 rating and local codes while featuring long term flexibility and strength. Use on metal heating, ventilating, and A/C duct systems; as well as fiberglass duct board systems and flex duct systems. Recommended for use to 10" of water column pressure without the need for fiberglass mesh reinforcement.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
800-008	Pro-Air Duct Sealant - 1/10 Gallon Tube - 10.5 oz.	EA	12
800-009	Pro-Air Duct Sealant - 1 Gallon	EA	12

Black Jack® Roof Cement



RM-10



RM-1G

Black Jack® All-Weather Roof Cement is an asphalt based patching compound designed to repair cracks, splits, seams and holes in roofing materials. It also works great in new construction and in setting flashings, drip edges and roofing material edges.

- Use in wet or dry conditions
- Seals flashings, and other roof projections
- Fiber reinforced
- Thick trowel grade

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
RM-10	Black Jack® All Weather Roof Cement - 10 oz. Tube	EA	6
RM-1G	Black Jack® All Weather Roof Cement - 1 Gallon	EA	6

TAPES

Stick-E-Tape

Self adhesive aluminum tape with temperature range of 40ºF to 200ºF. Easily painted. Excellent vapor barrier; effective UV and water shield over urethane foam. Preferred duct and pipe wrap.



50302

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
50302	Stick-E-Tape - AFT-701-2 - 2" x 50' Roll	EA	24

Flex Duct Tape

Specially designed to meet new UL181B FX code for flex duct. Higher adhesion and tack than traditional cloth duct tapes. Conformable, hand tearable foil; 3 mil thickness. 2 in. x 120 yds. Code identification printed on the tape. Acrylic adhesive for superior performance in extreme environments. (35°F to 260°F)



640-FD2S

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
640-FD2S	Flex Duct Tape - Silver - 2"	EA	24
640-FD2B	Flex Duct Tape - Black - 2"	EA	24
640-FD3S	Flex Duct Tape - Silver - 3"	EA	16

UL Listed Foil Tape

Unique acrylic adhesive for airtight bonds on joints and seams of fiberglass duct systems. Flexible, easy to use. Meets or exceeds performance standard AFLS 100 73 and UL 181 A P.



640-UL25

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
640-UL25	UL 181 Listed Foil Tape - 2-1/2" - 60 Yards	EA	16
640-UL3	UL 181 Listed Foil Tape - 3" - 60 Yards	EA	16

Yellow PTFE Thread Seal Tape

Oatey® Yellow Gas Line PTFE Thread Seal Tape is designed and manufactured for natural gas, propane, butane, water, oil and chemical lines. It is heavier than white tape with density of 1.35-1.50 grams/cubic centimeters, 4 mils thick. It complies with MIL-T-22230A (ASG), UL 31 RO, AGA 3226 and CAN/ULC-S642.



513-31403D

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
513-31403D	Yellow PTFE Thread Seal Tape, 1/2" x 260"	EA	1

Aluminum Foil Tape

Prevents heating and cooling losses. Blocks odors and moisture. Easy to handle. Use for HVAC and refrigeration systems. 35ºF to plus 260ºF working temperatures. 3-5 year shelf life. Made in USA.



640-AF2

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
640-AF2	2" Aluminum Foil Tape - 50 yds.	EA	24
640-AF25	2-1/2" Aluminum Foil Tape - 50 yds.	EA	20
640-AF3	3" Aluminum Foil Tape - 50 yds.	EA	16

Foil Scrim Kraft Tape

Non-tearable, diamond patterned backing with an aggressive rubber based adhesive system for consistently dependable performance. Made in the USA.



640-FSK2

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
640-FD2S	Flex Duct Tape - Silver - 2"	EA	24
640-FD2B	Flex Duct Tape - Black - 2"	EA	24

Cloth Duct Tapes

High tack, excellent strength. Superior performance in sealing air handling systems. Heavy cloth content for easier tearing and additional strength. Made in the USA.



PC-622-S



PC-622-B

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PC-622-S	2" x 60 Yards- Premium Grade Duct Tape - Silver	EA	24
PC-622-B	2"x 60 Yards - Premium Grade Duct Tape - Black	EA	24
PC-609-S	2"x 60 Yards - Industrial Grade Duct Tape - Silver	EA	24
PC-609-B	2"x 60 Yards - Industrial Grade Duct Tape - Black	EA	24
PC-600-S	2"x 60 Yards - Contractor Grade Duct Tape - Silver	EA	24
PC-600-B	2"x 60 Yards - Contractor Grade Duct Tape - Black	EA	24
PC-857	2"x 60 Yards - Metallized UL181B-FX Flex Duct Tape	EA	24

TAPES CONT'D

Tape

Vinyl electrical tape. Part 5255 holds up to 7 pounds per square inch when attached to steel surface.



5255

CATALOG NO.	DESCRIPTION	LENGTH	UOM	ORDER MUL.
5255	Vinyl Electric Tape	3/4" x 60'	EA	1

Cork Tape

Adheres firmly to all metals. Use on hot or cold pipes to stop condensation and drips.



6-330

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-330	Cork Tape, 1/8 in. x 2 in. x 30 ft.	EA	1

Shurtape® Duct Tape

General purpose, contractor grade cloth duct tape featuring aggressive adhesive and cold temperature performance for sealing, seaming, repairing, holding and waterproofing applications, as well as for tasks in the restoration industry, such as holding poly-sheeting. A co-extruded, repair duct tape, PC 9S Duck Pro® by Shurtape® provides superior adhesion with quick stick; excellent holding power for indoor and outdoor use; and easy tearability to finish jobs with speed and ease.



640-629B

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
640-629B	Shurtape® Duct Tape 2 in. x 60 yds. Black	EA	1
640-629S	Shurtape® Duct Tape 2 in. x 60 yds. Silver	EA	1
640-639B	Shurtape® Duct Tape 3 in. x 60 yds. Black	EA	1
640-639S	Shurtape® Duct Tape 3 in. x 60 yds. Silver	EA	1

Shurtape® LS 300 UV-Resistant Lineset Tape

UV-resistant lineset tape for taping outdoor HVAC components. An economical solution that holds strong outdoors, LS 300 is durable, easy to unwind and can be applied in a variety of temperature ranges and used in humid conditions.



640-300UV

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
640-300UV	Shurtape LS 300 UV-Resistant Lineset Tape, 48 x 55 mm	EA	1

Teflon® Tape

This PTFE Tape is made of non toxic, pure white PTFE. The tape can be used with chemicals, solvents, oxygen, and on food lines. The product can withstand up to 2000 psi of pressure.



5246

CATALOG NO.	DESCRIPTION	LENGTH	UOM	ORDER MUL.
5246	Teflon® Thread Seal Tape	1/2" x 520"	EA	1

Foam Tape

The DiversiTech® 1/8 in. x 2 in. x 30 ft. roll of foam insulation tape can be used on hot or cold pipes. It fits well around valves and fittings and is easily cut and molded.



6-9718

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
6-9718	Foam Tape, 1/8 in. x 2 in. x 30 ft.	EA	1

Shurtape® Shurflex Duct Tape

HVAC non-printed professional grade metalized cloth duct tape designed for airtight and moisture-free seaming, connecting, splicing, patching and sealing of sheet metal and flex duct, rigid ductboards, air vents, insulation, fibrous filter banks and pollution collection systems. For superior performance, SF 682 is easy to use, hand-tearable and designed in color and appearance to match sheet metal, flex duct and ductboard.




640-682

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
640-682	Shurtape® Shurflex Cloth Duct Tape 682 SIL, 48 x 55 m	EA	1
640-683	Shurtape® Shurflex Cloth Duct Tape 682 SIL, 72 x 55 m	EA	1

LINE TAPS

Quick-Tap

Features a valve core in the 1/4" male port. Simply pierce the line and back seat the needle. Flow starts when depressor type charging hose is connected. Flow shuts off automatically when hose is removed. If valve core is not desired, it may be removed. Connect hose, pierce line and back seat needle. This method offers full unrestricted flow. Valve core can be removed or changed at any time without loss of refrigerant if needle is front seated.



QT-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QT-1	Quick-Tap - 1/4", 5/16", 3/8" O.D. Tube Size	EA	1
QT-2	Quick-Tap - 1/2", 5/8" O.D. Tube Size	EA	1

MAC - The Ultimate In-Line Piercing Valves

Install valve. Connect charging hose. Service. That's all there is to it! MAC features uniport: 1 connection for piercing and servicing. Sealed with refrigerant resistant "O" rings. Needle automatically back seats after servicing, leaving line free of restriction. Connect to tubing with 2 socket-head screws. (Hex wrench is included with each valve.) Needle depressor is inserted into head of needle. Wing cap is turned down easily by hand until line is pierced. Wing cap is removed and system may be serviced with any charging hose with built-in depressor. When hose is removed, spring loaded needle back-seats forming a leak proof seal. Needle depressor is discarded and wing cap forms extra precautionary seal.




QTM-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QTM-1	MAC Line Piercing Valve - 1/4", 5/16", 3/8" O.D. Tube Size	EA	36
QTM-2	MAC Line Piercing Valve - 1/2", 5/8" O.D. Tube Size	EA	36

Copper Saddle Valve

For copper-to-copper brazing. Penetrates line in one easy operation with no holes to drill. Steel pin with valve core pierces line and is locked into valve body by tightening cap. Teflon ring assures positive seal. Available in sizes from 1/4" to 1-1/8".



VLC-4

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
VLC-4	Copper Saddle Valve - 1/4" O.D. Tube Size, pack of 6	PK	1
VLC-5	Copper Saddle Valve - 5/16" O.D. Tube Size, pack of 6	PK	1
VLC-6	Copper Saddle Valve - 3/8" O.D. Tube Size, pack of 6	PK	1
VLC-8	Copper Saddle Valve - 1/2" O.D. Tube Size, pack of 4	PK	1
VLC-10	Copper Saddle Valve - 5/8" O.D. Tube Size, pack of 3	PK	1
VLC-12	Copper Saddle Valve - 3/4" O.D. Tube Size, pack of 2	PK	1
VLC-18	Copper Saddle Valve - 1-1/8" O.D. Tube Size, pack of 2	PK	1
VLC-25	Additional Teflon Rings, pack of 25	PK	1

Quick-Tap-2

Identical to Quick-Tap except that a nylon handle replaces the hex wrench. Phillips-head screws are used.



QTH-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QTH-1	Quick-Tap-2 - 1/4", 5/16", 3/8" O.D. Tube Size	EA	1
QTH-2	Quick-Tap-2 - 1/2", 5/8" O.D. Tube Size	EA	1

Insta-Tap Refrigerant Recovery Tool

The fastest, easiest way to evacuate refrigerant before disposal of a unit. Snaps onto refrigerant line for full and immediate flow. Punctures super large hole for maximum full flow discharge to recovery unit. One tool fits all sizes from 3/16" to 7/8" O.D. hard tubing. Replaceable needle.



QT-100

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
QT-100	Quick-Tap-2 - 1/4", 5/16", 3/8" O.D. Tube Size	EA	1
QT-100N	Replaceable Hardened Steel Needle and Gasket	EA	1
QT-100G	Replacement Gasket Only	EA	3

Core Storer

All steel valve core remover and storage container. Completely knurled for easier grip, eliminating slippage when using with oily or greasy hands. Core Storer features a compartment for storing extra valve cores. Four replacement cores are included with each tool.



VCR-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
VCR-1	Core Remover and Storer	EA	1

Core Removal Tool

Designed to remove and replace valve cores without losing the refrigerant charge. Connects to any 1/4" male flare fitting. Saves time, saves refrigerant.



VCRT-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
VCRT-1	Core Removal Tool	EA	1

DRIERS

Liquid Line Driers



DAD052

High moisture and acid capacity. Maximum filtration capacity. Exceptional compatibility with new polyester oils. Compatible with all existing and new refrigerants and blends including 134a, 401A/B, 402A/B, 404A, 407A/B/C, 410A, 502, 507A. Spring loaded, molecular sieve XH-9 dessicant. Solid copper sweat fittings. Powder paint exterior coating surpasses 500 hour ASTM salt spray test and resists corrosion. Eliminates concern of additive stripping.

CATALOG NO.	VIRGINIA KMP	CONNECTION	CUBIC INCH	UOM	ORDER MUL.
DAD032	WLD-032 FLARE	1/4"	3"	EA	1
DAD032S	WLD-032 SWEAT	1/4"	3"	EA	1
DAD052	WLD-052 FLARE	1/4"	5"	EA	1
DAD052S	WLD-052 SWEAT	1/4"	5"	EA	1
DAD053S	WLD-053 SWEAT	3/8"	5"	EA	1
DAD082	WLD-082 FLARE	1/4"	8"	EA	1
DAD082S	WLD-082 SWEAT	1/4"	8"	EA	1
DAD083S	WLD-083 SWEAT	3/8"	8"	EA	1
DAD084S	WLD-084 SWEAT	1/2"	8"	EA	1
DAD163	WLD-163 FLARE	3/8"	16"	EA	1
DAD163S	WLD-163 SWEAT	3/8"	16"	EA	1
DAD164S	WLD-164 SWEAT	1/2"	16"	EA	1
DAD303	WLD303 FLARE	3/8"	30"	EA	1
DAD303S	WLD-303 SWEAT	3/8"	30"	EA	1
DAD304S	WLD-304 SWEAT	1/2"	30"	EA	1
DAD305	WLD-305 FLARE	5/8"	30"	EA	1

Suction Line Driers



DSLD13-5SVHH

The solid-core clean-up dryer was developed for use in a system suction line. The compact design incorporates a large outside diameter shell, which results in a shorter lay-in length, and a larger core, which provides a greater filtration area for maximum operating efficiency.The core material has controlled porosity which effectively removes and holds a maximum amount of contaminants with a minimum of pressure drop. It collects and holds inorganic acids and other harmful contaminants from a motor burnout. This binding process protects the core from acid decomposition. Access valves on both the inlet and outlet sides make it easy to measure pressure accurately. Occasionally, enough contaminant matter may collect in the filter core to cause a slight pressure drop. The access valves on the SLD make it easy to determine if a pressure drop exists and to measure the amount of the drop. The original DSLD, solid core, XH-9 molecular sieve dessicant suction line filter dryer. High acid capacity. Low pressure drop – exceptionally high flow rates. Designed for system clean-up. 500 hours salt spray protection. Shortest system cut-out lengths allow installation in tight areas. Two access valves simplify pressure drop measurement. Flare or solid copper sweat fittings.

CATALOG NO.	VIRGINIA KMP	CONNECTION	CUBIC INCH	UOM	ORDER MUL.
DSLD13-5SVHH	AL-24-55C SWEAT	5/8"	13"	EA	1
DSLD13-6SVHH	AL-30-6SC SWEAT	3/4"	13"	EA	1
DSLD27-7SVHH	AL-30-7SC SWEAT	7/8"	27"	EA	1
DSLD27-9SVHH	AL-44-9SC SWEAT	1-1/8"	27"	EA	1

Universal Spun Copper Driers

Manufactured with the latest generation molecular sieves compatible with more than 20 different types of refrigerants, including R-134A. They can be used in all hermetic and open refrigeration systems using CFC, HCFC and HFC gases and mixes such as commercial and domestic refrigerators, freezers and air conditioners ranging from 1/8 to 2.0 HP. Hermetically sealed with extended ends.



DX-3

DX-4

DXA-5

CATALOG NO.	OUTLET	INLET	DIAMETER	LENGTH GRAMS	DESSICANT R12	RECOMM. R22	TONNAGE QUANTITY	UOM	ORDER MUL.
DX-3	1/4"	1/4"	3/4"	7-11/16"	10	1/3	1/2	EA	24
DX-4	Multiple	1/4"	1"	9"	18	3/4	1-1/2	EA	1
DXA-5	1/4"	1/4"	1"	9-1/4"	20	3/4	1-1/2	EA	1

DRIERS CONT'D

Bi Flow Driers

The "DBF" Series is designed specifically for heat pump or reverse cycle application. External check valves are not required since they are incorporated within the filter dryer shell. The core design filters out contaminant particles down to 25 microns. 100% copper sweat or nickel plated flare fittings. Desiccant core provides reliable and effective, removal of solid contaminants, acid and moisture. Provides three times the filtration as the standard bi-flow. Core is cushioned in fiber gaskets to protect core and to insure trouble-free performance. Powder paint exterior coating surpasses 500 hour ASTM salt spray test and resists corrosion.



DBF163S

CATALOG NO.	VIRGINIA KMP	CONNECTION	CUBIC INCH	UOM	ORDER MUL.
DBF083S	V2A-083 SWEAT	3/8"	8	EA	1
DBF084S	V2A-084 SWEAT	1/2"	8	EA	1
DBF163	V2A-163 FLARE	3/8"	16	EA	1
DBF163S	V2A-163 SWEAT	3/8"	16	EA	1
DBF164S	V2A-164 SWEAT	1/2"	16	EA	1
DBF165S	V2A-165S SWEAT	3/8"	16	EA	1

Sight Glasses

Sight Glass and Moisture Indicator provides a quick visual diagnosis of refrigerant and moisture levels within a system. The sight glass indicates if the system has the proper refrigerant level, a restricted dryer or excessive pressure-drop. The moisture indicator recognizes moisture within the system. Provides early warning that a potential failure exits resulting in corrosion, chemical damage, restricted flow, or even compressor failure. Etch-resistant glass with a simple color comparison provides easy viewing and quick diagnostics. Flare models feature forged brass body and fittings for corrosion resistance. Sweat models feature copper fittings to permit solder installation without disassembly. Leak-proof design is compact and short in length to easily fit within a unit and provide accuracy in performance.



DPSG-2S

CATALOG NO.	VIRGINIA KMP	CONNECTION	CUBIC INCH	UOM	ORDER MUL.
DPSG-3MF	LDE-3-MF	MALE/FEMALE	3/8"	EA	1
DPSG-2S	LDE-2-S	SWEAT	1/4"	EA	1
DPSG-3S	LDE-3-S	SWEAT	3/8"	EA	1

LABELING AND IDENTIFICATION

DiversiTech Refrigerant ID Labels

Refrigerant labels are designed for proper identification of refrigerant in a recovery cylinder. These 3" x 4" self-adhesive vinyl refrigeration labels use a high-tack acrylic adhesive and UV cured screen printing. Each label indicates the type of refrigerant (eg. R-438A), the chemical name (eg. pentafluoroethane) and the UN No. (eg. UN3163).



- Color coded
- Large and easy to read refrigerant identification
- Durable UV cured screen printed

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
REFRIGERANT IDENTIFICATION LABELS (3" x 4")			
04022	R-22 Refrigerant ID Labels, pack of 10	PK	1
04134	R-134a Refrigerant ID Labels, pack of 10	PK	1
04404	R-404A (HP62/FX70) Refrigerant ID Labels, pack of 10	PK	1
04407	R-407C (SUVA 9000/KLEA 66) Refrigerant ID Labels, pack of 10	PK	1
04410	R-410A (AZ20) Refrigerant ID Labels, pack of 10	PK	1
04099	R-438A Refrigerant ID Labels, pack of 10	PK	1
04402	R-402A Refrigerant ID Labels, pack of 10	PK	1
04421	R-421A Refrigerant ID Labels, pack of 10	PK	1
04137	R-437A Refrigerant ID Labels, pack of 10	PK	1
SYSTEM REFRIGERANT/OIL LABELS (3" x 4")			
04850	Refrigerant Removed Labels, pack of 10	PK	1

REFRIGERANT SAFETY CAPS

Sentry™ Refrigerant Locking Caps - R-410, Red, 1/4"



RSC-RED-02

The Sentry™ Refrigerant Locking Caps are quick and easy way to comply with the IRC and IMC codes requirement that all outdoor access ports on A/C and refrigerant equipment have to be tamper resistant. This cap is anodized in red color for easy identification of R-410 refrigerant. It is designed for 1/4" access ports. An O-ring seal is also pre-installed to prevent leaks.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
RSC-RED-02	Sentry™ Refrigerant Locking Caps - 1/4", Red, 2 pcs Pack	PK	1
RSC-RED-04K	Sentry™ Refrigerant Locking Caps - 1/4", Red, 4 pcs Pack w/1 Universal Key	PK	1
RSC-RED-10	Sentry™ Refrigerant Locking Caps - 1/4", Red, 10 pcs Pack	PK	1
RSC-RED-50K	SentryTM Refrigerant Locking Caps - 1/4", Red, 50 pcs Pack w/2 Universal Keys	PK	1
RSC-RED-500	Sentry™ Refrigerant Locking Caps - 1/4", Red, 50 pcs Pack w/5 Driver Bits	PK	1

Sentry™ Refrigerant Locking Caps - Universal, Silver, 1/4"



RSC-SLV-02

The Sentry™ Refrigerant Locking Caps are quick and easy way to comply with the IRC and IMC codes requirement that all outdoor access ports on A/C and refrigerant equipment have to be tamper resistant. This cap is anodized in silver color and could be used on different types of refrigerants. It is designed for 1/4" access ports. An O-ring seal is also pre-installed to prevent leaks.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
RSC-SLV-02	Sentry™ Refrigerant Locking Caps - 1/4", Silver, 2 pcs Pack	PK	1
RSC-SLV-04K	Sentry™ Refrigerant Locking Caps - 1/4", Silver, 4 pcs Pack w/1 Universal Key	PK	1
RSC-SLV-10	Sentry™ Refrigerant Locking Caps - 1/4", Silver, 10 pcs Pack	PK	1
RSC-SLV-50K	Sentry™ Refrigerant Locking Caps - 1/4", Silver, 50 pcs Pack w/2 Universal Keys	PK	1
RSC-SLV-500	Sentry™ Refrigerant Locking Caps - 1/4", Silver, 500 pcs Pack w/5 Driver Bits	PK	1

Sentry™ Universal Key for Refrigerant Locking Caps



RSC-TOOL

This Universal Key is not only for DiversiTech's Sentry™ Refrigerant Locking Caps. It has three different keys that is fit to lock and unlock most of the refrigerant locking caps in the market. It is compact and easy to carry. This is the key contractors needed to get the job done!

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
RSC-TOOL	Universal Key for Refrigerant Locking Caps	EA	1

Sentry™ Refrigerant Locking Caps - R-22, Green, 1/4"



RSC-GRN-02

The Sentry™ Refrigerant Locking Caps are quick and easy way to comply with the IRC and IMC codes requirement that all outdoor access ports on A/C and refrigerant equipment have to be tamper resistant. This cap is anodized in green color for easy identification of R-22 refrigerant. It is designed 1/4" access ports. An O-ring seal is also pre-installed to prevent leaks.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
RSC-GRN-02	Sentry™ Refrigerant Locking Caps - 1/4", Green, 2 pcs Pack	PK	1
RSC-GRN-04K	Sentry™ Refrigerant Locking Caps - 1/4", Green, 4 pcs Pack w/1 Universal Key	PK	1
RSC-GRN-10	Sentry™ Refrigerant Locking Caps - 1/4", Green, 10 pcs Pack	PK	1
RSC-GRN-50K	Sentry™ Refrigerant Locking Caps - 1/4", Green, 50 pcs Pack w/2 Universal Keys	PK	1


Sentry™ Refrigerant Locking Caps - R-410, Red, 5/16"



RSC-RED-02-E

The Sentry™ Refrigerant Locking Caps are quick and easy way to comply with the IRC and IMC codes requirement that all outdoor access ports on A/C and refrigerant equipment have to be tamper resistant. This cap is anodized in red color for easy identification of R-410 refrigerant. It is designed for 5/16" access ports typically used on mini-splits and European styles of A/C systems. An O-ring seal is also pre-installed to prevent leaks.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
RSC-RED-02-E	Sentry™ Refrigerant Locking Caps - 5/16", Red, 2 pcs Pack w/ Universal Key	PK	1
RSC-RED-04K-E	Sentry™ Refrigerant Locking Caps - 5/16", Red, 4 pcs Pack w/1 Universal Key	PK	1
RSC-RED-10-E	Sentry™ Refrigerant Locking Caps - 5/16", Red, 10 pcs Pack	PK	1
RSC-RED-50K-E	Sentry™ Refrigerant Locking Caps - 5/16", Red, 50 pcs Pack w/2 Universal Keys	PK	1

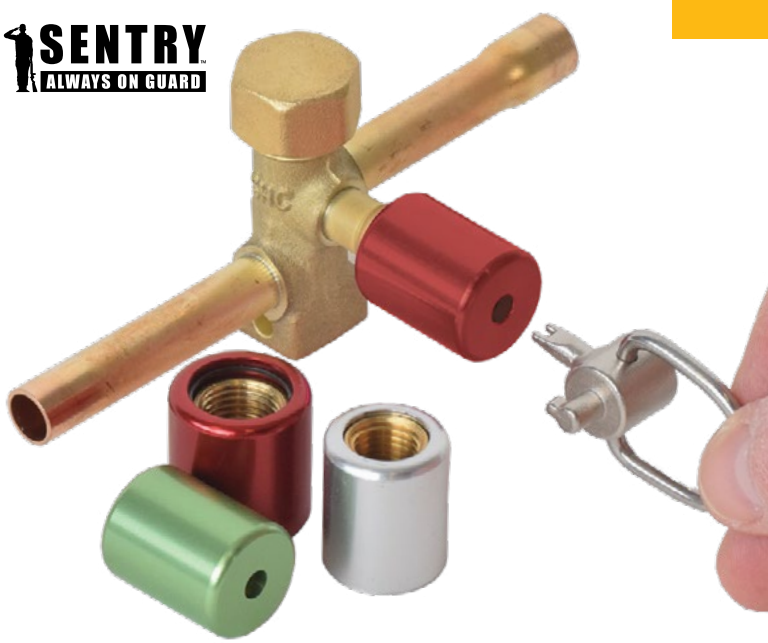

REFRIGERANT SAFETY CAPS CONT'D

Cop-Cap™ Locking Valve Cover



VCC-4

An effective way to discourage and prevent the removal of refrigerant. Cop-Cap™ fits this standard service valve on all central AC units and mini-splits. It helps prevent access by unauthorized persons and can only be removed with the included special tool. Simply thread Cop-Cap™ assembly onto existing 1/4" flare connection on system and lock set screw in place with hex wrench provided.

- Seals service valve to prevent leaks
- Prevents illegal venting or theft of refrigerant
- Stops unauthorized access in unsecured areas

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
VCC-4	Cop-Cap™, Pack of 2	PK	1
VCC-4B	Cop-Cap™ bulk, 100 per case	EA	100

TUBING INSULATION

Tubing Insulation



7-3838

Refrigerant labels are designed for proper identification of refrigerant in a recovery cylinder. These 3" x 4" Highest quality tubing insulation by Armacell. AC Accoflex® tubing insulation is a flexible rubber product from the inventors of elastomeric foam insulation. It is designed exclusively for HVAC, with a tough surface and excellent resistance to ultraviolet damage, condensation and mold.

3/8" WALL

CATALOG NO.	DESCRIPTION	TOTAL FEET	UOM	ORDER MUL.
7-3838	3/8" ID x 3/8" Wall, pack of 100,	600"	PK	1
7-3812	1/2" ID x 3/8" Wall, pack of 80	480"	PK	1
7-3858	5/8" ID x 3/8" Wall, pack of 65	390"	PK	1
7-3834	3/4" ID x 3/8" Wall, pack of 55	330"	PK	1
7-3878	7/8" ID x 3/8" Wall, pack of 45	270"	PK	1
7-381-18	1-1/8" ID x 3/8" Wall, pack of 35	210"	PK	1
7-381-38	1-3/8" ID x 3/8" Wall, pack of 30	180"	PK	1
7-381-58	1-5/8" ID x 3/8" Wall, pack of 20	120"	PK	1
7-382-18	2-1/8" ID x 3/8" Wall, pack of 16	96"	PK	1
7-382-58	2-5/8" ID x 3/8" Wall, pack of 12	72"	PK	1

1/2" WALL

CATALOG NO.	DESCRIPTION	TOTAL FEET	UOM	ORDER MUL.
7-1238	3/8" ID x 1/2" Wall, pack of 75	450"	PK	1
7-1212	1/2" ID x 1/2" Wall, pack of 66	396"	PK	1
7-1258	5/8" ID x 1/2" Wall, pack of 50	300"	PK	1
7-1234	3/4" ID x 1/2" Wall, pack of 40	240"	PK	1
7-1278	7/8" ID x 1/2" Wall, pack of 35	210"	PK	1
7-121-18	1-1/8" ID x 1/2" Wall, pack of 25	150"	PK	1
7-121-38	1-3/8" ID x 1/2" Wall, pack of 20	120"	PK	1
7-121-58	1-5/8" ID x 1/2" Wall, pack of 15	90"	PK	1
7-122-18	2-1/8" ID x 1/2" Wall, pack of 10	60"	PK	1
7-122-58	2-5/8" ID x 1/2" Wall, pack of 10	60"	PK	1

3/4" WALL

CATALOG NO.	DESCRIPTION	TOTAL FEET	UOM	ORDER MUL.
7-3438	3/8" ID x 3/4" Wall, pack of 40	240"	PK	1
7-3412	1/2" ID x 3/4" Wall, pack of 35	210"	PK	1
7-3458	5/8" ID x 3/4" Wall, pack of 24	144"	PK	1
7-3434	3/4" ID x 3/4" Wall, pack of 23	138"	PK	1
7-3478	7/8" ID x 3/4" Wall, pack of 20	120"	PK	1
7-341-18	1-1/8" ID x 3/4" Wall, pack of 15	90"	PK	1
7-341-58	1-5/8" ID x 3/4" Wall, pack of 10	60"	PK	1
7-342-18	2-1/8" ID x 3/4" Wall, pack of 9	54"	PK	1
7-342-58	2-5/8" ID x 3/4" Wall, pack of 8	48"	PK	1
7-382-58	2-5/8" ID x 3/8" Wall, pack of 12	72"	PK	1

1" WALL

CATALOG NO.	DESCRIPTION	TOTAL FEET	UOM	ORDER MUL.
7-1058	5/8" ID x 1" Wall, pack of 20	120"	PK	1

Self-Sealing Split Tubing Insulation

The Tubolit® semi-slit tubing insulation is made of 100% non-particulating polyethylene foam pipe insulation. Its closed-cell structure won't wick moisture and helps prevent the absorption of condensation that could cause mold to develop over time. It is pre-slit with a factory applied pressure sensitive adhesive to both seam surfaces and has a release liner for easy installation. Available in 3/8", 1/2", 3/4" and 1" wall thickness options with inner diameters from 3/8" to 3-1/8".



7-3838

3/8" WALL

CATALOG NO.	DESCRIPTION	TOTAL FEET	UOM	ORDER MUL.
7-S3838	3/8" ID x 3/8" Wall, pack of 90	540"	PK	1
7-S1238	1/2" ID x 3/8" Wall, pack of 76	456"	PK	1
7-S5838	5/8" ID x 3/8" Wall, pack of 66	396"	PK	1
7-S3438	3/4" ID x 3/8" Wall, pack of 50	300"	PK	1
7-S7838	7/8" ID x 3/8" Wall, pack of 46	276"	PK	1
7-S11838	1-1/8" ID x 3/8" Wall, pack of 37	222"	PK	1
7-S13838	1-3/8" ID x 3/8" Wall, pack of 30	180"	PK	1
7-S15838	1-5/8" ID x 3/8" Wall, pack of 23	138"	PK	1
7-S11038	1-1/2" ID x 3/8" Wall, pack of 21	126"	PK	1
7-S21838	2-1/8" ID x 3/8" Wall, pack of 16	96"	PK	1
7-S20038	2-3/8" ID x 3/8" Wall, pack of 14	84"	PK	1
7-S25838	2-5/8" ID x 3/8" Wall, pack of 12	72"	PK	1
7-S21038	2-7/8" ID x 3/8" Wall, pack of 10	60"	PK	1
7-S31838	3-1/8" ID x 3/8" Wall, pack of 9	54"	PK	1

1/2" WALL

CATALOG NO.	DESCRIPTION	TOTAL FEET	UOM	ORDER MUL.
7-S3812	3/8" ID x 1/2" Wall, pack of 69	414"	PK	1
7-S1212	1/2" ID x 1/2" Wall, pack of 56	336"	PK	1
7-S5812	5/8" ID x 1/2" Wall, pack of 50	300"	PK	1
7-S3412	3/4" ID x 1/2" Wall, pack of 44	264"	PK	1
7-S7812	7/8" ID x 1/2" Wall, pack of 40	240"	PK	1
7-S10012	1" ID x 1/2" Wall, pack of 35	210"	PK	1
7-S11812	1-1/8" ID x 1/2" Wall, pack of 31	186"	PK	1
7-S12512	1-1/4" ID x 1/2" Wall, pack of 28	168"	PK	1
7-S13812	1-3/8" ID x 1/2" Wall, pack of 25	150"	PK	1
7-S15812	1-5/8" ID x 1/2" Wall, pack of 20	120"	PK	1
7-S11012Y	1-1/2" ID x 1/2" Wall, pack of 17	102"	PK	1
7-S21812	2-1/8" ID x 1/2" Wall, pack of 14	84"	PK	1
7-S0012	2-3/8" ID x 1/2" Wall, pack of 12	72"	PK	1
7-S25812	2-5/8" ID x 1/2" Wall, pack of 10	60"	PK	1
7-S21012	2-7/8" ID x 1/2" Wall, pack of 9	54"	PK	1
7-S31812	3-1/8" ID x 1/2" Wall, pack of 8	48"	PK	1
7-S35812	3-5/8" ID x 1/2" Wall, pack of 6	36"	PK	1
7-S41812Y	4-1/8" ID x 1/2" Wall, pack of 5	30"	PK	1
7-S40012	4-1/2" ID x 1/2" Wall, pack of 4	24"	PK	1

3/4" WALL

CATALOG NO.	DESCRIPTION	TOTAL FEET	UOM	ORDER MUL.
7-S3834	3/8" ID x 3/4" Wall, pack of 25	228"	PK	1
7-S1234	1/2" ID x 3/4" Wall, pack of 35	210"	PK	1
7-S5834	5/8" ID x 3/4" Wall, pack of 30	180"	PK	1
7-S3434	3/4" ID x 3/4" Wall, pack of 27	162"	PK	1
7-S7834	7/8" ID x 3/4" Wall, pack of 25	150"	PK	1
7-S11834	1-1/8" ID x 3/4" Wall, pack of 20	120"	PK	1
7-S13834	1-3/8" ID x 3/4" Wall, pack of 16	96"	PK	1
7-S15834	1-5/8" ID x 3/4" Wall, pack of 14	84"	PK	1
7-S11034	1-1/2" ID x 3/4" Wall, pack of 11	66"	PK	1
7-S21834	2-1/8" ID x 3/4" Wall, pack of 9	54"	PK	1
7-S20034	2-3/8" ID x 3/4" Wall, pack of 9	54"	PK	1
7-S25834	2-5/8" ID x 3/4" Wall, pack of 8	48"	PK	1
7-S21034	2-7/8" ID x 3/4" Wall, pack of 7	42"	PK	1
7-S31834	3-1/8" ID x 3/4" Wall, pack of 6	36"	PK	1
7-S35834	3-5/8" ID x 3/4" Wall, pack of 5	30"	PK	1
7-S41834	4-1/8" ID x 3/4" Wall, pack of 4	24"	PK	1
7-S40034	4-1/2" ID x 3/4" Wall, pack of 4	24"	PK	1

1" WALL

CATALOG NO.	DESCRIPTION	TOTAL FEET	UOM	ORDER MUL.
7-S3810	3/8" ID x 1" Wall, pack of 25	150"	PK	1
7-S1210	1/2" ID x 1" Wall, pack of 21	126"	PK	1
7-S5810	5/8" ID x 1" Wall, pack of 20	120"	PK	1
7-S3410	3/4" ID x 1" Wall, pack of 20	120"	PK	1
7-S7810	7/8" ID x 1" Wall, pack of 16	96"	PK	1
7-S10010	1" ID x 1" Wall, pack of 16	96"	PK	1
7-S11810	1-1/8" ID x 1" Wall, pack of 14	84"	PK	1
7-S13810	1-3/8" ID x 1" Wall, pack of 12	72"	PK	1
7-S15810	1-5/8" ID x 1" Wall, pack of 10	60"	PK	1
7-S11010	1-1/2" ID x 1" Wall, pack of 9	54"	PK	1
7-S21810	2-1/8" ID x 1" Wall, pack of 9	54"	PK	1
7-S20010	2-3/8" ID x 1" Wall, pack of 7	42"	PK	1
7-S25810	2-5/8" ID x 1" Wall, pack of 6	36"	PK	1
7-S21010	2-7/8" ID x 1" Wall, pack of 5	30"	PK	1
7-S31810	3-1/8" ID x 1" Wall, pack of 4	24"	PK	1
7-S35810	3-5/8" ID x 1" Wall, pack of 4	24"	PK	1
7-S41810	4-1/8" ID x 1" Wall, pack of 4	24"	PK	1
7-S40010	4-1/2" ID x 1" Wall, pack of 3	18"	PK	1
7-S40012	4-1/2" ID x 1/2" Wall, pack of 4	24"	PK	1

CO AND SMOKE ALARMS

Carbon Monoxide Alarms



CM-1000

- 10 year sealed batteries provide continuous protection
- Microprocessor intelligence combined with electrochemical sensor virtually eliminates nuisance alarms
- Red LED indicates the status of power and CO
- Table top (free standing) or wall mounted. Mounting hardware included.
- Exceeds industry standards, ETL listed to UL Standard UL 2034 and California State Fire Marshal approved.
- 10 year limited warranty on both battery and alarm

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CM-1000	Carbon Monoxide Smart Alarm	EA	1

IoPhic® Smoke & Fire, Carbon Monoxide & Natural Gas Alarm



MDSCN111

- 4-in-1 smart alarm uses a single sensor to detect both CO & Natural Gas AND protects against both fast flaming & slow smolding fires
- 120-volt AC hardwired alarm with backup 9 volt battery is suitable for houses, apartments and mobile homes
- Mount the bracket to any standard wiring junction box and use the large mounting base to cover imperfections in drywall
- Features a quick activation pull-tab and a front loading battery drawer for replacement without removing the alarm from the bracket
- Comes with a 7 year limited warranty

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
MD-SCN111	Smoke & Fire, Carbon Monoxide and Natural Gas Alarm	EA	4

GAS CONNECTORS

EasyFlex Tankless Water Heater Connection Kits

The Tankless Water Heater Connection Kits by EASYFLEX are customized kits. Each kit includes one 1" OD, 3/4" MXF Gas Connector, two 3/4" ID, 3/4" FIP x 3/4" MIP Water Connectors, Hot & Cold Isolation Valve Set, and Pressure Relief Valve. One box has it all! Installation and maintenance are made easy for contractors and homeowners.



Global Pipe Manufacturer

EASYFLEX

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
EFLF-ISV-HCTP	Tankless Water Heater Isolation Valve Set	EA	1
EFHC-0118-3Y0118	Tankless Water Heater Isolation Valve Set + 18" Connectors	EA	1
EFHC-0124-3Y0124	Tankless Water Heater Isolation Valve Set + 24" Long Connectors	EA	1

DiversiTech Gas Connectors 1/2" OD

Combining flexibility, durability, and functionality, DiversiTech stainless steel gas connectors are CSA design certified and 100% leak tested for quality and security. DiversiTech gas connectors are durable and reliable to give you everything you need. Available in a variety of sizes and lengths.



D20-3132-18

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
D20-3132-18	Gas Connector - 18" long, 1/2" OD x 3/8" ID, M x F	EA	12
D20-3132-24	Gas Connector - 24" long, 1/2" OD x 3/8" ID, M x F	EA	12
D20-3132-36	Gas Connector - 36" long, 1/2" OD x 3/8" ID, M x F	EA	12
D20-3132-48	Gas Connector - 48" long, 1/2" OD x 3/8" ID, M x F	EA	12

DiversiTech Gas Connectors 5/8" OD

Combining flexibility, durability, and functionality, DiversiTech stainless steel gas connectors are CSA design certified and 100% leak tested for quality and security. DiversiTech gas connectors are durable and reliable to give you everything you need. Available in a variety of sizes and lengths.



D30-3132-18

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
D30-3131-24	Gas Connector - 24" long, 5/8" OD x 1/2" ID, M x M	EA	12
D30-3131-36	Gas Connector - 36" long, 5/8" OD x 1/2" ID, M x M	EA	12
D30-3131-48	Gas Connector - 48" long, 5/8" OD x 1/2" ID, M x M	EA	12
D30-3132-18	Gas Connector - 18" long, 5/8" OD x 1/2" ID, M x F	EA	12
D30-3132-24	Gas Connector - 24" long, 5/8" OD x 1/2" ID, M x F	EA	12
D30-3132-36	Gas Connector - 36" long, 5/8" OD x 1/2" ID, M x F	EA	12
D30-3132-48	Gas Connector - 48" long, 5/8" OD x 1/2" ID, M x F	EA	12

GAS CONNECTORS CONT'D

Yellow Epoxy Coated Gas Connectors

Yellow coated gas connectors include an epoxy coating for added durability and extra protection from corrosion, chemical stains from common household products and plumbing repairs. They can be used in various applications: Dryers, Boilers, BBQ Grills, Ranges/Ovens, Furnaces, Fireplaces, Space Heaters, Tankless Water Heaters, Rooftop Units, Manufactured Homes.



DC30-3132-18

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DC20-3132-18	Gas Connector coated - 18" long, 1/2" OD x 3/8" ID. M x F	EA	12
DC20-3132-24	Gas Connector coated - 24" long, 1/2" OD x 3/8" ID. M x F	EA	12
DC20-3132-36	Gas Connector coated - 36" long, 1/2" OD x 3/8" ID. M x F	EA	12
DC20-3132-48	Gas Connector coated - 48" long, 1/2" OD x 3/8" ID. M x F	EA	12
DC20-3131-18	Gas Connector coated - 18" long, 1/2" OD x 3/8" ID. M x F	EA	12
DC20-3131-24	Gas Connector coated - 24" long, 1/2" OD x 3/8" ID. M x F	EA	12
DC20-3131-36	Gas Connector coated - 36" long, 1/2" OD x 3/8" ID. M x F	EA	12
DC20-3131-48	Gas Connector coated - 48" long, 1/2" OD x 3/8" ID. M x F	EA	12
DC30-3132-18	Gas Connector coated - 18" long, 5/8" OD x ¬Ω" ID. M x F	EA	12
DC30-3132-24	Gas Connector coated - 24" long, 5/8" OD x ¬Ω" ID. M x F	EA	12
DC30-3132-36	Gas Connector coated - 36" long, 5/8" OD x ¬Ω" ID. M x F	EA	12
DC30-3132-48	Gas Connector coated - 48" long, 5/8" OD x ¬Ω" ID. M x F	EA	12
DC30-3131-18	Gas Connector coated - 18" long, 5/8" OD x ¬Ω" ID. M x M	EA	12
DC30-3131-24	Gas Connector coated - 24" long, 5/8" OD x ¬Ω" ID. M x M	EA	12
DC30-3131-36	Gas Connector coated - 36" long, 5/8" OD x ¬Ω" ID. M x M	EA	12
DC30-3131-48	Gas Connector coated - 48" long, 5/8" OD x ¬Ω" ID. M x M	EA	12

Dormont 20 Series

1/2" O.D. x 3/8" I.D. 1/2" MIP x 1/2" FIP Connectors



20-3132-18

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
20-3132-18	Gas Connector - 18" Long	EA	12
20-3132-24	Gas Connector - 24" Long	EA	12
20-3132-36	Gas Connector - 36" Long	EA	12
20-3132-48	Gas Connector - 48" Long	EA	12

Dormont 20 Series with Valve

Corrugated stainless steel connectors with special Supr Safe design to increase flexibility. Maximum service and safety and is approved for both indoor and outdoor use. This is perfect for range and furnace connections. This Series is AA and CGA approved. This connector comes in 20 3135 18 ½" O.D. x 3/8" I.D. x ½" FIP Ball Valve.



20-3135-18

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
20-3135-18	Gas Connector - 18" Long	EA	12
20-3135-24	Gas Connector - 24" Long	EA	12
20-3135-36	Gas Connector - 36" Long	EA	12
20-3135-48	Gas Connector - 48" Long	EA	12

Dormont 30 Series

Corrugated, stainless steel connectors with special Supr Safe® design to increase flexibility. Maximum service and safety, approved for indoor or outdoor use. Perfect for range and furnace connection. AGA and CGA approved. 3131 Series: 5/8" O.D. x 1/2" I.D. 1/2" MIP x 1/2" MIP Connectors. 3132 Series: 5/8" O.D. x 1/2" I.D. 1/2" MIP x 1/2" FIP Connectors.



30-3132-18

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
30-3131-24	Gas Connector - 24" Long	EA	12
30-3131-36	Gas Connector - 36" Long	EA	12
30-3131-48	Gas Connector - 48" Long	EA	12
30-3132-12	Gas Connector - 12" Long	EA	12
30-3132-18	Gas Connector - 18" Long	EA	12
30-3132-24	Gas Connector - 24" Long	EA	12
30-3132-30	Gas Connector - 30" Long	EA	12
30-3132-36	Gas Connector - 36" Long	EA	12
30-3132-48	Gas Connector - 48" Long	EA	12
30-3132-60	Gas Connector - 60" Long	EA	12
30-3132-72	Gas Connector - 72" Long	EA	12

Gas Ball Valve

Gas Ball Valves meet the stringent ISO 9000 quality standard. AGA and CGA certified.



91-3042

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
91-3042	5/8" O.D. Flare x 3/4" FIP for "30 Series" Gas Conn.	EA	10
91-2032	1/2" O.D. Flare x 1/2" FIP for "20 Series" Gas Conn.	EA	10
92-3232	1/2" FIP x 1/2" FIP	EA	10
92-4242	3/4" FIP x 3/4" FIP	EA	10

GENERAL HEATING PRODUCTS

Gas Equipment Service Tools

The GDK4080 is a complete set of high quality, small diameter precision gauging drills used to clean and enlarge gas orifices, burners and carburetor jets. It contains 41 commonly used gauging drills with handles, sizes from #40 to #80. A tapered broach with handle (GB3020) is also included.



GDK4080

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
GDK4080	Gauging Kit Drills, #40-80 set	EA	1
GB3020	Broach 3015 with handle	EA	1

HEAT RESISTANT CLOTH

Heat Resistant Cloth

This flame barrier drop cloth withstands temperatures to 3,000°F. No asbestos. Protects walls, floors, equipment, components and adjacent surfaces from torch flames when soldering, brazing or welding. All cloths have edges taped and sewn with grommets at each corner. Highly resistant to many chemicals and acids.



16510



16500

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
16500	18" x 18" Plain	EA	1
16510	18" x 18" Keyhole w/cutout for draping over pipes/tubes	EA	1
16520	36" x 36" Plain	EA	1

HEATING CABLES

Heating Cables

Self-regulating heating cables that give the installer the ultimate in flexibility.



HC-09

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
HC-09	Heating Cables	EA	

IGNITERS

Wolverine® Universal Hot Surface Igniter

Wolverine® hot surface igniters feature protective, dynamic, and informative packaging. Wolverine® hot surface igniters are 100% tested and completely reliable. They are compatible with all OEM furnaces. Universal hot surface igniters allow a contractor to reduce truck stock and replace hundreds of OEM igniters with just one SKU.



IGN-2

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
IGN-2	Wolverine™ Hot Surface Igniter by TrueStart™, Universal, Silicon Nitride	EA	6
IGN-2-6P	Wolverine™ Hot Surface Igniter by TrueStart™, Universal, Silicon Nitride - Contractor Pack, pack of 6	PK	1

Universal Silicon Carbide Igniters

TrueStart® hot surface igniters feature protective, dynamic, and informative packaging. TrueStart™ hot surface igniters are 100% tested and completely reliable. They are compatible with all OEM furnaces. TrueStart® hot surface igniters are available as a universal silicon carbide igniter.



IGN-001

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
IGN-001	TrueStart™ Hot Surface Igniter, Universal, Silicon Carbide	EA	6

IGNITERS CONT'D

Direct Replacement Igniters

TrueStart® hot surface igniters feature protective, dynamic, and informative packaging. TrueStart® hot surface igniters are 100% tested and completely reliable. They are compatible with all OEM furnaces. TrueStart® hot surface igniters are available as direct replacement for OEM silicon carbide igniters.



IGN-401

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
IGN-401	TrueStart™ Hot Surface Igniter, Direct Replacement, Silicon Carbide for 41-401	EA	6
IGN-402	TrueStart™ Hot Surface Igniter, Direct Replacement, Silicon Carbide for 41-402	EA	6
IGN-403	TrueStart™ Hot Surface Igniter, Direct Replacement, Silicon Carbide for 41-403	EA	6
IGN-405	TrueStart™ Hot Surface Igniter, Direct Replacement, Silicon Carbide for 41-405	EA	6
IGN-406	TrueStart™ Hot Surface Igniter, Direct Replacement, Silicon Carbide for 41-406	EA	6
IGN-407	TrueStart™ Hot Surface Igniter, Direct Replacement, Silicon Carbide for 41-407	EA	6
IGN-408	TrueStart™ Hot Surface Igniter, Direct Replacement, Silicon Carbide for 41-408	EA	6
IGN-409	TrueStart™ Hot Surface Igniter, Direct Replacement, Silicon Carbide for 41-409	EA	6
IGN-410	TrueStart™ Hot Surface Igniter, Direct Replacement, Silicon Carbide for 41-410	EA	6
IGN-412	TrueStart™ Hot Surface Igniter, Direct Replacement, Silicon Carbide for 41-412	EA	6
IGN-004	TrueStart™ Silicon Nitride Universal Kit	EA	6
IGN-110-102	TrueStart™ Hot Surface Igniter, Direct Replacement, Silicon Carbide for 41-110-102	EA	6
IGN-110-103	TrueStart™ Hot Surface Igniter, Direct Replacement, Silicon Carbide for 41-110-103	EA	6
IGN-110-101	TrueStart™ Hot Surface Igniter, Direct Replacement, Silicon Carbide for 41-110-101	EA	6
IGN-108-101	TrueStart™ Hot Surface Igniter, Direct Replacement, Silicon Carbide for 41-108-101	EA	6
IGN-106	TrueStart™ Hot Surface Igniter, Direct Replacement, Silicon Carbide for 41-106-101	EA	6
IGN-IR	TrueStart™ Universal Round Hot Surface Igniter Kit	EA	6

FLAME SENSORS

TrueStart® Flame Sensors

TrueStart® flame sensors are a direct replacement for OEM flame sensors. They are easy to install with matching flame rod length and bending angles. Model options are available for Carrier®/BDP, Lennox, Goodman/Amana, Rheem/Ruud, JCI/York, and Trane systems.



900-5

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
900-1	TrueStart™ Flame Sensor replaces Robertshaw 10-760, White-Rodgers 760-401, Packard PFS401, Supco FLS401, MARS 67970, SIC SP-103	EA	1
900-3	TrueStart™ Flame Sensor replaces Carrier™/Bryant LH33WZ516, LH680013	EA	1
900-4	TrueStart™ Flame Sensor replaces Carrier™/Bryant LH33WZ517, LH33WZ511, LH33WZ515, LH680012, LH680014	EA	1
900-5	TrueStart™ Flame Sensor replaces Carrier™ LH33WZ518	EA	1
900-6	TrueStart™ Flame Sensor replaces Carrier™ LH33WZ520	EA	1
900-8	TrueStart™ Flame Sensor replaces Lennox™ 28M9701, 20467102	EA	1
900-9	TrueStart™ Flame Sensor replaces Lennox™ 44745-001, 44745001, R44745-001, 98M8701	EA	1
900-10	TrueStart™ Flame Sensor replaces Goodman/Amana 0130F000, B1172606, 20488501, L38-035, L38035	EA	1
900-11	TrueStart™ Flame Sensor replaces Rheem/Ruud 62-23543-01 and 62-23543-03	EA	1
900-14	TrueStart™ Flame Sensor replaces Trane SEN491, SEN1114, SEN441, SEN0441	EA	1
900-15	TrueStart™ Flame Sensor replaces JCI/York 024-35354-000, 025-35354-700, S1-02527773000, S1-02527773700	EA	1
900-16	TrueStart™ Flame Sensor replaces JCI/York 025-30788-000, 025-30788-700, S1-02530788700	EA	1
900-17	TrueStart™ FFlame Sensor replaces JCI/York S1-2702-311P, 2702-311P, 2702-311	EA	1

IRON FITTINGS

Black Steel Welded Nipples

Welded Steel that withstands 700 PSI test pressure is perfect for everyday use. The specs for this product are ASTM A 120 (Nom B 10) and the thickness is Sch. 40.



BPN-5

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
BPN-1	1/2" x CL Black Welded Nipple	EA	25
BPN-2	1/2" x 1-1/2" Black Welded Nipple	EA	25
BPN-3	1/2" x 2" Black Welded Nipple	EA	25
BPN-4	1/2" x 2-1/2" Black Welded Nipple	EA	25
BPN-5	1/2" x 3" Black Welded Nipple	EA	25
BPN-6	1/2" x 3-1/2" Black Welded Nipple	EA	25
BPN-7	1/2" x 4" Black Welded Nipple	EA	20
BPN-8	1/2" x 4-1/2" Black Welded Nipple	EA	15
BPN-9	1/2" x 5" Black Welded Nipple	EA	15
BPN-10	1/2" x 5-1/2" Black Welded Nipple	EA	25
BPN-11	1/2" x 6" Black Welded Nipple	EA	15
BPN-12	1/2" x 7" Black Welded Nipple	EA	25
BPN-13	1/2" x 8" Black Welded Nipple	EA	15
BPN-14	1/2" x 9" Black Welded Nipple	EA	25
BPN-15	1/2" x 10" Black Welded Nipple	EA	15
BPN-16	1/2" x 11" Black Welded Nipple	EA	25
BPN-17	1/2" x 12" Black Welded Nipple	EA	15
BPN-18	3/4" x CL Black Welded Nipple	EA	25
BPN-19	3/4" x 1-1/2" Black Welded Nipple	EA	25
BPN-20	3/4" x 2" Black Welded Nipple	EA	25
BPN-21	3/4" x 2-1/2" Black Welded Nipple	EA	25
BPN-22	3/4" x 3" Black Welded Nipple	EA	15
BPN-23	3/4" x 3-1/2" Black Welded Nipple	EA	15
BPN-24	3/4" x 4" Black Welded Nipple	EA	15
BPN-25	3/4" x 4-1/2" Black Welded Nipple	EA	20
BPN-26	3/4" x 5" Black Welded Nipple	EA	20
BPN-28	3/4" x 6" Black Welded Nipple	EA	15
BPN-30	3/4" x 8" Black Welded Nipple	EA	10
BPN-32	3/4" x 10" Black Welded Nipple	EA	10
BPN-34	3/4" x 12" Black Welded Nipple	EA	15
BPN-35	1" x CL Black Welded Nipple	EA	25
BPN-37	1" x 2" Black Welded Nipple	EA	25
BPN-38	1" x 2-1/2" Black Welded Nipple	EA	25
BPN-39	1" x 3" Black Welded Nipple	EA	5
BPN-40	1" x 3-1/2" Black Welded Nipple	EA	5
BPN-41	1" x 4" Black Welded Nipple	EA	10
BPN-43	1" x 5" Black Welded Nipple	EA	5
BPN-44	1" x 5-1/2" Black Welded Nipple	EA	10
BPN-45	1" x 6" Black Welded Nipple	EA	5
BPN-47	1" x 8" Black Welded Nipple	EA	5
BPN-51	1" x 12" Black Welded Nipple	EA	5
BPN-52	1/2" x 18" Black Welded Nipple	EA	5
BPN-53	1/2" x 24" Black Welded Nipple	EA	3
BPN-54	1/2" x 36" Black Welded Nipple	EA	5
BPN-A12	1/2" Assortment Pack, 6 each of CL thru 6", pack of 66	PK	2
BPN-A34	3/4" Assortment Pack, 6 each of CL thru 6", pack of 66	PK	2

90 Degree Ell

- Material: ASTM A 197 Cupola Malleable Iron, 150 lb.
- Dimensions::
  ANSI B 16.3 - Malleable Iron Threaded Fittings
  ANSI B 16.14 - Ferrous Pipe Plugs, Bushings etc.
  ANSI B 16.39 - Malleable Iron Threaded Pipe Unions
- Threads: ANSI B 2.1 or BS 21
- Tensile Strength: 28.4 kg/mm.min



BPF-01

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
BPF-01	1/2" 90 Degree Elbow	EA	50
BPF-02	3/4" 90 Degree Elbow	EA	35
BPF-03	1" 90 Degree Elbow	EA	20

Coupling

The Coupling fitting is made of ASTM A 197 Cupola Malleable Iron, 150 LB. The dimensions for this fitting are ANSI B 16.3. The threads are ANSI V 2.1 or BS 21 and the tensile strength is 28.4 kg/mm.min for this fitting.



BPF-07

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
BPF-07	1/2" Coupling	EA	60
BPF-08	3/4" Coupling	EA	50
BPF-09	1" Coupling	EA	25

45 Degree Ell

The 45 Degree Ell fitting is made of ASTM A 197 Cupola Malleable Iron, 150 LB. The dimensions for this fitting are ANSI B 16.3. The threads are ANSI V 2.1 or BS 21 and the tensile strength is 28.4 kg/mm.min for this fitting.



BPF-04

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
BPF-04	1/2" 45 Degree Elbow	EA	50
BPF-05	3/4" 45 Degree Elbow	EA	40
BPF-06	1" 45 Degree Elbow	EA	15

Reducing Coupling

The Reducing Coupling fitting is made of ASTM A 197 Cupola Malleable Iron, 150 LB. The dimensions for this fitting are ANSI B 16.3. The threads are ANSI V 2.1 or BS 21 and the tensile strength is 28.4 kg/mm.min for this fitting.



BPF-10

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
BPF-10	3/4" x 1/2" Reducing Coupling	EA	60
BPF-11	1" x 1/2" Reducing Coupling	EA	30
BPF-12	1" x 3/4" Reducing Coupling	EA	25

IRON FITTINGS CONT'D.

90 Degree Street Ell

The 90 Degree Street Ell fitting is made of ASTM A 197 Cupola Malleable Iron, 150 LB. The dimensions for this fitting are ANSI B 16.3. The threads are ANSI V 2.1 or BS 21 and the tensile strength is 28.4 kg/mm.min for this fitting.



BPF-13

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
BPF-13	1/2" 90 Degree Street Elbow	EA	60
BPF-14	3/4" 90 Degree Street Elbow	EA	35

Reducing Tee

The Reducing Tee fitting is made of ASTM A 197 Cupola Malleable Iron, 150 LB. The dimensions for this fitting are ANSI B 16.3. The threads are ANSI V 2.1 or BS 21 and the tensile strength is 28.4 kg/mm.min for this fitting.



BPF-21

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
BPF-20	3/4" x 1/2" x 1/2" Reducing Tee	EA	25
BPF-21	3/4" x 1/2" x 3/4" Reducing Tee	EA	20
BPF-34	1" x 1" x 1/2" Reducing Tee	EA	15

Cap

The Cap fitting is made of ASTM A 197 Cupola Malleable Iron, 150 LB. The dimensions for this fitting are ANSI B 16.3. The threads are ANSI V 2.1 or BS 21 and the tensile strength is 28.4 kg/mm.min for this fitting.



BPF-25

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
BPF-25	1/2" Cap	EA	75
BPF-26	3/4" Cap	EA	40
BPF-27	1" Cap	EA	35

Union

The Union fitting is made of ASTM A 197 Cupola Malleable Iron, 150 LB. The dimensions for this fitting are ANSI B 16.39. The threads are ANSI V 2.1 or BS 21 and the tensile strength is 28.4 kg/mm.min for this fitting.



BPF-31

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
BPF-31	1/2" Union	EA	50
BPF-32	3/4" Union	EA	35
BPF-33	1" Union	EA	20

Tee

The Tee fitting is made of ASTM A 197 Cupola Malleable Iron, 150 LB. The dimensions for this fitting are ANSI B 16.3. The threads are ANSI V 2.1 or BS 21 and the tensile strength is 28.4 kg/mm.min for this fitting.



BPF-16

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
BPF-16	1/2" Tee	EA	40
BPF-17	3/4" Tee	EA	35
BPF-18	1" Tee	EA	20

Bushing

The Bushing fitting is made of ASTM A 197 Cupola Malleable Iron, 150 LB. The dimensions for this fitting are ANSI B 16.14. The threads are ANSI V 2.1 or BS 21 and the tensile strength is 28.4 kg/mm.min for this fitting.



BPF-22

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
BPF-22	3/4" x 1/2" Hex Bushing	EA	75
BPF-23	1" x 1/2" Hex Bushing	EA	50

Plug

The Plug fitting is made of ASTM A 197 Cupola Malleable Iron, 150 LB. The dimensions for this fitting are ANSI B 16.14. The threads are ANSI V 2.1 or BS 21 and the tensile strength is 28.4 kg/mm.min for this fitting.



BPF-28

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
BPF-28	1/2" Plug	EA	50
BPF-29	3/4" Plug	EA	30

ABRASIVE CLOTHS

Abrasive Cloth

Aluminum oxide, high quality 120 grit, abrasive cloth to thoroughly clean copper and steel tubing. Works wet or dry. Exceeds industry standards for abrasive cloth.



SC-10

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SC-10	Abrasive Cloth - 1-1/2" x 10 yds.	EA	1
SC-25	Abrasive Cloth - 1-1/2" x 25 yds.	EA	1

BATTERIES

Rayovac® is the leader in the industrial battery market and has been for years, with an estimated 50% share of the traditional industrial distribution channel. Rayovac® introduced the top-selling industrial flashlight to the market, and set the quality standard by which all other industrial flashlights are measured today. Whether your customer is searching for a toolbox-tough flashlight or high-performance batteries, Rayovac® offers a broad range of products to meet your needs.

Rayovac® Industrial Maximum Alkaline Batteries – Shrink Packed



7-ALAA

- Same battery performance as the Contractor Packs at a lower cost
- Formulated specifically to exceed the everyday demands of industrial applications
- Outstanding dependability for "must work" applications

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
7-ALAA	Alkaline AA Battery - Shrink Packed, pack of 8	EA	8
7-ALAAA	Alkaline AAA Battery - Shrink Packed, pack of 8	EA	8
7-ALC	Alkaline C Battery - Shrink Packed, pack of 6	EA	6
7-ALD	Alkaline D Battery - Shrink Packed, pack of 6	EA	6
7-AL9V	Alkaline 9V Battery - Shrink Packed, pack of 6	EA	6

Rayovac® Lantern Batteries



7-806

- Dependable performance — for "must work" applications
- Available in General Purpose, Heavy Duty, and Alkaline Maximum

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
7-806	6 Volt Alkaline Maximum - Spring Terminals, pack of 6	EA	6

Rayovac® Industrial Maximum Alkaline Batteries — Contractor Packs



7-ALAA-24

- Contractor preferred, clear, resealable package
- Greater battery per pack quantities command higher battery sales
- Displays much more readily than other competitive batteries

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
7-ALAA-24	Alkaline AA Battery - Contractor Pack, pack of 24	EA	24
7-ALAAA-18	Alkaline AAA Battery - Contractor Pack, pack of 18	EA	18
7-ALC-12	Alkaline C Battery - Contractor Pack, pack of 12	EA	12
7-ALD-12	Alkaline D Battery - Contractor Pack, pack of 12	EA	12
7-AL9V-12	Alkaline 9V Battery - Contractor Pack, pack of 12	EA	12

CONTACT CLEANERS

CBC II Contact Cleaner

A plastic safe, non flammable electronic contact and circuit board cleaner. Dries fast, leaves no residue. No harsh fumes or odors.



362-16

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
362-16	CBC II Contact Cleaner - 10 oz. Aerosol	EA	12

QD® Contact Cleaner

This contact cleaner is suitable for cleaning sensitive electronics and electrical equipment and does not leave any residue. It evaporates quickly and is safe to use on all plastics. This product is more useful where lower flashpoint cleaners are acceptable. The QD® Contact Cleaner is NSF K2 Registered.



CRC-4CF

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CRC-4CF	QD® Contact Cleaner - 11 oz.	EA	12

HF™ Contact Cleaner

A petroleum distillate based precision cleaner with a flash point of 205°F. It can be an alternative to CFCs when applications require higher flashpoints.



CRC-4-140

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CRC-4-140	HF™ Contact Cleaner - 11 oz.	EA	12

DEGREASERS

Heavy Duty Degreaser II

The Heavy Duty Degreaser II is a non-chlorinated, zero VOC formula for cleaning where chlorinated solvents are prohibited. It has a high flashpoint of 180°F. This degreaser effectively removes soils with no residue build-up. Please exercise caution on plastics.



CRC-7-140

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CRC-7-140	Heavy Duty Degreaser II – 15 oz.	EA	12

Chlor-Free® Degreaser

Non-chlorinated degreasing solvent which is used to remove oil, grease and other contaminants. It is especially useful for applications requiring a quick turnaround and where a low flashpoint solvent can be used.



CRC-7Z

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CRC-7Z	Chlor-Free® Degreaser - 14 oz.	EA	12

Citrus Degreaser

The Citrus Degreaser has a new Low VOC Formula. The product removes grease, oil and lubricants with no water wash-off. It evaporates quickly and leaves no residue. The product gives off a pleasant citrus scent and is NSF C1 Registered.



CRC-7PS

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CRC-7PS	Citrus Degreaser – 15 oz.	EA	12

Electronic Degreaser

This Advanced Technology Formula is non-chlorinated, non-conductive, non-corrosive and non-staining. It rapidly dissolves grease, oil and sludge for better efficiency of mechanical equipment. The Electronic Degreaser has no flash or fire point.



CRC-4NU

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CRC-4NU	Electronic Degreaser - 15 oz.	EA	12

HAND CLEANERS

Fast Orange® Hand Cleaner

Three out of five people prefer Fast Orange® over other hand cleaners. The first biodegradable, waterless hand cleaner with aloe, lanolin, and jojoba. Smooth lotion and extra-fine pumice available. USDA Approved.



HCO-7



HCO-15

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
HCO-7	Fast Orange® - 7-1/2 fl. oz. Smooth Squeeze Bottle	EA	12
HCO-15	Fast Orange® - 15 oz. Smooth Squeeze Bottle	EA	12
HCO-128	Fast Orange® - 1 Gallon Smooth with Dispenser	EA	4
HCP-7	Fast Orange® - 7-1/2 fl. oz. Pumice Squeeze Bottle	EA	12
HCP-15	Fast Orange® - 15 oz. Pumice Squeeze Bottle	EA	12

Wypall® Waterless Hand Wipes

These wipes go wherever hands go to get dirty. Full sized 12” x 12” wipes for full sized cleaning. Natural cleaning agent is tough on grease, grime, ink, and paint. Dual textured – smooth for wiping on one side and tough for scrubbing on the other. More wipes with our 75 count bucket.



5-42272

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-42272	Wypall® Waterless Hand Wipes - Bucket	EA	6
5-4227R	Hand Wipe Refills, pack of 75	PK	6

DROP CLOTHS AND SURFACE PROTECTION

Canvas Drop Cloths

Premium grade canvas drop cloths are made of first quality and full piece 100% cotton duck canvas fabric. The industrial grade canvas fabric is durable since it is tightly woven using virgin cotton yarn. The drop cloths are washable and reusable. Double stitched seams with heavy-duty rot resistant thread.



DC-4128

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DC-4128	Canvas Drop Cloth - 4' x 12'	EA	1
DC-9128	Canvas Drop Cloth - 9' x 12'	EA	1

LUBRICANTS

Knock'er Loose® Penetrating Solvent

An industrial strength, low viscosity penetrant designed to rapidly loosen and free seized, bound or frozen fasteners. This product also quickly permeates rust, scale, gum, grease and corrosion. Independent tests reveal that it outperforms its competition.



CRC-1KB

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CRC-1KB	Knock'er Loose® Penetrating Solvent - 13 oz.	EA	12

Screwloose® Industrial Penetrating Oil

A no compromise penetrant that attacks corrosion to free corroded fasteners and mechanical components. A super fast, powerful, concentrated penetrating solvent that loosens rust scale and corrosion and instantly penetrates minute and tightly fitted crevices.



CRC-8

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CRC-8	Screwloose® Industrial Penetrating Oil - 11 oz.	EA	12

White Lithium Grease

White Lithium Grease has superior lubrication and durability in any weather or temperature. It is useful as a break in lubricant for bearings or as a general purpose lubricant and corrosion inhibitor for tools, machinery and equipment.



CRC-9

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CRC-9	White Lithium Grease - 10 oz.	EA	12

Ultra Lite 3-36® Ultra Thin Non Staining Lubricant

Ultra thin, non staining lubricant that resists oil, dirt and dust build up. This lubricant also seals out moisture and protects against corrosion. It is excellent for drying out electrical components.



CRC-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CRC-1	Ultra Lite 3-36® Ultra Thin Non Staining Lubricant - 11 oz.	EA	12

Cutting Oil

Cutting Oil is a superior thread cutting lubricant for use on all types of metals, including brass, copper and aluminum. For use on ferrous and non-ferrous metals. Clings to vertical surfaces for improved performance.



CRC-CF2

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CRC-CF2	Cutting Oil - 16 oz. aerosol	EA	1

SP-400™ Corrosion Inhibitor

Long-term corrosion inhibitor that protects equipment subject to heat, humidity, chemicals or severely corrosive atmospheres. This product is best to use on machined surfaces and assemblies subjected to long periods of storage.



CRC-3

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CRC-3	SP-400™ Corrosion Inhibitor - 10 oz.	EA	12

3-36® Multi-Purpose Lubricant & Corrosion Inhibitor

A multi-purpose petroleum based compound that forms a clear, thin film that lubricates and protects against wear and corrosion. The product also displaces moisture and cleans.



CRC-2

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CRC-2	3-36® Multi-Purpose Lubricant & Corrosion Inhibitor - 11 oz.	EA	12

Sta-Plex™ Extreme Pressure Premium Red Grease

A superior multi-purpose certified lithium complex based grease which contains extreme pressure, anti-wear, and anti-oxidation additives. The product is very useful in high temperature and performance applications. The drop point is 500°F.



CRC-13

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CRC-13	Sta-Plex™ Extreme Pressure Premium Red Grease - 14 oz.	EA	10

Zinc-It® Instant Cold Galvanize™ Zinc Rich Galvanize Coating

High-performance zinc coating that electrochemically bonds with ferrous metals to form a galvanic cell. The product also fights rust and corrosion and can be used as a touch-up for damaged galvanized coatings. Zinc-It® Instant Cold Galvanize™ Zinc Rich Galvanize Coating dries quickly.



CRC-5

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CRC-5	Zinc-It® Instant Cold Galvanize™ Zinc Rich Galvanize	EA	12

Heavy Duty Silicone Mold Release

This product provides maximum releases and is useful in difficult to remove parts. The Heavy Duty Silicone Mold Release is colorless, odorless, non-staining and non-corrosive.



CRC-6

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CRC-6	Heavy Duty Silicone Mold Release - 12 oz.	EA	12

NOTE: Item numbers in **RED** indicate **Made in the U.S.A.**

LUBRICANTS CONT'D

WD-40®

Loosens rusted parts. Stops squeaks. Removes tar, grease and adhesives. Displaces moisture. Protects metal. New Smart Straw can.



741-002



741-001

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
741-001	WD-40, 8 oz.	EA	12
741-002	WD-40, 11 oz.	EA	12
741-003	WD-40, 14.4 oz. with E-Z Reach	EA	12

INDUSTRIAL TOWELS

Terry Towels

100% cotton. Minimum of 14" x 17". Pre-washed for absorbency, fully-hemmed, all-white, and reusable.



DTT-10

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DTT-10	Terry Towels, pack of 10	PK	1
DTT-24	Terry Towels, pack of 24	PK	8

Shop Towels

Heavy duty reusable towels. For wipe ups of grease, oil, water, etc. 100% cotton material is pre-shrunk and hemmed. Each towel measures 13" x 16".



ST-10

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
ST-4	Shop Towels, pack of 4	PK	1
ST-10	Shop Towels, pack of 10	PK	1
ST-24	Shop Towels, pack of 24	PK	1

SHEET METAL SCREWS

Masonry Screw

This product comes in a pack of 250 and is suitable for brick, tile, slate, cement, and cinder block. The screws are a nice addition to the toolbox.



5-SCRMS

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-SCRMS	Masonry Screw - 1/4" x 1-1/4", pack of 250	PK	1

Anchor Kit

Plastic anchor kit for sheet rock applications. Kit includes 100 anchors, screws and 1 masonry bit.



540-AK100

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
540-AK100	Anchor size 1/4 x 1, Screw Size 10 x 1-1/4 HWH	EA	1

Sheet Metal Screws – Drill Point

Self-drilling, self-tapping. Hex washer head. Produces the optimum hole size, resulting in a tighter fit. Made from special heat treated steel for extra strength. Packaged in resealable plastic cartons.



5-SCR61-2DP



5-SCR81-2DPBULK



5-SCR82DP

CATALOG NO.	DESCRIPTION	HEAD SIZE	UOM	ORDER MUL.
5-SCR61-2DP	6 x 1/2 Drill Point, pack of 1,000	1/4"	PK	1
5-SCR61-2DPBULK	6 x 1/2 Drill Point - Bulk, pack of 15,000	1/4"	PK	1
5-SCR81-2DP	8 x 1/2 Drill Point, pack of 1,000	1/4"	PK	1
5-SCR81-2DPBULK	8 x 1/2 Drill Point - Bulk, pack of 10,000	1/4"	PK	1
5-SCR83-4DP	8 x 3/4 Drill Point, pack of 500	1/4"	PK	1
5-SCR83-4DPBULK	8 x 3/4 Drill Point - Bulk, pack of 10,000	1/4"	PK	1
5-SCR81DP	8 x 1 Drill Point, pack of 500	1/4"	PK	1
5-SCR81DP-BULK	8 x 1 Drill Point - Bulk, pack of 7,500	1/4"	PK	1
5-SCR101-2DP	10 x 1/2 Drill Point, pack of 500	5/16"	PK	1
5-SCR101-2DPBULK	10 x 1/2 Drill Point - Bulk, pack of 10,000	5/16"	PK	1
5-SCR103-4DP	10 x 3/4 Drill Point, pack of 500	5/16"	PK	1
5-SCR103-4DP100	10 x 3/4 Drill Point, pack of 100	5/16"	PK	1
5-SCR103-4DPBULK	10 x 3/4 Drill Point - Bulk, pack of 5,000	3/4"	PK	1
5-SCR101DP	10 x 1 Drill Point, pack of 500	5/16"	PK	1
5-SCR101DP-BULK	10 x 1 Drill Point - Bulk, pack of 5,000	5/16"	PK	1
5-SCR101-12DP	10 x 1-1/2 Drill Point, pack of 250	5/16"	PK	1
5-SCR101-12DP BULK	10 x 1-1/2 Drill Point - Bulk, pack of 3,500	5/16"	PK	1
5-SCR102DP	10 x 2 Drill Point, pack of 350	5/16"	PK	1
5-SCR102DP-BULK	10 x 2 Drill Point - Bulk, pack of 2,500	5/16"	PK	1

Sheet Metal Screws – Taper Point

Hex washer slotted head. Burr-free. Full 5/16" head will not strip out of hex driver opening. Heat treated tapered point will not break or "walk". Packaged in resealable plastic cartons.



5-SCR63-8



5-SCR81-2BULK



5-SCR101

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-SCR63-8	6 x 3/8 Taper Point, pack of 1,000	PK	1
5-SCR63-8BULK	6 x 3/8 Taper Point - Bulk, pack of 20,000	PK	1
5-SCR71-2	7 x 1/2 Taper Point, pack of 1,000	PK	1
5-SCR71-2BULK	7 x 1/2 Taper Point - Bulk, pack of 15,000	PK	1
5-SCR81-2	8 x 1/2 Taper Point, pack of 1,000	PK	1
5-SCR81-25M	8 x 1/2 Taper Point, pack of 5,000	PK	1
5-SCR81-2BULK	8 x 1/2 Taper Point - Bulk, pack of 12,000	PK	1
5-SCR83-4	8 x 3/4 Taper Point, pack of 1,000	PK	1
5-SCR83-4BULK	8 x 3/4 Taper Point - Bulk, pack of 10,000	PK	1
5-SCR81	8 x 1 Taper Point, pack of 500	PK	1
5-SCR81BULK	8 x 1 Taper Point - Bulk, pack of 7,500	PK	1
5-SCR81-12	8 x 1-1/2 Taper Point, pack of 250	PK	1
5-SCR81-12-100	8 x 1-1/2 Taper Point, pack of 100	PK	1
5-SCR81-12W	8 x 1-1/2 Taper Point w/White Head,	PK	1
5-SCR81-12BULK	8 x 1-1/2 Taper Point - Bulk, pack of 5,000	PK	1
5-SCR82-100	8 x 2 Taper Point, pack of 100	PK	1
5-SCR82	8 x 2 Taper Point, pack of 350	PK	1
5-SCR82W	8 x 2 Taper Point w/White Head, pack of 250	PK	1
5-SCR82BULK	8 x 2 Taper Point - Bulk, pack of 3,000	PK	1
5-SCR103-4	10 x 3/4 Taper Point, pack of 1,000	PK	1
5-SCR103-4BULK	10 x 3/4 Taper Point - Bulk, pack of 10,000	PK	1
5-SCR101	10 x 1 Taper Point, pack of 500	PK	1
5-SCR101-2	10 x 1/2 Taper Point, pack of 1,000	PK	1
5-SCR101BULK	10 x 1 Taper Point - Bulk, pack of 7,000	PK	1

NOTE: Item numbers in **RED** indicate **Made in the U.S.A.**

MARKERS, PAINTS AND PRIMERS

General Purpose Spray Paint

New, more complete line of professional quality fast drying spray paints. Color code compressors or refrigerant recovery cylinders to match standard refrigerant identifying colors. Touch up equipment housings. Product meets most recent VOC legislation and is currently compliant.



799-002

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
799-001	Spray Paint - Gloss Black - 12 oz.	EA	6
799-002V	Spray Paint - Flat Black - 12 oz.	EA	6
799-003	Spray Paint - Gloss White - 12 oz.	EA	6
799-004	Spray Paint - Flat White - 12 oz.	EA	6
799-005	Spray Paint - Dark Machinery Gray - 12 oz.	EA	6
799-006	Spray Paint - Gray Primer - 12 oz.	EA	6
799-010	Spray Paint - Orange - 12 oz.	EA	6
799-011	Spray Paint - Aluminum (Silver) - 12 oz.	EA	6

High Heat Spray Paint

An ultra high temperature coating formulated to resist temperatures up to 1300°F. Great for use on boilers, furnaces, steam pipes, chimney collars, compressors and engine manifolds. Product meets most recent VOC legislation and is currently compliant.



799-041

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
799-040	High Heat Spray Paint - Aluminum - 12 oz.	EA	6
799-041	High Heat Spray Paint - Black - 12 oz.	EA	6

Industrial Enamel

Finally an aerosol paint that sprays in any direction without clogging. We guarantee it! Dries tack free in 10 to 20 minutes; fully dry in just one hour. Excellent corrosion and solvent resistance. Resists heat up to 250°F. Now in 20 oz. cans. Product meets most recent VOC legislation and is currently compliant.



799-024

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
799-021	Industrial Enamel - Flat Black - 12 oz.	EA	6
799-022	Industrial Enamel - Gloss White - 12 oz.	EA	6
799-024	Industrial Enamel - Machinery Light Gray - 12 oz.	EA	6
799-025	Industrial Enamel - Aluminum- 12 oz.	EA	6

COVERALLS

KLEENGUARD®

KleenGuard® Personal Protective Equipment (PPE) enables rather than inhibits – allowing for maximum productivity and safety for you and your employees. When you're looking for an economical way to help protect your workers during potentially hazardous tasks, the Kleenguard brand A35 Disposable Coveralls, for Liquid and Particle Protection, are an excellent choice.

- Microporous film-laminated material helps protect against hazardous liquids (splashes) and dry particles (like dust and dirt)
- This protective suit has a zipper front and open wrists and ankles
- Available in sizes Medium to 3XL, meets ANSI / ISEA 101- 1996 standards
- PPE for hazardous liquid handling, pressure washing, maintenance, industrial / general manufacturing
- Meets American National Standards Institute and International Safety Equipment Association ANSI/ISEA 101-1996 sizing standard



COV-WPM

KLEENGUARD

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
COV-WPM	KleenGuard® (PPE), A35 Liquid a7 Particle Protection, Medium, Case/25	CS	1
COV-WPL	KleenGuard® (PPE), A35 Liquid a7 Particle Protection, Large, Case/25	CS	1
COV-WPXL	KleenGuard® (PPE), A35 Liquid a7 Particle Protection, X-Large, Case/25	CS	1
COV-WP2XL	KleenGuard® (PPE), A35 Liquid a7 Particle Protection, 2X-Large, Case/25	CS	1
COV-WP3XL	KleenGuard® (PPE), A35 Liquid a7 Particle Protection, 3X-Large, Case/25	CS	1

DISPOSABLE GLOVES

Nitrile Disposable Gloves

Better puncture resistance than latex or vinyl. Superb tensile strength. Powder free to not compromise adhesive seals or fresh paint. Latex free alternative for latex-sensitive workers. Great barrier protection. Textured for a reliable grip, wet or dry. 9" cuff. Oil resistant.



NG-MCL-6

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
NG-MCM-35	Nitrile Gloves, Medium, Powder Free, 3.5mil, Pack of 100	PK	10
NG-MCL-35	Nitrile Gloves, Large, Powder Free, 3.5mil, Pack of 100	PK	10
NG-MCXL-35	Nitrile Gloves, X-Large, Powder Free, 3.5mil, Pack of 100	PK	10
NG-MCM-6	Nitrile Gloves, Medium, Powder Free, 6mil, Pack of 100	PK	10
NG-MCL-6	Nitrile Gloves, Large, Powder Free, 6mil, Pack of 100	PK	10
NG-MCXL-6	Nitrile Gloves, XLarge, Powder Free, 6mil, Pack of 100	PK	10

WORK GLOVES

Cut Resistant Gloves

The 540-42545 coated safety gloves are made of ultra-high molecular weight polyethylene (UHMWPE) yarn with nylon and stretch fiber, which provide both cut resistance and a comfortable fit. They are rated with ANSI Level 2 / EN388 Level 3 Cut Resistance and CPPT = 686 grams. This glove is designed for protection against minor hand lacerations and abrasions. The 540-98237 coated safety gloves are made of ultra-high molecular weight polyethylene (UHMWPE) fiber, spun with glass, stainless steel and spandex. They offer ANSI Level 4 / EN388 Level 5 Cut Resistance and CPPT = 2,085 grams. It is great for industrial tasks that require protection against hand lacerations.



540-42545

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
540-42545	Cut Resistant Glove, Level 3, Large, Black/White Color	PK	1
540-98237	Cut Resistant Glove, Level 5, Large, Black & Salt & Pepper Color	PK	1

Nitrile Gloves

Foam control gloves for industrial use that provide a high level of wet and dry grip. Standard in applications where tactile sensitivity is required.



540-1005L

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
540-1005L	Nitrile Gloves - Large, 1 pair per pack	EA	1

Heavy Duty Work Gloves

Your choice of durable work gloves. Washable, breathable, and durable for everyday use.



540-HU1L

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
540-HU1L	Heavy Utility Gloves - Large, 1 pair per pack	PK	1

Jackson Safety G40 Latex Coated Gloves

- Breathable cotton back for comfort; Silicone-free
- Crinkled latex coating for excellent grip
- Highest EN388 tear resistance rating; Excellent durability
- Separate right and left gloves in a pair for a snug fit
- Pack of 12 pairs



G-LCM

JACKSON

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
G-LCM	Jackson Safety G40 Latex Coated Gloves, Medium, 12 pairs per pack	PK	1
G-LCL	Jackson Safety G40 Latex Coated Gloves, Large, 12 pairs per pack	PK	1
G-LCXL	Jackson Safety G40 Latex Coated Gloves, X-Large, 12 pairs per pack	PK	1
G-LC2XL	Jackson Safety G40 Latex Coated Gloves, 2X-Large, 12 pairs per pack	PK	1

Leather Work Gloves

Versatile leather work gloves ideal for many industrial jobs. These leather work gloves offer: wing thumb pattern, continuous pull patch, seamless full leather index finger, leather knuckle strap, leather finger tips with elastic gather on back. Generously sized for a good working fit.



540-2114

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
540-2114	Leather Glove w/Safety Cuff, 1 pair per pack	EA	12

Jackson Safety G40 Foam Nitrile Coated Gloves

- 25% better productivity than leather, with excellent grip and dexterity for rough tasks
- Maintains the highest EN388 abrasion rating, even after five washes
- Better oil and industrial grease grip (almost 3x better than previous G40 nitrile gloves)
- Seamless knit nylon back for comfort, available in a variety of sizes (ranging from Medium up to 2XL)
- Pack of 12 Pairs



G-NCM

JACKSON

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
G-NCM	Jackson Safety G40 Foam Nitrile Coated Gloves, Medium, 12 pairs per pack	PK	1
G-NCL	Jackson Safety G40 Foam Nitrile Coated Gloves, Large, 12 pairs per pack	PK	1
G-NCXL	Jackson Safety G40 Foam Nitrile Coated Gloves, X-Large, 12 pairs per pack	PK	1
G-NC2XL	Jackson Safety G40 Foam Nitrile Coated Gloves, 2X-Large, 12 pairs per pack	PK	1

Box Handler Gloves

Washable, breathable, and durable for everyday use.



540-BH1L

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
540-BH1L	Box Handler Gloves - Large, 1 pair per pack	PK	6

HAND WARMERS

Hand Warmer

Air-activated hand warmers deliver hours of warmth and relief from cold weather. Once the package is opened, an exothermic reaction begins providing an effective defense against the winter cold.



HW-10P

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
HW-10P	Hand Warmer, pack of 10	PK	1

PERSONAL PROTECTION EQUIPMENT

Masks

Pleated Mask - 5-500M

- 3-Ply Medical Style Pleated Mask
- Non-Sterile, General Purpose Use
- Splash Proof Inner Layer
- Behind the Ear Attachment



5-500M

KN95 Mask-5 - 500KN

- Particle Filtering Efficiency (PFE) ≥ 95% of 0.3 Micron Particles
- 5-Layer Protection of High-Quality Non-Woven Fabric, Hot Air Cotton and Melt Blown Fabric
- Adjustable Nose Clip Seals and Prevents Fogging
- Dual Elastic Ear-loop Secures Mask to Face
- Not a NIOSH Approved Respirator



5-500KN

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-500M	Pleated Masks, pack of 50	PK	1
5-500KN	KN95 Masks, pack of 50	PK	1

Jackson Safety V30 Nemesis Safety Glasses



SG-NV30CC

JACKSON SAFETY Brand

- Feature a sporty, flexible, lightweight design that your employees will be happy to wear; they have a stylish, sporty look and feel
- Meets ANSI Z87.1+ standards for personal eye protection
- Polycarbonate lenses provide 99.9% UVA/UVB/UVC protection
- Patented FLEX-DRY designed to be extremely flexible, to channel sweat away from the eyes, and to help prevent slippage down the nose - all for long-term comfort

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SG-NV30CC	Jackson Safety V30 Nemesis Safety Glasses - Clear Anti-Fog Lenses with Camo Frame, Case/12	CS	1
SG-NV30CB	Jackson Safety V30 Nemesis Safety Glasses - Smoke Anti-Fog Lenses with Camo Frame, Case/12	CS	1
SG-NV30BC	Jackson Safety V30 Nemesis Safety Glasses - Clear Lenses with Black Frame, Case/12	CS	1
SG-NV30B	Jackson Safety V30 Nemesis Safety Glasses - Clear Anti-Fog Lenses with Black Frame, Case/12	CS	1

DISPOSABLE TOWELS

WypAll® Plus Towels

Absorbs grease, oil, water and solvents from floors, hands, parts, tools and machinery. Tough enough for extra heavy jobs. Comes in a convenient pop-up box of 100 towels.



5-05790

WYPALL

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-05790	WypAll® Plus Towels - White, pack of 100	PK	9

Teri® Reinforced Towels

The Teri® reinforced towels feature multi-ply tissue reinforced with nylon webbing for added strength on the job. Made from 100% recycled paper. Towel size is 9-3/4" x 16-3/4". Towel color is white. Comes in a convenient pop up box. 126 towels/box. 10 boxes/case.



5-34790

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-34790	Teri® Reinforced Towels, pack of 126	PK	10

Kimtex® Shop Towels

Long lasting Kimtex® stands up to oils, chemicals and solvents better than ordinary shop towels. Cloth-like feel and performance. Towel size is 9-3/4" x 16-3/4". 100 towels/box. 5 boxes/case.



5-33570

KIMTECH

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-33570	Kimtex® Shop Towels, pack of 100	PK	5

DISPOSABLE TOWELS CONT'D

WypAll® X70 Cloths

The economical alternative to scrap rags. Heavy-duty cloths made with high-tech HydroKnit® fast-absorbing material. Durable and tough construction lets them stand up to any task. Can be reused time and time again. Available in white or blue.



5-41455

WYPALL

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-41411	WypAll® X70 Cloths, 9-3/4" x 16-3/4" Blue, pack of 100	PK	10
5-41455	WypAll® X70 Cloths, 9-3/4" x 16-3/4" White, pack of 100	PK	10

WypAll® ShopPro X80 Towels

Like a rental shop towel, only more consistent. Engineered to feel like cloth and work even better. Absorbs more oil and water faster pound for pound than laundered shop towels. The ShopPro X80 is simply the heaviest duty towel in the Kimberly Clark line. 160 towels/box.



5-41041

WYPALL

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
5-41041	WypAll® ShopPro X80 Towels, pack of 160	PK	1

SHOE COVERS

Shoe Covers

Slip these shoe covers on in seconds to protect carpet, tile, or wood from dirt and scuff marks. Customers will appreciate your professional appearance.



SC-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SC-1	Navy Blue Shoe Covers, pack of 50 pairs	PK	1
SC-1WP	Waterproof Shoe Covers, pack of 50 pairs	PK	1

SAFETY SUPPLIES

First Aid Kits

10 and 25-unit first aid kits packaged in economy plastic boxes to assist when industrial accidents occur.



FAK-10

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
FAK-10	10-Unit First Aid Kit	EA	1
FAK-25	25-Unit First Aid Kit	EA	1

INSECT KILLERS

Sting Less Wasp & Hornet Killer

Kills wasps, hornets and yellow jackets. Very fast-acting when insects are hit directly. Allow approximately 24 hours for those that were not directly hit. This container delivers a 20-foot jet blast to knock down the insects and allow for the user to remain at a safe distance.



436-20

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
436-20	Sting Less Wasp & Hornet Spray - 14 oz. Aerosol	EA	12

Wasp & Hornet Killer

Enforcer® Wasp & Hornet Killer shoots a 20-foot jet blast for instant knockdown of wasps, hornets, and yellow jackets. Enforcer® Wasp & Yellow Jacket Foam is a 20-foot blast of blanketing foam that plugs yellow jacket holes and clings to wasp and hornet nests, preventing their escape.





8-WH16 8-FWH16

ENFORCER

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
8-WH16	Enforcer Wasp & Hornet Killer - 16 oz. Aerosol	EA	12
8-FWH16	Enforcer Wasp & Yellow Jacket Foam - 16 oz. Aerosol	EA	12

Maintenance Chemical Solution Quick Reference Guide

MasterCare®






EQUIPMENT TYPE	TRIPLE-D®	ECO-COIL™	PRO-BROWN™	PRO-BLUE™
Condenser Units	X	X	X	X
No Rinse		X		
Evaporator Units	X	X		
No Rinse	X	X		
Safe On Rubber Roof Tops	X			
Safe On Fan Blades, Grilles, Etc.	X	X		
Safe On Electronic Air Filters	X	X		
Safe On Permanent Filters	X	X		
Microchannel Coils	X	X		
Small Condenser Coils	X	X	X	X
Small Evaporator Coils	X	X		
Mini-Splits	X	X		
APPLICATION SOLUTION				
Brightener			X	X
Condensate “Gunk”	X	X	X	X
Degreasing	X		X	X
Deodorizer	X	X		
Dirt and Grime	X	X	X	X
Disinfectant		USE SANI C-N-D™ COIL AND DRAIN DISINFECTANT		
Heresite Coated Coils		X		
Oxide Deposits			X	X
Remove Minerals				
CHEMICAL TYPE				
Alkaline	X	X	X	X
Acidic				
DILUTION (PRODUCT: H2O)				
Condensers	1:6	1:3	1:3	1:3
Evaporators	1:10	1:6		
Evaporators (No Rinse)	1:20	1:6		
PACKAGING AVAILABLE				
4 Ounce Concentrate	TRIPLE-D-1SHOT			PRO-BLUE-1SHOT
4X Concentrate Quart	TRIPLE-D-4X			PRO-BLUE-4X
19 Ounce Aerosol	TRIPLE-D-AER	ECO-COIL-AER		PRO-BLUE-AER
1 Quart Trigger Sprayer	TRIPLE-D-RTU			
32 Ounce Bottle				
1 Gallon	TRIPLE-D	ECO-COIL	PRO-BROWN	PRO-BLUE
5 Gallon				
55 Gallon Drum				PRO-BLUE-55
ENVIRONMENTAL				
Biodegradable	X	X	X	X
Meets EPA’s Design for the Environment Alternative Program as Green		X		
FOOD COMPLIANCE				
USDA Approved	X	X		X
NSF Registered	X	X	X	X

Maintenance Chemical Solution Quick Reference Guide CONT'D

MasterCare






EQUIPMENT TYPE	PRO-GREEN™	PRO-RED PLUS™	PRO-YELLOW™	PRO-KLEEN™
Condenser Units	X	X	X	X
No Rinse	X			
Evaporator Units	X			
No Rinse	X			
Rubber Roof Tops				
Fan Blades, Grilles, Etc.	X			
Electronic Air Filters	X			
Permanent Filters	X			
Microchannel Coils	X			
Small Condenser Coils	X	X	X	X
Small Evaporator Coils	X			
Mini-Splits	X			
APPLICATION SOLUTION				
Brightener		X	X	X
Condensate "Gunk"	X	X	X	X
Degreasing		X	X	X
Deodorizer	X			
Dirt and Grime	X	X	X	X
Disinfectant		USE SANI C-N-D™ COIL AND DRAIN DISINFECTANT		
Heresite Coated Coils				
Oxide Deposits		X	X	X
Remove Minerals				X
CHEMICAL TYPE				
Alkaline	X	X	X	
Acidic				X
DILUTION (PRODUCT: H2O)				
Condensers	1:3	1:3	1:2	1:3
Evaporators	1:3			
Evaporators (No Rinse)	1:3			
PACKAGING AVAILABLE				
4 Ounce Concentrate	PRO-GREEN-1SHOT	PRO-RED-1SHOT		
4X Concentrate Quart	PRO-GREEN-4X	PRO-RED-4X		
19 Ounce Aerosol	PRO-GREEN-AER			
1 Quart Trigger Sprayer				
32 Ounce Bottle				
1 Gallon	PRO-GREEN	PRO-RED+	PRO-YELLOW	PRO-KLEEN
5 Gallon				
55 Gallon Drum				
ENVIRONMENTAL				
Biodegradable	X	X	X	X
Meets EPA's Design for the Environment Alternative Program as Green				
FOOD COMPLIANCE				
USDA Approved	X			
NSF Registered	X	X	X	

NOTE: Item numbers in RED indicate Made in the U.S.A.

COIL CLEANERS

MasterCare® Triple-D® Universal Coil Cleaner



TRIPLE-D

MasterCare® Triple-D® is the ultimate universal coil cleaner that can be used on condensers, evaporators, microchannels, roof-top units, and mini-split applications. The triple active synergistic highly effective solution is formulated to remove a broad range of soils while degreasing and deodorizing. It is ideal for cleaning most metals including aluminum and copper while extending equipment life and diminishing the potential for refrigerant leaks. Using 75% less than comparable products, it reduces the amount of solution needed to clean. Triple-D® is biodegradable, NSF approved and available in a variety of packaging configurations.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
TRIPLE-D	MasterCare® Triple-D® - 1 Gallon Concentrate	EA	4
TRIPLE-D-AER	MasterCare® Triple-D® - 19 oz. Aerosol	EA	12
TRIPLE-D-AER-6	MasterCare® Triple-D® - 19 oz. Aerosol, 6 Pack	EA	6
TRIPLE-D-4X	MasterCare® Triple-D® - 4x Concentrate	EA	12
TRIPLE-D-1SHOT	MasterCare® Triple-D® - 4 oz. Concentrate	EA	14
TRIPLE-D-RTU	MasterCare® Triple-D® - 1 Qt. Pre-Mixed Sprayer	EA	12

Eco-Coil™ Environmentally Friendly Coil Cleaner



ECO-COIL

Eco-Coil™ is an environmentally friendly no rinse non-corrosive cleaner ideal for evaporator and condenser coils, electronic and permanent filters, fan blades, grilles, mini-split and microchannel applications. Eco-Coil quickly cleans away dirt, dust, and deposits while deodorizing with no harmful risks to animal, aquatic or plant life. Tested to provide the highest level of performance, Eco-Coil not only reduces the number of products required to clean but also has different water mixture ratios to maximize solution usage. Furthermore, it brightens, biodegradable, NSF approved, and meets the EPA's Design for the Environment Alternative Program as a "green" product.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
ECO-COIL	Eco-Coil™ Environmentally Friendly Coil Cleaner - 1 Gallon Container	EA	4
ECO-COIL-AER	Eco-Coil™ - 19 oz. Aerosol	EA	1


MasterCare® Pro-Brown™



PRO-BROWN

MasterCare® Pro-Brown™ is a heavy duty alkaline cleaner that pulls out deeply embedded dirt removing greasy soils and oxidation while brightening and cleaning coils. Ideal for air-cooled condensers and mini-splits thanks to its dual action foaming capabilities. It is biodegradable.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PRO-BROWN	MasterCare® Pro-Brown™ Foaming Coil Cleaner - 1 Gallon Container	EA	4

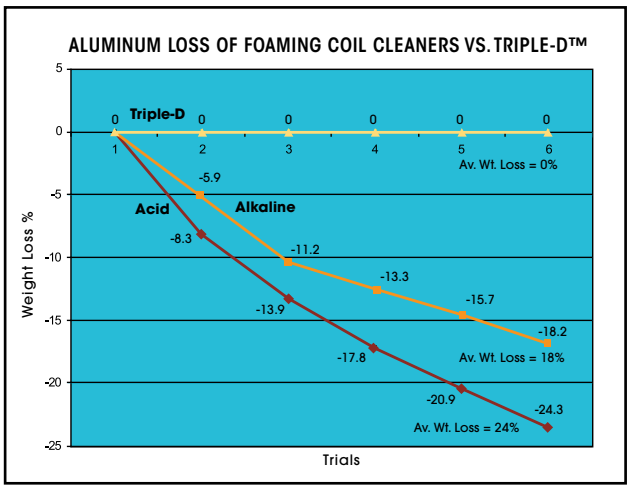

Conventional foaming acid and non-acid coil cleaners attack and chemically react with the aluminum coil components. This reaction is exhibited by a foaming action. The attack/reaction dissolves the aluminum, destroying the heat-transfer ability of the coil and creating the potential for refrigerant leaks.

MasterCare® Pro-Blue™



PRO-BLUE

MasterCare® Pro-Blue™ is a heavy foaming alkaline-based solution designed for condensers and mini-splits that penetrates dirt and grease removing deposits resulting in clean and brightened coils. Pro-Blue is biodegradable, NSF approved, and available in numerous packaging configurations.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PRO-BLUE	MasterCare® Pro-Blue™ Foaming Concentrate (non-acid) - 1 gallon container	EA	4
PRO-BLUE-AER	MasterCare® Pro-Blue™ - 19 oz. Aerosol	EA	6
PRO-BLUE-4X	MasterCare® Pro-Blue™ - 4x Concentrate	EA	12
PRO-BLUE-1SHOT	MasterCare® Pro-Blue™ - 4 oz. Concentrate	EA	14
PRO-BLUE-55	MasterCare® Pro-Blue™ - 55 Gallon Drum	EA	1

MasterCare® Pro-Green™



PRO-GREEN

MasterCare® Pro-Green™ is a no rinse, mild alkaline coil cleaner that can be used on air-cooled condensers, evaporators, electronic and permanent filters, fan blades, grilles, mini-split and microchannel applications. Pro-Green cleans deposits on coils and rids condensate pans of slime. It is NSF approved for use in federally inspected plants and available in numerous packaging configurations.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PRO-GREEN	MasterCare® Pro-Green™ No Rinse - 1 Gallon Container	EA	4
PRO-GREEN-AER	MasterCare® Pro-Green™ - 19 oz. Aerosol	EA	6
PRO-GREEN-4X	MasterCare® Pro-Green™ - 4x Concentrate	EA	12
PRO-GREEN-1SHOT	MasterCare® Pro-Green™ - 4 oz. Concentrate	EA	14

COIL CLEANERS CONT'D

MasterCare® Pro-Red Plus™

MasterCare® Pro-Red Plus™ is a fast acting cleaning solution for condensers, microchannels, and mini-splits that foams and lifts away stubborn deposits including tarnish and corrosion. Its corrosion inhibitors protect even sensitive metals like aluminum and copper. Its non-acid formula is as effective as conventional acid cleaners without the use of hydrofluoric acid. The vigorous foaming action eliminates the need for prolonged soaking, steam cleaning or scrubbing coils and without emitting corrosive fumes or rusting ferrous metals. Pro-Red Plus™ is biodegradable, NSF approved, and available in a number of convenient packaging solutions.



PRO-RED+

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PRO-RED+	MasterCare® Pro-Red Plus™ Cleaner and Brightener (non-acid) - 1 Gallon container	EA	4
PRO-RED-4X	MasterCare® Pro-Red Plus™ - 4x Concentrate	EA	12
PRO-RED-1SHOT	MasterCare® Pro-Red Plus™ - 4 oz. Concentrate	EA	14
PRO-RED+5	MasterCare® Pro-Red Plus™ - 5 Gallon Pail	EA	1

Coil Guard™

Ideally used in coastal areas, where salt air accelerates rust and decay. Highly recommended for use in all geographical areas to prolong the life of a unit. When applied properly, Coil Guard™ dries quickly and immediately resists salt spray, acids, and soap solutions. Weather will not blacken it. Coil Guard™ has high dielectric properties and has no effect on heat transfer. Our blue tinted product is used to ensure complete coverage of coating.



CG-AER

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CG-AER	Clear Coil Guard™ - 20 oz. Aerosol	EA	12
CGB-AER	Blue Coil Guard™ - 20 oz. Aerosol	EA	12

Cool-Weld™ Heat Barrier Spray

Spray on thick gel formula that protects surfaces from heat and damage. Odorless, non-toxic gel coats rubber, plastic, and painted surfaces to shield them during welding or soldering.



COOLWELD-32

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
COOL-WELD-32	Cool-Weld™ Heat Barrier Spray - 32 oz. Container	EA	12

Foam-Plus™ Aerosol Foaming Coil Cleaner

Heavy-duty foaming detergent coil cleaner in an aerosol can. Non-flammable and water-based with no chlorinated solvents. Blasting foam stream reaches into tight areas for maximum cleaning. The foaming alkaline detergent quickly liquifies dirt, grease, oil or other residue and is completely self-rinsing on condensate producing coils.



358-20

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
358-20	Foam-Plus™ Foaming Coil Cleaner - 19 oz.	EA	12

MasterCare® Pro-Yellow™

MasterCare® Pro-Yellow™ is a powerful cleaner ideal for condensers, microchannels, and mini-splits that targets large concentrations of dirt and grime. With its heavy foaming alkaline-based solution, debris will be removed from the coil while providing excellent brightening. Pro-Yellow is biodegradable and available in a number of packaging solutions.



PRO-YELLOW

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PRO-YELLOW	MasterCare® Pro-Yellow™ (non-toxic) - 1 Gallon Container	EA	4

MasterCare® Pro-Kleen™

A unique foaming acid coil cleaner designed to replace hazardous hydrofluoric acid coil cleaners. It contains a synergistic combination of mineral acids, corrosion inhibitors, biodegradable surfactants, penetrants, and degreasers that emulsify, solubilize and neutralize soils leaving a clean, bright, efficient coil surface.



PRO-KLEEN

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PRO-KLEEN	MasterCare® Pro-Kleen™ Outdoor Coil Cleaner - 1 Gallon container	EA	4

Pan-Patch™

Pan-Patch™ is a two part epoxy coating designed for HVAC applications. It is a self leveling formula that is ideal in a damp or wet environment. Pan-Patch™ resists corrosion and stops pan leaks without replacing the pan. Light gray in color, one gallon covers about 160 square feet with 10 mil thickness.



PANPATCH-BAG

CATALOG NO.	DESCRIPTION	COVERAGE	UOM	ORDER MUL.
PAN-PATCH-BAG	Pan-Patch™ Pan Sealant - Bag, pack of 10	8 sq. ft.	EA	10
PANPATCH	Pan-Patch™ Pan Sealant - 1 Gallon	160 sq. ft.	EA	4

COIL CLEANERS CONT'D

SpeedClean® SpeedyFoam®

Foaming, non-acid, non-fuming, and water soluble. SpeedyFoam cleaner and degreaser removes grime, oil, and grease from condenser and evaporator coils, mechanical equipment, and air filters. Non-caustic and safe for all metals, including aluminum.



SC-FCC-1



SPEEDCLEAN


CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SC-FCC-1	SpeedClean® SpeedyFoam® Coil Cleaner, 1 Gallon	EA	4
SC-FCC-5	SpeedClean® SpeedyFoam® Coil Cleaner, 5 Gal. Pail	EA	1

SpeedClean® SpeedyBright®

Scientifically formulated to dissolve all types of limescale, rust, and calcium carbonate deposits from water passages and heating elements. SpeedyBright improves operating efficiency in tankless water heaters, gas/electric water heaters, and other water heating/heat exchange systems. Extend the usable life of cleaned equipment by quickly and safely removing energy robbing contaminants. Phosphoric acid based cleaner classified by UL to NSF/ANSI Standard 60.



SPDYBRT-CS



SPEEDCLEAN

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SPDYBRT-CS	SpeedClean® SpeedyBright® Cleaner, 2 x .5 Gallon	EA	2
SPDY-BRT-05	SpeedClean® SpeedyBright® Cleaner, 5 Gallon Pail	EA	1

SYSTEM FLUSHES

Pro-Flush® HVAC Flushing Solvent

A flushing solvent for A/C and refrigeration systems formulated for R410A retrofits, refrigerant conversions and compressor burnouts. Compatible with all refrigerants and compressor oils. All solvents in Pro-Flush® conform to EPA SNAP standards, and are low toxicity and residue free. Available as a kit or in an 8 or 16 oz. solvent refill. The kit makes servicing quick, easy, and safe, as well as assuring you get to the job site with all necessary hardware in hand for 1 stop servicing. The kit includes: 8 oz. container of Pro-Flush® solvent, refillable Pro-Flush® injector tool pressure tank, pressure relief valve for added safety, large rubber adapter that flushes up to 1-1/4" line sets, service hose.



PF-KIT

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PF-KIT	Pro-Flush® Kit - injector, 8 oz. refill, nozzle adapter and hose	EA	3
PF-08	Pro-Flush® HVAC Flushing Solvent - 8 oz. Refill	EA	6
PF-16	Pro-Flush® HVAC Flushing Solvent - 16 oz. Refill	EA	6
PF-ADAPTER	Pro-Flush® Line Set Adapter	EA	1
PF-IGUN	Replacement Injector Tool	EA	1
PF-IHOSE	2" Replacement Hose	EA	1

MasterCare® Super Change™

Super Change eliminates oil change outs replacing R22 line set conversion flushes. Ideal for dry charged units, retrofits, and drop-in refrigerants, Super Change maximizes oil return and heat transfer including POE charged compressors. Reusable hose (20122) included. Also available in flexible injectable hose (991-MC).



991-MC

MasterCare®

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
981	MasterCare® Super Change™ Refrigerant Retrofit	EA	6
991-MC	MasterCare® Super Change™ Refrigerant Retrofit, Hose	EA	4

LEAK DETECTION

Bubble-N-Trouble™ Freeze Protected Spray-On Leak Detector

Non-corrosive, non-toxic, and biodegradable. Does not attack metal or interfere with brazing or soldering. Spray-on application allows easy access for hard to reach places. Tacking agent holds solution on test surface making Bubble-N-Trouble™ very economical. USDA AUTHORIZED



BNT-32

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
BNT-32	Bubble-N-Trouble™ Freeze Protected Leak Detector - 32 oz. Spray	EA	12
BNT-1	Bubble-N-Trouble™ Freeze Protected Leak Detector - 1 Gallon Container	EA	4

Radiant Leak Finder™

Radiant color and viscous clinging formula exposes the smallest leaks. Freeze-protected – remains effective down to 0° F.



RLF-8

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
RLF-8	Radiant Leak Finder™ - 8 oz. Container	EA	12

UV Pocket Light

UV Pocket Light with 3 AAA batteries included. A great light to pair with 995 Flex Inject® Sealant and 990 Flash™ Detect Inject.



89DC

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
89DC	UV Pocket Light	EA	12

Patriot Pocket Worklight

A three light integrated rechargeable system that includes a red top light (30 lumens), 250 lumen front light, and a 390-400nm wavelength UV light. Patriot charger sold separately (111110A).



111110



111110A

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
111110	Patriot Worklight	EA	6
111110A	Patriot Worklight Charger	EA	6

MasterCare® Pro-Bubble™ Leak Detector

Easy-to-use, high-bubbling, viscoelastic blue leak detector. New improved formula.



PRO-BUBBLE-32

MasterCare

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PRO-BUBBLE-32	MasterCare® Pro-Bubble™ Leak Detector - 32 oz. Spray	EA	12

MasterCare® LeakArmor™ UV Dye

MasterCare® LeakArmor™ UV Dye is an integrated UV dye solution that injects without the use of tools or manifold gauges. LeakArmor UV Dye travels with the speed of the refrigerant once installed, finding leaks within minutes. Using a patented misting orifice, LeakArmor UV Dye uses the refrigerant as the propellant, ensuring a no-mess injection every time. Can be used with all HFC refrigerants.



990

MasterCare

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
980	MasterCare® LeakArmor™ UV Dye	EA	12
990	MasterCare® LeakArmor™ UV Dye, Hose	EA	6

AC SEALANTS

MasterCare® LeakArmor™ Easy Shot™ with UV Dye



972KIT

MasterCare®

MasterCare® LeakArmor™ Easy Shot™ with UV dye eliminates moisture, finds and stops leaks, and prevents future leaks. Fast and easy to install; requires no pump down or recovery. Compatible with all oils and refrigerants and ideal for all systems including microchannel, heat pump and geothermal. Kit includes hose and sealant for medium systems between up to 6 tons. 2 oz. vacuum packed can.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
972KIT	MasterCare® LeakArmor™ Easy Shot™ with UV Dye	EA	12

MasterCare® LeakArmor™ Flex Shot™



985



995

MasterCare®

MasterCare® LeakArmor™ Flex Shot™ hoses and inject adapters are the fastest, most effective proven way to permanently seal and prevent minor air conditioning and refrigeration (AC/R) leaks. With no tools or gauges required, the Flex Shot sealant works by traveling through the system in the gas phase with the oil and refrigerant fixing leaks immediately. Flex Shot works with all compressors, heat pumps, condensers, and other system components with 1/4" SAE high- and low-side service ports. It will not plug up manifold gauges, metering devices, thermostatic expansion valves (TXVs), pistons or cause cap tube blockages. It meets the ASHRAE ARI 700 refrigerant standard and is compatible with any refrigerant including R-410A with no pump downs or recoveries required. Flex Shot is suitable for use in aluminum and copper coils and is microchannel friendly. 0.3 oz single use hose.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
985	MasterCare® LeakArmor™ Leak Sealant, Hose w/Inject Adapters Attached	EA	6
985S-MC	MasterCare® LeakArmor™ Leak Sealant, Hose	EA	6
985M-MC	MasterCare® LeakArmor™ Leak Sealant, 4 Hoses	EA	4
995	MasterCare® LeakArmor™ Leak Sealant with UV Dye, Hose w/Inject Adapters Attached	EA	6
995S-MC	MasterCare® LeakArmor™ Leak Sealant with UV Dye, Hose	EA	6
995M-MC	MasterCare® LeakArmor™ Leak Sealant with UV Dye, 4 Hoses	EA	4
IA-MC	MasterCare™ LeakArmor™ FlexShot™ Inject Adapters	EA	6

MasterCare® LeakArmor™ Easy Shot™



944KIT

MasterCare®

MasterCare® LeakArmor™ Easy Shot™ eliminates moisture, stops leaks, and prevents future leaks. Fast and easy to install; requires no pump down or recovery. Compatible with all oils and refrigerants and ideal for all systems including microchannel, heat pump and geothermal. Kit includes hose and sealant for medium systems up to 12 tons. 2 oz. vacuum packed can.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
944KIT	MasterCare® LeakArmor™ Easy Shot™	EA	12

Pro-Tite™ Resin Based Thread Sealant



CLL-1

Resin based thread sealant that adheres to internal surfaces, fills voids while forming a flexible fluid tight seal. Specifically formulated for use on metals and plastics subject to extreme vibration. Serviceable at temperatures from 100°F (73°C) to 400°F (204°C) and from full vacuum to 10,000 PSI. Pro-Tite™ is impervious to most chemicals including refrigerants, petroleum products, gases, steam, etc. Alcohol based.

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
CLL-1	Pro-Tite™ Thread Sealant - 1-1/3 oz. Squeeze Tube	EA	12
CLL-4	Pro-Tite™ Thread Sealant - 4 oz. Brush Top	EA	12

SYSTEM ADDITIVES

Acid Eliminator

Keeps acid away; compatible with all refrigerants and oils. Chemically neutralizes and prevents acids that are formed in air conditioning and refrigeration systems due to refrigerant and refrigeration oil break-down, moisture, and compressor burnout. Easy-to-use, no complicated charts. Works fast, circulates quickly, and leaves no solids or solid residuals. Will not harm system components. Can prevent system breakdown.



ACID-ELIM

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
ACID-ELIM	Acid Eliminator - 4 oz. Plastic Bottle	EA	12

MasterCare® Boost Juice® Performance Enhancer

MasterCare® Boost Juice® is an HVAC/R system performance improvement additive that lowers energy costs by reducing the amperage draw up to 22% (testing average of 13%) on a system when running. It does this by lubricating the components, removing moisture and oxygen, and dissolving particle debris to a molecular level. This debris is captured in the liquid line drier reducing drag and friction for the refrigerant and oil. By using Boost Juice, your customers can expect to see noticeable improvements in system performance typically within 24 to 72 hours (depending on the state of the system – new versus old) with consistent performance. Noise levels will also be reduced once Boost Juice is installed providing a long-term benefit to your customers.



992-MC

MasterCare

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
992-MC	MasterCare® Boost Juice® Performance Enhancer	EA	4
993KIT	MasterCare® Boost Juice® Performance Enhancer Kit	EA	6

MasterCare® D'Scale™ Acid Scale Remover for Cooling Towers

MasterCare® D'Scale™ is a low-foaming scale remover that quickly removes scale, corrosion and rust from cooling towers. D'Scale™ has pH indicating dye. The color changes to yellow when acid has been consumed. Each gallon dissolves 3 pounds of scale.



D-SCALE

MasterCare

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
D-SCALE	MasterCare® D'Scale™ Acid Scale Remover - 1 Gallon Container	EA	4

Pro-Thaw™ Liquid Dryer for Refrigerants

Chemically dries all refrigerants (R-12, R-22, R-134a, etc.), methyl chloride and methylene chloride. Frees up systems frozen due to moisture contamination in 5 minutes and prevents refreezing. Does not contain any dissolved solids, leaves no residue and works with or without solid dryers.



PRO-THAW



PRO-THAW-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
PRO-THAW-1	Pro-Thaw™ - 1 oz. Plastic Bottle	EA	24
PRO-THAW	Pro-Thaw™ - 4 oz. Plastic Bottle	EA	12

Acid Test Kit™

Detects acid in refrigeration oil. Convenient, one-step test means no chemicals to mix. Easy to evaluate. Color change indicates acidity; color intensity reveals the amount of acid present in the oil sample.



ATK-4



ATK-1



ATK-1P

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
ATK-4	Acid Test Kit™, pack of 4	EA	4
ATK-1	Acid Test Kit™	EA	1
ATK-1P	Acid Test Kit™ for POE Oil	EA	1

MasterCare® Super-Kool™ Nickel-Safe and Metal-Safe Ice Machine Cleaner

An economical, fast-acting, non-foaming acid sequestrant formula that quickly removes soil and mineral buildup. This safe, highly-concentrated, inhibited formula will not attack nickel or other metal components. USDA AUTHORIZED



SUPER-KOOL

MasterCare

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SUPER-KOOL-16	MasterCare® Super-Kool™ Ice Machine Cleaner - 16 oz. Bottle	EA	12
SUPER-KOOL	MasterCare® Super-Kool™ Ice Machine Cleaner - 1 Gallon Container	EA	4

Pro-Lube-VAC™ Vacuum Pump Oil

VP-68 Premium Vacuum Pump Oil is now based on a highly refined paraffinic based stock. This new improved formulation is lighter in color and provides better viscosity and oxidation stability than the previous formulation. VP-68 provides excellent cold start performance; formulated to meet minimum moisture content specifications.



VP68-01

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
VP68-32	Pro-Lube-VAC™ Vacuum Pump Oil - 1 Quart Jug	EA	12
VP68-01	Pro-Lube-VAC™ Vacuum Pump Oil - 1 Gallon Jug	EA	4

DEODORIZERS

Duct-Fresh™ Gel

A non-toxic, super-effective odor neutralizer for HVAC ducts, proficient at destroying stubborn odors including pet, smoke, and musty smells in residential, industrial and commercial applications. Effective for up to 6 months.



DUCT-FRESH-8

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DUCT-FRESH-8	Duct-Fresh™ Gel - 8 oz.	EA	12
DUCT-FRESH-16	Duct-Fresh™ Gel - 16 oz.	EA	8
DUCT-FRESH-40	Duct-Fresh™ Gel - 40 oz.	EA	8

Duct-Fresh™ Spray

A non-toxic, instantaneous, super-effective odor neutralizer for HVAC ducts. Destroys stubborn pet odors, smoke, and musty smells in residential, industrial and commercial applications. Great for spot-treating malodor problem areas.



DUCT-FRESH-32

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
DUCT-FRESH-32	Duct-Fresh™ Spray - 1 Quart	EA	12

Odor-Aid™

Cleans and deodorizes with an easy pump spray. Eliminates offensive odors from coils and ducts.



171AIR

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
171AIR	Odor-Aid™ - 7 oz. Bottle with Spray Top	EA	12

DISINFECTANTS

Sani C-N-D™ Coil and Drain Pan Disinfectant

EPA REGISTERED

Sani C-N-D™ is an EPA registered disinfectant, fungicide, mildewstat and viricide. It is ready-to-use and assures consistent, effective results. Sani C-N-D™ destroys "dirty sock," mildew and other malodors.



SANI-CND

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
SANI-CND-32	Sani C-N-D™ Disinfectant - 32 oz. Container	EA	12
SANI-CND	Sani C-N-D™ Disinfectant - 1 Gal. Container	EA	4
SANI-CND-5	Sani C-N-D™ Disinfectant - 5 Gallon Pail	EA	1
SANI-CND-55	Sani C-N-D™ Disinfectant - 55 Gallon Drum	EA	1

DRAIN PAN REPAIR

Pan-Kote Heavy Duty Drain Pan Patch

A super-durable rubberized coating used to fill-in and patch HVAC drain pans. Seals out rust and corrosion. Stays flexible in variable weather conditions.



641-14

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
641-14	Pan-Kote Drain Pan Patch - 14 oz. Aerosol	EA	12

COIL PROTECTANT

Pro-Lube-POE™ Polyolester

Pro-Lube POE is custom formulated for use in refrigeration compressors. This specialty lubricant is compatible with new HFC refrigerants as well as CFC and HCFC refrigerants.



POE32-32

CATALOG NO.	DESCRIPTION	UOM	ORDER MUL.
POE32-32	SUS150 ISO32 Pro-Lube-POE™ Polyolester - 1 Quart Can	EA	12

GLYCOLS

DiversiTech produces a complete line of industrial coolant and heat transfer products in the HVAC/R Industry. Our product line includes ProTek PG propylene glycol products formulated with food-grade corrosion inhibitors and ProTek EG ethylene glycol products for industrial applications. Both product groups are designed to provide freeze and burst protection and are formulated with inhibitors and antifoam agents to provide long-term stability against system corrosion and fouling.

ProTek EG™

An inhibited ethylene glycol based heat transfer fluid designed for use in hydronic, chilled and closed water.



EG

CATALOG NO.	DESCRIPTION	GYCOL/WATER RATIO	UOM	ORDER MUL.
EG	ProTek EG™ - 1 Gallon Jug	95/5	EA	4
EG-5	ProTek EG™ - 5 Gallon Pail	95/5	EA	1
EG-55	ProTek EG™ - 55 Gallon Drum	95/5	EA	1

ProTek PG 100™

ProTek 100™ is an inhibited propylene glycol based industrial heat transfer fluid and antifreeze that contains food grade corrosion inhibitors. It is suitable for use in potable water systems. ProTek 100™ is designed to provide freeze and burst protection, excellent thermal conductance, protection against corrosion and fouling and long term stability in closed recirculating water loops. ProTek 100™ provides burst protection to 100°F. Freeze points and burst points are controlled by the propylene glycol to water ratio.



PG-100

CATALOG NO.	DESCRIPTION	GYCOL/WATER RATIO	UOM	ORDER MUL.
PG-100	ProTek-100™ - 1 Gallon Jug	70/30	EA	4
PG-100-5	ProTek-100™ - 5 Gallon Pail	70/30	EA	1
PG-100-55	ProTek-100™ - 55 Gallon Drum	70/30	EA	1

ProTek PG Plus™

ProTek PG PLUS™ is an inhibited propylene glycol based industrial heat transfer fluid and anti freeze that contains food grade corrosion inhibitors. It is suitable for use in potable water systems. ProTek PG PLUS™ is designed to provide freeze and burst protection, excellent thermal conductance, protection against corrosion and fouling and long term stability in closed recirculating water loops. ProTek PG PLUS™ must be mixed with water to provide freeze and burst protection. Freeze points and burst points are controlled by the propylene glycol to water ratio.



PG-PLUS

CATALOG NO.	DESCRIPTION	GYCOL/WATER RATIO	UOM	ORDER MUL.
PG-PLUS	ProTek-Plus™ - 1 Gallon Jug	95/5	EA	4
PG-PLUS-5	ProTek-Plus™ - 5 Gallon Pail	95/5	EA	1
PG-PLUS-55	ProTek-Plus™ - 55 Gallon Drum	95/5	EA	1

ProTek BG™ for Cast Iron Water Boilers

A red liquid boiler grade product formulated specifically with corrosion inhibitors necessary for use in water boilers.



PG-BG

CATALOG NO.	DESCRIPTION	GYCOL/WATER RATIO	UOM	ORDER MUL.
PG-BG	ProTek-BG™ - 1 Gallon Jug	70/30	EA	4
PG-BG-55	ProTek-BG™ - 55 Gallon Drum	70/30	EA	1

INDOOR AIR QUALITY



INDOOR AIR QUALITY - RESIDENTIAL

Coil and Airstream Disinfection	429
Filtration Enhancement Ionization	430
Ductless Mini-Split	430
Air Filtration	431
Replacement UV lamps	432
Commercial Coil and Airstream Disinfection	433

COIL AND AIRSTREAM DISINFECTION

APCO-X ULTRA



TUV-APCOX-U

APCO-X ULTRA Air Treatment System reduces indoor air pollution and extends the life of HVAC systems, continuously treating the air in the entire home. It includes a polycarbonate housing and real-time LED lamp monitoring and lamp life timer. APCO-X ULTRA boasts a non-ozone 3-year UVC lamp and lifetime EverCarbon™ catalyst for even more disinfecting power. 24V operation and includes a 120/208/240 VAC 40VA Packard transformer. UL 2998 validated for zero ozone emissions.

CATALOG NO.	ELECTRICAL	UV LAMP	LAMP LIFE	UOM	ORDER MUL.
TUV-APCOX-U	18-32 VAC	TUVL-315	3 Years	EA	1
TUV-APCOX-UD (Dual System)	18-32 VAC	TUVL-315 (2)	3 Years	EA	1

APCO-X



TUV-APCOX-ER3

APCO-X is the result of more than a decade of development and is our most advanced indoor air treatment system and is 30% more effective than our original APCO. It combines UVC light with our EverCarbon™ catalyst to safely & effectively neutralize odor-causing VOCs and biological contaminants. It not only treats the air but also helps keep the HVAC system clean and efficient and extend it's life. Dual systems include a second remote-mounted UV light typically mounted at the coil. Validated to UL 2998 for zero ozone. Includes lifetime warranty.

CATALOG NO.	ELECTRICAL	UV LAMP	LAMP LIFE	UOM	ORDER MUL.
TUV-APCOX-ER3	18-32 VAC	TUVL-315	3 Years	EA	1
TUV-APCOX-DER3 (Dual System)	18-32 VAC	TUVL-315 (2)	3 Years	EA	1
TUV-APCOX-SI3-P	110-277 VAC	TUVL-315	3 Years	EA	1
TUV-APCOX-DI3-P (Dual System)	110-277 VAC	TUVL-315 (2)	3 Years	EA	1

APCO-X MAG


TUV-APCOX-MAG15-ER3

APCO-X MAG combines UVC light combines UVC light with our EverCarbon™ catalyst to safely & effectively neutralize odor-causing VOCs and biological contaminants. It features a 110 lb. rubber coated antivibration magnet for mounting inside air system. It not only treats the air but also helps keep the HVAC system clean and efficient and extend it's life. Dual systems include a second remote-mounted UV light typically mounted at the coil. Validated to UL 2998 for zero ozone. Includes lifetime warranty.

CATALOG NO.	ELECTRICAL	UV LAMP	LAMP LIFE	UOM	ORDER MUL.
TUV-APCOX-MAG15-ER3	18-32 VAC	TUVL-315	3 Years	EA	1
TUV-APCOX-MAG15-ST3	110-277 VAC	TUVL-315	3 Years	EA	1
TUV-APCOX-MAG15-DT3 (Dual System)	110-277 VAC	TUVL-315 (2)	3 Years	EA	1
TUV-APCOX-MAG11-ER3	18-32 VAC	TUVL-315	3 Years	EA	1
TUV-APCOX-MAG11-ST3	110-277 VAC	TUVL-315	3 Years	EA	1

APCO-ONE



TUV-APCO-ONE

The APCO-ONE system is designed to improve air quality and HVAC equipment performance and efficiency. Same great technology from the APCO family of products, now with polycarbonate housing and real-time LED lamp monitoring and lamp life timer. With its advanced non-ozone 2-year UVC lamp and lifetime EverCarbon™ catalyst, APCO-ONE helps maintain a healthy HVAC system while neutralizing microorganisms that would otherwise recirculate throughout the home or building. 24V operation and includes a 120/208/240 VAC 40VA Packard transformer. UL 2998 validated for zero ozone emissions.

CATALOG NO.	ELECTRICAL	UV LAMP	LAMP LIFE	UOM	ORDER MUL.
TUV-APCO-ONE	18-32 VAC	TUVL-315	2 Years	EA	1

APCO



TUV-APCO-ER2

The original APCO system cleans the air by combining UVC light and activated carbon; two technologies proven to be most effective at neutralizing germs, and odor-causing by reducing chemical vapors known as volatile organic compounds (VOCs). It also helps keep the HVAC system clean and efficient and extend it's life. Dual systems include a second remote-mounted UV light typically mounted at the coil. Validated to UL 2998 for zero ozone. Includes lifetime warranty.

CATALOG NO.	ELECTRICAL	UV LAMP	LAMP LIFE	UOM	ORDER MUL.
TUV-APCO-ER	18-32 VAC	TUVL-115	1 Year	EA	1
TUV-APCO-ER2	18-32 VAC	TUVL-215	2 Years	EA	1
TUV-APCO-DER (Dual System)	18-32 VAC	TUVL-115 TUVL-115-P	1 Year	EA	1
TUV-APCO-DER2 (Dual System)	18-32 VAC	TUVL-215 TUVL-215-P	2 Years	EA	1
TUV-APCO-SI2-P	110-277 VAC	TUVL-215	2 Years	EA	1
TUV-APCO-DI2-P (Dual System)	110-277 VAC	TUVL-215 TUVL-215-P	2 Years	EA	1

APCO MAG


TUV-APCOX-MAG15-ER3

APCO MAG is designed for internal mounting using a magnet (or screws) and is available with either a 15" lamp (6 cells) or 11" lamp (4 cells). Validated to UL 2998 for zero ozone. Includes lifetime warranty.

CATALOG NO.	ELECTRICAL	UV LAMP	LAMP LIFE	UOM	ORDER MUL.
TUV-APCO-MAG11-ER2	18-32 VAC	TUVL-111P	1 Year	EA	1
TUV-APCO-MAG15-ER2	18-32 VAC	TUVL-211P	2 Years	EA	1
TUV-APCO-MAG15-DT2 (Dual System)	110-277 VAC	TUVL-211P (2)	2 Years	EA	1

COIL AND AIRSTREAM DISINFECTION

Blue-Tube UV-X



TUV-BTX-ER3

Blue-Tube UV-X is our most advanced HVAC UV light yet, with 3-year lamp life and an improved electronic power supply. It features a 110 lb. rubber coated antivibration magnet for mounting inside air system. It's the simple, safe, and effective way to keep the HVAC system clean and improve indoor air quality. The powerful UVC light neutralizes germs continuously and is known for its reliability, ease of installation, innovative features and quality components. Validated to UL 2998 for zero ozone. Includes lifetime warranty.

CATALOG NO.	ELECTRICAL	UV LAMP	LAMP LIFE	UOM	ORDER MUL.
TUV-BTX-ER3	18-32 VAC	TUVL-315	3 Years	EA	1
TUV-BTX-ST3	110-277 VAC	TUVL-315	3 Years	EA	1

Blue-Tube UV



TUV-BT-ER2

Blue-Tube UV is the single most popular germicidal UV light product for HVAC systems in the world. Home owners breathe easy knowing that the air their family breathes is protected by this proven technology. Blue-Tube UV is the simple, safe, and effective way to keep your air system clean and improve indoor air quality. Validated to UL2998 for zero ozone. Includes lifetime warranty.

CATALOG NO.	ELECTRICAL	UV LAMP	LAMP LIFE	UOM	ORDER MUL.
TUV-BT-ER	18-32 VAC	TUVL-115P	1 Year	EA	1
TUV-BT-ER2	18-32 VAC	TUVL-215P	2 Years	EA	1
TUV-ST-ER	110-277 VAC	TUVL-115P	1 Year	EA	1
TUV-ST-ER2	110-277 VAC	TUVL-215P	2 Years	EA	1

DUCTLESS MINI-SPLIT

Mini UV LED



TUV-MINI-LED-SW

Mini UV LED is the first-of-its-kind UV light LED system for mini-splits and similar limited space applications. Like all A/C systems, mini-splits are prone to internal mold growth and microbial contamination, particularly on and near the blower wheel. The replaceable 5-year LED light strip in is designed to keep surfaces clean while having no impact on plastic materials. Validated to UL 2998 for zero ozone. Includes 5 year warranty.

CATALOG NO.	ELECTRICAL	LED LIFE	UOM	ORDER MUL.
TUV-MINI-LED-SW	110-277 VAC	5 Years	EA	1



Mini UV LED in mini-split

AHU Series 1



TUV-200D-I

The AHU Series 1 germicidal UV light system is installed in the central air system where it neutralizes mold, viruses and bacteria. It also suppresses mold growth on the cooling coils and surrounding areas while generally improving indoor air quality throughout the home. It features a water-tight commercial grade power supply and is available in single & dual lamp configurations for comprehensive UV light disinfection. Validated to UL2998 for zero ozone. Includes lifetime warranty.

CATALOG NO.	ELECTRICAL	UV LAMP	LAMP LIFE	UOM	ORDER MUL.
TUV-100S-I	110-277 VAC	TUVL-115P	1 Year	EA	1
TUV-100D-I (Dual System)	110-277 VAC	TUVL-115P	1 Year	EA	1
TUV-200S-I	110-277 VAC	TUVL-215P	2 Years	EA	1
TUV-200D-I (Dual System)	110-277 VAC	TUVL-215P	2 Years	EA	1

FILTRATION ENHANCEMENT IONIZATION

ENHANCE-ION



TUV-BIPO-ER

ENHANCE-ION™ is installed inside the air system to improve indoor air quality. ENHANCE-ION enhances the ability of the HVAC filter to capture airborne contaminants and pollutants such as PM2.5 (fine particulate matter less than 2.5 microns in diameter), as well as airborne contaminants and pollutants effectively turning a standard filter into a high-efficiency filter. In laboratory tests, ENHANCE-ION increases capture efficiency by up to 30%. Includes a 3 year warranty.

CATALOG NO.	ELECTRICAL	DIMENSIONS	UOM	ORDER MUL.
TUV-BIPO-ER	18-32 VAC	5"L x 3.1"H x 1.9"D	EA	1

AIR FILTRATION

Purity Low Profile (PLP)

PLP offers high-efficiency polarized filtration with low static pressure which provides continuous (multiple pass) high-efficiency filtration. Validated to UL2998 for zero ozone. Includes lifetime warranty.



TUV-PLP-20X20NB

CATALOG NO.	SIZE	ELECTRICAL	UOM	ORDER MUL.
TUV-PLP-20X25NB	20" X 25"	24VAC	EA	1
TUV-PLP-20X24NB	20" X 24"	24VAC	EA	1
TUV-PLP-20X22NB	20" X 22"	24VAC	EA	1
TUV-PLP-20X20NB	20" X 20"	24VAC	EA	1
TUV-PLP-18X20NB	18" X 20"	24VAC	EA	1
TUV-PLP-18X18NB	18" X 18"	24VAC	EA	1
TUV-PLP-16X16NB	16" X 16"	24VAC	EA	1
TUV-PLP-16X25NB	16" X 25"	24VAC	EA	1
TUV-PLP-16X24NB	16" X 24"	24VAC	EA	1
TUV-PLP-16X20NB	16" X 20"	24VAC	EA	1
TUV-PLP-14X25NB	14" X 25"	24VAC	EA	1
TUV-PLP-14X24NB	14" X 24"	24VAC	EA	1
TUV-PLP-14X20NB	14" X 20"	24VAC	EA	1
TUV-PLP-12X12NB	12" X 12"	24VAC	EA	1
TUV-PLP-12X20NB	12" X 20"	24VAC	EA	1
TUV-PLP-12X24NB	12" X 24"	24VAC	EA	1
TUV-PLP-14X14NB	14" X 14"	24VAC	EA	1
TUV-PLP-14X30NB	14" X 30"	24VAC	EA	1
TUV-PLP-15X20NB	15" X 20"	24VAC	EA	1
TUV-PLP-16X30NB	16" X 30"	24VAC	EA	1
TUV-PLP-18X24NB	18" X 24"	24VAC	EA	1
TUV-PLP-20X30NB	20" X 30"	24VAC	EA	1
TUV-PLP-24X24NB	24" X 24"	24VAC	EA	1
TUV-PLP-24X30NB	24" X 30"	24VAC	EA	1
TUV-PLP-25X25NB	25" X 25"	24VAC	EA	1
TUV-PLP-16.500X21.625NB	16.5" X 21.625"	24VAC	EA	1
TUV-PLP-20X21.625NB	20" X 21.625"	24VAC	EA	1
TUV-PLP-21.500X23.250NB	21.5" X 23.25"	24VAC	EA	1

(PLP) Replacement Media

Media should be replaced every 3-6 months on average.



TUV-PLP-20X20NB

CATALOG NO.	SIZE	UOM	ORDER MUL.
TUV-PLPM-1-20X25NB	20" X 25"	EA	1
TUV-PLPM-1-20X24NB	20" X 24"	EA	1
TUV-PLPM-1-20X22NB	20" X 22"	EA	1
TUV-PLPM-1-20X20NB	20" X 20"	EA	1
TUV-PLPM-1-18X20NB	18" X 20"	EA	1
TUV-PLPM-1-18X18NB	18" X 18"	EA	1
TUV-PLPM-1-16X16NB	16" X 16"	EA	1
TUV-PLPM-1-16X25NB	16" X 25"	EA	1
TUV-PLPM-1-16X24NB	16" X 24"	EA	1
TUV-PLPM-1-16X20NB	16" X 20"	EA	1
TUV-PLPM-1-14X25NB	14" X 25"	EA	1
TUV-PLPM-1-14X24NB	14" X 24"	EA	1
TUV-PLPM-1-14X20NB	14" X 20"	EA	1
TUV-PLPM-1-12X12NB	12" X 12"	EA	1
TUV-PLPM-1-12X20NB	12" X 20"	EA	1
TUV-PLPM-1-12X24NB	12" X 24"	EA	1
TUV-PLPM-1-14X14NB	14" X 14"	EA	1
TUV-PLPM-1-14X30NB	14" X 30"	EA	1
TUV-PLPM-1-15X20NB	15" X 20"	EA	1
TUV-PLPM-1-16X30NB	16" X 30"	EA	1
TUV-PLPM-1-18X24NB	18" X 24"	EA	1
TUV-PLPM-1-20X30NB	20" X 30"	EA	1
TUV-PLPM-1-24X24NB	24" X 24"	EA	1
TUV-PLPM-1-24X30NB	24" X 30"	EA	1
TUV-PLPM-1-25X25NB	25" X 25"	EA	1
TUV-PLPM-1-16.50X21.625NB	16.5" X 21.625"	EA	1
TUV-PLPM-20X21.625NB	20" X 21.625"	EA	1
TUV-PLPM-21.500X23.250NB	21.5" X 23.25"	EA	1

REPLACEMENT UV LAMPS

Residential Replacement UV Lamps

UVC lamps lose effectiveness over time but will continue to produce visible light after they have lost their germicidal effectiveness. For this reason it is necessary to replace them every one, two, or three years depending on type.

CATALOG NO.	LENGTH	LAMP LIFE	FITS	UOM	ORDER MUL.
TUVL-315	15"	3 Years	TUV-APCOX-U TUV-APCOX-UD TUV-APCOX-ER3 TUV-APCOX-DER3 TUV-APCOX-SI3-P TUV-APCOX-DI3-P TUV-APCOX-MAG15-ER3 TUV-APCOX-MAG15-ST3 TUV-APCOX-MAG15-DT3 TUV-BTX-ER3 TUV-BTX-ST3	EA	1



CATALOG NO.	LENGTH	LAMP LIFE	FITS	UOM	ORDER MUL.
TUVL-311	11"	3 Years	TUV-APCOX-MAG11-ER3 TUV-APCOX-MAG11-ST3	EA	1



CATALOG NO.	LENGTH	LAMP LIFE	FITS	UOM	ORDER MUL.
TUVL-215	15"	2 Years	TUV-APCO-SI2-P TUV-APCO-DI2-P TUV-APCO-ONE	EA	1



CATALOG NO.	LENGTH	LAMP LIFE	FITS	UOM	ORDER MUL.
TUVL-215P	15"	2 Years	TUV-BT-ER2 TUV-BT-ST2	EA	1




CATALOG NO.	LENGTH	LAMP LIFE	FITS	UOM	ORDER MUL.
TUVL-115	15"	1 Year	TUV-APCO-ER TUV-APCO-DER	EA	1



CATALOG NO.	LENGTH	LAMP LIFE	FITS	UOM	ORDER MUL.
TUVL-115P	15"	1 Year	TUV-BT-ER TUV-BT-ST	EA	1



CATALOG NO.	LENGTH	LAMP LIFE	FITS	UOM	ORDER MUL.
TUVL-211	11"	2 Years	TUV-APCO-MAG11-ER2 TUV-APCO-RT-ER2 TUV-APCO-RT-ST2 TUV-APCO-RT-DT2	EA	1



CATALOG NO.	ELECTRICAL	LAMP LIFE	FITS	UOM	ORDER MUL.
TUV-MINI-LED-SW	110-277 VAC	5 Years	TUV-MINI-LED-SW	EA	1




COMMERCIAL COIL AND AIRSTREAM DISINFECTION

Blue-Tube XL

Blue-Tube XL is designed to improve indoor air quality by reducing airborne viruses, bacteria, and allergens. When coil-mounted it also saves energy and maintenance costs associated with commercial HVAC. A biofilm of only 0.002" can reduce efficiency by 37%.

Blue-Tube XL offers easy and flexible installation and includes an advanced multi-voltage, water-resistant power supply. All parts (except lamps) are covered by a lifetime warranty. This system also improves indoor air quality by neutralizing airborne bacteria, viruses, and allergens. Validated to UL 2998 for zero ozone. Includes lifetime warranty.

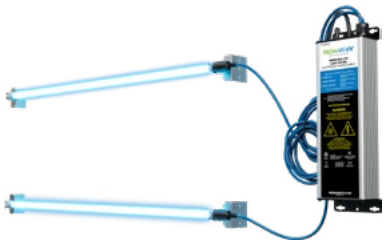

TUV-BTXL-232D
Coil Mount Configuration



TUV-BTXL-232D
Duct Mount Configuration

CATALOG NO.	LAMP LENGTH	LAMP COUNT	REPLACEMENT LAMP	UOM	ORDER MUL.
TUV-BTXL-232S	32"	1	TUVCL-232HO	EA	1
TUV-BTXL-232D	32"	2	TUVCL-232HO	EA	1
TUV-BTXL-246S	46"	1	TUVCL-246HO	EA	1
TUV-BTXL-246D	46"	2	TUVCL-246HO	EA	1
TUV-BTXL-260S	60"	1	TUVCL-260HO	EA	1
TUV-BTXL-260D	60"	2	TUVCL-260HO	EA	1



Blue-Tube XL
in cooling coil

Blue-Tube XL
Coil Mount Installation

COIL SIZING CHART FOR AHU UNITS

COIL HEIGHT \ COIL WIDTH	33"	40"	47"	56"	61"	72"	82"	98"	108"	120"	144"
24"	232S	232S	246S	246S	260S	260S	260S	246D	246D	260D	260D
32"	232S	232S	246S	246S	260S	260S	260S	246D	246D	260D	260D
40"	232S	232S	246S	246D	260S	260D	260D	246D (2)	246D (2)	260D	260D
56"	232D	232D	246D	246D	260D	260D	260D	246D (2)	246D (2)	260D (2)	260D (2)
62"	232D	232D	246D	246D	260D	260D	260D	246D (2)	246D (2)	260D (2)	260D (2)
72"	232D	232D	246D	246D	260D	260D	260D	246D (2)	246D (2)	260D (2)	260D (2)
82"	232D	232D	246D	246D	260D	260D	246D (2)	246D (3)	246D (3)	260D (3)	260D (3)
98"	232D (2)	232D (2)	246D (2)	246D (2)	260D (2)	260D (2)	246D (3)	246D (4)	246D (4)	260D (4)	260D (4)
108"	232D (2)	232D (2)	246D (2)	246D (2)	260D (2)	260D (2)	246D (3)	246D (4)	246D (4)	260D (4)	260D (4)
120"	232D (2)	232D (2)	246D (2)	246D (2)	260D (2)	260D (2)	246D (3)	246D (4)	260D (4)	260D (4)	260D (4)
144"	232D (2)	232D (2)	246D (2)	246D (2)	260D (2)	260D (4)	246D (4)	246D (4)	260D (4)	260D (4)	260D (4)

Blue-Tube XL Replacement Lamps

CATALOG NO.	LENGTH	LAMP LIFE	OUTPUT	COATING	UOM	ORDER MUL.
TUVCL-232HO	32"	2 Years	High	None	EA	1



TUVCL-246HO	46"	2 Years	High	None	EA	1



TUVCL-260HO	60"	2 Years	High	None	EA	1

THERMOSTATS and CONTROLS



800 Series
800 Series Thermostats 435

700 Series
700 Series Thermostats 435

WIFI
WIFI Thermostats 436

ACCESSORIES
PRO1 Accessory 436

WIRELESS
700 Series Thermostats 437

PROsync
700 Series Thermostats 437

600 Series
600 Series Thermostats 438

500 Series
500 Series Thermostats 438

800 SERIES

THERMOSTATS

Striking designs and the perfect blend of advanced features that are easy to use.

Features

Glow In The Dark Light Button
Color Coded Terminal Blocks
Large Easy To Read Displays
Private Label Badge System
Interchangeable Subbase



T855SH

CATALOG NO.	HEAT AND COOL STAGES	POWER SOURCE	PROGRAMMING	UOM	OM
T855SH	Up to 2 Heat, 2 Cool Conventional Up to 5 Heat, 3 Cool Heat Pump	Battery or Hardwire	7 Day, 5/1/1 or Non-Programmable	EA	1
T855	Up to 2 Heat, 2 Cool Conventional Up to 3 Heat, 2 Cool Heat Pump	Battery or Hardwire	7 Day, 5/1/1 or Non-Programmable	EA	1
T805	1 Heat, 1 Cool Only	Battery or Hardwire	7 Day, 5/1/1 or Non-Programmable	EA	1

700 SERIES

THERMOSTATS

Striking designs and the perfect blend of advanced features that are easy to use.

CATALOG NO.	HEAT AND COOL STAGES	POWER SOURCE	PROGRAMMING	UOM	OM
T771	1 Heat, 1 Cool Only	Battery or Hardwire	Non-Programmable	EA	1
T755S*	Up to 2 Heat, 2 Cool Conventional Up to 3 Heat, 2 Cool Heat Pump	Battery or Hardwire	7 Day, 5/1/1 or Non-Programmable	EA	1
T755	Up to 2 Heat, 2 Cool Conventional Up to 3 Heat, 2 Cool Heat Pump	Battery or Hardwire	7 Day, 5/1/1 or Non-Programmable	EA	1
T751	Up to 2 Heat 2 Cool Conventional Up to 3 Heat 2 Cool Heat Pump	Battery or Hardwire	Non-Programmable	EA	1
T731	Up to 1 Heat 1 Cool Conventional Up to 2 Heat 1 Cool Heat Pump	Battery or Hardwire	Non-Programmable	EA	1
T725	1 Heat, 1 Cool Conventional 2 Heat, 1 Cool Heat Pump	Battery or Hardwire	7 Day, 5/1/1 or Non-Programmable	EA	1
T721	1 Heat, 1 Cool Conventional 2 Heat, 1 Cool Heat Pump	Battery or Hardwire	Non-Programmable	EA	1
T715	2 Heat, 2 Cool	Battery or Hardwire	7 Day, 5/1/1 or Non-Programmable	EA	1
T705	1 Heat, 1 Cool Only	Battery or Hardwire	7 Day, 5/1/1 or Non-Programmable	EA	1
T701	1 Heat, 1 Cool Only	Battery or Hardwire	Non-Programmable	EA	1

*Compatible With Wired Remote Sensors



T701



T721



T755



T771

WIFI THERMOSTATS

WIFI THERMOSTATS

Connected homes are a rapidly growing market segment and homeowners are requesting connected devices more every day. With PRO1, you have three great and reliable models to oer with condence



T855iSH



T701i, T721i, T751i

Features

Exclusively for HVAC professionals
ENERGY STAR compliant
Compatible with every PRO1 subbase (T855iSH)
Compatible with any 2H/1C Heat Pump or 1H/1C Conventional PRO1 subbase (T721i)
Compatible with any 1H/1C Conventional PRO1 subbase (T701i)

CATALOG NO.	HEAT AND COOL STAGES	POWER SOURCE	PROGRAMMING	UOM	OM
T855iSH	Up to 2 Heat, 2 Cool Conventional Up to 5 Heat, 3 Cool Heat Pump	Hardwire Only	7 Day or Non-Programmable	EA	1
T751i	2 Heat, 2 Cool Heat Pump 4 Heat, 2 Cool Conventional	Hardwire Only	Programmable Through App	EA	1
T721i	2 Heat, 1 Cool Heat Pump 1 Heat, 1 Cool Conventional	Hardwire Only	Programmable Through App	EA	1
T701i	1 Heat, 1 Cool Only	Hardwire Only	Programmable Through App	EA	1

THERMOSTAT ACCESSORIES

PRO1 ACCESSORY

CATALOG NO.	TITLE	DESCRIPTION	WORKS WITH	UOM	OM
R250S	Wired Outdoor or Slab Sensor	The R250S can be wired to any Pro1 wired sensor capable thermostat. This accessory allows you to sense temperature anywhere. It can be used as an outdoor sensor or as a slab (floor) sensor!	T755S T855SH T855iSH	EA	1
R251S	Wired Indoor Remote Sensor	The R251S can be wired to any Pro1 wired sensor capable thermostat. This accessory allows you to sense temperature anywhere. Move sensing location away from the thermostat!	T755S T855SH T855iSH	EA	1
T150	Thermostat Guard	Protect your thermostat with this commercial grade locking thermostat guard which can be installed without removing the existing thermostat. This is a perfect solution for installs in high traffic areas.	Any Thermostat	EA	1
T119	Universal Wall Plate	Cover up wall marks when updating thermostats using the T119. This heavy-duty plastic plate fits on all Pro1 sub-bases in both vertical and horizontal mounting applications. It even fits inside the T150 Thermostat Guard.	Any Thermostat	EA	1
E219	Weather Resistant Junction Box	The E219 is an optional accessory to WW160W (Wireless Wire.) When WW160W is installed outdoors, it must be weather protected. The E219 is a weather resistant junction box that can be used to weather protect WW160W.	Any Thermostat	EA	1



R250S



R251S

WIRELESS THERMOSTATS

WIRELESS THERMOSTATS

If you are upgrading systems, want to move a thermostat's location, or need extra wires for any reason, the T755WHO is the perfect solution. Simply wire the equipment module to the air handler and place the thermostat exactly where you want it maximizing comfort, control, and convenience. The PROsync™ Wireless System is the perfect solution to add a premium look and performance at an aordable price.



T731WO

Features

Exclusively for HVAC professionals Compatible with every PRO1 subbase Occupancy Sensor

CATALOG NO.	HEAT AND COOL STAGES	POWER SOURCE	PROGRAMMING	UOM	OM
T731WO	Up to 1 Heat, 1 Cool Conventional Up to 2 Heat, 1 Cool Heat Pump	Battery or Hardwire	Non-Programmable	EA	1
T731W	Up to 1 Heat, 1 Cool Conventional Up to 2 Heat, 1 Cool Heat Pump	Battery or Hardwire	Non-Programmable	EA	1

PROSYNC™ Wireless System

PROSYNC WIRELESS SYSTEM

CATALOG NO.	HEAT AND COOL STAGES	POWER SOURCE	PROGRAMMING	UOM	OM
T755WHO	Up to 2 Heat, 2 Cool Conventional Up to 4 Heat, 2 Cool Heat Pump	Battery or Hardwire	7 Day, 5/1/1 or Non-Programmable	EA	1
R751WO	Up to 1 Heat, 1 Cool Conventional Up to 2 Heat, 1 Cool Heat Pump	Battery or Hardwire	Non-Programmable	EA	1
R250W	Wireless Outdoor Remote Sensor	Battery	N/A	EA	1



T755WHO

600 SERIES

Simple and heavy-duty products at a great price, perfect for new construction.

CATALOG NO.	HEAT AND COOL STAGES	POWER SOURCE	PROGRAMMING	UOM	OM
T601-2	1 Heat, 1 Cool	Battery or Hardwire	Non-Programmable	EA	1
T605-2	1 Heat, 1 Cool	Battery or Hardwire	7 Day or 5/1/1 Programmable	EA	1
T621-2	1 Heat, 1 Cool Conventional 2 Heat, 1 Cool Heat Pump	Battery or Hardwire	Non-Programmable	EA	1
T625-2	1 Heat, 1 Cool Conventional 2 Heat, 1 Cool Heat Pump	Battery or Hardwire	7 Day or 5/1/1 Programmable	EA	1



T605-2




T621-2

500 SERIES

Mechanical/Line Voltage Thermostats

By utilizing the universal subbase system and FREE private label badge the, T501M gives installers the features they love at an affordable price. The innovative, interchangable switches and face plates create three thermostats in one.



T501M

Features

Mercury Free (T501ML2 & T501ML4)

CATALOG NO.	HEAT AND COOL STAGES	POWER SOURCE	PROGRAMMING	UOM	OM
T501M	1 Heat, 1 Cool	24 Volt Mechanical	Non-Programmable	EA	1
T501ML2	Heat Only	Two Wire	Non-Programmable	EA	1
T501ML4	Heat Only	Four Wire	Non-Programmable	EA	1



T501ML2

About DiversiTech

Founded in 1971, DiversiTech® Corporation is North America's largest manufacturer of equipment pads and a leading manufacturer and supplier of components and related products for the heating, ventilating, air conditioning, and refrigeration (HVAC/R) industry. Headquartered in the Atlanta, Ga. metropolitan area, DiversiTech's mission for its wholesaler partners is to simplify their work. The Company is focused on growth through internal product development, external partnerships, and acquisition. Manufacturing a suite of products, which includes a wide range of mechanical, electrical, chemical, and structural parts for HVAC/R systems, DiversiTech brings unparalleled scaling capabilities and supplier expertise. The Company holds numerous patents and operates an advanced R & D materials division dedicated to bringing more value to its customers. The Company maintains over 1 million square feet of manufacturing and distribution space in key U.S., Canadian and European locations. DiversiTech has enjoyed a continued history of successful growth and has acquired industry recognized brand names including hilmor®, Imperial®, Quick-Sling®, UltraLite®, Spin® Tools, SpeedClean®, and Fresh-Aire UV®.















DiversiTech®

Duluth, GA 30097
678.542.3600
800.995.2222
www.diversitech.com
©2024 DiversiTech Corporation