




Concealed Z6152AV Model For Water Closets

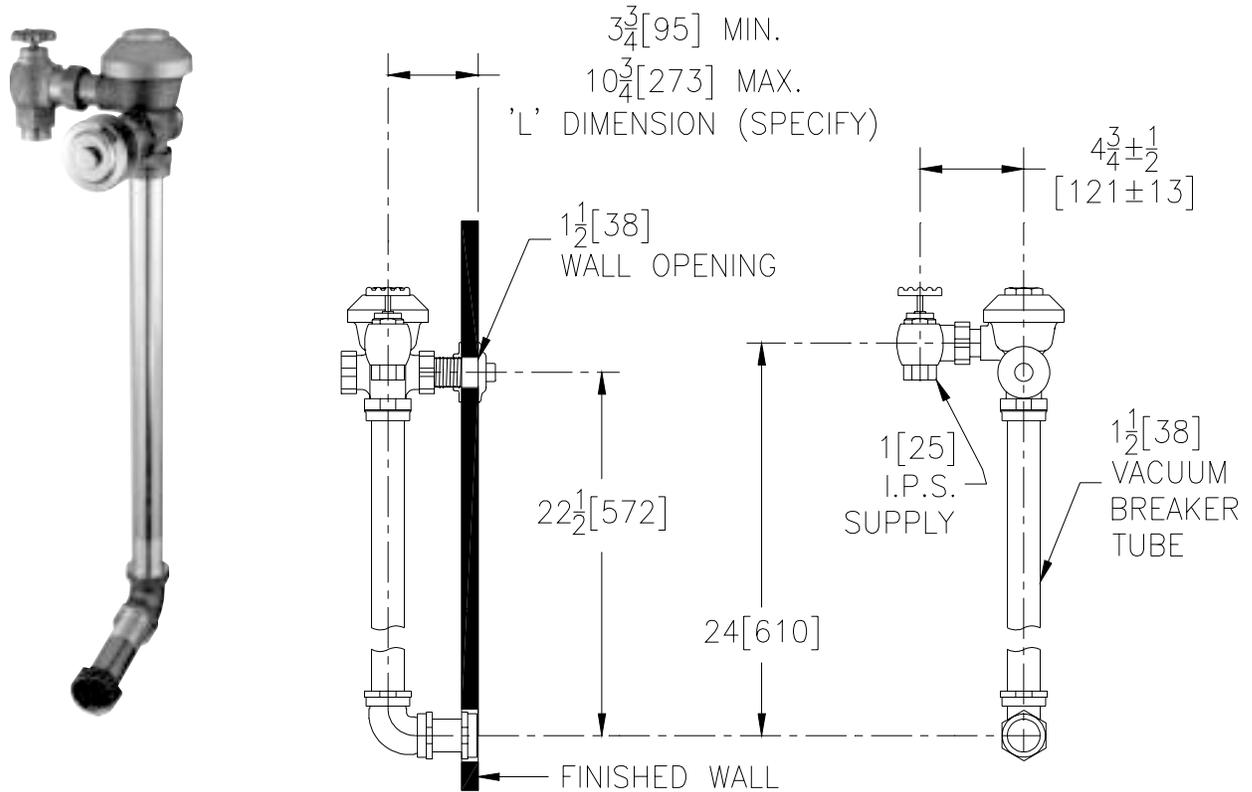

Flow Options

- | | | |
|--------------------------|-----------------------|--------------------------|
| <input type="checkbox"/> | -WS1 | 1.6 Gal. Low Consumption |
| <input type="checkbox"/> | -FF | 4.5 Gal. Ful Flush |
| <input type="checkbox"/> | Standard Flush | 3.5 Gallons Per Flush |

Suffix Options (Check/Specify Appropriate Options)

- | | | |
|-------|------------|-----------------------------|
| _____ | -BG | BioCare Handle |
| _____ | -J | Metal Oscilating ADA Handle |
| _____ | -L3 | 3" [76] Metal Push Button |
| _____ | | Other |

ENGINEERING SPECIFICATION: ZURN Z6152AV

AquaVantage® 'AV' Concealed Closet Flush Valve- Concealed, quiet diaphragm-type rough brass flushometer valve with Zurn's AquaVantage® TPE, chloramine resistant, dual seal diaphragm with a clog resistant, triple filtered by-pass. The valve is complete with a non-hold open and no leak push button feature, high back pressure vacuum breaker, one piece hex coupling nut, adjustable tailpiece and spud coupling for back spud connection. Control stop has internal siphon-guard protection, and a sweat solder kit. Internal seals are made of chloramine resistant materials.

This space is for Architectural/engineering Approval