




Y-Branches

A.Y. McDonald Service Fittings are made in the United States of America and are manufactured to meet or exceed the AWWA C800 (latest revision) standard. Our service fittings are rated to withstand the same pressures as the tubing they are designed to fit. They are designed and tested for cold potable water **only**. EPDM rubber gaskets are used in our compression fittings.

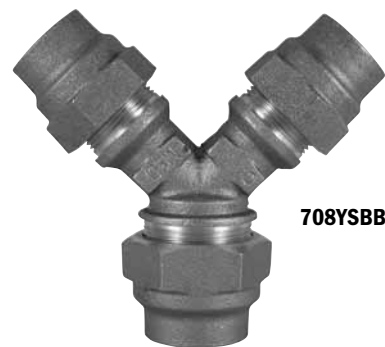

708YSBB

To order Y-Branch Assemblies: Model No. 08Y2CC 1 x 3/4 means:

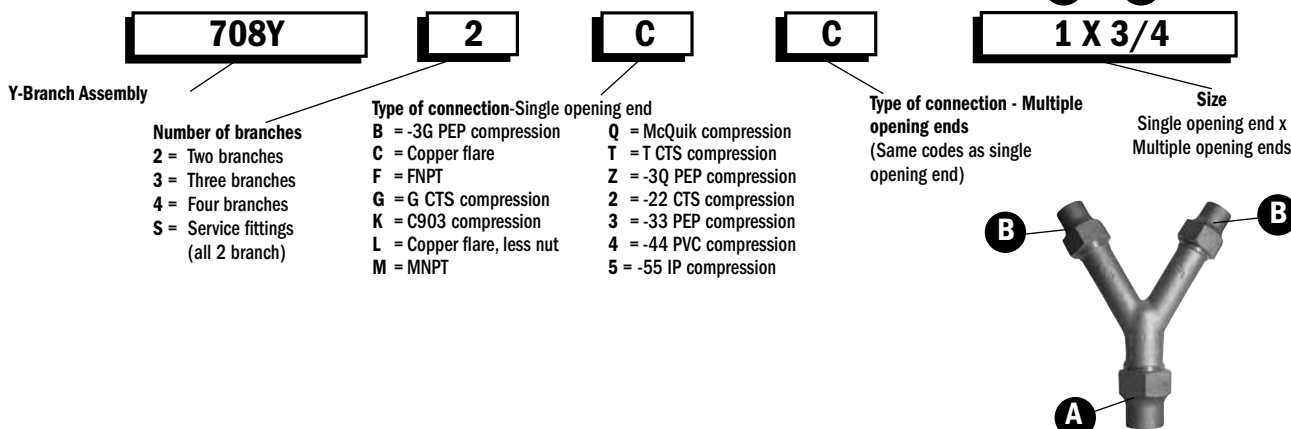

			708YSCC	708YS22	708YSGG	708YSQQ	708YSTT
Size	Single End	Multiple Ends	Flare x Flare	-22 CTS Compression x -22 CTS Compression	G CTS Compression x G CTS Compression	Q CTS Compression x Q CTS Compression	T CTS Compression x T CTS Compression
1" x 3/4"	1"	3/4"	●	●	●	●	●
1 1/4" x 1"	1 1/4"	1"		●	●	●	●
1 1/2" x 1"	1 1/2"	1"		●	●	●	●
2" x 1"	2"	1"		●	●	●	●

			708YS33	708YSBB	708YSZZ	708YS44	708YS55
Size	Single End	Multiple Ends	-33 PEP Compression x -33 PEP Compression	-3G PEP Compression x -3G PEP Compression	-3Q PEP Compression x -3Q PEP Compression	-44 PVC Compression x -44 PVC Compression	-55 IP Compression x -55 IP Compression
1" x 3/4"	1"	3/4"	●	●	●	●	●

			708YSMC	708YSM2	708YSMG	708YSMQ	708YSMT
Size	Single End	Multiple Ends	MNPT x Flare	MNPT x -22 CTS Compression	MNPT x G CTS Compression	MNPT x Q CTS Compression	MNPT x T CTS Compression
1" x 3/4"	1"	3/4"	●	●	●	●	●

OPTIONS

- For Handyloc - Replace "Q" or "-3Q" with "H" or "-3H" in 3/4" & 1" **only**.
- For C903 tube - Replace "Q" with "K". On "Q" Series options only 3/4" x 1" **only**.
- For valve or fitting less flare nut add "L" to end of model number.
- CTS Anode (QA) & Flare Anode (A) - Replace "Q" with QA or add "A" to flare.
- Insert stiffeners are **required** on all flexible plastic connections. See page 23.
- See page 15 for Flare conversion adapters.