



Buy it for looks. Buy it for life.®

Specifications

DESCRIPTION


- Brass construction various finishes identified by suffix
- Designed to allow replacement of a 2 or 3 handle tub/shower valve.
- Installation requires a minimum clearance of 6" between horizontal \mathcal{C} (critical level) and spout outlet \mathcal{C} .
- Fits all 1 handle tub/showers with 7" escutcheon

STANDARDS

- Designed and manufactured to comply with the requirements of: CSA B125 and ASME A112.18.1M and all requirements referenced therein


WARRANTY

- Warranted for one year against material or manufacturing defects




Tub/Shower Cover Plate


<u>MODEL</u>	<u>FINISH</u>
1920	Chrome
1920P	Polished Brass
1920BN	Brushed Nickel
1920ORB	Oil Rubbed Bronze

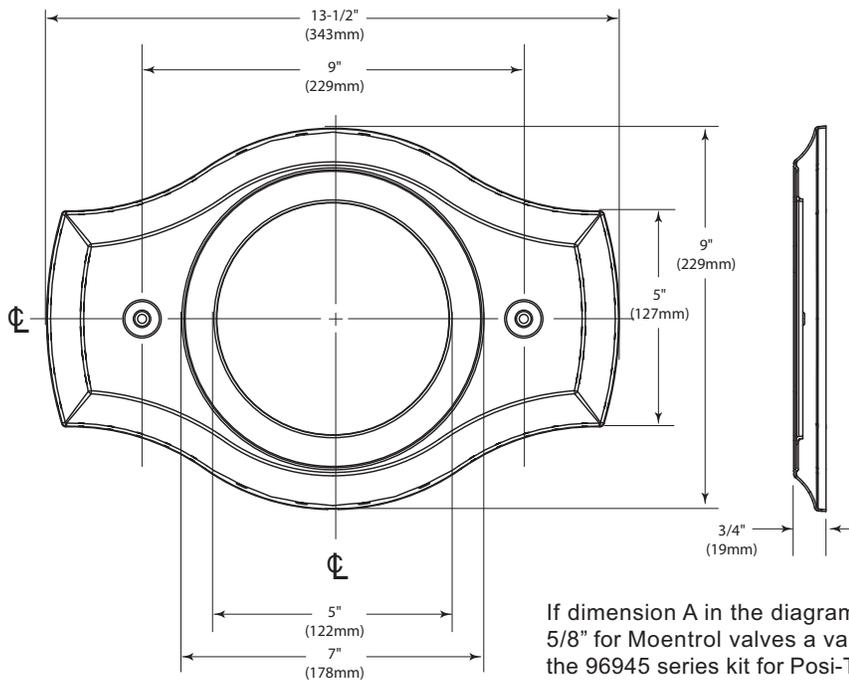

If dimension A in the diagrams below exceeds 2" for Posi-Temp valves or 1-5/8" for Moentrol valves a valve extension kit will be required. Please order the 96945 series kit for Posi-Temp valves and the 137347 series kits for Moentrol valves (must designate finish)



Posi-Temp Valve

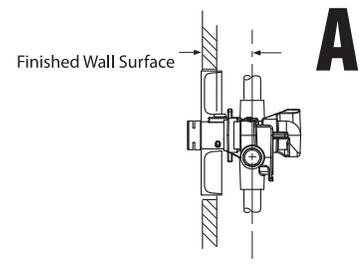

Moentrol Valve

CRITICAL DIMENSIONS

(DO NOT SCALE)