



**Rhythm®**  
Drop-in Bathroom Sink  
**K-2603-SU**

**Features**

- 20-gauge stainless steel.
- Drop-in.
- Oval basin.
- Without overflow.
- No faucet holes; requires wall- or counter-mount faucet.
- 23-1/8" (587 mm) x 15-1/4" (387 mm)

**Recommended Accessories**

K- 7114 Pop-Up Drain  
K- 7127 Drain  
K- 7129 Drain  
K- 8998 P-Trap

**Components**

Additional included component/s: Basin clamp accessory (2-packs), drain gasket, and tube.




**ADA**

**Codes/Standards**

ASME A112.19.3/CSA B45.4  
ADA  
ICC/ANSI A117.1

**KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.

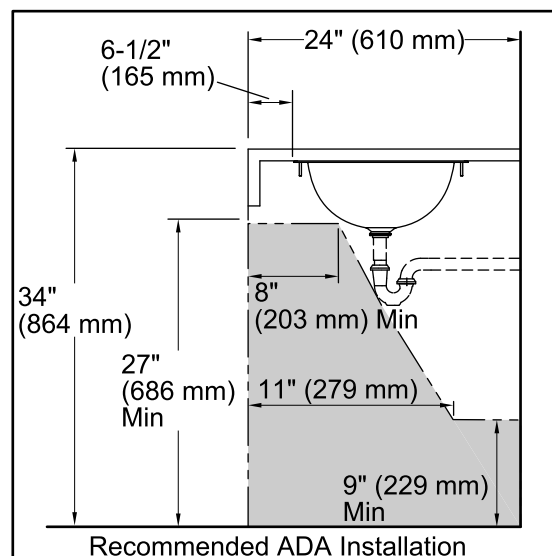

Minimum faucet spout reach of 5" (127 mm) is required. Review bathroom sink and faucet rough-in dimensions carefully to ensure the spout will reach over the rim into the basin.

Supplied basin clamp assembly requires 3/4" (19 mm) minimum countertop thickness. Installer must supply anchors for thinner countertops.

**NOTICE:** Countertop manufacturer or cutter must use the cut-out template provided by Kohler Co. (call 1-800-4- KOHLER). Kohler Co. is not responsible for cut out errors when the incorrect cut-out template is used.

ADA compliant when installed to the specific requirements of these regulations.

All product dimensions are nominal.

Bowl configuration: Single

Installation: Under-mount

Bowl area (Only)      Length: 18" (457 mm)  
                                  Width: 13" (330 mm)  
                                  Water depth: 5-7/8" (149 mm)

Drain hole: 5/8" (16 mm)

Template: Drop-in, 1006417-7, required, included