





QPM43

QuickSert CR™ Polymer Multi-Port Tees with, 3/4" Inlet and 1/2" Outlet Ports

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

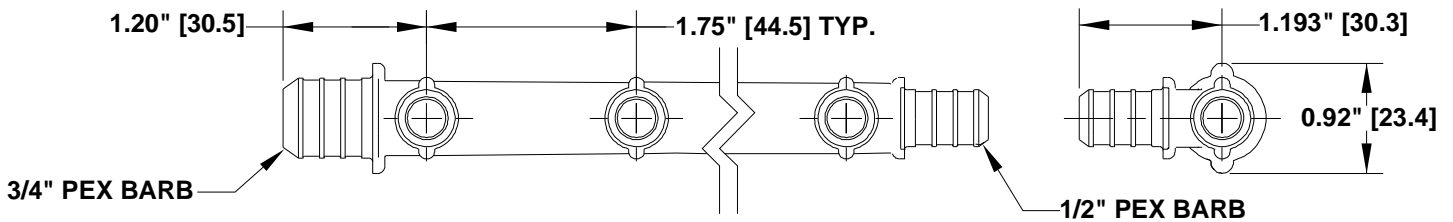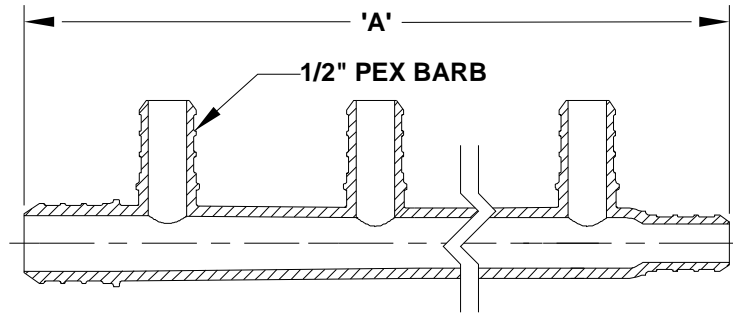

*Shown as QPM43-4

Part Number	Description	'A'
QPM43-3	(1) 3/4" PEX Crimp Inlet w/ (3) 1/2" PEX Crimp Outlet Ports	4.13" [104.9]
QPM43-4	(1) 3/4" PEX Crimp Inlet w/ (4) 1/2" PEX Crimp Outlet Ports	5.85" [148.6]
QPM43-5	(1) 3/4" PEX Crimp Inlet w/ (5) 1/2" PEX Crimp Outlet Ports	7.56" [192.0]

Engineering Specification: ZurnPEX® QuickSert CR™ Multi-Port Tee. The QPM43_ Multi-Port Tee is used to supply different fixtures from the main line. Molded from Acudel®. Multi-Port Tees, as a system with Zurn PEX® tube, are pressure rated at 160 PSI at 73°F, 100 PSI at 180°F, and 80 PSI at 200°F. These Multi-Port Tees are listed by NSF as complying with the following standards: NSF/ANSI Standard 14, NSF/ANSI Standard 61, ASTM F877, and CSA B137.5, and ASTM F2159.

Accessories

- ___ **QCLP3X** 1/2" QuickClamp™ Crimp Ring
- ___ **QCCL4X** 3/4" QuickClamp™ Crimp Ring
- ___ **QCR3X** 1/2" Copper Crimp Ring
- ___ **QCR4X** 3/4" Copper Crimp Ring

* Regularly furnished unless otherwise specified.