



Sandstone Powder Coat Finish



Brushed Stainless Steel

**BARRIER-FREE
PLF8SKTP**

Suggested Specification

Model PLF8SKTP shall deliver 8.0 gph of 50° F degree water at 90° F ambient and 80° F inlet water. Model PLF8SKTP features push buttons on the front and both sides of the cabinet. Water flows as long as a button is depressed. Cabinet finish shall be sandstone powder coated paint on galvanized steel or brushed stainless steel. Shall use R-134a refrigerant. Shall comply with ANSI 117.1 and ADA. Shall be listed by Underwriters Laboratories to US and Canadian standards. Shall comply with ANSI/NSF 61 and NSF/ANSI 372.

Models

- **PLF8SKTP** delivers 4.0 gph of chilled drinking water

Standard Features

- Waterways are Lead-Free in materials & construction
- Stainless steel top
- Welded, heavy-gauge steel frame
- High efficiency cooling system
- Refrigerant R-134a

Finishes

- Standard cabinet finish: Sandstone powder coated paint on galvanized steel
- Optional finishes (at additional cost): Stainless steel and optional greystone powder coated finishes

Installation

- Prior to roughing consult with local, state and federal codes for proper mounting height
- Shipped with complete instructions and wall mounting bracket
- Removable side and front panels provide easy access for installation

Limited 5-Year Warranty

(Continental limits of the United States and Canada) Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

Export Warranty

One year on components parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

Certifications/Compliance

- Oasis International Electric Water Coolers are listed by Underwriters Laboratories Inc. and comply with both U.S. and Canadian Requirements.
- Product Certified to NSF/ANSI Standard 61-G & 372 and conforms with the lead content requirements for “lead free” plumbing as defined by California, Vermont, Maryland, and Louisiana state laws and the U.S. Safe Drinking Water Act.
- This unit complies with ARI standard 1010 Testing, Operating and Rating requirements (electric water coolers only).
- These water coolers comply with the requirements of ADA (Americans with Disabilities Act) when properly installed.




Model	50° F Drinking Water 90° F Ambient Air Temp*			Hot'N Cold Model	115 Volts, 60 HZ			Glass Filler Acc. Option	Cabinet Color Finish	Net Wt. Approx
	Rated Capacity GHP	Base Rate GHP	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
PLF8SKTP	8.0	8.0	No	No	1/5	4.4	450	No	Yes	67 Lbs

* Industry Standard Rating Condition 80° F inlet water temperature

Specifications subject to change without notice

OASIS® BARRIER-FREE ON-A-WALL WATER COOLER MODELS PLF8SKPE, PLF8SKTP

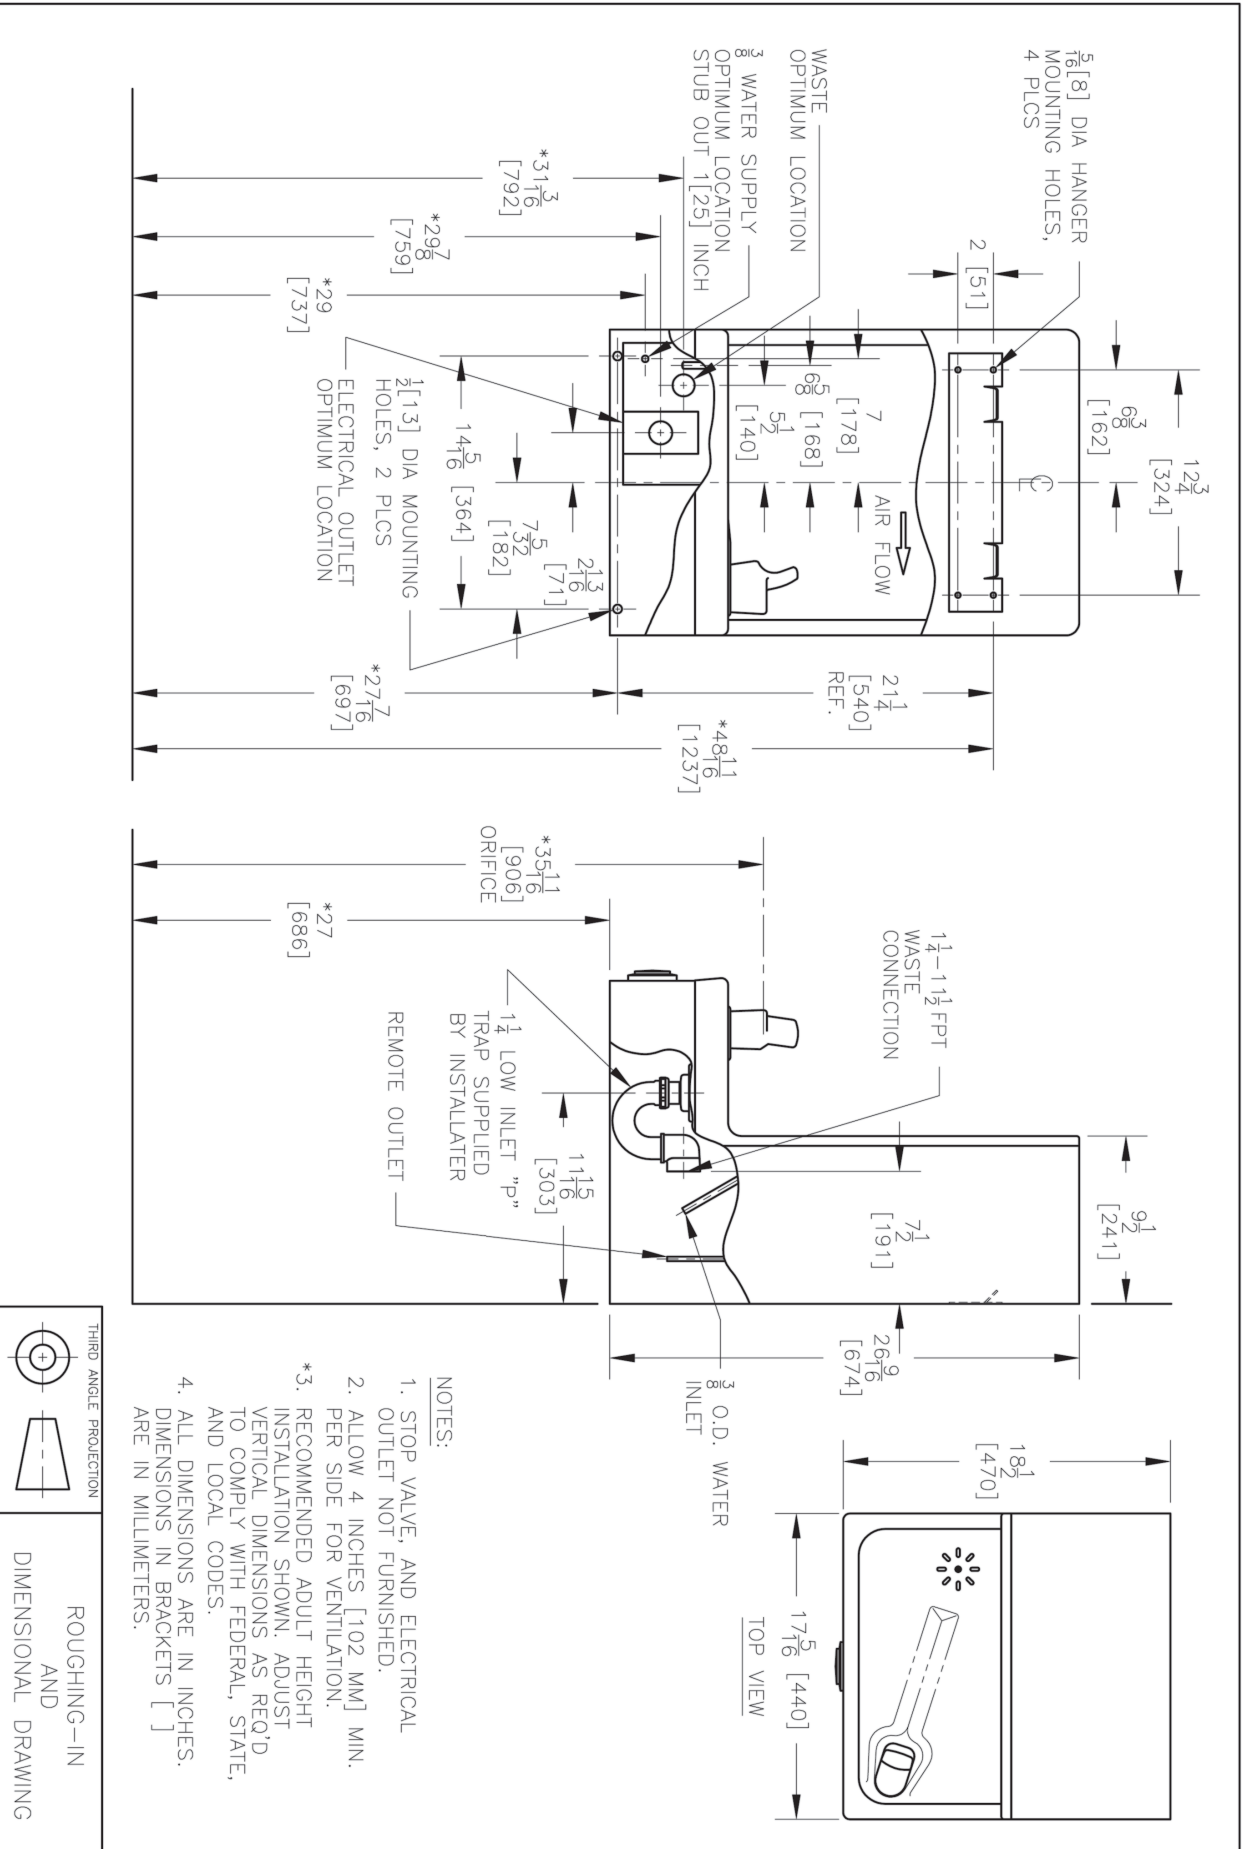

- NOTES:**
1. STOP VALVE, AND ELECTRICAL OUTLET NOT FURNISHED.
 2. ALLOW 4 INCHES [102 MM] MIN. PER SIDE FOR VENTILATION.
 3. RECOMMENDED ADULT HEIGHT INSTALLATION SHOWN. ADJUST VERTICAL DIMENSIONS AS REQ'D TO COMPLY WITH FEDERAL, STATE, AND LOCAL CODES.
 4. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS.



Rev: 11/2014
 Oasis International | 2222 East Campus View Blvd. | Columbus, OH 43235
 For customer service and technical helpline assistance call: 800.950.3226

Oasis is a registered trademark of LVD Acquisition, LLC dba Oasis International
 © 2014 LVD Acquisition



www.oasiscoolers.com