


# BELL-BELL COUPLERS 12" - 60" DIAMETER

| PART #   | PIPE SIZE          | A                    | B                   | C                    | JOINT |
|----------|--------------------|----------------------|---------------------|----------------------|-------|
| 1215AA   | 12 in<br>(300 mm)  | 14.6 in<br>(371 mm)  | 14.0 in<br>(356 mm) | 15.4 in<br>(391 mm)  | ST/WT |
| 1515AA   | 15 in<br>(375 mm)  | 17.8 in<br>(451 mm)  | 16.0 in<br>(406 mm) | 18.6 in<br>(472 mm)  | ST/WT |
| 1815AA   | 18 in<br>(450 mm)  | 21.4 in<br>(544 mm)  | 18.0 in<br>(457 mm) | 22.4 in<br>(569 mm)  | ST/WT |
| 2415AA   | 24 in<br>(600 mm)  | 28.2 in<br>(716 mm)  | 14.8 in<br>(376 mm) | 29.3 in<br>(743 mm)  | ST/WT |
| 3013AN65 | 30 in<br>(750 mm)  | 36.0 in<br>(914 mm)  | 22.6 in<br>(574 mm) | 38.5 in<br>(978 mm)  | ST/WT |
| 3613AN65 | 36 in<br>(900 mm)  | 42.5 in<br>(1080 mm) | 22.6 in<br>(574 mm) | 45.1 in<br>(1145 mm) | ST/WT |
| 4213AN85 | 42 in<br>(1050 mm) | 48.9 in<br>(1241 mm) | 18.0 in<br>(457 mm) | 50.4 in<br>(1280 mm) | ST    |
| 4213AN65 | 42 in<br>(1050 mm) | 48.9 in<br>(1242 mm) | 18.0 in<br>(457 mm) | 50.4 in<br>(1280 mm) | WT    |
| 4813AN85 | 48 in<br>(1200 mm) | 54.9 in<br>(1393 mm) | 18.0 in<br>(457 mm) | 57.5 in<br>(1461 mm) | ST    |
| 4813AN65 | 48 in<br>(1200 mm) | 54.9 in<br>(1394 mm) | 18.0 in<br>(457 mm) | 57.5 in<br>(1461 mm) | WT    |
| 6013AN85 | 60 in<br>(1500 mm) | 67.3 in<br>(1708 mm) | 19.1 in<br>(486 mm) | 70.1 in<br>(1780 mm) | ST    |
| 6013AN65 | 60 in<br>(1500 mm) | 67.3 in<br>(1708 mm) | 19.1 in<br>(486 mm) | 70.1 in<br>(1780 mm) | WT    |

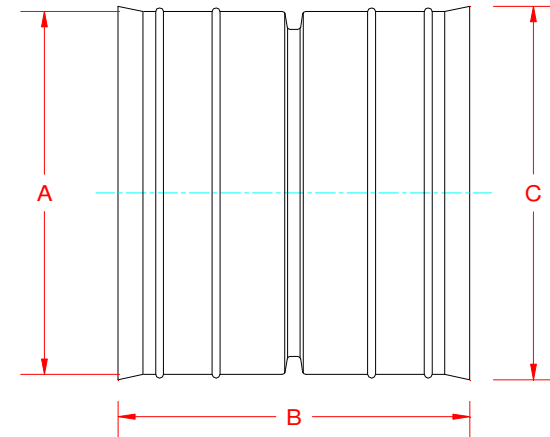

\* REQUIRES GASKET TO PROVIDE  
SPECIFIED JOINT PERFORMANCE

NOTE: ALL FITTINGS DIMENSIONS ARE FOR REFERENCE ONLY



|              |      |           |
|--------------|------|-----------|
| DRAWING #:   | 2030 |           |
| DRAWN BY:    | JCB  | 10.30.06  |
| APPROVED BY: |      |           |
| REVISIONS:   | TJR  | 4/15/2009 |
|              |      |           |
|              |      |           |