





API 602 PISTON CHECK VALVES
FORGED CARBON , STAINLESS STEEL OR ALLOY STEEL
¼" TO 2" (6 TO 50 mm)
ASME CLASSES 150 TO 2680

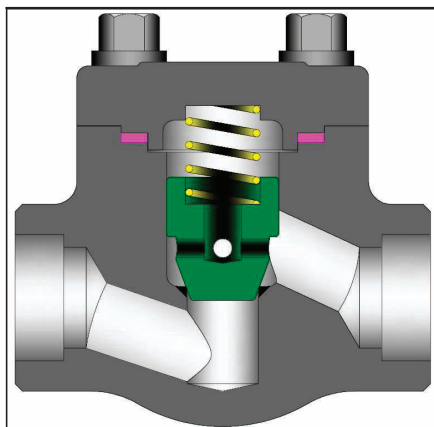

Ball Check

STANDARD MATERIALS (Other materials available)

				PART	MATERIALS			
Class	Bore	Fig. No.		Body	A105 + Stellite 6 Faced	A182 F11 + Stellite 6 Faced	A182 F22 + Stellite 6 Faced	A182 F316 (1)
		Piston	Ball					
150	Standard	PC01	BC01	Cap	A105	A182 F11	A182 F22	A182 F316
	Full	PCL1	BCL1					
300	Standard	PC03	BC03	Disc/Ball	A276 T420	A276 T316		
	Full	PCL3	BCL3					
600	Standard	PC06	BC06	Gasket (2)	Spiral Wound SST with Graphite	Spiral Wound SST with PTFE		
	Full	PCL6	BCL6					
800	Standard	PC08	BC08	Spring	Inconel 625			
	Full	PCL8	BCL8					
1500	Standard	PC15	BC15	Body / Cap Bolting (2)	A193 Gr. B7	A193 Gr. B16	A193 Gr. B8M	
	Full	PCL5	BCL5					
1680	Standard	PC16	BC16	Identification Plate	Series 300 SST			
2500	Standard	PC25	BC25					
2690	Standard	PC26	BC26					

DESIGN FEATURES:


- **Standard trim** is stellite faced seat integral to the body and 13% chrome disc/ball (API trim 8). Other trims available on request.
- **Seat faces** lapped for smooth finish and superior sealing.
- **Wall thickness** per heavy wall API 602 requirements.
- **Each** valve is shell and seat pressure tested per industry standard API 598.
- **Check** valve are suitable for service in horizontal line with cap vertical.
- **End Flanges** have the following raised faces per ASME B16.5:
Classes 150-300: 1/16" (2mm).
Classes 600: 1/4" (7mm).
- **Other** available options as follows:
-Alternate valve materials such as chrome and stainless steel alloys.
-Alternate trim materials.
-NACE service.
-Special cleaning for applications such as oxygen or chlorine.
-Other options available as specified.

- (1) Threaded and weld end valve bodies A182 F316L
- (2) Welded bonnets also available.

NOTE: See page 43 for flow, safety and maintenance information.

Design Specifications

Item	Applicable Specification
Wall thickness	API 602
Pressure - temperature ratings	ASME B16.34
General valve design	API 602 & B16.34
End to End dimensions	ASME B16.10
Flange design	ASME B16.5
Thread design	ASME B1.20.1
Butt Weld design	ASME B16.25
Socket Weld design	ASME B16.11
Materials	ASTM

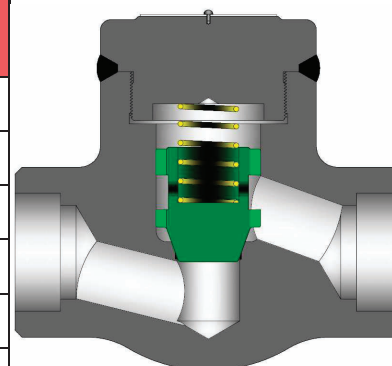

Welded Bonnet Design

PISTON CHECK VALVE DIMENSIONS (CLASS 150—800).


SIZE	ASME 150			ASME 300			ASME 600		
	Bolted Bonnet			Bolted Bonnet			Bolted Bonnet		
	Standard Bore			Standard Bore			Standard Bore		
in	A	C	D	A	C	D	A	C	D
mm	FE			FE			FE		
½	4.25	2.2	0.39	6.00	2.2	0.39	6.50	2.2	0.39
13	108	55	10	152	55	10	165	55	10
¾	4.62	2.2	0.50	7.00	2.2	0.50	7.50	2.2	0.50
19	117	55	13	178	55	13	190	55	13
1	5.00	2.8	0.69	8.00	2.8	0.69	8.50	2.8	0.69
25	127	72	18	203	72	18	216	72	18
1¼	5.50	3.2	0.91	8.50	3.2	0.91	9.00	3.2	0.91
32	140	81	23	216	81	23	229	81	23
1½	6.50	3.6	1.12	9.00	3.7	1.12	9.50	3.7	1.12
38	165	91	29	229	94	29	241	94	29
2	8.00	4.4	1.26	10.50	4.4	1.38	11.50	4.4	1.38
50	203	112	32	267	112	35	292	112	35

SIZE	ASME 800									
	Bolted Bonnet						Welded Bonnet			
	Standard Bore			Full Bore			Standard Bore		Full Bore	
in	A	C	D	A	C	D	A	C	A	C
mm	WE			WE			WE		WE	
¼	3.11	2.2	0.26	-	-	-	3.11	2.2	0.26	-
6	79	55	7	-	-	-	79	55	7	-
¾	3.11	2.2	0.39	-	-	-	3.11	2.2	0.39	-
10	79	55	10	-	-	-	79	55	10	-
½	3.11	2.2	0.39	3.62	2.2	0.50	3.11	2.2	0.39	3.62
13	79	55	10	92	55	13	79	55	10	92
¾	3.62	2.2	0.50	4.37	3.0	0.69	3.62	2.2	0.50	4.37
19	92	55	13	111	72	18	92	55	13	111
1	4.37	3.0	0.69	4.72	3.2	0.91	4.37	3.0	0.69	4.72
25	111	72	18	120	81	23	111	72	18	120
1¼	4.72	3.2	0.91	5.98	3.7	1.12	4.72	3.2	0.91	5.98
32	120	81	23	152	94	29	120	81	23	152
1½	5.98	3.7	1.12	6.77	4.4	1.40	5.98	3.7	1.12	6.77
38	152	94	29	172	112	36	152	94	29	172
2	6.77	4.4	1.38	8.66	5.2	1.85	6.77	4.4	1.38	8.66
50	172	112	35	220	132	47	172	112	35	220


**ADDITIONAL MATERIALS
AND CLASSES AVAILABLE
UPON REQUEST.**

WE = Socket Weld / Threaded Ends
FE = Flanged Ends

C = Center to top

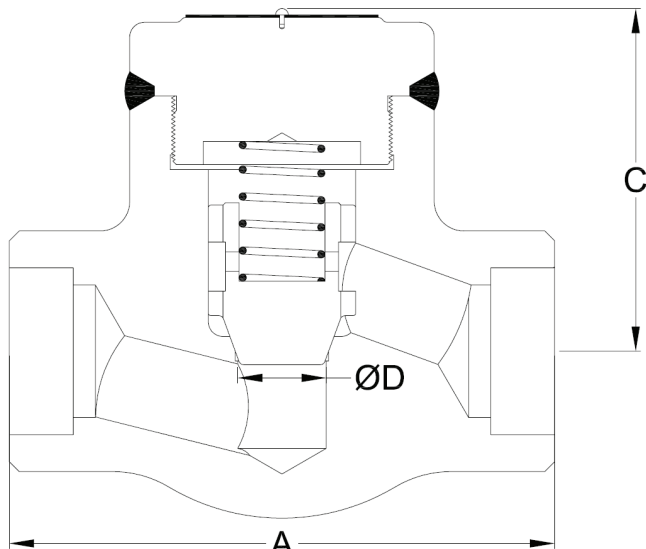

Welded Bonnet Socket Weld Ends Design

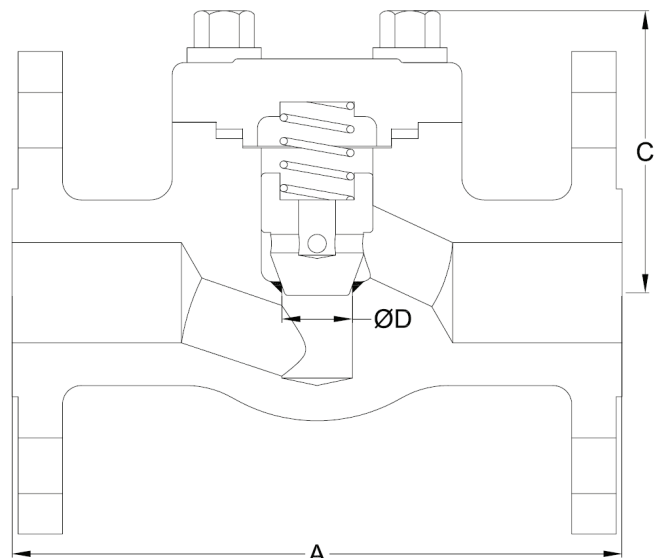

Bolted Bonnet Flanged Ends Design

PISTON CHECK VALVE DIMENSIONS (CLASS 1500—2680).

SIZE	ASME 1500 & 1690												
	Bolted Bonnet							Welded Bonnet					
	Standard Bore				Full Bore			Standard Bore			Full Bore		
in	A		C	D	A	C	D	A	C	D	A	C	D
mm	FE	WE			WE			WE					
¼	-	3.11	2.9	0.26	-	-	-	3.11	2.9	0.39	-	-	-
6	-	79	73	7	-	-	-	79	73	10	-	-	-
¾	-	3.11	2.9	0.39	-	-	-	3.11	2.9	0.50	-	-	-
10	-	79	73	10	-	-	-	79	73	13	-	-	-
½	8.50	3.62	2.9	0.39	4.37	2.9	0.50	3.62	2.9	0.39	4.37	2.9	0.50
13	216	92	73	10	111	73	13	92	73	10	111	73	13
¾	9.00	4.37	2.9	0.50	4.72	3.3	0.69	4.37	2.9	0.51	4.72	3.3	0.69
19	229	111	73	13	120	84	18	111	73	13	120	84	18
1	10.00	4.72	3.3	0.69	5.98	3.8	0.91	4.72	3.3	0.69	5.98	3.8	0.91
25	254	120	84	18	152	97	23	120	84	18	152	97	23
1¼	11.00	5.98	3.8	0.91	6.77	4.5	1.12	5.98	3.8	0.91	6.77	4.5	1.12
32	279	152	97	23	172	115	29	152	97	23	172	115	29
1½	12.00	6.77	4.5	1.12	8.66	5.2	1.38	6.77	4.5	1.12	8.66	5.2	1.38
38	305	172	115	29	220	132	35	172	115	29	220	132	35
2	14.50	8.66	5.2	1.38	9.84	5.2	1.85	8.66	5.2	1.38	10.24	5.2	1.85
50	368	220	132	35	250	132	47	220	132	35	260	132	47


SIZE	ASME 2500 & 2680					
	Bolted Bonnet			Welded Bonnet		
	Standard Bore			Standard Bore		
in	A	C	D	A	C	D
mm	WE			WE		
½	5.91	4.0	0.43	5.91	5.3	0.55
13	150	102	11	150	135	14
¾	5.91	4.0	0.43	5.91	5.3	0.55
19	150	102	11	150	135	14
1	6.69	4.2	0.55	6.69	5.7	0.75
25	170	107	14	170	146	19
1¼	7.87	5.0	0.63	7.87	6.9	0.98
32	200	128	16	200	176	25
1½	7.87	5.0	0.98	7.87	6.9	1.10
38	200	128	25	200	176	28
2	9.84	5.6	1.10	9.84	7.7	1.38
50	250	143	28	250	196	35

**ADDITIONAL MATERIALS
AND CLASSES AVAILABLE
UPON REQUEST.**


WE = Socket Weld / Threaded Ends

FE = Flanged Ends

C = Center to top open

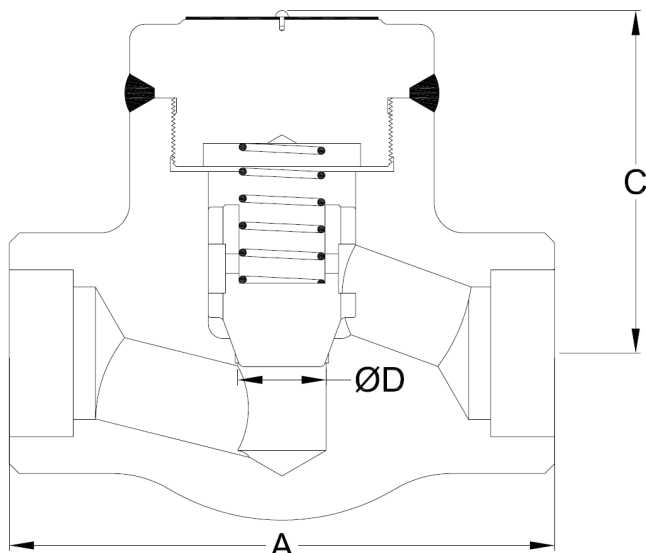

Welded Bonnet Socket Weld Ends Design

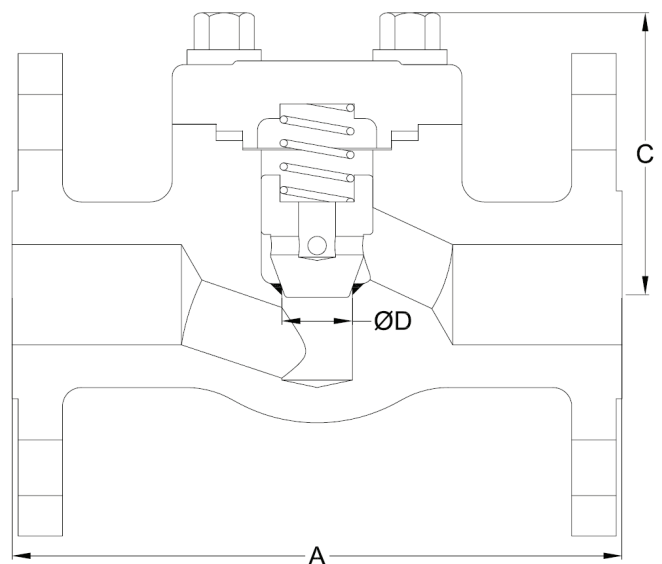

Bolted Bonnet Flanged Ends Design

API 602 PISTON CHECK VALVES
FORGED CARBON , STAINLESS STEEL OR ALLOY STEEL
¼" TO 2" (6 TO 50 mm)
ASME CLASSES 150 TO 2680

SIZE	ASME 150			ASME 300			ASME 600			ASME 800											
	Bolted Bonnet			Bolted Bonnet			Bolted Bonnet			Bolted Bonnet						Welded Bonnet					
	Standard Bore			Standard Bore			Standard Bore			Standard Bore			Full Bore			Standard Bore			Full Bore		
in	WT	LB	C _v	WT	LB	C _v	WT	LB	C _v	WT	LB	C _v	WT	LB	C _v	WT	LB	C _v	WT	LB	C _v
mm	FE	KG		FE	KG		FE	KG		WE	KG		WE	KG		WE	KG		WE	KG	
¼	-	-	-	-	-	-	-	-	-	3.3	0.7	-	-	3.1	0.7	-	-	-	-		
6	-	-	-	-	-	-	-	-	-	1.5	-	-	-	1.4	-	-	-	-	-		
¾	-	-	-	-	-	-	-	-	-	3.3	1.5	-	-	3.1	1.5	-	-	-	-		
10	-	-	-	-	-	-	-	-	-	1.5	-	-	-	1.4	-	-	-	-	-		
½	7.5	1.5	8.2	1.5	7.5	1.5	3.1	1.5	4.2	2.6	3.1	1.5	4.2	2.6	3.1	1.5	4.2	2.6	3.1		
13	3.4	-	3.7	-	3.4	-	1.4	-	1.9	-	1.4	-	1.9	-	1.4	-	1.9	-	1.4		
¾	9.7	2.7	10.6	2.7	12.8	2.7	4.2	2.7	5.7	4.9	4.0	2.7	5.7	4.9	4.0	2.7	5.7	4.9	4.0		
19	4.4	-	4.8	-	5.8	-	1.9	-	2.6	-	1.8	-	2.6	-	1.8	-	2.6	-	1.8		
1	18.1	5.1	19.4	5.1	20.9	5.1	5.7	5.1	9.3	8.9	5.7	5.1	9.3	8.9	5.7	5.1	9.3	8.9	5.7		
25	8.2	-	8.8	-	9.5	-	2.6	-	4.2	-	2.6	-	4.2	-	2.6	-	4.2	-	2.6		
1¼	19.6	9.1	21.2	9.1	22.9	9.1	9.3	9.1	11.7	13.7	9.3	9.1	11.7	13.7	9.3	9.1	11.7	13.7	9.3		
32	8.9	-	9.6	-	10.4	-	4.2	-	5.3	-	4.2	-	5.3	-	4.2	-	5.3	-	4.2		
1½	26.5	14.0	30.2	14.0	34.4	14.0	11.7	14.0	19.8	21.9	11.7	14.0	19.8	21.9	11.7	14.0	19.8	21.9	11.7		
38	12.0	-	13.7	-	15.6	-	5.3	-	9.0	-	5.3	-	9.0	-	5.3	-	9.0	-	5.3		
2	31.5	22.4	39.2	22.4	54.0	22.4	19.8	22.4	34.4	40	19.8	22.4	34.4	40	19.8	22.4	34.4	40	19.8		
50	14.3	-	17.8	-	24.5	-	9.0	-	15.6	-	9.0	-	15.6	-	9.0	-	15.6	-	9.0		

SIZE	ASME 1500 & 1687												ASME 2500 & 2680							
	Bolted Bonnet						Welded Bonnet						Bolted Bonnet			Welded Bonnet				
	Standard Bore			Full Bore			Standard Bore			Full Bore			Standard Bore			Standard Bore				
in	WT	LB	WT	LB	C _v	WT	LB	C _v	WT	LB	C _v	WT	LB	C _v	WT	LB	C _v	WT	LB	C _v
mm	FE	KG	WE	KG		WE	KG		WE	KG		WE	KG		WE	KG		WE	KG	
¼	-	-	4.9	0.7	-	-	-	-	4.9	0.7	-	-	-	-	-	-	-	-	-	
6	-	-	2.2	-	-	-	-	-	2.2	-	-	-	-	-	-	-	-	-	-	
¾	-	-	4.9	1.5	-	-	-	-	4.9	1.5	-	-	-	-	-	-	-	-	-	
10	-	-	2.2	-	-	-	-	-	2.2	-	-	-	-	-	-	-	-	-	-	
½	20.7	5.3	5.3	1.5	6.4	1.5	5.3	1.5	6.4	1.5	17.6	1.8	15.4	3.0	17.6	1.8	15.4	3.0	17.6	
13	9.4	-	2.4	-	2.9	-	2.4	-	2.9	-	8.0	-	7.0	-	8.0	-	7.0	-	8.0	
¾	24.7	6.4	6.4	2.7	10.1	2.7	6.4	2.7	10.1	2.7	17.2	1.9	15.0	3.1	17.2	1.9	15.0	3.1	17.2	
19	11.2	-	2.9	-	4.6	-	2.9	-	4.6	-	7.8	-	6.8	-	7.8	-	6.8	-	7.8	
1	31.7	10.1	10.1	5.1	14.3	5.1	10.1	5.1	14.3	5.1	26.5	3.2	24.3	6.0	26.5	3.2	24.3	6.0	26.5	
25	14.4	-	4.6	-	6.5	-	4.6	-	6.5	-	12.0	-	11.0	-	12.0	-	11.0	-	12.0	
1¼	35.3	14.3	14.3	9.1	23.1	9.1	14.3	9.1	23.1	9.1	43.0	4.3	39.7	10.5	43.0	4.3	39.7	10.5	43.0	
32	16.0	-	6.5	-	10.5	-	6.5	-	10.5	-	19.5	-	18.0	-	19.5	-	18.0	-	19.5	
1½	47.4	23.1	23.1	14.0	34.4	14.0	23.1	14.0	34.4	14.0	42.5	10.7	39.0	13.5	42.5	10.7	39.0	13.5	42.5	
38	21.5	-	10.5	-	15.6	-	10.5	-	15.6	-	19.3	-	17.7	-	19.3	-	17.7	-	19.3	
2	61.7	34.2	34.2	22.4	37.5	22.4	34.2	22.4	37.5	22.4	59.5	14.2	63.9	22.4	59.5	14.2	63.9	22.4	59.5	
50	28.0	-	15.5	-	17.0	-	15.5	-	17.0	-	27.0	-	29.0	-	27.0	-	29.0	-	27.0	

FE = Flanged Ends
WE = Socket Weld / Threaded Ends

WT = Weight
C_v = Flow Coefficient