


Submitted Model No.:

Specific Features:



▲ Designate proper finish suffix

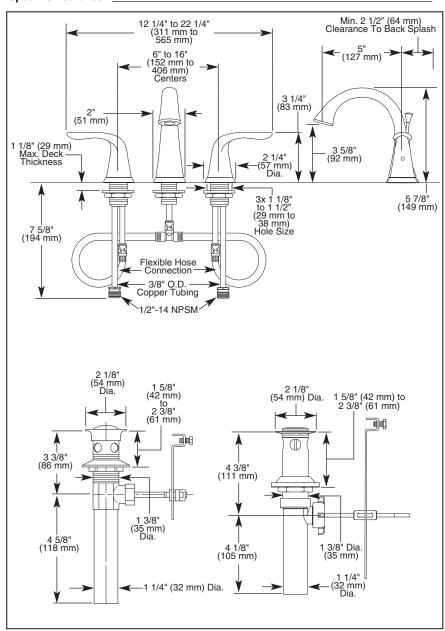

FAUCETS

- Lahara® Bath Collection
- Two Handle Widespread Deck Mount
- 3 Hole Sink Applications
- 6" to 16" Centers
- Quick-Snap® Installation

STANDARD SPECIFICATIONS:

- Solid brass fabricated end valve and spout bodies.
- Widespread 6" (152mm) to 16" (406 mm) centers.
- 5" (127 mm) long, 5 7/8" (149 mm) high rigid spout.
- Quick-Snap® installation.
- 1/4 turn handle stops.
- Hot and cold stems are interchangeable.
- Control mechanism is a rotating cylinder with stainless steel plate and 90° rotation, with replaceable non-metallic seats operating in stainless steel lined sockets.
- 3/8" O.D. copper supply tubes with 1/2"-14 NPSM
- Models without "MPU" suffix include polypropylene pop-up type drain fitting with plated metal flange and stopper cap.
- Models with "MPU" suffix include metal drain with pop-up type drain fitting with plated flange and stopper cap.
- Models have a maximum 1.5 gpm flow rate @ 60 PSI.
- Note: Standard mounting deck thickness can be extended 1" with RP10612.

WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.









COMPLIES WITH:

- ASMF A112 18 1 / CSA B125 1
- ASME A112.18.2 / CSA B125.2
- Indicates compliance to ICC/ANSI A117.1
- EPA WaterSense"LF" models verified compliant with .25% weighted average Pb content regulations.

