



ZIP FASTENERS

Product Features


- Material: C1018/C1022
- Self piercing screws
- IHWH slot
- DRIVE TEST - Driving speed: 2,500 RPM; Axial load: 13.6lb;
Test plate thickness: 0.8mm; 2.0 sec or less
- Zinc plated
- De-hydrogen embrittlement



PSZIP10

Product Specifications

PSZIP10D1000	10X1/2 ZIP SCRW 1000	PSZIP10F1000	10X3/4 ZIP SCRW 1000
PSZIP10F100	10X3/4 ZIP SCRW 1000	PSZIP10F5000	10X3/4 ZIP SCRW 5000

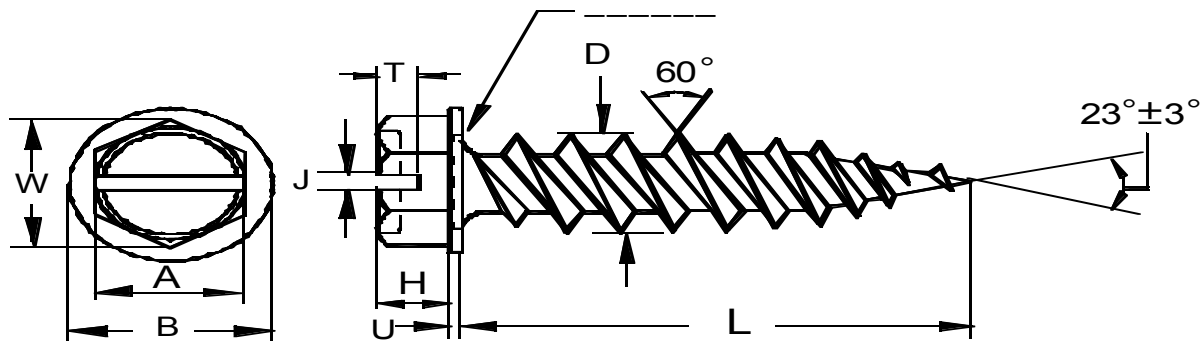

SIZE INCH	TPI	A	W	B	H	U	T	J	D	kgf.cm	SIZE INCH	L
#10	13	0.305 0.312	0.340 min	0.384 0.414	0.105 0.120	0.019 0.031	0.057 0.080	0.050 0.060	0.183 0.194	56 min	1/2	0.470°0.530

Warranty and Codes

This PROSELECT product carries a 1-year limited warranty.