

Z5840

TAG _____

20" x 18" Wall Hung Lavatory



Z5840 Series

Suffix Options:

□ -CB Heavy Duty Cast Ductile Iron Mounting Bracket

Recommended Trim:

- ☐ **Z8743-PC** Grid Strainer
- ☐ **Z8700** Series P-Trap
- ☐ **Z8800** Series Top with Flexible Supplies
- Z8946-1-NT ADA Trap, Stop, and Supply Protectors

Optional Trim:

- ☐ **Z8746-PC** ADA Grid Strainer
- ☐ **Z8946-3-NT** ADA Trap, Stop, and Supply Protectors for Offset Grid Strainers

These dimensions and specifications are subject to change without notice.

Fixture dimensions meet ANSI/ASME standard A112.19.2 and CAN/CSA B45 requirements.

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when lavatory is installed 34" [864mm] from finished floor.



ZURN INDUSTRIES, LLC. ◆ COMMERCIAL BRASS OPERATION 5900 ELWIN BUCHANAN DRIVE ◆ SANFORD NC 27330 Phone: 1-800-997-3876 ◆ Fax: 919-775-3541 www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED
3544 Nashua Drive ◆ Mississauga, Ontario L4V1L2
Phone: 905-405-8272 Fax: 905-405-1292

Z5840 Series

- 20" [508 mm] x 18" [45 mm]
- · Enameled cast iron
- · Faucet holes for 4" or 8" centers
- Wall hung lavatory provided with wall hanger or for use with exposed arm carrier systems.
- · Front Overflow
- Waste: 1-1/4" O.D.
- Depth: 6-1/2"
- Shipping Weight: 60lbs.

Engineering Specification:

- □ **Z5841** 20" x 18" enameled cast iron wall hung lavatory. Provided with single faucet hole.*
- □ **Z5844** 20" x 18" enameled cast iron wall hung lavatory. Provided with 4" center faucet holes.*
- ☐ **Z5848** 20" x 18" enameled cast iron wall hung lavatory. Provided with 8" center faucet holes.*

*For use with wall hanger plate or exposed arm carrier.

Architectural/Engineering Approval

See Zurn One Systems for suggested packages.

The information contained in this document is subject to change without notice.

Please contact Zurn for most up to date information.




Z5840


TAG _____

20" x 18" Wall Hung Lavatory Cast Iron Lavatory Rough-In

Rough-in dimensions for Z5840 Series

- · Z5841 with single faucet hole
- Z5844 with 4" center faucet holes
- · Z5848 with 8" center faucet holes



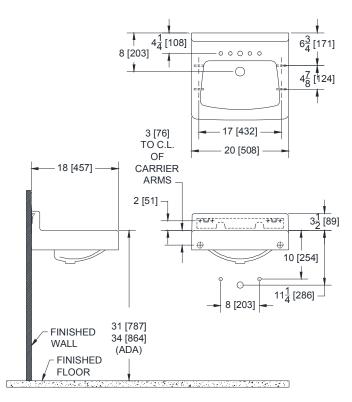

These dimensions and specifications are subject to change without notice.

Fixture dimensions meet ANSI/ASME standard A112.19.2 and CAN/CSA B45 requirements.

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when lavatory is installed 34" [864mm] from finished floor.



ZURN INDUSTRIES, LLC. ◆ COMMERCIAL BRASS OPERATION 5900 ELWIN BUCHANAN DRIVE ◆ SANFORD NC 27330 Phone: 1-800-997-3876 ◆ Fax: 919-775-3541 www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED 3544 Nashua Drive ◆ Mississauga, Ontario L4V1L2 Phone: 905-405-8272 Fax: 905-405-1292 Note: Rough-in for concealed arm carrier, see Zurn Z1231 -AL Rough-in sheet.