




PRODUCT DIMENSIONS & SPECIFICATIONS

DX-TREME CM SERIES UNCASED DOWNFLOW COILS FOR USE WITH MANUFACTURED HOME FURNACES

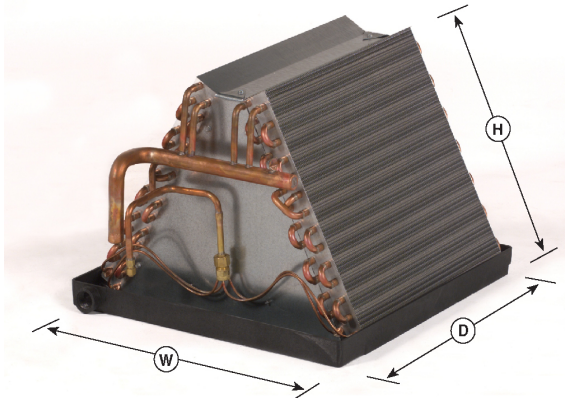

Representative picture only. Some models may vary in appearance.

STANDARD SPECIFICATIONS

- Riffed copper tubing, enhanced aluminum fins.
- Immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Left-hand refrigerant and plumbing connections.
- Liquid line - 3/8" ODS, suction line - 7/8" ODS.
- Liquid line Schrader valve for hiss-testing.
- Heavy duty polypropylene drain pans.
- Drain connection: 177L pans have single LH 3/4" MPT, 195L pan have quad drains, 3/4" MPT.
- Condensate drain elbow and flexible drain tubing included.
- Downflow plate kit included.
- ARI certifiable with all brands of A/C and heat pump systems.
- ETL listed for use with both R-22 and R-410a when proper metering device is used.
- Ten-year limited warranty.

AVAILABLE OPTIONS:

- Factory or field-installable TXV.
- Schrader mounted on suction manifold.

COIL MODEL	PISTON SIZE		DIMENSIONS			SHIPPING INFORMATION			
			PAN WIDTH (W)	PAN DEPTH (D)	BARE SLAB HEIGHT (H)	SHIPPING WEIGHT			SKID QTY
						2 ROW	3 ROW	4 ROW	
CM24A(2,3)F-177L	0.059	0.055	17-3/4	19-5/8	12	17	27	N/A	30
CM24B(2,3)F-177L	0.059	0.055	17-3/4	19-5/8	14	20	31	N/A	25
CM24C(2,3)F-177L	0.059	0.055	17-3/4	19-5/8	16	23	36	N/A	25
CM24D(2,3)F-177L	0.059	0.055	17-3/4	19-5/8	18	25	40	N/A	20
CM30A(2,3)F-177L	0.068	0.059	17-3/4	19-5/8	14	20	31	N/A	25
CM30B(2,3)F-177L	0.068	0.059	17-3/4	19-5/8	16	23	36	N/A	25
CM30C(2,3)F-177L	0.068	0.059	17-3/4	19-5/8	18	25	40	N/A	20
CM36A(2,3)F-177L	0.074	0.068	17-3/4	19-5/8	16	23	36	N/A	25
CM36B(2,3)F-177L	0.074	0.068	17-3/4	19-5/8	18	25	40	N/A	20
CM42A(2,3)F-177L	0.080	0.074	17-3/4	19-5/8	18	25	40	N/A	20
‡ CM48A3F-177L	0.084	0.080	17-3/4	19-5/8	20	N/A	45	N/A	16
‡ CM48A4F-195L	0.084	0.080	19-1/2	19-3/8	20	N/A	N/A	58	16
‡ CM48B3F-177L	0.084	0.080	17-3/4	19-5/8	22	N/A	49	N/A	12
‡ CM48B4F-195L	0.084	0.080	19-1/2	19-3/8	22	N/A	N/A	64	12
‡ CM48C3F-177L	0.084	0.080	17-3/4	19-5/8	24	N/A	54	N/A	12
‡ CM48C4F-195L	0.084	0.080	19-1/2	19-3/8	24	N/A	N/A	70	12
‡ CM48D3F-177L	0.084	0.080	17-3/4	19-5/8	26	N/A	58	N/A	12
‡ CM48D4F-195L	0.084	0.080	19-1/2	19-3/8	26	N/A	N/A	76	12
CM48E3F-177L	0.084	0.080	17-3/4	19-5/8	18	N/A	40	N/A	20
‡ CM60A(3,4)F-195L	0.092	0.089	19-1/2	19-3/8	24	N/A	54	70	12
‡ CM60B(3,4)F-195L	0.092	0.089	19-1/2	19-3/8	26	N/A	58	76	12

Notes:

Do not use heavy duty polypropylene drain pans on oil furnaces or other applications where outlet temperatures may exceed 300°F. Specify metal drain pans for these applications.

‡ These coils are intended to be mounted on top of the furnace, not inside the furnace cavity.

[] number of rows available

F = florater. Other metering devices are available: X = R22 TXV; 4 = R410a TXV; G = R410a florater

800-423-9007 | **R-410a READY** | **AIR MEMBER** | **ETL US Intertek** | **Proud Member Of HARDI** | **ASSEMBLED IN THE USA** | **EVERYTHING'S RIGHT HERE™**