SERVICE PARTS LIST

BULLETIN NO. 55-26-2670

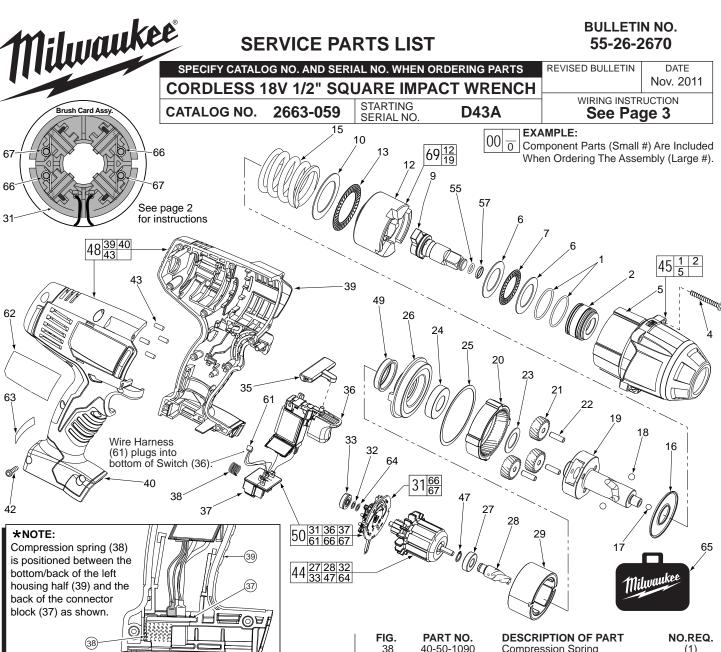


FIG.	PART NO.	DESCRIPTION OF PART N	NO.REQ.
1		O-Ring	(2) (1)
2		Bushing	
4	05-88-5988	M5 X 35mm Pan Hd. Slt. T-20 Screv	v (4)
5 6 7		Gearcase Housing	(1)
6	45-88-1875	Washer	(2)
	02-80-3256	Thrust Bearing	(1)
9	42-06-0680	1/2" Anvil	(1)
10	45-88-1006	Washer	(1)
12		Hammer	(1)
13	02-80-0200	Thrust Bearing	(1)
15	40-50-0755	Compression Spring	(1)
16	45-88-1650	Washer	(1)
17	02-02-7010	7/32" Ball	(1)
18	02-02-0250	1/4" Ball	(2) (1)
19		Camshaft	(1)
20	32-65-0260	Ring Gear	(1)
21	32-62-0500	Planet Gear	(3)
22	44-60-1960	Pin	(3)
23		Washer	(1)
24	02-04-0375	Ball Bearing	(1)
25	34-40-0290	Seal Ring	(1)
26	44-66-0895	Motor Mount Plate	(1)
27		Ball Bearing - Front	(1)
28		Pinion	(1)
29	18-01-3025	Service Field Assembly	(1)
31	22-22-1700	Brush Card	(1)
32		Washer	(1)
33		Ball Bearing - Rear	(1)
35	45-24-0570		(1)
36	23-66-0427	Switch	(1)
37		Connector Block	(1)

FIG. PART NO. DESC	RIPTION OF PART	NO.REQ.
38 40-50-1090 Comp	ression Spring	(1)
39 Handle	e - Left	(1)
	e - Right	(1)
42 06-82-0995 M4 x 1	16mm Pan Hd. T-20 Screw	(9)
43 45-30-0255 Rubbe	er Slug	(4)
44 16-01-3030 Armat	ure Assembly	(1)
45 14-30-0870 Front	Housing Assembly	(1)
47 Retain	ing Ring	(1)
48 31-44-0695 Handle	e Šet	(1)
49 45-22-0380 Rubbe		(1)
50 22-56-1130 Switch	/Connector Block Assembly	(1)
55 34-40-0900 O-Ring	g	(1)
57 44-90-4530 C-Ring		(1)
61 Wire F	Harness	(1)
	e Nameplate Kit	(1)
63 10-20-2998 Warnii	ng Label	(1)
64 Washe	er	(1)
65 42-55-2665 Carryi	ng Case, Optional	(1)
66 40-50-2170 Brush	Spring - Right Handed	(2)
67 40-50-2175 Brush	Spring - Left Handed	(2) (2)
69 14-46-2070 Camsl	haft/Hammer Service Kit	(1)


FIG. **LUBRICATION**


(Type 'Z' Grease, No. 49-08-7655):

Lightly coat the I.D. of the Ring Gear (20) and the center of 20,21 the three Planet Gears (21) with grease.

- Place a dab of grease in ball grooves of the Cam Shaft (19). 19
- Lightly coat the front washer surface of Anvil (9) with grease, 9 place a dab in the Ball hole on the backside of Anvil.
- Coat outside grooves of Bushing (2) with grease. 2

MILWAUKEE ELECTRIC TOOL CORPORATION 13135 W. LISBON RD., BROOKFIELD, WI 53005

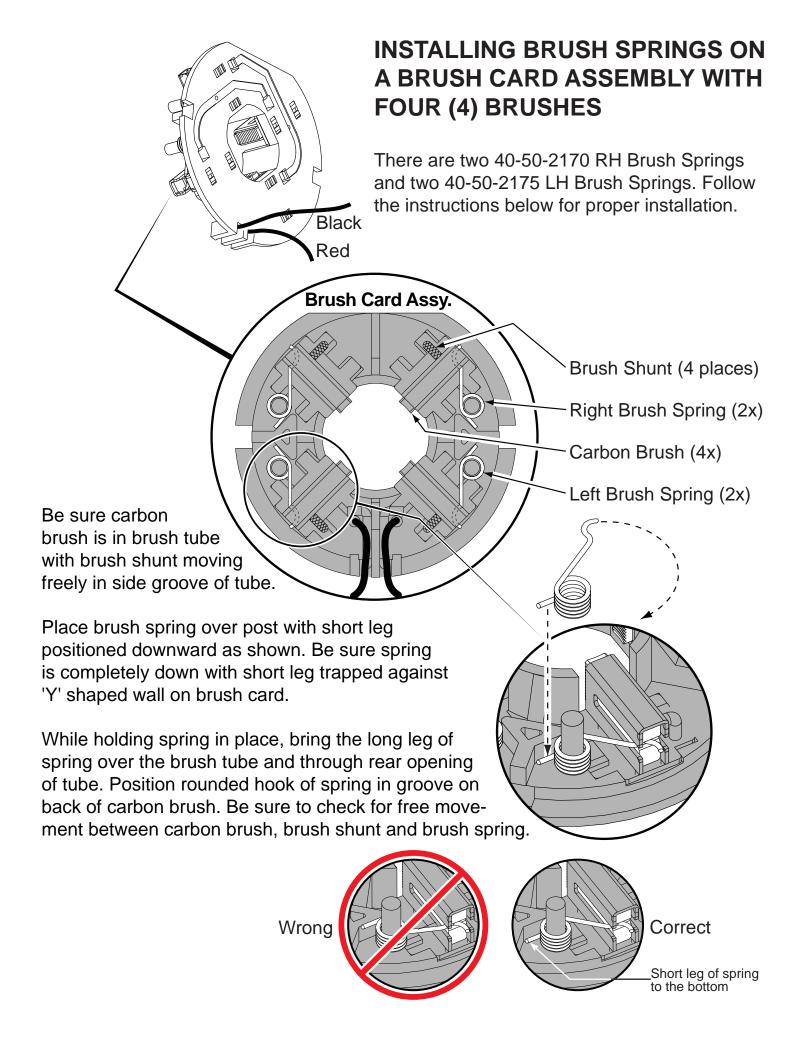

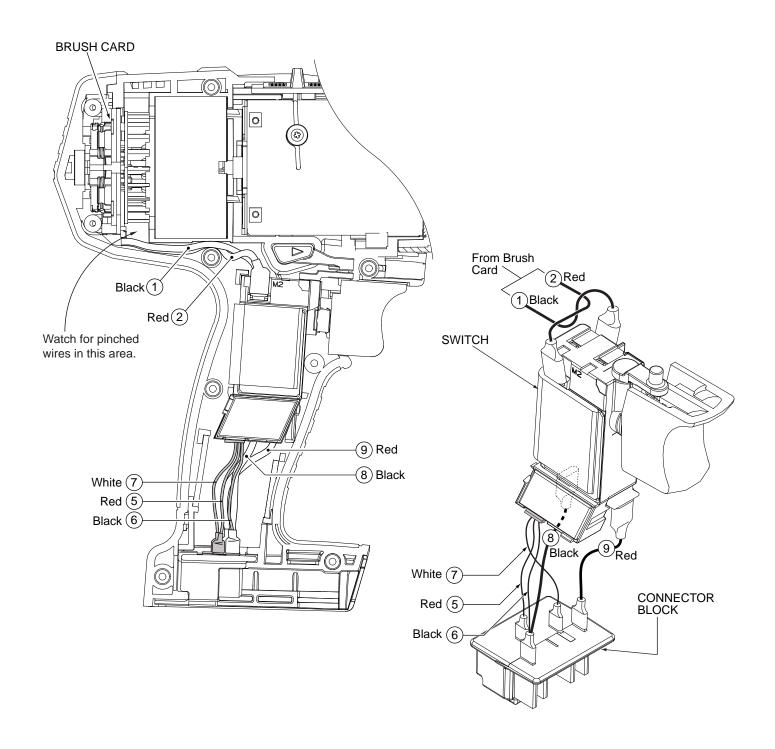

WIRING SPECIFICATIONS							
Wire No.	Wire Color	Origin or Gauge	Length	Terminals, Connectors and 1 or 2 End Wire Preparation			
1	Black			Component of the Switch/Connector Block Assembly.			
2	Red			Component of the Switch/Connector Block Assembly.			
5	Red			Component of the Switch/Connector Block Assembly.			
6	Black			Component of the Switch/Connector Block Assembly.			
7	White			Component of the Switch/Connector Block Assembly.			
8	Black			Component of the Switch/Connector Block Assembly.			
9	Red			Component of the Switch/Connector Block Assembly.			

