




Infra-Riser - Circular

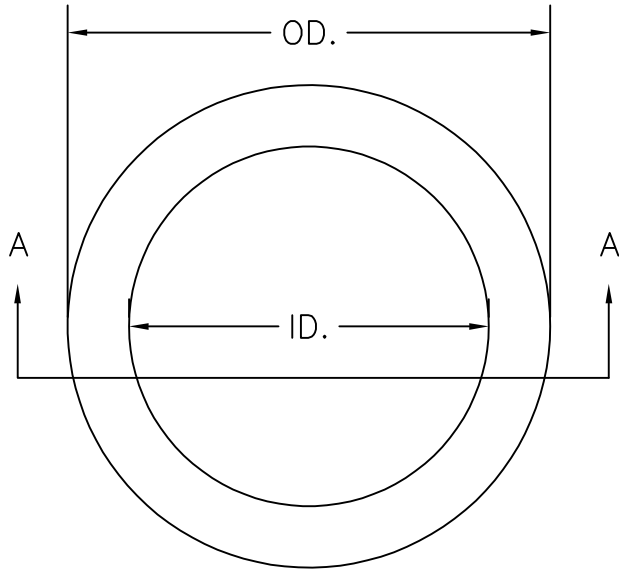

SECTION A-A FOR FLAT MODELS

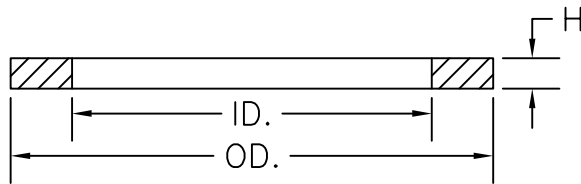

SECTION A-A FOR TAPERED MODELS

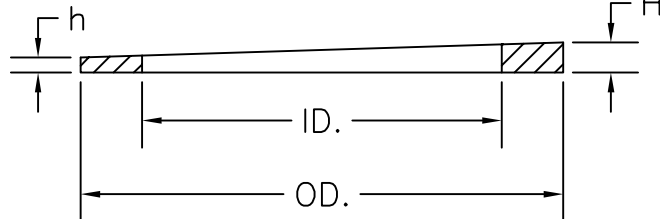

AVAILABLE SIZES:

DIAMETERS:	ID.	OD.	
24"	(616MM)	31"	(806MM)
24"	(610MM)	34"	(864MM)
24"	(610MM)	36"	(914MM)
26"	(660MM)	34"	(864MM)
26"	(660MM)	36"	(914MM) FLAT ONLY
28"	(718MM)	41"	(1041MM)
30"	(768MM)	40"	(1016MM)
33"	(838MM)	40"	(1016MM) FLAT ONLY
34"	(863MM)	40"	(1016MM) FLAT ONLY
38"	(965MM)	46"	(1168MM) FLAT ONLY
38"	(965MM)	49"	(1244MM)

FLAT: THICKNESS

H= .25(6MM)
H= .50(12MM)
H= 1.00(25MM)
H= 1.50(38MM)
H= 2.00(51MM)
H= 2.50(64MM)
H= 3.00(76MM)

TAPERED: THICKNESS

h= .50(12MM) H= 1.00(25MM)
h= 1.00(25MM) H= 1.50(38MM)
h= 1.50(38MM) H= 2.00(51MM)
h= 2.00(51MM) H= 2.50(64MM)
h= 2.50(64MM) H= 3.00(76MM)

PRODUCT SPECIFICATIONS:

1. MATERIAL COMPOSITE OF RECYCLED RUBBER, NYLON FIBER AND POLYURETHANE PREPOLYMER
2. COLOR: BLACK
3. SHORE HARDNESS 75A +/- 7 POINTS
4. TENSILE STRENGTH MINIMUM 1.0 MPa
5. INITIAL COMPRESSION DEFORMATION 2.9%
6. COMPRESSION SET 1.5%
7. BRITTLENESS AT LOW TEMPERATURE -40 C
8. COEFFICIENT OF THERMAL EXPANSION 12.95 X 10-5

Product Number

IR-C

Design Features

- Materials See Notes
- Design Load Traffic
- Open Area N/A
- Coating None
- √ Designates Machined Surface

Certification

-
-
-
- Country of Origin:USA

Drawing Revision

03/16/2012 Designer: BDD
06/25/2019 Revised By: BDD

Disclaimer

Weights (lbs/kg), dimensions (inches/mm) and drawings provided for your guidance. We reserve the right to modify specifications without prior notice.

CONFIDENTIAL: This drawing is the property of EJ Group, Inc. and embodies confidential information, registered marks, patents, trade secret information, and/or know-how that is the property of EJ Group, Inc. Copyright © 2011 EJ Group, Inc. All rights reserved.

Contact

800 626 4653
ejco.com