


Stainless Steel

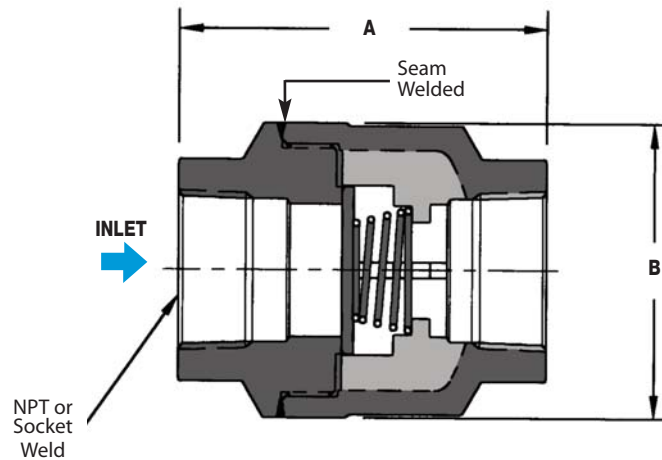

| DIMENSIONS & SPECIFICATIONS – inches |          |          |          |          |          |          |          |
|--------------------------------------|----------|----------|----------|----------|----------|----------|----------|
| Size                                 | 1/2"     | 3/4"     | 1"       | 1 1/4"   | 1 1/2"   | 2"       | 3"       |
| MODEL CODE                           | WSSCV-12 | WSSCV-13 | WSSCV-14 | WSSCV-15 | WSSCV-16 | WSSCV-17 | WSSCV-19 |
| A                                    | 2.69     | 3.00     | 3.32     | 3.81     | 4.75     | 5.03     | 6.87     |
| B                                    | 1.62     | 2.12     | 2.56     | 3.06     | 3.44     | 4.38     | 6.19     |
| Weight (lbs)                         | 1.1      | 1.5      | 1.9      | 3.8      | 4.7      | 7.7      | 18.8     |
| Standard Cracking Pressure*          | 0.25     | 0.25     | 0.25     | 0.25     | 0.25     | 0.25     | 0.25     |
| Optional Cracking Pressure*          | 5.0      | 5.0      | 5.0      | 5.0      | 5.0      | 5.0      | 5.0      |
| Cv                                   | 7        | 13       | 22       | 39       | 54       | 93       | 180      |

\* Note: Differential Pressure at which valve opens and flow occurs (PSI).

### WSSCV Check Valve Construction

