


Features

- Vitreous china
- Washout
- 3/4" top spud
- 14" (356 mm) extended rim
- 0.125 gpf (0.47 lpf) to 1.0 gpf (3.8 lpf)
- WaterSense® compliant when used with WaterSense flushometer
- Will replace K-4960-ET urinal

HIGH EFFICIENCY URINAL (HEU) K-4904-ET

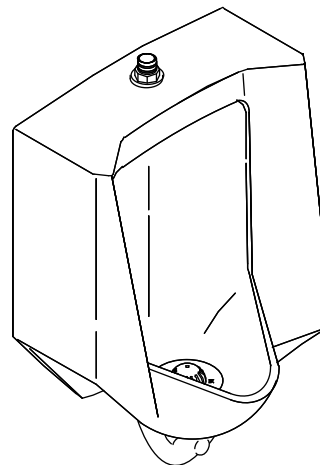

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ICC/ANSI A117.1
- ASME A112.19.2/CSA B45.1
- Energy Policy Act of 2005
- EPA WaterSense®

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome

Specified Model

Model	Description	Colors/Finishes	
K-4904-ET	High Efficiency Urinal (HEU) with 3/4" top spud	☐ 0	☐ Other_____

Recommended Accessories		
K-10668	WAVE DC flushometer – 0.125 gpf (0.47 lpf)	☐ CP
K-10949	Touchless DC urinal flushometer with TriPoint™ technology – 0.125 gpf (0.47 lpf)	☐ CP
K-13520	Manual washdown urinal flushometer – 0.125 gpf (0.47 lpf)	☐ CP
K-10675	WAVE DC flushometer - 0.5 gpf (1.9 lpf)	☐ CP
K-10958	Touchless DC urinal flushometer with TriPoint™ technology - 0.5 gpf (1.9 lpf)	☐ CP
K-13519	Manual washdown urinal flushometer - 0.5 gpf (1.9 lpf)	☐ CP
K-10676	WAVE DC flushometer - 1.0 gpf (3.8 lpf)	☐ CP
K-10960	Touchless DC flushometer with TriPoint™ technology - 1.0 gpf (3.8 lpf)	☐ CP
K-13518	Manual washdown urinal flushometer - 1.0 gpf (3.8 lpf)	☐ CP

Product Specification

The washout urinal shall be made of vitreous china with a 3/4" top spud. Urinal shall have a 14" (356 mm) extended rim. Urinal shall use 0.125 gpf (0.47 lpf) to 1.0 gpf (3.8 lpf) depending on flushometer specified. Urinal shall be WaterSense compliant when used with WaterSense flushometer. Urinal shall be Kohler Model K-4904-ET-_____.

BARDON™ 1/8th GPF

Technical Information

Fixture:	
Configuration	3/4" top spud urinal
Water per flush	0.125 gpf (0.47 lpf) to 1.0 gpf (3.8 lpf)*
Spud inlet size	3/4"
* Designed to flush with 0.125 gpf (0.47 lpf) to 1.0 gpf (3.8 lpf) of water when installed with a water-saving flushometer.	

Included components:	
3/4" inlet spud	18376
2" outlet spud	18766
Strainer	85061
Hanger (2 required)	64512




Installation Notes

Install this product according to the installation guide.

Refer to manufacturer's instructions and local codes for flushometer requirements.

Will comply with **ADA** when installed per Section 605 Urinals of the Act.

*Urinal complies with ADA requirements when rim is mounted no higher than 17" (432 mm) from finished floor.

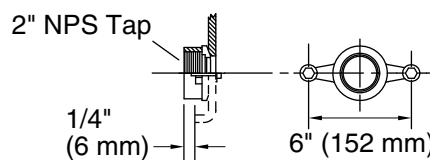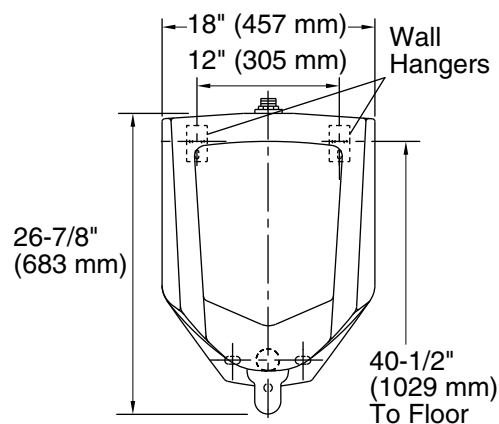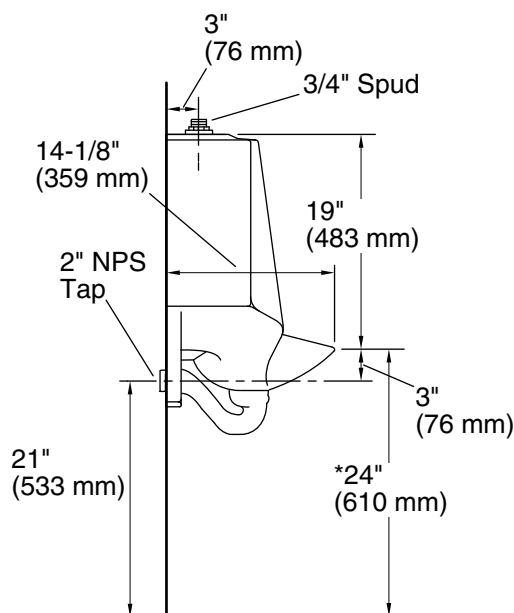

Outlet Detail

Product Diagram