

Specifications

PFX Series

Lead-Free Multi-Turn Stops



Product Features

- Lead-free brass body
- Lead-free brass/plastic stem
- Operating pressure: 125psi maximum
- Operating temperature: 40°F-160°F
- Angle, straight, dual outlet and loose key stops available

Codes and Certifications

- cUPC approved
- ASME A112.18.1/CSA B125.1
- NSF/ANSI/CAN 61
- NSF 372- Low Lead

Model Numbers

Individual Stops

PFXAC31C*	LF 5/8 COMP X 1/4 COMP ANG ST CP
PFXAC32C*	LF 5/8 OD X 3/8 OD COMP ANG ST CP
PFXAC32CLK*	LF 5/8 OD X 3/8 OD COMP ST L/K CP
PFXAC32CLON*	LF 5/8 OD COMP X 3/8 OD COMP ANG ST
PFXAC32R*	LF 5/8 OD X 3/8 OD COMP ANG ST RB
PFXAP32C	LF 1/2 PEX X 3/8 COMP ANG ST CP
PFXAS31R*	LF 1/2 SWT X 1/4 COMP ANG ST RB
PFXAS31C*	LF 1/2 SWT X 1/4 COMP ANG ST CP
PFXAS32C*	LF 1/2 SWT X 3/8 OD COMP ANG ST CP
PFXAS32R*	LF 1/2 SWT X 3/8 OD COMP ANG ST RB
PFXAT22C	LF 3/8 FIP X 3/8 COMP ANG ST CP
PFXAT32C	LF 1/2 FIP X 3/8 COMP ANG ST CP
PFXAV32C	LF 1/2 CPVC X 3/8 COMP ANG ST CP
PFXAV32R	LF 1/2 CPVC X 3/8 COMP ANG ST RB
PFXSV32C	LF CP 1/2 CPVC X 3/8 COMP STRT ST
PFXSV32R	LF 1/2 CPVC X 3/8 COMP STRT ST RB
PFXSC32C*	LF 5/8 COMP X 3/8 COMP STRT ST CP
PFXSP32C	LF 1/2 PEX X 3/8 COMP STRT ST CP
PFXSS32C*	LF 1/2 SWT X 3/8 COMP STRT ST CP
PFXST22C	LF 3/8 FIP X 3/8 OD COMP STRT ST CP
PFXST32C	LF 1/2 FIP X 3/8 OD COMP STRT ST CP

Dual Outlet

PFX3T322C	LF 1/2 FIPX3/8X3/8 OD COMP ANG ST
PFX3T322R	LF 1/2 FIPX3/8X3/8 OD COMP ANG ST
PFX3C322C*	LF 5/8 ODX3/8X3/8 OD COMP DU OUT ST
PFX3C322R*	LF 5/8 ODX3/8X3/8 OD COMP DU OUT ST

Dual Handle

PFXDC321R*	LF 5/8 X 3/8 X 1/4 COMP DU HDL ST
PFXDC322C	LF 5/8 COMP X 3/8 COMP DU HDL ST
PFXDC322R*	LF 5/8 COMP X 3/8 COMP DU HDL ST
PFXDT322R	LF 1/2 FIP X 3/8 OD COMP DU ST CP


*For use copper tube only.

Warranty and Codes


This PROFLO product carries a 1-year limited warranty. ASME A112.18.1-2005/CSA B125.1-05.



PFX3T322C

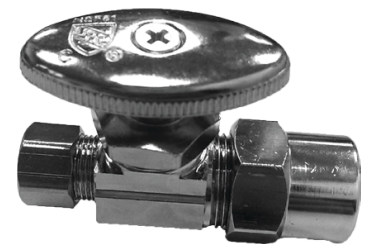

PFXSV32C

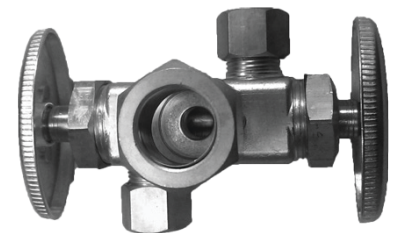

PFXDC322C

