

Compression wall seal

Submittal information

Date submitted:

Project Information


Job name :	Location :
Engineer :	Date submitted:
Contractor :	Submitted by:
Manufacturer's representative :	Approved by :

Technical Data

Material Rubber

Product information and application use

Ecoflex® compression wall seals can be used with wall sleeves, or can be used alone where a field core drill is preferred. It creates a watertight seal between the core drill surface and the outer jacket of Ecoflex piping

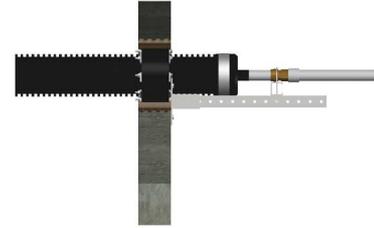

Part name	Part no.	Inner diameter pipe [inch]	Outer diameter pipe [inch]	Weight per UOM [lbs/UOM]
Compression Wall Seal for 2.7" Jacket	1007358	2.7559	4.7638	2.6
Compression Wall Seal for 5.5" Jacket	1007360	5.5118	7.874	5.1
Compression Wall Seal for 6.9" Jacket	1007361	6.9685	9.7638	7.8
Compression Wall Seal for 7.9" Jacket	1007362	7.9528	9.8819	6.1

Installation

For new concrete walls, install over the pipe and Ecoflex compression wall seals into the wall sleeve for a watertight seal. For an existing wall with a field core drill, install between core drill surface and outer jacket of the Ecoflex pipe. Refer to the Uponor Pre-insulated Pipe Systems Design and Installation Manual for more information.

Related applications

- Pre-Insulated Pipe Systems
- Radiant Heating and Cooling Systems
- Permafrost Protection Systems
- Turf Conditioning Systems

Codes

Standards

Listings

Notes

Core Drill OD - 4.75"

Core Drill OD - 8"

Core Drill OD - 10"

Trademark Information

ProPEX® is a registered trademark of Uponor Inc. ProPEX™ is a trademark of Uponor Ltd.

Contact information

Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124
T 800.321.4739
F 952.891.2008

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726
F 800.636.9517