

# Specifications

## DESCRIPTION

- Brass construction with chrome plated finish
- 3/8" compression connection x 24" braided polymer supply lines

## OPERATION

- Lever style handle
- 5-1/4" spout reach
- Temperature controlled through 110° arc of handle
- Operates with less than 5 pounds of force

## FLOW

- Aerator is limited to 2.2gpm max (8.3 L/min)

## CARTRIDGE

- Ceramic disc Duralast cartridge (with temperature limit stop)
- Nonmetallic/nonferrous and ceramic material


## STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B-125.1 and all applicable specifications referenced therein
- Certified to NSF 61/9
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

- ADA for lever handles

## WARRANTY

- Warranted for five years against material or manufacturing defects



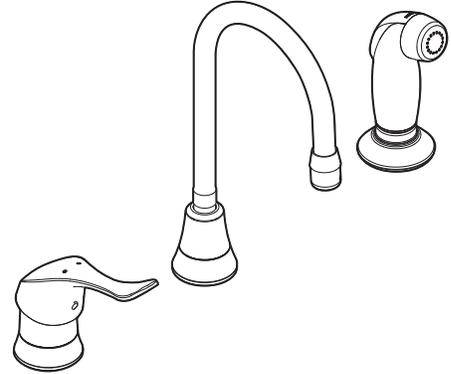


### Single Handle Multi-Purpose Faucet with hose and spray

MODEL	SIDE SPRAY
8137	
8138	X



**NOTE:** Designed to be installed through 2 holes - 1-1/2" min. dia.

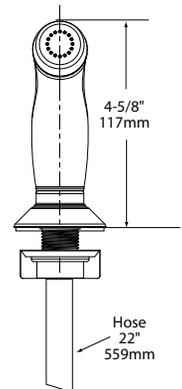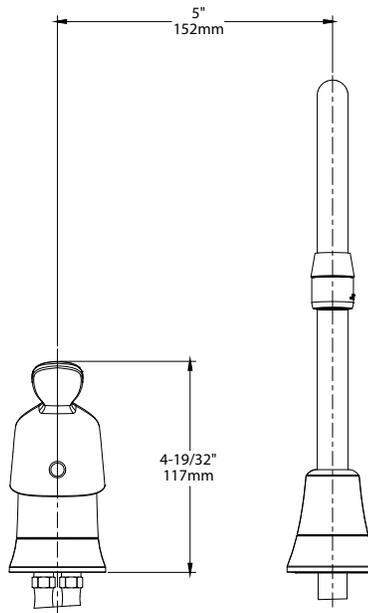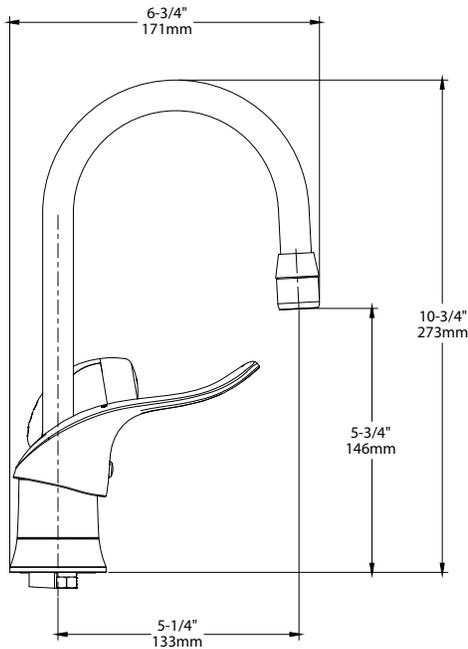

## CRITICAL DIMENSIONS

(DO NOT SCALE)