

SPECIFICATIONS

FIGURE PTT

GAUGES & THERMOMETERS



PRESSURE/TEMPERATURE TEST PLUG

FNW Figure PTT brass pressure/temperature test plugs facilitate quick pressure and temperature readings at recommended test points without disturbing the process. Mainly used in plumbing, heating, ventilation and air conditioning installations. Lead-free option available for potable water systems (FNW Fig. XPTT).

FEATURES


- 1,000 psi maximum operating pressure
- 1/4" or 1/2" MNPT end process connection
- Brass body
- EPDM diaphragm/core
- Plastic cap retainer
- -40°F – 302°F (-40°C – 150°C) temperature rating



*ASME B1.20.1 complaint

*CRN registered

*Lead-free option available (FNW Fig. XPTT)

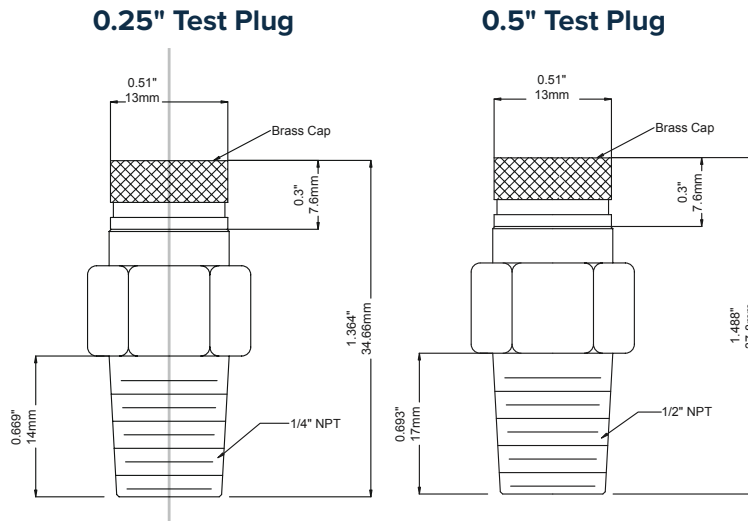

REFERENCE CHART

Catalog Number	Lead-Free	Connection Size		Maximum Operating Pressure	
		in.	mm	psi	kPa
FNWPTTB	No	1/4	6	1,000	6,895
FNWPTTD	No	1/2	13	1,000	6,895