

# SPECIFICATIONS

## FIGURE PTT

### GAUGES, THERMOMETERS & ACCESSORIES

# PRESSURE/TEMPERATURE TEST PLUG


FNW Figure PTT brass pressure/temperature test plugs facilitate quick pressure and temperature readings at recommended test points without disturbing the process. Mainly used in plumbing, heating, ventilation and air conditioning installations. Lead-free option available for potable water systems (FNW Fig. XPTT).

### FEATURES


- 1,000 PSI maximum operating pressure
- 1/4" or 1/2" MNPT end process connection
- Brass body
- NBR (Buna N) diaphragm/core
- Plastic cap retainer
- -40°F – 302°F (-40°C – 150°C) temperature rating
- ASME B1.20.1 compliant
- CRN registered
- Lead-free option available (FNW Fig. XPTT)



**0.25" Test Plug**

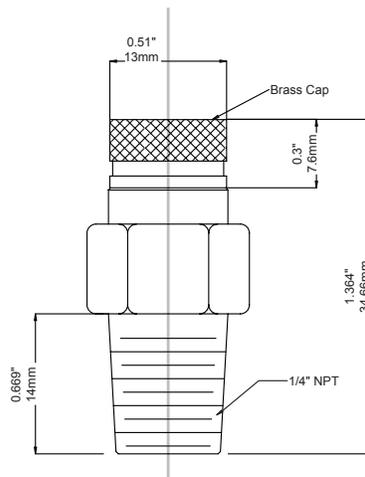

**0.5" Test Plug**

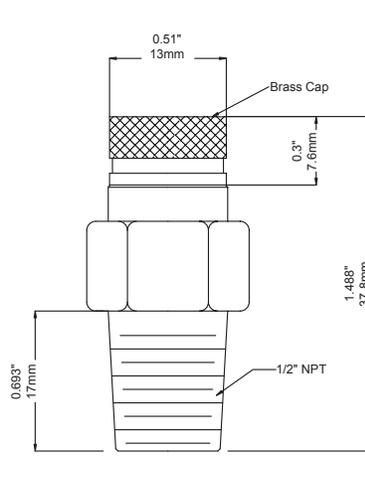

### REFERENCE CHART

Catalog Number	Lead-Free	Connection Size		Maximum Operating Pressure	
		in.	mm	PSI	kPa
FNWPTTB	No	1/4	6	1,000	6,895
FNWPTTD	No	1/2	13	1,000	6,895