


## Description & Features:

- Facilitates quick pressure and temperature readings at recommended test points within process
- Test plugs are available in brass or lead free brass wetted parts
- Gauge adapters ship with protective aluminum sleeve
- ASME B1.20.1 compliant
- CRN registered
- 5 year warranty

## Applications:

- Mainly used in plumbing, heating, ventilation and air conditioning installations
- Lead free version for potable water systems

## Specifications

<b>Body</b>	STP: Brass STP-LF: Lead free brass
<b>Diaphragm/Core</b>	NBR (Buna N)
<b>Temperature Rating</b>	-40°F to 302°F (-40°C to 150°C)
<b>Maximum Pressure Rating</b>	1,000 psi (6,895 kPa)
<b>Connection</b>	1/4" NPT or 1/2" NPT
<b>Warning</b>	 <b>WARNING:</b> This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .

## STP Order Codes (products in bold are normally stock in North America)

Brass Test Plug	
1/4" NPTM	<b>FNWPTTB</b>
1/2" NPTM	<b>FNWPTTD</b>


Gauge Adaptor	
2.75 OAL x 1.75" x 0.125" probe	<b>STP003</b>
2.25 OAL x 1.75" x 0.125" probe	STP004

## STP-LF Order Codes (products in bold are normally stock in North America)


Lead Free Brass Test Plug	
1/4" NPTM	<b>STP001LF</b>
1/2" NPTM	<b>STP002LF</b>

Other sizes and materials available upon request.


### 1/4" Test Plug

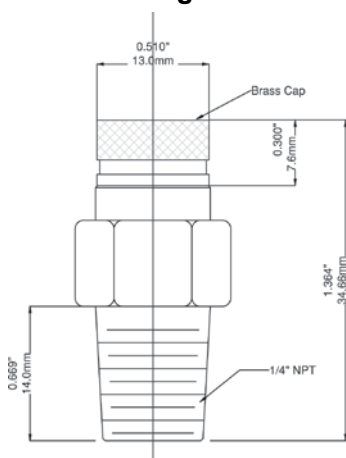

### 1/2" Test Plug

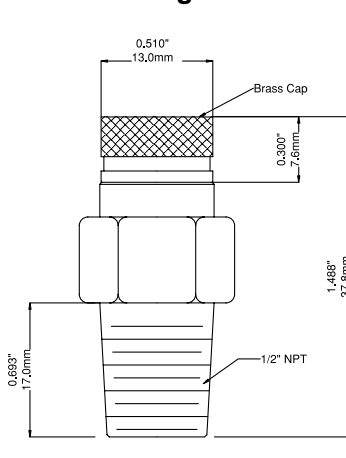

### Gauge Adaptor 2.25"

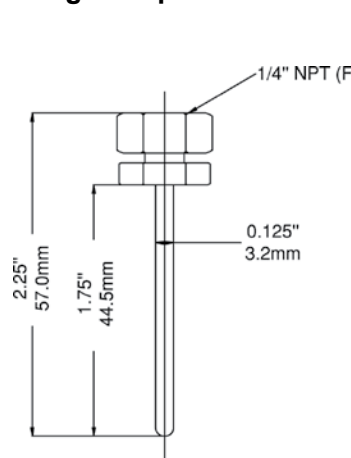

### Gauge Adaptor 2.75"

