

Model  
**WETS 2000.1302-1.28 HWS**  
OPTIMA® Systems AC Powered HET Flushometer and HET Water Closet

**DESCRIPTION**

Complete HET system with exposed, AC powered, sensor activated, Royal® OPTIMA® SMOOTH™ HET Flushometer and HET vitreous china fixture.

**Flush Cycle**

Model WETS 2000.1302-1.28 HWS (1.28 gpf/4.8 Lpf)



**SPECIFICATIONS**

Quiet, exposed, sensor activated diaphragm type, chrome plated HET Flushometer for either left or right hand supply and HET vitreous china fixture with the following features:

**Flushometer**

- PERMEX™ Synthetic Rubber Diaphragm with Dual Filtered Fixed Bypass
- 1" I.P.S. Screwdriver Bak-Chek® Angle Stop
- Free Spinning Vandal Resistant Stop Cap
- Adjustable Tailpiece
- High Back Pressure Vacuum Breaker Flush Connection with One-Piece Bottom Hex Coupling Nut, Spud Coupling and Flange for 1 1/2" Top Spud
- Sweat Solder Adapter w/Cover Tube and Cast Wall Flange w/Set Screw
- High Copper, Low Zinc Brass Castings for Dezincification Resistance
- Non-Hold-Open Handle, Fixed Metering Bypass and no external volume adjustment to ensure water conservation
- Flush Accuracy Controlled by CID™ Technology
- Diaphragm, Stop Seat and Vacuum Breaker to be molded from PERMEX™ Rubber Compound for Chloramine Resistance
- Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037.

**OPTIMA® SMOOTH™ Unit**

- ADA compliant OPTIMA® SMOOTH™ AC powered infrared sensor for automatic "Hands-free" operation
- Mechanical Manual Override Flush Handle
- "User in View" flashing LED
- 25 to 80 psi operating range
- Vandal resistant 1/8" ball-type hex key included

**Fixture**

- Floor mounted vitreous china
- 1 1/2" I.P.S. top spud inlet
- 2 1/8" trapway diameter
- Integral flushing rim
- Elongated bowl with siphon jet flush
- Closet bolts and caps included

**SPECIFICATIONS (CONTINUED)**

- 100 % factory flush tested
- Toilet seat not included  
Compatible with toilet seat models:  
Olsonite 10CT, Bemis 1955CT &  
Church Commercial 295CT
- Water closet shall be in compliance to the applicable sections of ASME A112.19.2/CSA B45.1

**FEATURES**

**Automatic**

Sloan OPTIMA® SMOOTH™ equipped Flushometers provide the ultimate in sanitary protection and automatic operation. There are no handles to trip or buttons to push. The Flushometer operates by means of an infrared sensor that adapts to its surroundings. Once the user enters the sensor's effective range and then steps away, the Flushometer Solenoid initiates the flushing cycle to flush the fixture.

**Hygienic**

User makes no physical contact with the Flushometer surface. Helps control the spread of infectious diseases. 72-hour Sentinel Flush keeps fixture fresh during periods of nonuse.

**Economical**

Automatic operation provides water usage savings over other flushing devices. Reduces maintenance and operation costs.

**Practical**

Solid state electronic circuitry assures years of dependable, trouble-free operation. The operational components of the Flushometer are identical to a handle activated Royal® Flushometer, proven by more than 100 years of experience.

**Warranty**

3 year (limited)

**NOTE:**

- Plumbing System Requirements
- Minimum **Flowing** Pressure: 25 PSI
  - Minimum Flow Rate: 18 GPM

This space for Architect/Engineer approval	
Job Name	Date
Model Specified	Quantity
Variations Specified	
Customer/Wholesaler	
Contractor	
Architect	

The information contained in this document is subject to change without notice.



Listed by I.A.P.M.O.



Sloan Valve Company is buying renewable energy certificates to meet 100% of the company's purchased electricity use at its Franklin Park, Illinois facility.



Sloan Valve Company  
10500 Seymour Avenue,  
Franklin Park, IL 60131  
Phone: 1-800-9-VALVE-9 (982-5839)  
or 1-847-671-4300  
Fax: 1-800-447-8329 or 1-847-671-4380  
www.sloanvalve.com

Copyright © 2010 Sloan Valve Company  
Rev. 0b (10/10)

Model  
**WETS 2000.1302-1.28 HWS**  
OPTIMA® Systems AC Powered HET Flushometer and HET Water Closet

**DESCRIPTION**

Complete HET system with exposed, AC powered, sensor activated, Royal® OPTIMA® SMOOTH™ HET Flushometer and HET vitreous china fixture.

**Flush Cycle**

Model WETS 2000.1302-1.28 HWS (1.28 gpf/4.8 Lpf)

**ELECTRICAL SPECIFICATIONS**

- **Control Circuit**  
6 VDC input, 8 second arming delay, 72 hour Sentinel Flush
- **OPTIMA® Sensor Range**  
Normal Range (recommended for Water Closets) with 2 – 3 second flush delay:  
26" – 32" (660 mm – 813 mm)  
Normal Range (recommended for Water Closets) with 1 – 2 second flush delay:  
26" – 32" (660 mm – 813 mm)  
Reduced Range (recommended for Urinals) with 1 – 2 second flush delay:  
20" – 26" (508 mm – 660 mm)
- **OPTIMA® Sensor Type**  
Active infrared with automatic adjustment
- **Operating Pressure**  
25 – 80 psi (172-552 kPa)
- **Transformer**  
EL-386 (Plug-in)  
120 VAC, 50/60 Hz Primary  
6 VAC, 50/60 Hz Secondary  
Class II, 25 VA.  
EL-451 (Box Mount)  
120 VAC, 50/60 Hz Primary  
6 VAC, 50/60 Hz Secondary  
Class II, 25 VA.
- **Transformer Options**  
EL-386 (120 VAC/6 VAC 50/60 Hz (3 VA) – Plug-in (will operate one unit)  
EL-451 (120 VAC/6 VAC 50/60 Hz (25 VA) – Box Mount (will operate up to 8 units)

**OPERATION**



1. A continuous, invisible light beam is emitted from the OPTIMA® SMOOTH™ unit's Infrared Sensor.




2. When the user enters the sensor's effective range, the Red LED light in the sensor window flashes for eight seconds. After eight seconds of sensing the user, the light will stop flashing and the unit waits for the user to step away before initiating a flush cycle.





3. When the user steps away, the unit initiates a flush cycle. The unit then automatically resets and is ready for the next user.

One EL-386 Transformer serves one (1) Optima® closet/urinal Flushometer.

One EL-451 Transformer serves up to eight (8) Optima® closet/urinal Flushometers. Specify part number and number of transformers required accordingly.



**DIMENSIONS/ROUGH-IN**

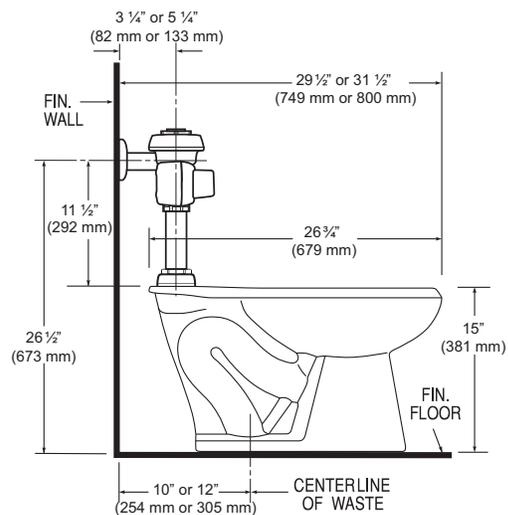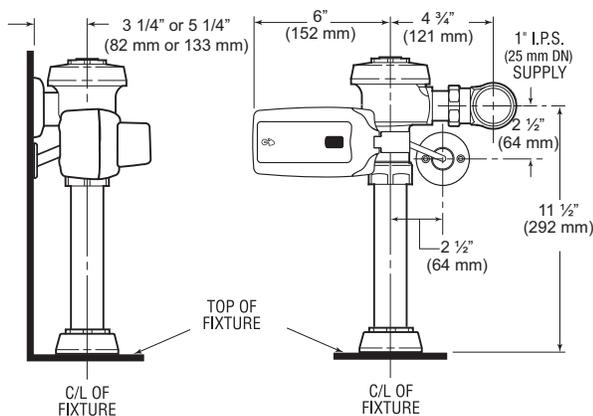

**SLOAN VALVE COMPANY • 10500 SEYMOUR AVENUE • FRANKLIN PARK, IL 60131**

Phone: 1-800-9-VALVE-9 or 1-847-671-4300 • Fax: 1-800-447-8329 or 1-847-671-4380 • www.sloanvalve.com