

SPECIFICATIONS

OPULENCE™ SINGLE HANDLE POT FILLER

Model

D205057

Description

- Ceramic disc valves at wall and at end of spout
- 2-piece articulated spout folds out of the way when not in use
- Swivel spout reach extends up to 22"
- Designed for cold water hook up
- Single hole wall mount
- 2.2gpm (8.3L/min) maximum flow rate @60 psi

Standards



NSF/ANSI 372

- NSF/ANSI 372

MEETS ASME
A112.18.1M/A112.18.1

- ASME A112.18.1M/A112.18.1




- ADA Accessibility Guidelines for Buildings and Facilities - 309.4 Operation for Operable Parts

Warranty


Danze products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.

Flow Rate

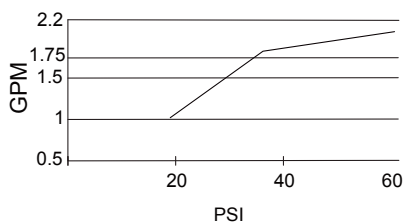

Finishes Available

- Chrome
- Other: Refer to Price List for additional finish

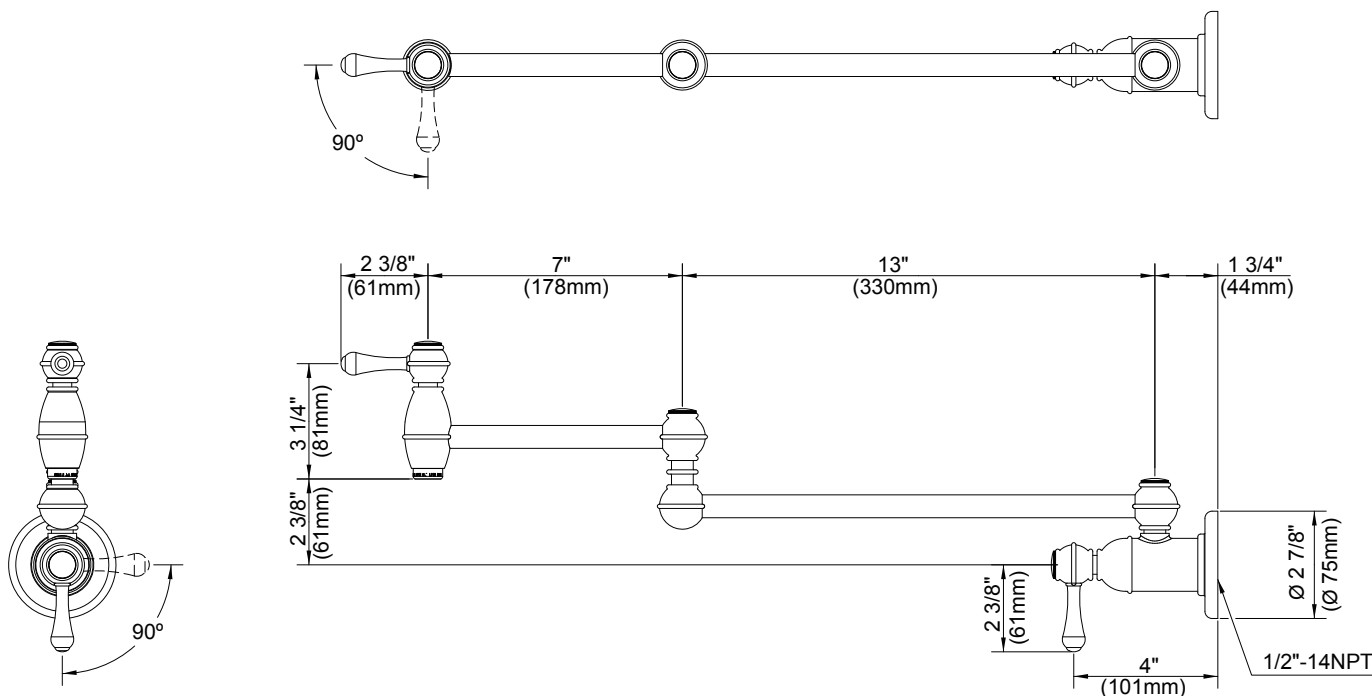

Submittal Information:

Job Name: _____

Location: _____

Contractor: _____

Contact #: _____