


- GT26-4YPC Finish(CC) ☐
- GT26-4YPK Finish(KK) ☐
- GT26-4YPU Finish(UU) ☐
- GT26-4YPY Finish(Y) ☐

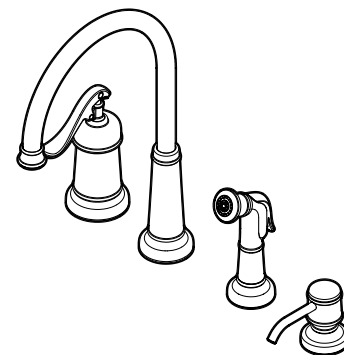

Specifications

- 3 or 4-Hole Installation
- Pforever Seal

Features

- Soap/ Lotion Dispenser
- Quick Connect Installation
- Temperature Memory Feature Retains Desired Temperature Setting
- 3 or 4-Hole Installation
- 2.2 GPM (8.33 L/M) Flow Rate
- 360° Swivel Spout
- High-Arc Decorative Spout
- Includes Matching Side Spray
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®


Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- ADA Compliant-ANSI A117.1 (Lever handles only)



Dimensions

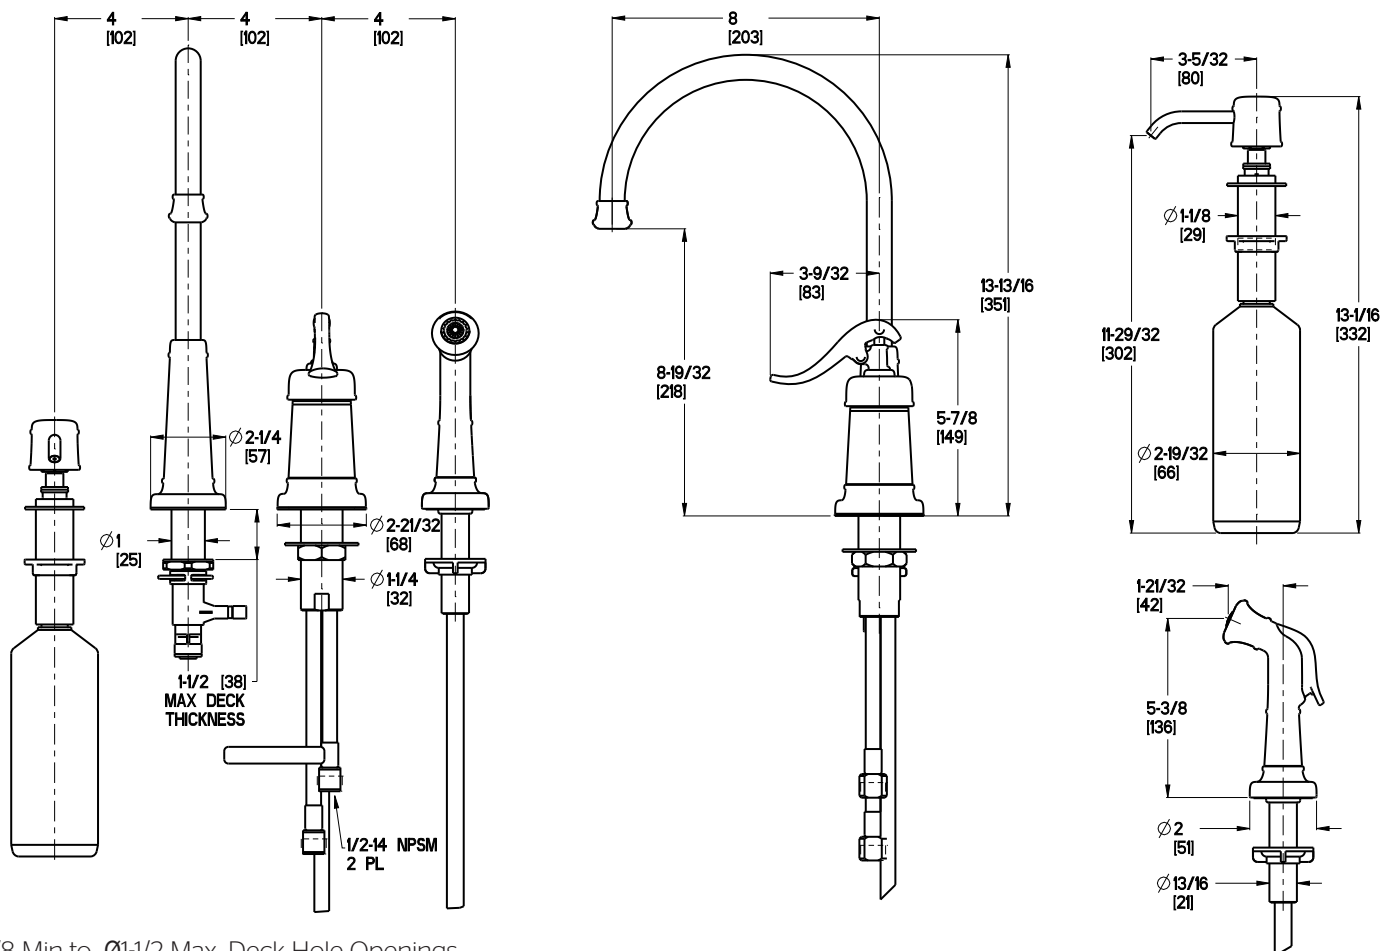

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings