




# SUBMITTAL DATA

## CONICAL SPIN-IN TAKEOFF — DX69, DX69D, DX69DE

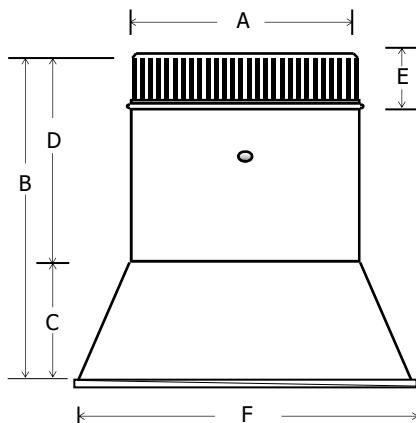

DX69 - No Damper shown  
DX69D - w/Damper  
DX69DE - w/2" Damper Extension

A	B	C	D	E	F	GA
4	8.75	2.75	6	1.75	6	28
5	8.75	2.75	6	1.75	7	28
6	8.50	2.50	6	1.75	8	26
7	8.25	2.25	6	1.75	9	26
8	8.75	2.75	6	1.75	10	26
9	9.25	3.25	6	1.75	12	26
10	9.25	3.25	6	1.75	12	26
12	9.25	3.25	6	1.75	14	26
14	9.25	3.25	6	1.75	16	26
16	9.50	3.50	6	1.75	18	26
18	9.50	3.50	6	1.75	20	26
20	13.25	7.25	6	1.75	22	26
22	16.00	10.00	6	1.75	24	26
24	11.25	5.25	6	1.75	26	26

Galvanized Steel, G30/40 coating standard, G90 available  
Damper Extension Kit available

### PART NUMBER DESIGNATIONS

#### DX69XX, DX69DXX, DX69DEXX

Where: XX = Diameter (04-24)

D = Damper (Single and dual hardware available)

E = Damper Extension 2" H

(Reinforced damper axis or 3/8" solid rod)

Options: Standard 28/26GA; 24GA available

PROJECT: \_\_\_\_\_ COMPANY: \_\_\_\_\_ DATE : \_\_\_\_\_

LOCATION: \_\_\_\_\_ SUBMITTED BY: \_\_\_\_\_